

Automation systems Drive solutions

Controls
Inverters
Motors
Gearboxes
Engineering Tools

Motors: MD three-phase AC motors

Gearboxes: g500-B bevel gearbox

Lenze
As easy as that.

Contents of the L-force catalogue

About Lenze	Lenze makes many things easy for you. A matter of principle: the right products for every application. L-force product portfolio		
Automation systems	Controller-based Automation Drive-based automation	1.1 1.2	
Drive solutions	HighLine tasks StateLine tasks BaseLine tasks	2.1 2.2 2.3	
Controls	Cabinet Controller Panel Controller I/O system 1000 Monitor Panel	3.1 3.2 3.3 3.4 3.5 3.6	
Inverters	Decentralised Cabinet	Inverter Drives 8400 protec Inverter Drives 8400 motec Servo Drives 9400 HighLine Inverter Drives 8400 TopLine Servo Inverters i700 Inverter Drives 8400 HighLine Inverter Drives 8400 StateLine Inverter Drives 8400 BaseLine	4.1 4.2 4.4 4.5 4.6 4.7 4.8 4.10
Motors	Servo motors Three-phase AC motors	MCS synchronous servo motors MDKS synchronous servo motors MQA asynchronous servo motors MCA asynchronous servo motors MF three-phase AC motors MH three-phase AC motors MD three-phase AC motors m300 Lenze Smart Motor MD/MH basic three-phase AC motors	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9
Gearboxes	Axial gearbox Right-angle gearbox Motor data	g700-P planetary gearbox MPR/MPG planetary gearboxes g500-H helical gearbox GST helical gearboxes g500-S shaft-mounted helical gearbox GFL shaft-mounted helical gearboxes g500-B bevel gearbox GKR bevel gearboxes GKS helical-bevel gearboxes GSS helical-worm gearboxes Assignment see above	6.1 6.2 6.3 6.4 6.5 6.6 6.7 6.8 6.9 6.10 6.11
Engineering Tools	Navigator Drive Solution Designer Drive Solution Catalogue Engineer PLC Designer VisiWinNET® EASY Starter	7.1 7.2 7.3 7.4 7.5 7.6 7.7	

 Selected portfolio

 Additional portfolio

Lenze makes many things easy for you.

With our motivated and committed approach, we work together with you to create the best possible solution and set your ideas in motion - whether you are looking to optimise an existing machine or develop a new one. We always strive to make things easy and seek perfection therein. This is anchored in our thinking, in our services and in every detail of our products. It's as easy as that!

1

Developing ideas

Are you looking to build the best machine possible and already have some initial ideas? Then get these down on paper together with us, starting with small innovative details and stretching all the way to completely new machines. Working together, we will develop an intelligent and sustainable concept that is perfectly aligned with your specific requirements.

2

Drafting concepts

We see welcome challenges in your machine tasks, supporting you with our comprehensive expertise and providing valuable impetus for your innovations. We take a holistic view of the individual motion and control functions here and draw up consistent, end-to-end drive and automation solutions for you - keeping everything as easy as possible and as extensive as necessary.

3

Implementing solutions

Our easy formula for satisfied customers is to establish an active partnership with fast decision-making processes and an individually tailored offer. We have been using this simple principle to meet the ever more specialised customer requirements in the field of mechanical engineering for many years.

4

Manufacturing machines

Functional diversity in perfect harmony: as one of the few full-range providers in the market, we can provide you with precisely those products that you actually need for any machine task – no more and no less. Our L-force product portfolio, a consistent platform for implementing drive and automation tasks, is invaluable in this regard.

5

Ensuring productivity

Productivity, reliability and new performance peaks on a daily basis – these are our key success factors for your machine. After delivery, we offer you cleverly devised service concepts to ensure continued safe operation. The primary focus here is on technical support, based on the excellent application expertise of our highly-skilled and knowledgeable after-sales team.

A matter of principle: the right products for every application.


Lenze's extensive L-force product portfolio follows a very simple principle. The functions of our finely scaled products are assigned to the three lines Base-Line, State-Line or High-Line.

But what does this mean for you? It allows you to quickly recognise which products represent the best solution for your own specific requirements.

Powerful products with a major impact:


- Easy handling
- High quality and durability
- Reliable technologies in tune with the latest developments

Lenze products undergo the most stringent testing in our own laboratory. This allows us to ensure that you will receive consistently high quality and a long service life. In addition to this, five logistics centres ensure that the Lenze products you select are available for quick delivery anywhere across the globe. It's as easy as that!

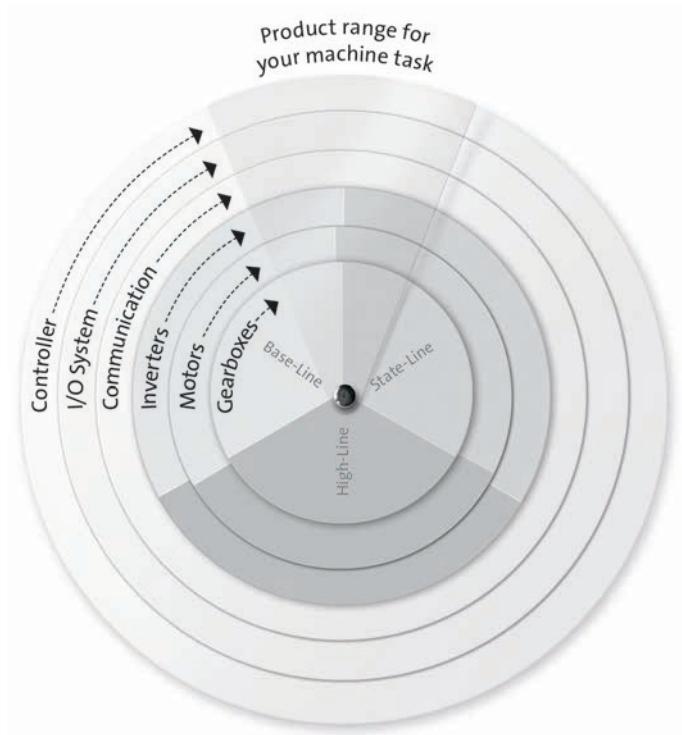


L-force product portfolio

Controls

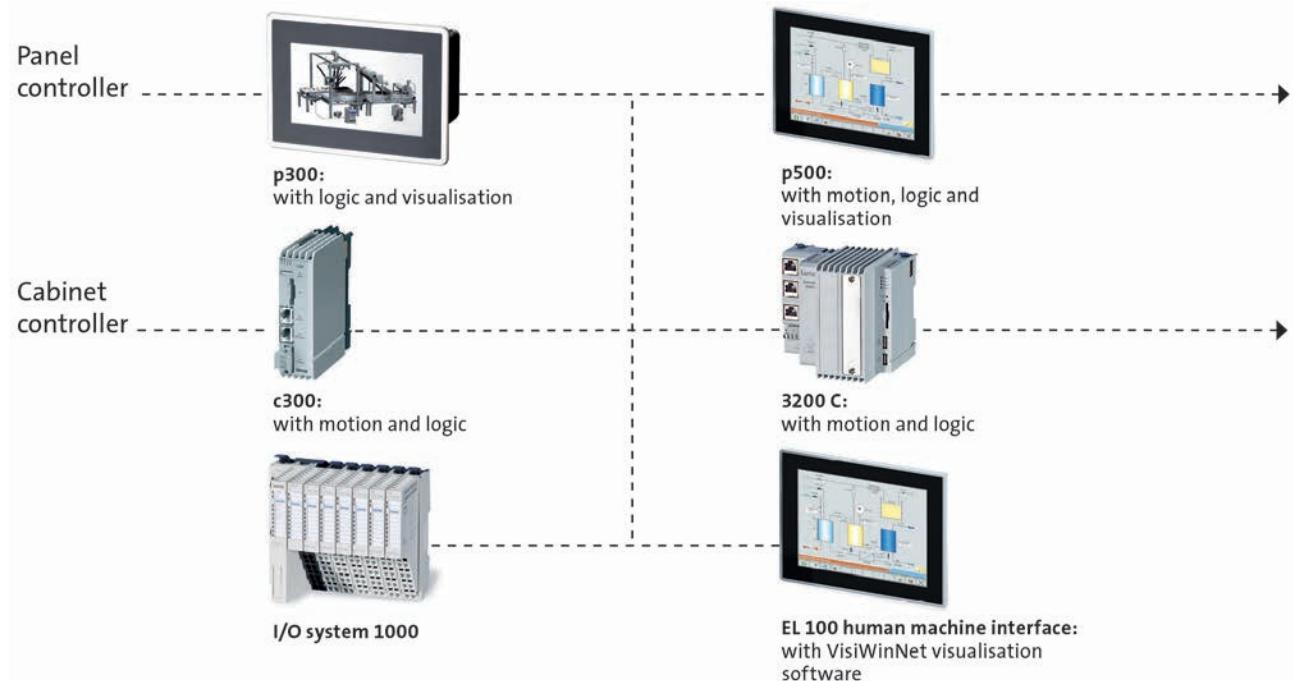

Engineering Tools

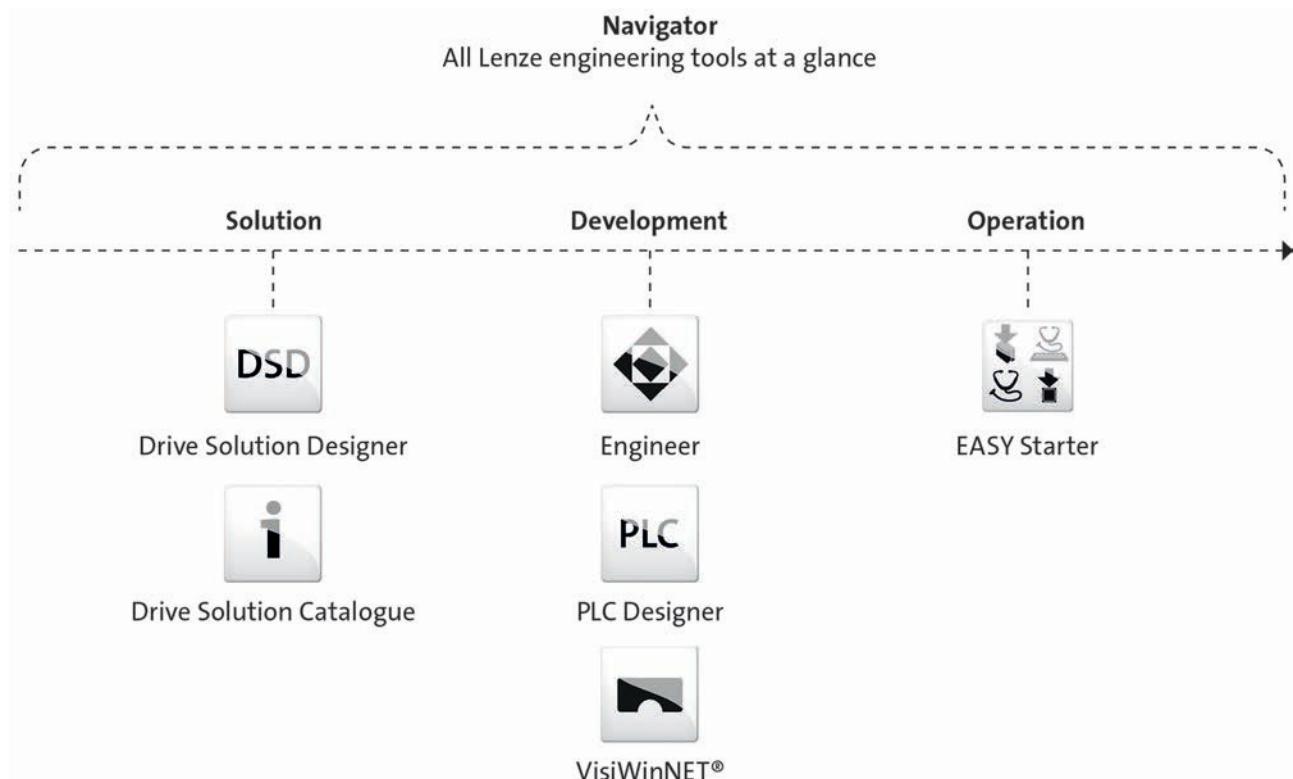

L-force product portfolio

Inverters

High-Line



Servo-Inverter i700



Servo Drives ECS



Inverter Drives 8400
TopLine



Servo Drives 9400 HighLine



Inverter Drives 8400
HighLine

State-Line



Inverter Drives 8400
StateLine



decentralised
Inverter Drives 8400 protec



decentralised
Inverter Drives 8400 motec



decentralised
Inverter Drives SMV
IP65



Inverter Drives SMV IP31

Base-Line



Inverter Drives smd




Inverter Drives 8400
BaseLine


L-force product portfolio

Motors


High-Line

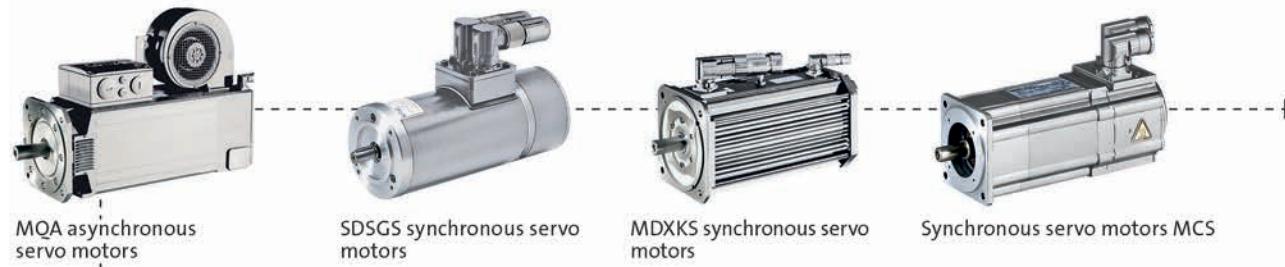

State-Line

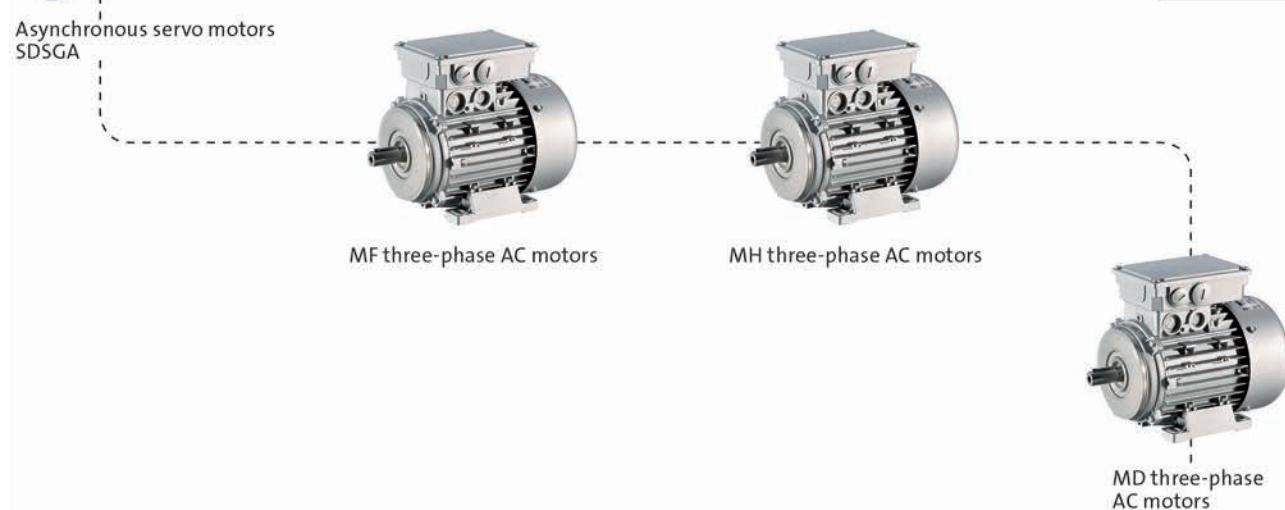

Base-Line

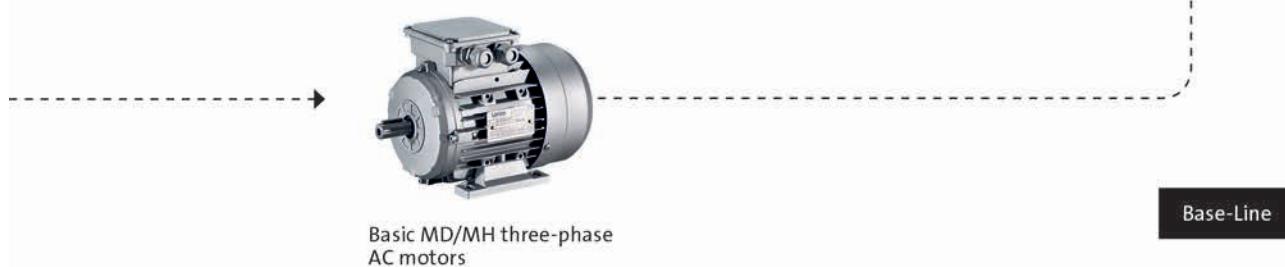

L-force product portfolio

Gearboxes

High-Line



Planetary gearboxes



Shaft-mounted helical
gearboxes

State-Line



Helical-bevel gearboxes



Helical gearboxes



Bevel gearboxes



Helical-worm gearboxes



Worm gearboxes


Base-Line

Gearboxes

g500-B bevel geared motors

0.06 to 0.55 kW

0.75 to 3 kW (efficiency class IE1)

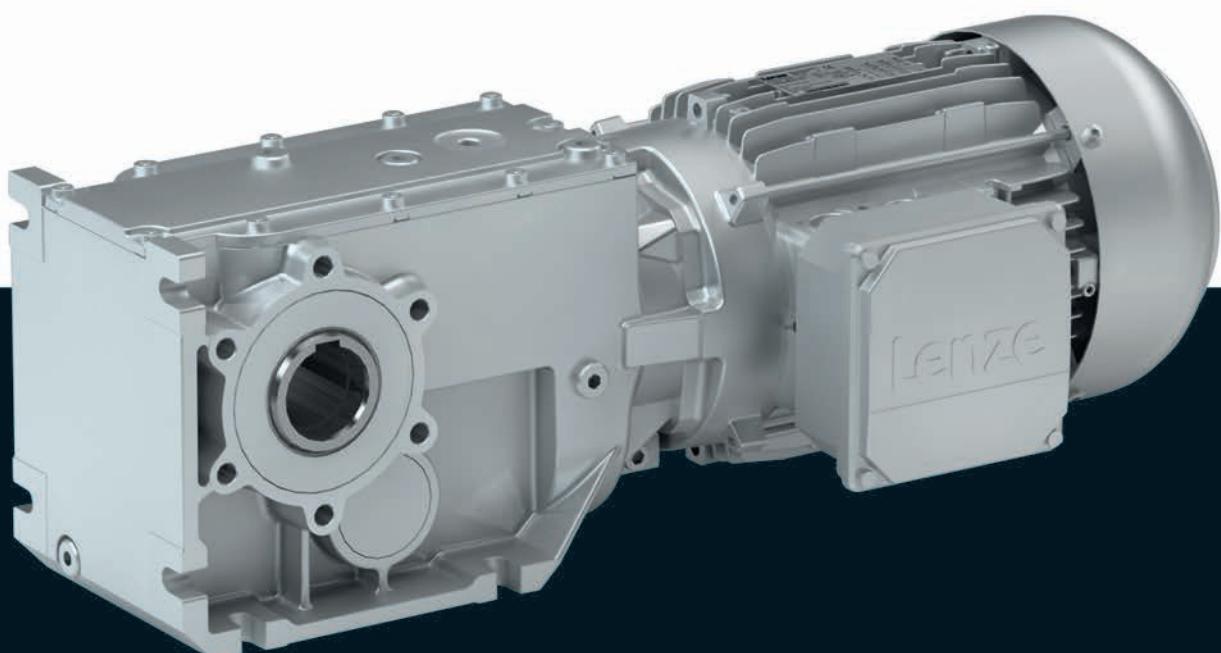

g500-B bevel geared motors



Contents

General information	List of abbreviations	6.7 - 5
	Product information	6.7 - 6
	Equipment	6.7 - 7
	The gearbox kit	6.7 - 8
	Dimensioning	6.7 - 14
Technical data	Selection tables, notes	6.7 - 19
	Selection tables, 4-pole motors	6.7 - 21
	Selection tables, 2-pole motors	6.7 - 40
	Selection tables, 6-pole motors	6.7 - 53
	Dimensions, notes	6.7 - 59
	Dimensions, 4-pole motors	6.7 - 60
	Dimensions, 2-pole motors	6.7 - 72
	Dimensions, 6-pole motors	6.7 - 81
	Weights, 4-pole motors	6.7 - 90
	Weights, 2-pole motors	6.7 - 90
	Weights, 6-pole motors	6.7 - 90
	Surface and corrosion protection	6.7 - 91

g500-B bevel geared motors



Contents

g500-B bevel geared motors



General information

List of abbreviations

c		Load capacity
i		Ratio
m	[kg]	Mass
M ₂	[Nm]	Output torque
M ₂₂	[Nm]	Output torque
M _{a_1}	[Nm]	Starting torque
M _{a_2}	[Nm]	Starting torque
n ₂	[r/min]	Output speed
n ₂₁	[r/min]	Output speed
n ₂₂	[r/min]	Output speed

CCC	China Compulsory Certificate
CE	Communauté Européenne
CSA	Canadian Standards Association
cURus	Combined certification marks of UL for the USA and Canada
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

g500-B bevel geared motors



General information

Product information

In combination with three-phase AC motors, our bevel gearboxes form a compact and powerful drive unit. Numerous options at the input and output end provide for the drive to be exactly adapted to your application.

The efficient bevel gearboxes feature high reliable radial forces, closely stepped gear reductions and a low backlash. They are available in 2-pole and 3-pole design with a torque up to 450 Nm and a ratio of up to $i = 360$.

Versions

- High-efficient right-angle gearbox in a compact design for space-saving installation
- Standardised shaft and flange dimensions for an easy machine integration
- Low backlash and high torsional stiffness provide for exact results in positioning applications
- With three-phase AC motors in the power range 0.06 ... 0.55 kW
With IE1 three-phase AC motors in the power range 0.75 ... 3 kW

Inverters for motor-proximity installation

The Drive Package with decentralised Inverter Drives 8400 motec covers a power range up to 3 kW.

The product name

Gearbox type	Product range		Design	Rated torque [Nm]	Product
Bevel gearbox	g500	-	B	45	g500-B45
				110	g500-B110
				240	g500-B240
				450	g500-B450

g500-B bevel geared motors




General information

Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

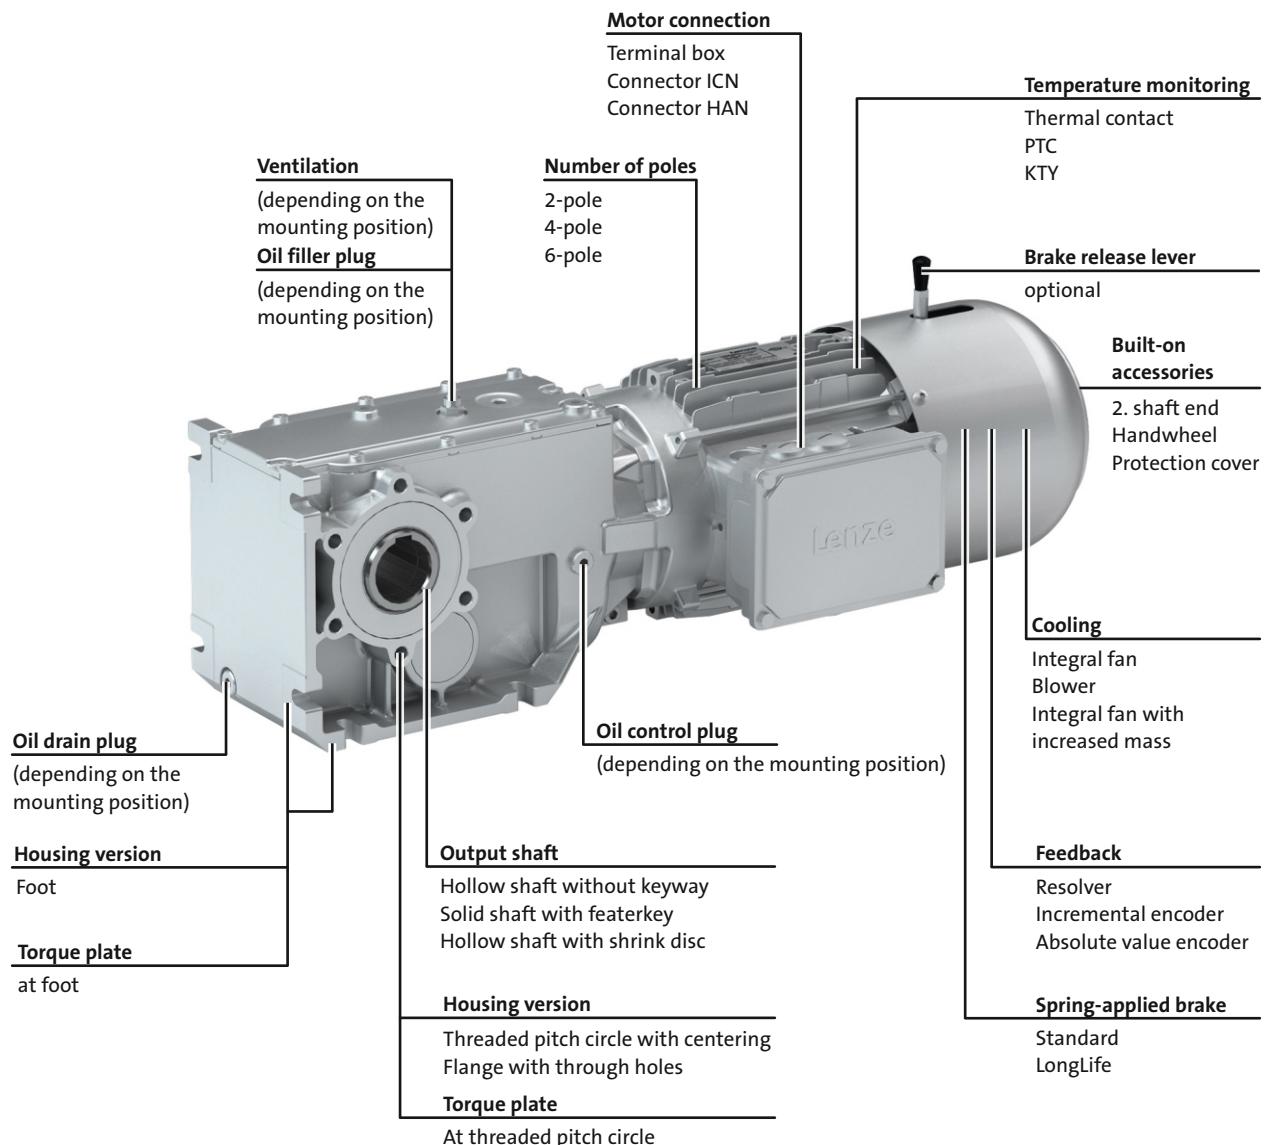

g500-B bevel geared motors



General information

The gearbox kit

Geared motor

Product	g500-B45	g500-B110	g500-B240	g500-B450
Motor type				
Efficiency class IE1		MD□MA AC motor		
Efficiency class IE2				
4-pole motor				
0.06 - 0.09 kW	063			
0.12 - 0.25 kW		063		
0.37 - 0.55 kW			071	
0.75 - 1.1 kW				080
1.5 kW				090
2.2 - 3.0 kW				100
4.0 - 5.5 kW				112
7.5 - 9.2 kW				
2-pole motor				
0.18 - 0.25 kW			063	
0.37 - 0.55 kW			071	
0.75 - 1.1 kW			080	
1.5 - 2.2 kW			090	
3 - 4 kW				100
5.5 - 7.5 kW				112
6-pole motor				
0.18 - 0.25 kW			071	
0.37 - 0.55 kW			080	
Technical data				
Rated power		See selection table		
Mains voltage		230/400 V ; 230 V; 460 V		
Mains frequency		50 Hz; 60 Hz; 60 Hz		
Output torque		See selection table		
Output speed		See selection table		
Ratio		See selection table		
Load capacity		See selection table		
Mounting position				
Standard		A/B/C/D/E/F		
Combined	ABCDEF	AEF		
Colour		Not coated Primed Paint in various corrosion-protection designs in accordance with RAL colours		
Surface and corrosion protection		Without OKS(uncoated) OKS-G (primed) OKS-S (small) OKS-M (medium) OKS-L (large)		

g500-B bevel geared motors




General information

The gearbox kit

Mounting positions

- Mounting position (A to F) and position of system blocks (1 to 6)

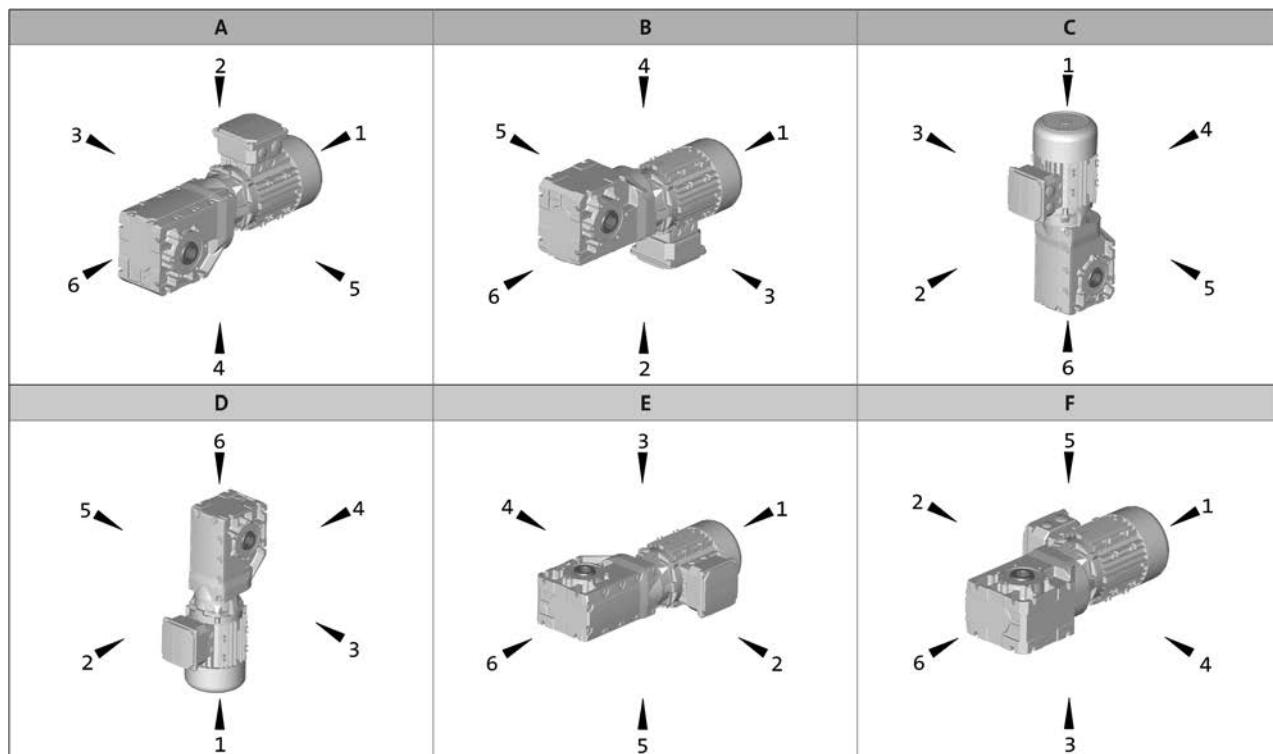

Hollow shaft: 0

Solid shaft: 3, 5, 8 (3+5)

Hollow shaft with shrink disc: 3, 5

Without flange: 0

Flange: 3, 5, 8 (3+5)

Terminal box / motec: 2, 3, 4, 5

g500-B bevel geared motors



General information

The gearbox kit

Motor details

Product	MD□MA□□																			
	063-02 063-22	063-11 063-12 063-31 063-32 063-42	071-11 071-12 071-13 071-31 071-32 071-33	071-42	080-11 080-12 080-13 080-31 080-32 080-33 080-42	090-11 090-12 090-31 090-32	100-12 100-31 100-32 100-41	112-22 112-31 112-32 112-41	132-12 132-21 132-22 132-32											
Connection type																				
Terminal box ICN connector HAN-10E connector HAN-Modular connector																				
Spring-applied brake																				
Rated torque [Nm]		4 8		4 8		8 16		16 32	32 60	60 80										
Brake voltage [V]	DC 24/180/205 AC 230/400/460																			
Brake design	Standard LongLife																			
	Standard Overexcited Cold Brake																			
Options	Manual release lever Low noise With cover ring																			
Feedback																				
With absolute value encoder With incremental encoder With resolver																				
Cooling																				
Without blower/integral fan Blower Integral fan with increased mass																				
Temperature monitoring																				
TKO thermal contact KTY83-110 thermal detector KTY84-130 thermal detector PTC thermistor																				
Approval																				
cURus CCC																				
Degree of protection																				
IP55																				
Further options																				
Protection cover 2nd shaft end Handwheel																				

- ▶ Further information and installation feasibilities can be found in the Motors chapter.

g500-B bevel geared motors



General information

The gearbox kit

Motor details

Connection type		
Cooling: integral fan		
Cooling: blower		
Further options		

6.7

g500-B bevel geared motors



General information

The gearbox kit

Gearbox details

Product	g500-B45	g500-B110	g500-B240	g500-B450
Driven shaft				
Solid shaft without keyway [mm]				
Solid shaft with featherkey [mm]	20x40		30x60	
Hollow shaft with keyway [mm]	18/20	20/25	30/35	35/40
Hollow shaft with shrink disc [mm]	20		30/35	35
Design		Standard stainless steel		
Gasket		Standard FPM (Viton)		
Bearing		Standard		
Fitting grease		Not enclosed Enclosed		
Housing				
Housing version		With foot With foot and centering		
Output flange				
flange diameter [mm]	110/120	120/160	160/200	200
Lubricant				
Type		CLP 460 ¹⁾ CLP HC 320 CLP HC 220 CLP HC 220 USDA H1		
Oil-level inspection		Without inspection		Without inspection With inspection
Breather element		Without		Standard mounting position: Mounted Combined mounting position: loosely enclosed
Backlash				
Backlash		Standard		
Accessories				
Torque plate	Rubber buffers At threaded pitch circle	At threaded pitch circle	At threaded pitch circle At foot	At foot
Shaft cover		Hollow shaft Shrink disc: Rotating cover Shrink disc: Fixed cover		

¹⁾ Not suitable for geared servo motors.

- ▶ Further information and installation feasibilities can be found in the Gearboxes chapter.

g500-B bevel geared motors



General information

The gearbox kit

Gearbox details

Solid shaft			
Foot mounting without centring	Foot mounting With centering	Flange with through holes	
Hollow shaft			
Foot mounting without centring	Foot mounting With centering	Flange with through holes	
Hollow shaft with shrink disc			
Foot mounting without centring	Foot mounting With centering	Flange with through holes	
Accessories			
2nd output shaft end	Torque plate at foot	Torque plate at threaded pitch circle	Cover Hollow shaft/shrink disc

6.7

g500-B bevel geared motors

General information



Dimensioning

General information about the data provided in this catalogue

The powers, torques and speeds specified in this catalogue are rounded values and are valid under the following conditions:

- Operating time/day = 8 h (100% OT)
- Duty class I for up to 10 switching operations/h
- Mounting positions and designs in this catalogue
- Standard lubricant
- $T_{amb} = 20 \text{ }^{\circ}\text{C}$ for gearboxes,
 $T_{amb} = 40 \text{ }^{\circ}\text{C}$ for motors (in accordance with EN 60034)
- Site altitude $< = 1000 \text{ m amsl}$
- The selection tables provide the permissible mechanical powers and torques. For notes on the thermal power limit, see chapter drive dimensioning.
- The rated power specified for motors and geared motors applies to operating mode S1 (in accordance with EN 60034).

Under different operating conditions, the values obtained may vary from those listed here.

In the case of extreme operating conditions, please consult your Lenze sales office.

g500-B bevel geared motors



General information

Dimensioning

Thermal power limit

The thermal power limit, defined by the heat balance, limits the permissible gearbox continuous power. It may be less than the mechanical power ratings listed in the selection tables.

The thermal power limit is affected by:

- the churning losses in the lubricant. These are determined by the mounting position and the circumferential speed of the gears;
- the load and the speed
- the ambient conditions: temperature, air circulation, input or dissipation via shafts and the foundation

If the following input speeds n_1 are exceeded, please contact Lenze:

Motor frame size	Mounting position A, B, E, F	Mounting position C, D
063 ... 100	4000 r/min	3000 r/min
112 ... 132	3000 r/min	1500 r/min

- ▶ For a short period of time up to 5 min, 30 % higher speeds are permissible

Possible ways of extending the application area

- synthetic lubricant (option)
- shaft sealing rings made from FP material/Viton (option)
- reduction in lubricant quantity
- cooling of the geared motor by means of air convection on the machine/system

g500-B bevel geared motors



General information

Dimensioning

Load capacity and application factor

Load capacity c of gearbox

Rated value for the load capacity of Lenze geared motors.

- c is the ratio of the permissible rated torque of the gearbox to the rated torque supplied by the drive component (e.g. the built-in Lenze motor).
- The value of c must always be greater than the value of the application factor k calculated for the application.


Application factor k (according to DIN 3990)

Takes into account the influence of temporally variable loads which are actually present during the anticipated operating time of gearboxes and geared motors.

k is determined by:

- the type of load
- the load intensity
- temporal influences

Duty class	Load type
I	Smooth operation, small or light jolts
II	Uneven operation, average jolts
III	Uneven operation, severe jolts and/or alternating load

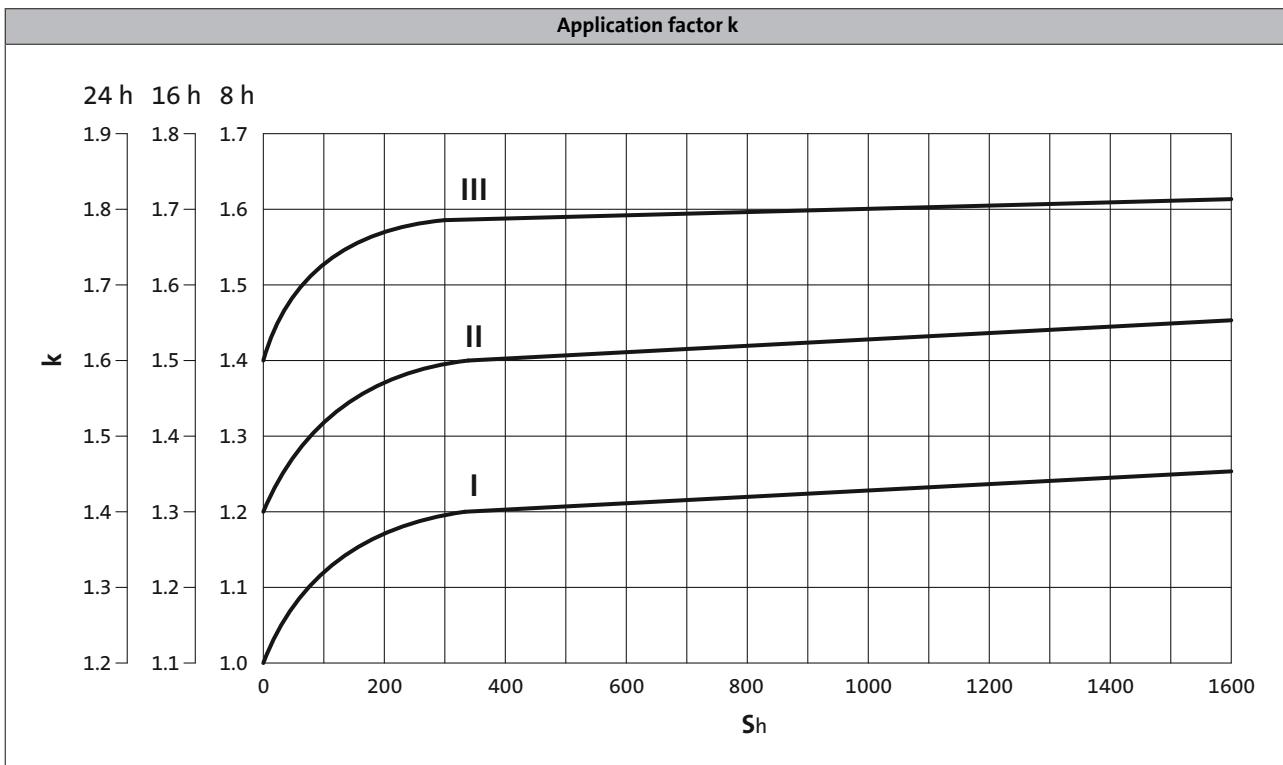

6.7

► S_h = switchings/h

g500-B bevel geared motors




General information

Dimensioning

Torque derating at low motor frequencies

Motor size-dependent torque reduction, taking into account the thermal response during operation on the inverter.

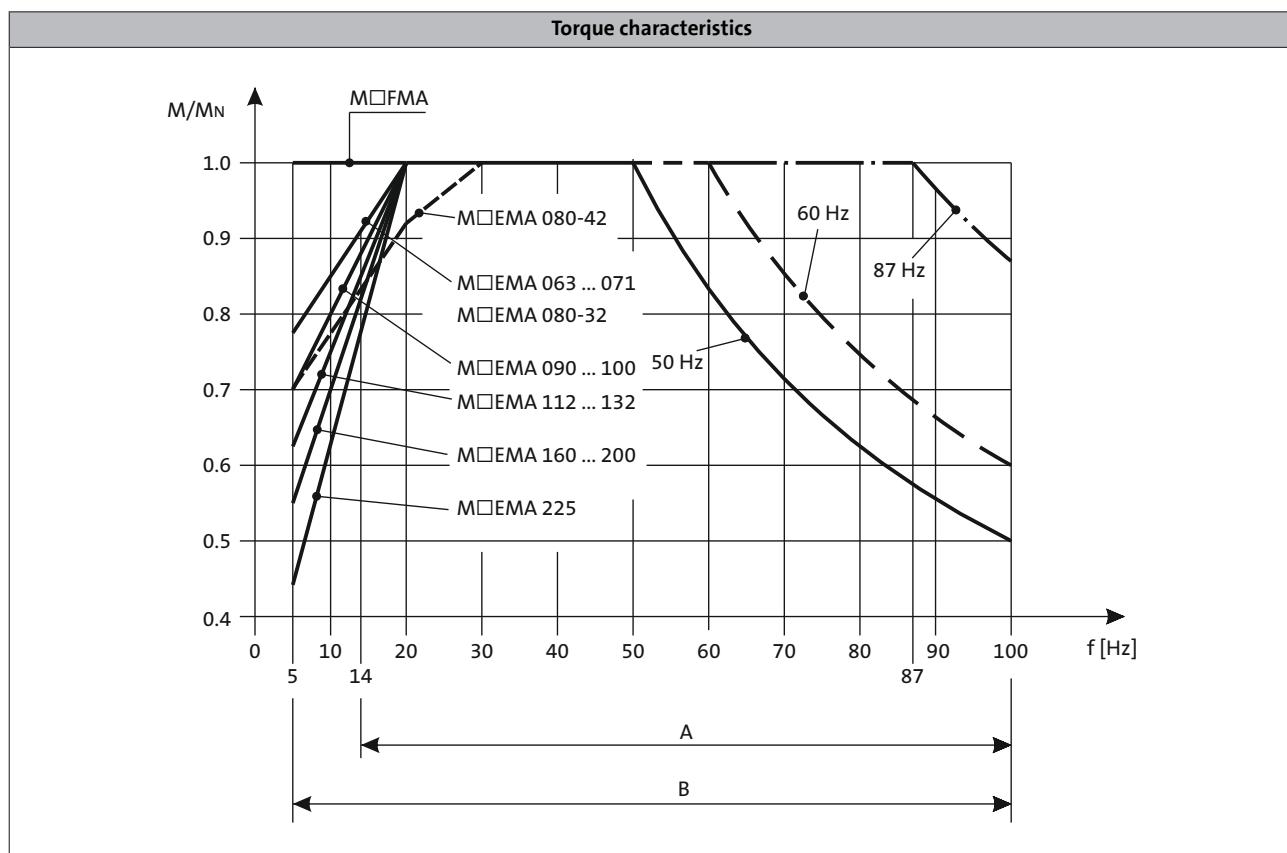

A = Operation with integral fan and brake

B = Operation with integral fan and brake control "Holding current reduction"

You can use the Drive Solution Designer for precise drive dimensioning.

The Drive Solution Designer helps you to carry out a fast and high-quality drive dimensioning.

The software includes well-founded and proven knowledge on drive applications and electro-mechanical drive components.

Please contact your Lenze sales office.

6.7

g500-B bevel geared motors



General information

Dimensioning

Weights

The values given in the tables consider the following gearbox/motor combination:

- Gearbox with hollow shaft without flange including lubricant amount for mounting position A
- Motor without built-on accessories (with integral fan)

For versions deviating from this, additional weights have to be considered.

The respective values can be found for:

- Geared motors without built-on accessories
 - > Chapter: Geared motors/Technical data
- Gearbox options
 - > Chapter: Gearboxes/Technical data and accessories
- Motor options: Spring-applied brake, feedback, 2. Shaft end, handwheel and increased centrifugal mass
 - > Chapter: Motors/Accessories

Moments of inertia

The given moments of inertia of the gearbox refer to the drive shaft. The influence of the ratio (i^2) has been considered in the data.

When the total moment of inertia of the geared motor is calculated, the values of the gearbox, motor and accessories have to be added.

The respective values can be found for:

- Gearboxes
 - > Chapter: Gearbox/Technical data
- Motors without built-on accessories
 - > Chapter: Motors/Technical data/Rated data
- Motor options: Spring-applied brake, feedback, 2. Shaft end, handwheel and increased centrifugal mass
 - > Chapter: Motors/Accessories

g500-B bevel geared motors



Technical data

Selection tables, notes

Notes on the selection tables with 4-pole motors

The selection tables show the available combinations of gearbox type, number of stages, ratio and motor. They are used only to provide basic orientation.

The following legend indicates the structure of the selection tables.

Rated power Prated of the drive motor depending on the rated frequency

50 Hz: $P_N = 0.06 \text{ kW}$
87 Hz: $P_N = 0.11 \text{ kW}$

Torque diagram

2-stufige Getriebe
← Number of the gear stage of the gearbox

Mains operation 400 V, 50 Hz			Inverter operation									i	Product			
			5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			g500	MD□MA□□		
n_2 [r/min]	M_2 [Nm]	c	n_{22} [r/min]	M_{22} [Nm]	n_{21} [r/min]	M_2 [Nm]	n_2 [r/min]	M_2 [Nm]	c	n_2 [r/min]	M_2 [Nm]	c				
146	7.0	5.4	8.3	7.0	35	7.0	146	7.0	5.4	146	7.0	5.4	17.378	-B45	063-02	60
131	8.0	4.9	7.5	7.6	31	8.0	131	8.0	4.9	131	8.0	4.9	19.365	-B45	063-02	60

↑
Mains operation
Output speed n_2
Output torque M_2

↑
Inverter operation
The speed and torque data are valid for self-ventilated and forced ventilated drives. Forced ventilated drives can always output the torque M_2 in the entire setting ranges. In the case of self-ventilated drives, a reduction to M_{22} is required in the lower speed range.

↑
Load capacity c of the gearbox
c is the ratio between the permissible rated torque of the gearbox and the rated torque of the three-phase AC motor (converted to the driven shaft).
c must be always higher than the service factor k determined for the application k.

↑
The following applies to self-ventilated geared motors:
 n_{22} is the minimum speed where the torque M_{22} is permissible, from n_{21} to n_2 , the maximum torque is M_2

↑
The following applies to forced ventilated geared motors:
From the minimum speed n_{22} to n_2 , the maximum torque is M_2

↑
Ratio i

↑
Product Gearbox

↑
Product Motor

↑
Page number for dimensions

Motor voltages

The power values and torques indicated in the selection tables relate to the following motor voltages:

- 50 Hz : Δ 230 V / Y 400 V
- 60 Hz : 230 V or 460 V
- 87 Hz : Δ 400 V

Operation at 87 Hz

In 87 Hz operation, the three-phase AC motor (which is designed for a voltage of Δ 230 V / Y 400 V at 50 Hz) is operated on an inverter with 400 V rated voltage in a delta connection. It is important to note here that the inverter must be configured for 87Hz output.

This offers the following advantages over 50 Hz operation:

- the setting range of the motor is increased by a factor of 1.73.
- the motor can then provide around 1.73 times greater output, which in turn allows a smaller and more affordable motor to be selected for the application.
- the efficiency of the motor is also improved.

g500-B bevel geared motors



Technical data

Selection tables, notes

Notes on the selection tables with 2-pole and 6-pole motors

The selection tables show the available combinations of gearbox type, number of stages, ratio and motor. They are used only to provide basic orientation.

The following legend indicates the structure of the selection tables.


Rated power Prated of the drive motor depending
on the rated frequency




50 Hz: $P_N = 0.18 \text{ kW}$

2-stufige Getriebe ← Number of the gear stage of the gearbox

Mains operation 400 V, 50 Hz			i	Product	
n ₂ [r/min]	M ₂ [Nm]	c		g500	MD□MA□□
239	7.0	5.7	11.449	-B110	063-11
216	8.0	5.3	12.698	-B110	063-11

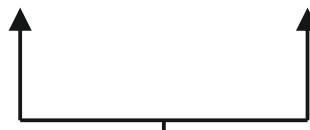

Mains operation
Output speed n₂
Output torque M₂

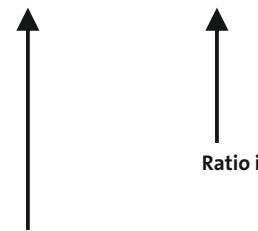


Load capacity c of the gearbox

c is the ratio between the permissible rated torque of the gearbox and the rated torque of the three-phase AC motor (converted to the driven shaft).

c must be always higher than the service factor k determined for the application k.

$$c = \frac{M_{2,zul}}{M_{1N} \cdot i \cdot \eta_{Getr}} > k$$

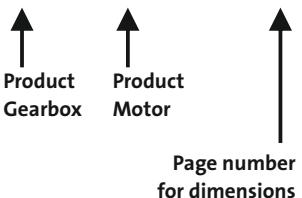

Product Gearbox Product Motor
Ratio i Page number
for dimensions

Motor voltages

The power values and torques indicated in the selection tables relate to the following motor voltages:

- 50 Hz : Δ 230 V / Y 400 V
- 60 Hz : 230 V or 460 V

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.06 \text{ kW}$
87 Hz: $P_N = 0.11 \text{ kW}$

2-stage gearboxes

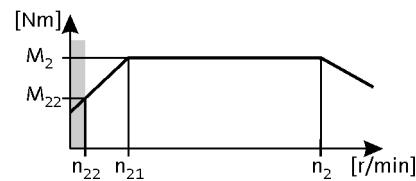

Mains operation 400 V, 50 Hz			Inverter operation												i	Product		
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c	g500	MD□MA□□	
64	9.0	5.3	6.5	8.5	27	9.0	64	9.0	5.3	114	9.0	4.3	22.270	-B45	063-02	60		
57	10	4.7	5.8	9.6	24	10	57	10	4.7	101	10	4.4	25.051	-B45	063-02	60		
50	11	4.1	5.0	11	21	11	50	11	4.1	88	11	3.8	28.808	-B45	063-02	60		
44	12	3.6	4.4	12	18	12	44	12	3.6	78	13	3.4	32.593	-B45	063-02	60		
38	14	3.1	3.9	14	16	14	38	14	3.1	68	15	2.9	37.481	-B45	063-02	60		
34	16	2.8	3.4	16	14	16	34	16	2.8	60	17	2.7	42.222	-B45	063-02	60		
29	19	2.4	3.0	19	12	19	29	19	2.4	52	19	2.4	48.556	-B45	063-02	60		
26	21	2.2	2.7	21	11	21	26	21	2.2	47	21	2.1	53.889	-B45	063-02	60		
23	24	1.9	2.3	24	9.7	24	23	24	1.9	41	24	1.8	61.972	-B45	063-02	60		

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.09 \text{ kW}$
87 Hz: $P_N = 0.16 \text{ kW}$

2-stage gearboxes

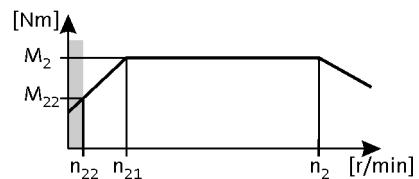

Mains operation 400 V, 50 Hz			Inverter operation									i	Product			
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			g500	MD□MA□□		
103	8.0	5.7	11	7.8	45	8.0	103	8.0	5.7	186	8.0	4.9	13.386	-B45	063-22	60
91	9.0	5.0	9.6	8.8	40	9.0	91	9.0	5.0	164	9.0	4.3	15.111	-B45	063-22	60
79	10	4.4	8.3	10	35	10	79	10	4.4	143	10	3.8	17.378	-B45	063-22	60
71	11	3.9	7.5	11	31	11	71	11	3.9	128	11	3.4	19.365	-B45	063-22	60
62	13	3.4	6.5	13	27	13	62	13	3.4	112	13	2.9	22.270	-B45	063-22	60
55	15	3.0	5.8	15	24	15	55	15	3.0	99	15	3.0	25.051	-B45	063-22	60
48	17	2.6	5.0	17	21	17	48	17	2.6	86	17	2.6	28.808	-B45	063-22	60
42	19	2.3	4.4	19	18	19	42	19	2.3	76	19	2.3	32.593	-B45	063-22	60
37	22	2.0	3.9	22	16	22	37	22	2.0	66	22	2.0	37.481	-B45	063-22	60
33	25	1.8	3.4	25	14	25	33	25	1.8	59	25	1.8	42.222	-B45	063-22	60
28	29	1.6	3.0	28	12	28	28	29	1.6	51	28	1.6	48.556	-B45	063-22	60
26	32	1.4	2.7	32	11	31	26	32	1.4	46	31	1.4	53.889	-B45	063-22	60
22	37	1.2	2.3	36	9.7	36	22	37	1.2	40	36	1.2	61.972	-B45	063-22	60

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.12 \text{ kW}$
87 Hz: $P_N = 0.21 \text{ kW}$

2-stage gearboxes

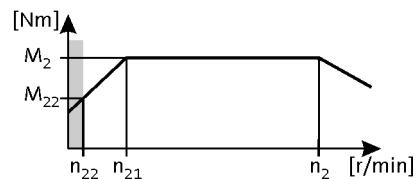

Mains operation 400 V, 50 Hz			Inverter operation												i	Product		
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c	g500	MD□MA□□	
			20	4.2	84	5.0				357	5.0		7.111	-B45	063-12	60		
			18	4.8	73	6.0				310	6.0		8.178	-B45	063-12	60		
			16	5.4	66	7.0				279	7.0		9.101	-B45	063-12	60		
136	8.0	5.6	14	6.2	57	8.0	136	8.0	5.6	242	8.0	4.8	10.466	-B45	063-12	60		
122	9.0	5.1	13	6.8	52	9.0	122	9.0	5.1	218	9.0	4.3	11.640	-B45	063-12	60		
			11	7.5	47	10				200	10	5.5	12.698	-B110	063-12	63		
107	10	4.4	11	7.9	45	10	107	10	4.4	189	10	3.8	13.386	-B45	063-12	60		
94	12	3.9	9.6	8.9	40	11	94	12	3.9	168	11	3.3	15.111	-B45	063-12	60		
82	13	3.4	8.3	10	35	13	82	13	3.4	146	13	2.9	17.378	-B45	063-12	60		
74	15	3.0	7.5	11	31	15	74	15	3.0	131	15	2.6	19.365	-B45	063-12	60		
73	15	5.5	7.4	12	31	15	73	15	5.5	130	15	4.7	19.556	-B110	063-12	63		
64	17	2.6	6.5	13	27	17	64	17	2.6	114	17	2.3	22.270	-B45	063-12	60		
63	17	5.5	6.4	13	27	17	63	17	5.5	113	17	4.7	22.489	-B110	063-12	63		
57	19	2.4	5.8	15	24	19	57	19	2.4	101	19	2.3	25.051	-B45	063-12	60		
57	19	4.6	5.8	15	24	19	57	19	4.6	101	19	3.9	25.185	-B110	063-12	63		
50	22	2.0	5.0	17	21	22	50	22	2.0	88	22	2.0	28.808	-B45	063-12	60		
49	22	4.6	5.0	17	21	22	49	22	4.6	88	22	3.9	28.963	-B110	063-12	63		
45	24	4.0	4.5	19	19	24	45	24	4.0	79	24	3.4	31.919	-B110	063-12	63		
44	25	1.8	4.4	19	18	24	44	25	1.8	78	24	1.8	32.593	-B45	063-12	60		
38	29	3.7	3.9	22	16	28	38	29	3.7	68	28	3.2	37.400	-B110	063-12	63		
38	29	1.6	3.9	22	16	28	38	29	1.6	68	28	1.5	37.481	-B45	063-12	60		
36	31	3.3	3.6	24	15	30	36	31	3.3	63	30	3.2	40.000	-B110	063-12	63		
34	32	1.4	3.4	25	14	32	34	32	1.4	60	32	1.4	42.222	-B45	063-12	60		
31	35	3.1	3.2	27	13	35	31	35	3.1	55	35	3.0	46.000	-B110	063-12	63		
30	37	3.0	3.0	28	13	36	30	37	3.0	53	36	2.9	48.167	-B110	063-12	63		
29	37	1.2	3.0	29	12	36	29	37	1.2	52	36	1.2	48.556	-B45	063-12	60		
27	40	1.7	2.8	31	11	40	27	40	1.7	48	40	1.7	52.698	-B110	063-12	63		
26	41	1.1	2.7	32	11	40	26	41	1.1	47	40	1.1	53.889	-B45	063-12	60		
24	46	1.7	2.4	36	9.9	46	24	46	1.7	42	46	1.7	60.603	-B110	063-12	63		
23	47	2.4	2.4	36	9.8	46	23	47	2.4	42	46	2.4	61.045	-B110	063-12	63		
21	51	3.1	2.2	40	8.9	50	21	51	3.1	38	50	3.2	67.113	-B240	063-12	66		
19	58	3.1	1.9	45	7.9	57	19	58	3.1	33	57	3.2	76.213	-B240	063-12	66		
19	58	1.9	1.9	45	7.8	57	19	58	1.9	33	57	1.9	76.500	-B110	063-12	63		
14	77	1.4	1.4	59	6.0	76	14	77	1.4	25	76	1.5	100.786	-B110	063-12	63		

3-stage gearboxes

Mains operation 400 V, 50 Hz			Inverter operation												i	Product		
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c	g500	MD□MA□□	
21	51	4.7	2.1	39	8.8	50	21	51	4.7	37	50	4.6	68.459	-B240	063-12	66		

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.12 \text{ kW}$
87 Hz: $P_N = 0.21 \text{ kW}$

3-stage gearboxes

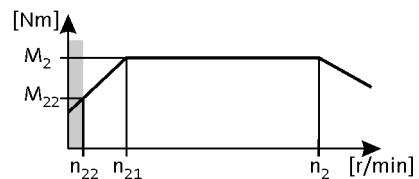

Mains operation 400 V, 50 Hz			Inverter operation									i	Product			
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			g500	MD□MA□□		
16	65	3.7	1.7	50	6.9	64	16	65	3.7	29	64	3.6	87.563	-B240	063-12	66
14	74	3.2	1.5	57	6.0	73	14	74	3.2	26	73	3.1	99.437	-B240	063-12	66
13	85	2.8	1.3	65	5.3	83	13	85	2.8	22	83	2.9	113.673	-B240	063-12	66
11	96	2.5	1.1	74	4.6	95	11	96	2.5	20	95	2.5	129.087	-B240	063-12	66
9.8	108	2.2	1.0	84	4.1	107	9.8	108	2.2	17	107	2.3	145.674	-B240	063-12	66
8.6	123	2.0	0.9	95	3.6	121	8.6	123	2.0	15	121	2.0	165.426	-B240	063-12	66
7.6	140	1.7	0.8	108	3.2	138	7.6	140	1.7	14	138	1.7	188.442	-B240	063-12	66
7.3	148	3.0	0.7	114	3.1	146	7.3	148	3.0	13	146	3.1	193.948	-B450	063-12	69
6.7	159	1.5	0.7	123	2.8	157	6.7	159	1.5	12	157	1.5	213.994	-B240	063-12	66
6.4	171	2.6	0.6	132	2.7	168	6.4	171	2.6	11	168	2.7	223.563	-B450	063-12	69
5.8	183	1.3	0.6	141	2.4	180	5.8	183	1.3	10	180	1.3	245.178	-B240	063-12	66
5.7	189	2.4	0.6	146	2.4	186	5.7	189	2.4	10	186	2.4	247.882	-B450	063-12	69
5.1	207	1.2	0.5	160	2.2	204	5.1	207	1.2	9.1	204	1.2	278.422	-B240	063-12	66
4.5	237	1.0	0.5	182	1.9	233	4.5	237	1.0	8.0	233	1.0	317.617	-B240	063-12	66

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.18 \text{ kW}$
87 Hz: $P_N = 0.33 \text{ kW}$

2-stage gearboxes

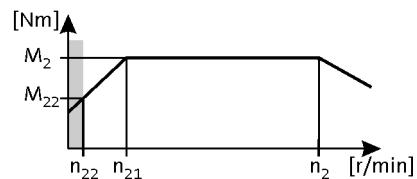

Mains operation 400 V, 50 Hz			Inverter operation									i	Product			
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			g500	MD□MA□□		
252	6.0	4.7	27	5.0	111	6.0	252	6.0	4.7	457	7.0	3.9	5.411	-B45	063-32	60
219	7.0	4.7	23	5.7	96	7.0	219	7.0	4.7	398	8.0	3.9	6.222	-B45	063-32	60
192	9.0	4.5	20	6.6	84	9.0	192	9.0	4.5	348	9.0	3.7	7.111	-B45	063-32	60
167	10	4.5	18	7.5	73	10	167	10	4.5	303	10	3.7	8.178	-B45	063-32	60
150	11	4.1	16	8.4	66	11	150	11	4.1	272	11	3.5	9.101	-B45	063-32	60
130	13	3.6	14	9.6	57	13	130	13	3.6	237	13	3.0	10.466	-B45	063-32	60
119	14	4.5	13	11	52	14	119	14	4.5	216	14	3.7	11.449	-B110	063-32	63
117	14	3.2	13	11	52	14	117	14	3.2	213	14	2.7	11.640	-B45	063-32	60
108	15	4.1	11	12	47	15	108	15	4.1	195	15	3.5	12.698	-B110	063-32	63
102	16	2.8	11	12	45	16	102	16	2.8	185	16	2.4	13.386	-B45	063-32	60
94	17	4.1	9.9	14	41	17	94	17	4.1	170	18	3.5	14.603	-B110	063-32	63
90	18	2.5	9.6	14	40	18	90	18	2.5	164	18	2.1	15.111	-B45	063-32	60
79	21	2.2	8.3	16	35	21	79	21	2.2	142	21	1.8	17.378	-B45	063-32	60
71	23	1.9	7.5	18	31	23	71	23	1.9	128	23	1.6	19.365	-B45	063-32	60
70	23	3.5	7.4	18	31	23	70	23	3.5	127	24	2.9	19.556	-B110	063-32	63
61	27	1.7	6.5	21	27	27	61	27	1.7	111	27	1.4	22.270	-B45	063-32	60
61	27	3.5	6.4	21	27	27	61	27	3.5	110	27	2.9	22.489	-B110	063-32	63
55	30	1.5	5.8	23	24	30	55	30	1.5	99	30	1.4	25.051	-B45	063-32	60
54	30	2.9	5.8	23	24	30	54	30	2.9	98	30	2.5	25.185	-B110	063-32	63
47	34	1.3	5.0	27	21	34	47	34	1.3	86	35	1.2	28.808	-B45	063-32	60
47	35	2.9	5.0	27	21	35	47	35	2.9	86	35	2.5	28.963	-B110	063-32	63
43	38	2.6	4.5	29	19	38	43	38	2.6	78	39	2.2	31.919	-B110	063-32	63
42	39	1.2	4.4	30	18	39	42	39	1.2	76	39	1.1	32.593	-B45	063-32	60
37	44	2.5	4.0	34	16	44	37	44	2.5	67	44	2.1	36.707	-B110	063-32	63
37	45	2.4	3.9	35	16	45	37	45	2.4	66	45	2.0	37.400	-B110	063-32	63
36	45	1.0	3.9	35	16	45	36	45	1.0				37.481	-B45	063-32	60
34	48	2.1	3.6	37	15	48	34	48	2.1	62	48	2.0	40.000	-B110	063-32	63
32	52	2.9	3.4	40	14	52	32	52	2.9	57	52	2.8	43.267	-B240	063-32	66
30	55	2.0	3.2	42	13	55	30	55	2.0	54	56	1.9	46.000	-B110	063-32	63
28	58	1.9	3.0	44	13	58	28	58	1.9	51	58	1.8	48.167	-B110	063-32	63
28	59	2.9	3.0	45	12	59	28	59	2.9	50	59	2.8	49.133	-B240	063-32	66
26	63	2.6	2.8	48	11	63	26	63	2.6	47	64	2.4	52.510	-B240	063-32	66
26	63	1.1	2.8	49	11	63	26	63	1.1	47	64	1.0	52.698	-B110	063-32	63
23	71	2.6	2.4	55	10	71	23	71	2.6	42	72	2.4	59.630	-B240	063-32	66
23	73	1.1	2.4	56	9.9	73	23	73	1.1	41	73	1.1	60.603	-B110	063-32	63

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.18 \text{ kW}$
87 Hz: $P_N = 0.33 \text{ kW}$

2-stage gearboxes

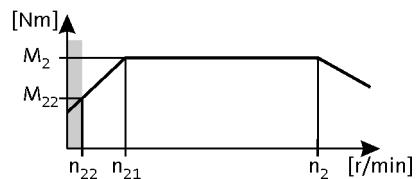

Mains operation 400 V, 50 Hz			Inverter operation												i	Product			
			5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)						g500	MD□MA□□		
n_2 [r/min]	M_2 [Nm]	c	n_{22} [r/min]	M_{22} [Nm]	n_{21} [r/min]	M_2 [Nm]	n_2 [r/min]	M_2 [Nm]	c	n_2 [r/min]	M_2 [Nm]	c	n_2 [r/min]	M_2 [Nm]	c				
22	73	1.5	2.4	56	9.8	73	22	73	1.5	41	74	1.5	61.045	-B110	063-32	63			
20	80	2.0	2.2	62	8.9	80	20	80	2.0	37	81	2.0	67.113	-B240	063-32	66			
18	91	2.0	1.9	70	7.9	91	18	91	2.0	33	92	2.0	76.213	-B240	063-32	66			
18	92	1.2	1.9	71	7.8	92	18	92	1.2	32	93	1.2	76.500	-B110	063-32	63			

3-stage gearboxes

Mains operation 400 V, 50 Hz			Inverter operation												i	Product			
			5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)						g500	MD□MA□□		
n_2 [r/min]	M_2 [Nm]	c	n_{22} [r/min]	M_{22} [Nm]	n_{21} [r/min]	M_2 [Nm]	n_2 [r/min]	M_2 [Nm]	c	n_2 [r/min]	M_2 [Nm]	c	n_2 [r/min]	M_2 [Nm]	c				
20	80	3.0	2.1	62	8.8	80	20	80	3.0	36	81	2.9	68.459	-B240	063-32	66			
18	91	2.7	1.9	70	7.7	91	18	91	2.7	32	92	2.5	77.741	-B240	063-32	66			
16	102	2.4	1.7	79	6.9	102	16	102	2.4	28	103	2.2	87.563	-B240	063-32	66			
14	116	2.1	1.5	89	6.0	116	14	116	2.1	25	117	2.0	99.437	-B240	063-32	66			
12	133	1.8	1.3	102	5.3	133	12	133	1.8	22	134	1.8	113.673	-B240	063-32	66			
11	151	1.6	1.1	116	4.6	151	11	151	1.6	19	152	1.6	129.087	-B240	063-32	66			
9.5	172	2.6	1.0	133	4.2	172	9.5	172	2.6	17	174	2.6	144.128	-B450	063-32	69			
9.4	170	1.4	1.0	131	4.1	170	9.4	170	1.4	17	172	1.4	145.674	-B240	063-32	66			
8.5	191	2.4	0.9	147	3.8	191	8.5	191	2.4	16	193	2.3	159.807	-B450	063-32	69			
8.3	193	1.2	0.9	149	3.6	193	8.3	193	1.2	15	195	1.2	165.426	-B240	063-32	66			
7.8	209	2.2	0.8	161	3.4	209	7.8	209	2.2	14	212	2.1	174.919	-B450	063-32	69			
7.2	220	1.1	0.8	169	3.2	220	7.2	220	1.1	13	222	1.1	188.442	-B240	063-32	66			
7.0	232	1.9	0.7	179	3.1	232	7.0	232	1.9	13	235	1.9	193.948	-B450	063-32	69			
6.1	267	1.7	0.6	206	2.7	267	6.1	267	1.7	11	270	1.7	223.563	-B450	063-32	69			
5.5	296	1.5	0.6	228	2.4	296	5.5	296	1.5	10	300	1.5	247.882	-B450	063-32	69			

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.25 \text{ kW}$
87 Hz: $P_N = 0.45 \text{ kW}$

2-stage gearboxes

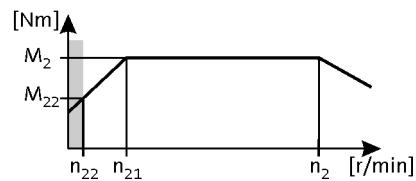

Mains operation 400 V, 50 Hz			Inverter operation												i	Product		
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)				g500	MD□MA□□			
264	9.0	5.6	28	6.6	116	9.0	264	9.0	5.6	478	9.0	4.8	5.185	-B110	063-42	63		
253	9.0	4.4	27	6.9	111	9.0	253	9.0	4.4	458	9.0	3.7	5.411	-B45	063-42	60		
230	10	5.6	24	7.6	101	10	230	10	5.6	416	10	4.8	5.963	-B110	063-42	63		
220	10	3.9	23	7.9	96	10	220	10	3.9	399	10	3.3	6.222	-B45	063-42	60		
193	12	3.7	20	9.1	84	12	193	12	3.7	349	12	3.1	7.111	-B45	063-42	60		
193	12	5.6	20	9.1	84	12	193	12	5.6	349	12	4.8	7.111	-B110	063-42	63		
168	14	3.3	18	10	73	13	168	14	3.3	303	13	2.8	8.178	-B45	063-42	60		
168	14	5.6	18	10	73	13	168	14	5.6	303	13	4.8	8.178	-B110	063-42	63		
151	15	3.0	16	12	66	15	151	15	3.0	273	15	2.5	9.101	-B45	063-42	60		
151	15	5.2	16	12	66	15	151	15	5.2	273	15	4.4	9.101	-B110	063-42	63		
131	17	2.6	14	13	57	17	131	17	2.6	237	17	2.2	10.466	-B45	063-42	60		
131	17	5.1	14	13	57	17	131	17	5.1	237	17	4.4	10.466	-B110	063-42	63		
120	19	4.8	13	15	52	19	120	19	4.8	217	19	4.0	11.449	-B110	063-42	63		
118	19	2.3	13	15	52	19	118	19	2.3	213	19	2.0	11.640	-B45	063-42	60		
108	21	4.3	11	16	47	21	108	21	4.3	195	21	3.6	12.698	-B110	063-42	63		
102	22	2.0	11	17	45	22	102	22	2.0	185	22	1.7	13.386	-B45	063-42	60		
94	24	3.7	9.9	19	41	24	94	24	3.7	170	24	3.2	14.603	-B110	063-42	63		
91	25	1.8	9.6	19	40	25	91	25	1.8	164	25	1.5	15.111	-B45	063-42	60		
88	26	3.6	9.3	20	39	26	88	26	3.6	159	26	3.0	15.556	-B110	063-42	63		
79	29	1.6	8.3	22	35	29	79	29	1.6	143	29	1.3	17.378	-B45	063-42	60		
77	30	3.2	8.1	23	34	29	77	30	3.2	139	29	2.8	17.889	-B110	063-42	63		
71	32	1.4	7.5	25	31	32	71	32	1.4	128	32	1.2	19.365	-B45	063-42	60		
70	32	3.1	7.4	25	31	32	70	32	3.1	127	32	2.6	19.556	-B110	063-42	63		
62	37	1.2	6.5	28	27	37	62	37	1.2	111	37	1.0	22.270	-B45	063-42	60		
61	37	2.8	6.4	29	27	37	61	37	2.8	110	37	2.4	22.489	-B110	063-42	63		
55	41	1.1	5.8	32	24	41	55	41	1.1	99	41	1.1	25.051	-B45	063-42	60		
54	42	2.6	5.8	32	24	41	54	42	2.6	99	41	2.2	25.185	-B110	063-42	63		
47	48	2.3	5.0	37	21	48	47	48	2.3	86	48	2.0	28.963	-B110	063-42	63		
43	53	2.0	4.5	41	19	53	43	53	2.0	78	53	1.7	31.919	-B110	063-42	63		
37	61	1.8	4.0	47	16	60	37	61	1.8	68	60	1.5	36.707	-B110	063-42	63		
37	62	1.7	3.9	48	16	62	37	62	1.7	66	62	1.5	37.400	-B110	063-42	63		
34	66	1.2	3.6	51	15	66	34	66	1.2	62	66	1.2	40.000	-B110	063-42	63		
30	76	1.2	3.2	59	13	76	30	76	1.2	54	76	1.2	46.000	-B110	063-42	63		
28	80	1.4	3.0	61	13	79	28	80	1.4	52	79	1.3	48.167	-B110	063-42	63		
28	81	3.0	3.0	63	12	81	28	81	3.0	51	81	2.9	49.133	-B240	063-42	66		

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.25 \text{ kW}$
87 Hz: $P_N = 0.45 \text{ kW}$

2-stage gearboxes

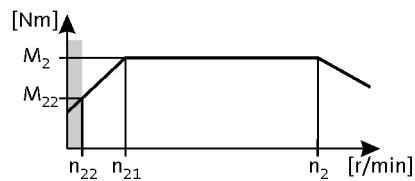

Mains operation 400 V, 50 Hz			Inverter operation									i	Product			
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c	
26	87	2.7	2.8	67	11	86	26	87	2.7	47	86	2.6	52.510	-B240	063-42	66
23	99	2.4	2.4	76	10	98	23	99	2.4	42	98	2.4	59.630	-B240	063-42	66
22	101	1.1	2.4	78	9.8	100	22	101	1.1	41	100	1.1	61.045	-B110	063-42	63
20	111	1.4	2.2	86	8.9	110	20	111	1.4	37	110	1.4	67.113	-B240	063-42	66
18	126	1.4	1.9	97	7.9	125	18	126	1.4	33	125	1.4	76.213	-B240	063-42	66

3-stage gearboxes

Mains operation 400 V, 50 Hz			Inverter operation									i	Product			
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c	
20	110	2.2	2.1	85	8.8	110	20	110	2.2	36	110	2.1	68.459	-B240	063-42	66
18	125	1.9	1.9	97	7.7	125	18	125	1.9	32	125	1.9	77.741	-B240	063-42	66
16	141	1.7	1.7	109	6.9	140	16	141	1.7	28	140	1.6	87.563	-B240	063-42	66
15	148	3.0	1.6	114	6.7	147	15	148	3.0	28	147	2.9	89.534	-B450	063-42	69
14	164	2.7	1.5	127	6.0	163	14	164	2.7	25	163	2.7	99.274	-B450	063-42	69
14	160	1.5	1.5	124	6.0	160	14	160	1.5	25	160	1.5	99.437	-B240	063-42	66
12	184	2.4	1.3	142	5.4	183	12	184	2.4	22	183	2.5	111.372	-B450	063-42	69
12	183	1.3	1.3	141	5.3	182	12	183	1.3	22	182	1.3	113.673	-B240	063-42	66
11	204	2.2	1.2	157	4.9	203	11	204	2.2	20	203	2.2	123.487	-B450	063-42	69
11	208	1.2	1.1	160	4.6	207	11	208	1.2	19	207	1.2	129.087	-B240	063-42	66
9.5	239	1.9	1.0	184	4.2	237	9.5	239	1.9	17	237	1.9	144.128	-B450	063-42	69
9.4	235	1.0	1.0	181	4.1	234	9.4	235	1.0	17	234	1.0	145.674	-B240	063-42	66
8.6	265	1.7	0.9	204	3.8	263	8.6	265	1.7	16	263	1.7	159.807	-B450	063-42	69
7.8	290	1.6	0.8	223	3.4	288	7.8	290	1.6	14	288	1.6	174.919	-B450	063-42	69
7.1	321	1.4	0.7	247	3.1	319	7.1	321	1.4	13	319	1.4	193.948	-B450	063-42	69
6.1	370	1.2	0.6	285	2.7	368	6.1	370	1.2	11	368	1.2	223.563	-B450	063-42	69
5.5	410	1.1	0.6	316	2.4	408	5.5	410	1.1	10	408	1.1	247.882	-B450	063-42	69

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.37 \text{ kW}$
87 Hz: $P_N = 0.66 \text{ kW}$

2-stage gearboxes

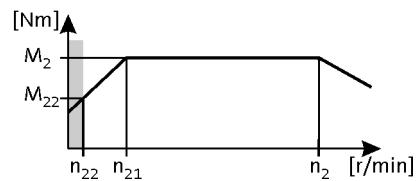

Mains operation 400 V, 50 Hz			Inverter operation									i	Product			
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c	
272	12	4.9	28	9.5	116	12	272	12	4.9			5.185	-B110	071-32	63	
261	13	3.0	27	9.9	111	13	261	13	3.0	466	13	2.6	5.411	-B45	071-32	60
237	14	4.9	24	11	101	14	237	14	4.9			5.963	-B110	071-32	63	
227	15	2.7	23	11	96	15	227	15	2.7	405	15	2.3	6.222	-B45	071-32	60
198	17	2.5	20	13	84	17	198	17	2.5	354	17	2.1	7.111	-B45	071-32	60
198	17	4.6	20	13	84	17	198	17	4.6			7.111	-B110	071-32	63	
172	19	2.3	18	15	73	19	172	19	2.3	308	19	1.9	8.178	-B45	071-32	60
172	19	4.2	18	15	73	19	172	19	4.2			8.178	-B110	071-32	63	
155	22	2.1	16	17	66	22	155	22	2.1	277	22	1.8	9.101	-B45	071-32	60
155	22	3.9	16	17	66	22	155	22	3.9			9.101	-B110	071-32	63	
135	25	1.8	14	19	57	25	135	25	1.8	241	25	1.5	10.466	-B45	071-32	60
135	25	3.6	14	19	57	25	135	25	3.6			10.466	-B110	071-32	63	
123	27	3.3	13	21	52	27	123	27	3.3			11.449	-B110	071-32	63	
121	28	1.6	13	21	52	28	121	28	1.6	217	28	1.4	11.640	-B45	071-32	60
111	30	3.0	11	23	47	30	111	30	3.0	198	30	2.5	12.698	-B110	071-32	63
105	32	1.4	11	25	45	32	105	32	1.4	188	32	1.2	13.386	-B45	071-32	60
97	35	2.6	9.9	27	41	35	97	35	2.6	173	35	2.2	14.603	-B110	071-32	63
93	36	1.3	9.6	28	40	36	93	36	1.3	167	36	1.1	15.111	-B45	071-32	60
91	37	2.5	9.3	29	39	37	91	37	2.5	162	37	2.1	15.556	-B110	071-32	63
81	41	1.1	8.3	32	35	41	81	41	1.1			17.378	-B45	071-32	60	
79	43	2.3	8.1	33	34	43	79	43	2.3	141	43	1.9	17.889	-B110	071-32	63
72	47	2.2	7.4	36	31	46	72	47	2.2	129	46	1.8	19.556	-B110	071-32	63
63	54	1.9	6.4	41	27	53	63	54	1.9	112	53	1.6	22.489	-B110	071-32	63
56	60	1.8	5.8	46	24	60	56	60	1.8	100	60	1.5	25.185	-B110	071-32	63
49	69	1.6	5.0	53	21	69	49	69	1.6	87	69	1.3	28.963	-B110	071-32	63
44	76	1.4	4.5	59	19	76	44	76	1.4	79	76	1.2	31.919	-B110	071-32	63
42	80	3.0	4.3	61	18	79	42	80	3.0	75	79	2.5	33.433	-B240	071-32	66
38	87	1.3	4.0	67	16	87	38	87	1.3	69	87	1.1	36.707	-B110	071-32	63
38	89	1.2	3.9	69	16	89	38	89	1.2	67	89	1.0	37.400	-B110	071-32	63
37	90	2.7	3.8	70	16	90	37	90	2.7	66	90	2.2	37.967	-B240	071-32	66
35	95	1.1	3.6	73	15	95	35	95	1.1	63	95	1.0	40.000	-B110	071-32	63
33	103	2.3	3.4	79	14	103	33	103	2.3	58	103	2.2	43.267	-B240	071-32	66
31	110	1.0	3.2	84	13	110	31	110	1.0				46.000	-B110	071-32	63
29	117	2.1	3.0	90	12	117	29	117	2.1	51	117	2.0	49.133	-B240	071-32	66
27	125	1.9	2.8	96	11	125	27	125	1.9	48	125	1.8	52.510	-B240	071-32	66

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.37 \text{ kW}$
87 Hz: $P_N = 0.66 \text{ kW}$

2-stage gearboxes

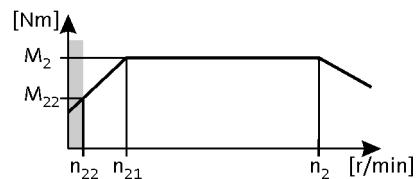

Mains operation 400 V, 50 Hz			Inverter operation												i	Product g500	
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c		
24	142	1.7	2.4	109	10	142	24	142	1.7	42	142	1.6	59.630	-B240	071-32	66	
21	160	1.1	2.2	123	8.9	159	21	160	1.1	38	159	1.1	67.113	-B240	071-32	66	
19	181	1.1	1.9	140	7.9	181	19	181	1.1	33	181	1.1	76.213	-B240	071-32	66	

3-stage gearboxes

Mains operation 400 V, 50 Hz			Inverter operation												i	Product g500	
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c		
31	108	3.2	3.2	83	13	108	31	108	3.2				45.245	-B450	071-32	69	
28	119	3.2	2.9	92	12	119	28	119	3.2				50.167	-B450	071-32	69	
23	148	3.0	2.3	114	9.6	148	23	148	3.0	41	148	2.9	62.262	-B450	071-32	69	
21	159	1.5	2.1	122	8.8	159	21	159	1.5	37	159	1.5	68.459	-B240	071-32	66	
18	180	1.3	1.9	139	7.7	180	18	180	1.3	32	180	1.3	77.741	-B240	071-32	66	
16	203	1.2	1.7	157	6.9	203	16	203	1.2	29	203	1.1	87.563	-B240	071-32	66	
16	213	2.1	1.6	164	6.7	213	16	213	2.1	28	213	2.0	89.534	-B450	071-32	69	
14	236	1.9	1.5	182	6.0	236	14	236	1.9	25	236	1.8	99.274	-B450	071-32	69	
14	231	1.0	1.5	178	6.0	230	14	231	1.0	25	230	1.0	99.437	-B240	071-32	66	
13	265	1.7	1.3	204	5.4	265	13	265	1.7	23	265	1.7	111.372	-B450	071-32	69	
11	294	1.5	1.2	226	4.9	293	11	294	1.5	20	293	1.5	123.487	-B450	071-32	69	
9.8	343	1.3	1.0	264	4.2	342	9.8	343	1.3	18	342	1.3	144.128	-B450	071-32	69	
8.8	380	1.2	0.9	293	3.8	380	8.8	380	1.2	16	380	1.2	159.807	-B450	071-32	69	
8.1	416	1.1	0.8	321	3.4	416	8.1	416	1.1	14	416	1.1	174.919	-B450	071-32	69	

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.55 \text{ kW}$
87 Hz: $P_N = 1.0 \text{ kW}$

2-stage gearboxes

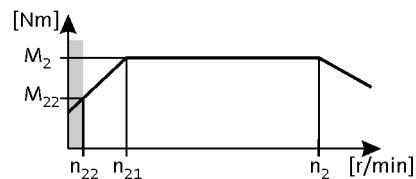

Mains operation 400 V, 50 Hz			Inverter operation												i	Product g500		
			5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)								
n_2 [r/min]	M_2 [Nm]	c	n_{22} [r/min]	M_{22} [Nm]	n_{21} [r/min]	M_2 [Nm]	n_2 [r/min]	M_2 [Nm]	c	n_2 [r/min]	M_2 [Nm]	c						
394	13	5.1	41	9.7	168	13	394	13	5.1						3.565	-B240	071-42	66
271	18	3.8	28	14	116	18	271	18	3.8						5.185	-B110	071-42	63
260	19	2.0	27	15	111	19	260	19	2.0	465	20	1.7			5.411	-B45	071-42	60
236	21	3.4	24	16	101	21	236	21	3.4						5.963	-B110	071-42	63
226	22	1.8	23	17	96	22	226	22	1.8	404	22	1.5			6.222	-B45	071-42	60
225	22	4.5	23	17	96	22	225	22	4.5						6.257	-B240	071-42	66
198	25	1.7	20	19	84	25	198	25	1.7	354	26	1.4			7.111	-B45	071-42	60
198	25	3.1	20	19	84	25	198	25	3.1	354	26	2.5			7.111	-B110	071-42	63
172	29	1.5	18	22	73	29	172	29	1.5	308	29	1.3			8.178	-B45	071-42	60
172	29	2.8	18	22	73	29	172	29	2.8	308	29	2.3			8.178	-B110	071-42	63
154	32	1.4	16	25	66	32	154	32	1.4	276	33	1.2			9.101	-B45	071-42	60
154	32	2.6	16	25	66	32	154	32	2.6	276	33	2.2			9.101	-B110	071-42	63
134	37	1.2	14	29	57	37	134	37	1.2	240	38	1.0			10.466	-B45	071-42	60
134	37	2.4	14	29	57	37	134	37	2.4	240	38	2.0			10.466	-B110	071-42	63
123	41	2.2	13	31	52	41	123	41	2.2	220	41	1.8			11.449	-B110	071-42	63
121	41	1.1	13	32	52	41	121	41	1.1						11.640	-B45	071-42	60
111	45	2.0	11	35	47	45	111	45	2.0	198	46	1.7			12.698	-B110	071-42	63
96	52	1.7	9.9	40	41	52	96	52	1.7	172	53	1.4			14.603	-B110	071-42	63
90	55	1.7	9.3	43	39	55	90	55	1.7	162	56	1.4			15.556	-B110	071-42	63
79	64	1.5	8.1	49	34	64	79	64	1.5	141	65	1.3			17.889	-B110	071-42	63
72	69	1.4	7.4	54	31	69	72	69	1.4	129	71	1.2			19.556	-B110	071-42	63
63	80	1.3	6.4	62	27	80	63	80	1.3	112	81	1.1			22.489	-B110	071-42	63
60	83	2.9	6.2	64	26	83	60	83	2.9	107	85	2.4			23.450	-B240	071-42	66
56	89	1.2	5.8	69	24	89	56	89	1.2	100	91	1.0			25.185	-B110	071-42	63
52	95	2.5	5.4	74	22	95	52	95	2.5	94	97	2.1			26.878	-B240	071-42	66
49	103	1.1	5.0	79	21	103	49	103	1.1						28.963	-B110	071-42	63
46	108	2.2	4.8	84	20	108	46	108	2.2	82	110	1.8			30.522	-B240	071-42	66
42	119	2.0	4.3	91	18	119	42	119	2.0	75	121	1.7			33.433	-B240	071-42	66
37	135	1.8	3.8	104	16	135	37	135	1.8	66	137	1.5			37.967	-B240	071-42	66
33	154	1.6	3.4	118	14	154	33	154	1.6	58	156	1.5			43.267	-B240	071-42	66
29	174	1.4	3.0	134	12	174	29	174	1.4	51	177	1.3			49.133	-B240	071-42	66
27	186	1.3	2.8	144	11	186	27	186	1.3	48	189	1.2			52.510	-B240	071-42	66
24	212	1.1	2.4	163	10	212	24	212	1.1	42	215	1.1			59.630	-B240	071-42	66

6.7

3-stage gearboxes

Mains operation 400 V, 50 Hz			Inverter operation												i	Product g500		
			5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)								
n_2 [r/min]	M_2 [Nm]	c	n_{22} [r/min]	M_{22} [Nm]	n_{21} [r/min]	M_2 [Nm]	n_2 [r/min]	M_2 [Nm]	c	n_2 [r/min]	M_2 [Nm]	c						
35	143	3.1	3.6	110	15	143	35	143	3.1	62	145	3.0			40.330	-B450	071-42	69
31	161	2.8	3.2	124	13	161	31	161	2.8	56	163	2.6			45.245	-B450	071-42	69

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.55 \text{ kW}$
87 Hz: $P_N = 1.0 \text{ kW}$

3-stage gearboxes

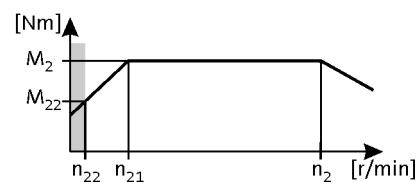

Mains operation			Inverter operation									i	Product			
400 V, 50 Hz			5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			g500	MD□MA□□		
n_2 [r/min]	M_2 [Nm]	c	n_{22} [r/min]	M_{22} [Nm]	n_{21} [r/min]	M_2 [Nm]	n_2 [r/min]	M_2 [Nm]	c	n_2 [r/min]	M_2 [Nm]	c				
28	178	2.5	2.9	137	12	178	28	178	2.5	50	181	2.4	50.167	-B450	071-42	69
25	199	2.3	2.6	154	11	199	25	199	2.3	45	203	2.1	56.154	-B450	071-42	69
23	221	2.0	2.3	170	9.6	221	23	221	2.0	40	225	1.9	62.262	-B450	071-42	69
21	237	1.0	2.1	183	8.8	237	21	237	1.0				68.459	-B240	071-42	66
20	244	1.8	2.1	188	8.7	244	20	244	1.8	37	248	1.7	68.788	-B450	071-42	69
18	271	1.7	1.9	209	7.9	271	18	271	1.7	33	275	1.6	76.271	-B450	071-42	69
16	318	1.4	1.6	245	6.7	318	16	318	1.4	28	323	1.3	89.534	-B450	071-42	69
14	352	1.3	1.5	271	6.0	352	14	352	1.3	25	358	1.2	99.274	-B450	071-42	69
13	395	1.1	1.3	305	5.4	395	13	395	1.1	23	402	1.1	111.372	-B450	071-42	69
11	438	1.0	1.2	338	4.9	438	11	438	1.0	20	445	1.0	123.487	-B450	071-42	69

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 0.75 \text{ kW}$
87 Hz: $P_N = 1.35 \text{ kW}$

2-stage gearboxes

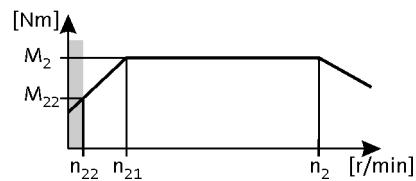

Mains operation 400 V, 50 Hz			Inverter operation												i	Product		
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c	g500	MD□MA□□	
396	17	4.7	41	13	168	17	396	17	4.7	707	17	3.9	3.565	-B240	080-32	66		
272	25	2.8	28	19	116	25	272	25	2.8	486	25	2.3	5.185	-B110	080-32	63		
237	29	2.5	24	22	101	29	237	29	2.5	423	29	2.1	5.963	-B110	080-32	63		
225	30	4.1	23	23	96	30	225	30	4.1				6.257	-B240	080-32	66		
198	34	2.2	20	27	84	34	198	34	2.2	354	35	1.9	7.111	-B110	080-32	63		
172	39	2.1	18	31	73	39	172	39	2.1	308	40	1.7	8.178	-B110	080-32	63		
155	44	1.9	16	34	66	44	155	44	1.9	277	44	1.6	9.101	-B110	080-32	63		
135	51	1.8	14	39	57	51	135	51	1.8	241	51	1.5	10.466	-B110	080-32	63		
123	55	1.6	13	43	52	55	123	55	1.6	220	56	1.4	11.449	-B110	080-32	63		
111	61	1.5	11	47	47	61	111	61	1.5	198	62	1.2	12.698	-B110	080-32	63		
97	70	1.3	9.9	55	41	70	97	70	1.3	173	71	1.1	14.603	-B110	080-32	63		
94	72	3.1	9.7	56	40	72	94	72	3.1	168	73	2.6	15.008	-B240	080-32	66		
91	75	1.2	9.3	58	39	75	91	75	1.2	162	76	1.0	15.556	-B110	080-32	63		
84	81	3.0	8.6	63	36	81	84	81	3.0	150	82	2.5	16.857	-B240	080-32	66		
79	86	1.1	8.1	67	34	86	79	86	1.1				17.889	-B110	080-32	63		
74	92	2.6	7.6	71	31	92	74	92	2.6	132	93	2.2	19.143	-B240	080-32	66		
72	94	1.1	7.4	73	31	94	72	94	1.1				19.556	-B110	080-32	63		
68	100	2.4	7.0	77	29	100	68	100	2.4	122	100	2.0	20.650	-B240	080-32	66		
60	113	2.1	6.2	88	26	113	60	113	2.1	108	114	1.8	23.450	-B240	080-32	66		
53	130	1.9	5.4	100	22	130	53	130	1.9	94	131	1.6	26.878	-B240	080-32	66		
46	147	1.6	4.8	114	20	147	46	147	1.6	83	148	1.4	30.522	-B240	080-32	66		
42	161	1.5	4.3	125	18	161	42	161	1.5	75	162	1.2	33.433	-B240	080-32	66		
37	183	1.3	3.8	142	16	183	37	183	1.3	66	185	1.1	37.967	-B240	080-32	66		
33	209	1.2	3.4	161	14	209	33	209	1.2	58	210	1.1	43.267	-B240	080-32	66		
29	237	1.0	3.0	183	12	237	29	237	1.0				49.133	-B240	080-32	66		

3-stage gearboxes

Mains operation 400 V, 50 Hz			Inverter operation												i	Product		
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c	g500	MD□MA□□	
46	149	3.0	4.7	116	19	149	46	149	3.0	81	151	2.5	30.985	-B450	080-32	69		
39	175	2.6	4.0	136	17	175	39	175	2.6	69	177	2.1	36.373	-B450	080-32	69		
35	195	2.3	3.6	150	15	195	35	195	2.3	63	196	2.2	40.330	-B450	080-32	69		
31	218	2.1	3.2	169	13	218	31	218	2.1	56	220	2.0	45.245	-B450	080-32	69		
28	242	1.9	2.9	187	12	242	28	242	1.9	50	244	1.8	50.167	-B450	080-32	69		
25	271	1.7	2.6	210	11	271	25	271	1.7	45	273	1.6	56.154	-B450	080-32	69		
23	300	1.5	2.3	232	9.6	300	23	300	1.5	41	303	1.4	62.262	-B450	080-32	69		
21	332	1.4	2.1	257	8.7	332	21	332	1.4	37	334	1.3	68.788	-B450	080-32	69		
19	368	1.2	1.9	285	7.9	368	19	368	1.2	33	371	1.2	76.271	-B450	080-32	69		
16	432	1.0	1.6	334	6.7	432	16	432	1.0				89.534	-B450	080-32	69		

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 1.1 \text{ kW}$
87 Hz: $P_N = 2.0 \text{ kW}$

2-stage gearboxes

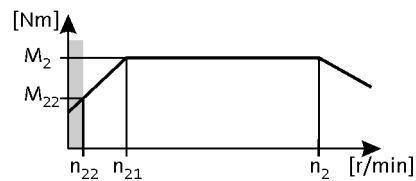

Mains operation 400 V, 50 Hz			Inverter operation												i	Product	
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 30 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)							
n_{22} [r/min]	M_{22} [Nm]		n_{21} [r/min]	M_2 [Nm]	n_2 [r/min]	M_2 [Nm]	c	n_2 [r/min]	M_2 [Nm]	c							
390	26	4.5	41	15	253	26	390	26	4.5					3.565	-B240	080-42	66
268	37	1.9	28	22	174	37	268	37	1.9	482	38	1.6	5.185	-B110	080-42	63	
233	43	1.7	24	25	151	43	233	43	1.7	419	43	1.4	5.963	-B110	080-42	63	
222	45	3.5	23	26	144	45	222	45	3.5				6.257	-B240	080-42	66	
196	51	1.5	20	30	127	51	196	51	1.5	352	52	1.3	7.111	-B110	080-42	63	
170	59	1.4	18	34	110	59	170	59	1.4	306	59	1.2	8.178	-B110	080-42	63	
153	65	1.3	16	38	99	65	153	65	1.3	275	66	1.1	9.101	-B110	080-42	63	
147	68	2.8	15	39	95	68	147	68	2.8	265	69	2.4	9.440	-B240	080-42	66	
133	75	1.2	14	44	86	75	133	75	1.2				10.466	-B110	080-42	63	
130	77	2.7	14	45	84	77	130	77	2.7	233	78	2.2	10.720	-B240	080-42	66	
121	82	1.1	13	48	79	82	121	82	1.1				11.449	-B110	080-42	63	
115	87	2.4	12	50	75	87	115	87	2.4	207	88	2.0	12.081	-B240	080-42	66	
101	98	2.2	11	57	66	100	101	98	2.2	182	100	1.8	13.719	-B240	080-42	66	
93	108	2.1	9.7	62	60	108	93	108	2.1	167	109	1.7	15.008	-B240	080-42	66	
83	121	2.0	8.6	70	53	121	83	121	2.0	148	122	1.7	16.857	-B240	080-42	66	
73	137	1.8	7.6	80	47	137	73	137	1.8	131	139	1.5	19.143	-B240	080-42	66	
67	148	1.6	7.0	86	44	148	67	148	1.6	121	150	1.4	20.650	-B240	080-42	66	
59	168	1.4	6.2	97	38	168	59	168	1.4	107	170	1.2	23.450	-B240	080-42	66	
52	193	1.2	5.4	112	34	193	52	193	1.2	93	195	1.0	26.878	-B240	080-42	66	
46	219	1.1	4.8	127	30	219	46	219	1.1				30.522	-B240	080-42	66	
42	240	1.0	4.3	139	27	240	42	240	1.0				33.433	-B240	080-42	66	

3-stage gearboxes

Mains operation 400 V, 50 Hz			Inverter operation												i	Product	
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 30 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)							
n_{22} [r/min]	M_{22} [Nm]		n_{21} [r/min]	M_2 [Nm]	n_2 [r/min]	M_2 [Nm]	c	n_2 [r/min]	M_2 [Nm]	c							
70	142	3.2	7.3	82	45	142	70	142	3.2	126	144	2.6	19.831	-B450	080-42	69	
61	164	2.8	6.4	95	40	164	61	164	2.8	110	166	2.3	22.813	-B450	080-42	69	
55	182	2.5	5.7	105	36	182	55	182	2.5	99	184	2.1	25.294	-B450	080-42	69	
50	201	2.2	5.2	116	32	201	50	201	2.2	90	203	1.9	27.945	-B450	080-42	69	
45	222	2.0	4.7	129	29	222	45	222	2.0	81	225	1.7	30.985	-B450	080-42	69	
38	261	1.7	4.0	151	25	261	38	261	1.7	69	264	1.4	36.373	-B450	080-42	69	
35	289	1.6	3.6	168	22	289	35	289	1.6	62	293	1.5	40.330	-B450	080-42	69	
31	325	1.4	3.2	188	20	325	31	325	1.4	55	328	1.3	45.245	-B450	080-42	69	
28	360	1.3	2.9	208	18	360	28	360	1.3	50	364	1.2	50.167	-B450	080-42	69	
25	403	1.1	2.6	233	16	403	25	403	1.1	45	407	1.1	56.154	-B450	080-42	69	
22	447	1.0	2.3	259	15	447	22	447	1.0				62.262	-B450	080-42	69	

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 1.5 \text{ kW}$
87 Hz: $P_N = 2.7 \text{ kW}$

2-stage gearboxes

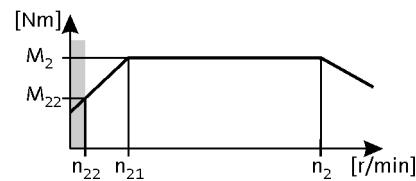

Mains operation 400 V, 50 Hz			Inverter operation												i	Product		
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c	g500	MD□MA□□	
396	34	4.0	41	24	168	34	396	34	4.0				3.565	-B240	090-32	66		
288	47	3.1	30	34	123	47	288	47	3.1	516	48	2.6	4.889	-B240	090-32	66		
272	50	1.4	28	36	116	50	272	50	1.4				5.185	-B110	090-32	63		
237	58	1.3	24	41	101	58	237	58	1.3				5.963	-B110	090-32	63		
225	60	2.6	23	43	96	60	225	60	2.6	403	61	2.2	6.257	-B240	090-32	66		
205	66	2.7	21	47	87	66	205	66	2.7	366	67	2.3	6.883	-B240	090-32	66		
198	69	1.1	20	49	84	69	198	69	1.1				7.111	-B110	090-32	63		
180	75	2.5	19	54	77	75	180	75	2.5				7.817	-B240	090-32	66		
172	79	1.0	18	56	73	79	172	79	1.0				8.178	-B110	090-32	63		
149	91	2.1	15	65	64	91	149	91	2.1	267	92	1.8	9.440	-B240	090-32	66		
132	103	2.0	14	73	56	103	132	103	2.0	235	104	1.7	10.720	-B240	090-32	66		
117	117	1.8	12	83	50	117	117	117	1.8	209	117	1.5	12.081	-B240	090-32	66		
103	132	1.6	11	94	44	132	103	132	1.6	184	133	1.4	13.719	-B240	090-32	66		
94	145	1.5	9.7	103	40	145	94	145	1.5	168	146	1.3	15.008	-B240	090-32	66		
84	163	1.5	8.6	116	36	163	84	163	1.5	150	164	1.2	16.857	-B240	090-32	66		
74	185	1.3	7.6	131	31	185	74	185	1.3	132	186	1.1	19.143	-B240	090-32	66		
68	199	1.2	7.0	141	29	199	68	199	1.2	122	201	1.0	20.650	-B240	090-32	66		
60	226	1.1	6.2	161	26	226	60	226	1.1				23.450	-B240	090-32	66		

3-stage gearboxes

Mains operation 400 V, 50 Hz			Inverter operation												i	Product		
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c	g500	MD□MA□□	
100	137	3.1	10	97	42	137	100	137	3.1	178	138	2.6	14.165	-B450	090-32	69		
86	158	2.8	8.9	112	37	158	86	158	2.8	154	159	2.3	16.349	-B450	090-32	69		
79	173	2.6	8.1	123	34	173	79	173	2.6	141	174	2.2	17.885	-B450	090-32	69		
71	191	2.4	7.3	136	30	191	71	191	2.4	127	193	2.0	19.831	-B450	090-32	69		
62	220	2.0	6.4	156	26	220	62	220	2.0	111	222	1.7	22.813	-B450	090-32	69		
56	244	1.8	5.7	173	24	244	56	244	1.8	100	246	1.5	25.294	-B450	090-32	69		
51	270	1.7	5.2	191	22	270	51	270	1.7	90	272	1.4	27.945	-B450	090-32	69		
46	299	1.5	4.7	212	19	299	46	299	1.5	81	301	1.3	30.985	-B450	090-32	69		
39	351	1.3	4.0	249	17	351	39	351	1.3	69	353	1.1	36.373	-B450	090-32	69		
35	389	1.2	3.6	276	15	389	35	389	1.2	63	392	1.1	40.330	-B450	090-32	69		
31	437	1.0	3.2	310	13	437	31	437	1.0				45.245	-B450	090-32	69		

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 2.2 \text{ kW}$
87 Hz: $P_N = 3.9 \text{ kW}$

2-stage gearboxes

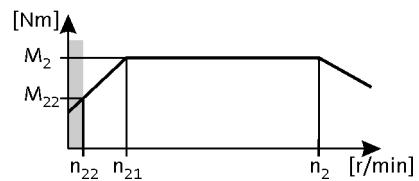

Mains operation 400 V, 50 Hz			Inverter operation												i	Product	
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)							
n_{22} [r/min]	M_{22} [Nm]		n_{21} [r/min]	M_2 [Nm]	n_2 [r/min]	M_2 [Nm]	c	n_2 [r/min]	M_2 [Nm]	c							
404	49	2.8	41	30	168	49	404	49	2.8	715	49	2.3		3.565	-B240	100-12	66
295	68	2.2	30	41	123	68	295	68	2.2	522	68	1.8		4.889	-B240	100-12	66
230	87	1.8	23	52	96	87	230	87	1.8	408	87	1.5		6.257	-B240	100-12	66
209	95	1.9	21	67	87	95	209	95	1.9					6.883	-B240	100-12	66
184	108	1.7	19	76	77	108	184	108	1.7					7.817	-B240	100-12	66
153	131	1.5	15	92	64	131	153	131	1.5					9.440	-B240	100-12	66
134	149	1.4	14	104	56	149	134	149	1.4					10.720	-B240	100-12	66
119	167	1.2	12	117	50	167	119	167	1.2					12.081	-B240	100-12	66
105	190	1.1	11	133	44	190	105	190	1.1					13.719	-B240	100-12	66
96	208	1.1	9.7	146	40	208	96	208	1.1					15.008	-B240	100-12	66
85	234	1.0	8.6	164	36	234	85	234	1.0					16.857	-B240	100-12	66

3-stage gearboxes

Mains operation 400 V, 50 Hz			Inverter operation												i	Product	
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)							
n_{22} [r/min]	M_{22} [Nm]		n_{21} [r/min]	M_2 [Nm]	n_2 [r/min]	M_2 [Nm]	c	n_2 [r/min]	M_2 [Nm]	c							
210	95	3.2	21	57	88	95	210	95	3.2	372	95	2.7		6.860	-B450	100-12	69
155	129	2.9	16	77	64	129	155	129	2.9	274	129	2.4		9.315	-B450	100-12	69
139	143	2.7	14	100	58	143	139	143	2.7	247	143	2.3		10.328	-B450	100-12	69
113	177	2.3	11	106	47	177	113	177	2.3	200	177	1.9		12.775	-B450	100-12	69
102	196	2.2	10	118	42	196	102	196	2.2	180	197	1.8		14.165	-B450	100-12	69
88	227	1.9	8.9	136	37	227	88	227	1.9	156	227	1.6		16.349	-B450	100-12	69
81	248	1.8	8.1	149	34	248	81	248	1.8	143	248	1.5		17.885	-B450	100-12	69
73	275	1.6	7.3	165	30	275	73	275	1.6	129	275	1.4		19.831	-B450	100-12	69
63	316	1.4	6.4	190	26	316	63	316	1.4	112	316	1.2		22.813	-B450	100-12	69
57	351	1.3	5.7	210	24	351	57	351	1.3	101	351	1.1		25.294	-B450	100-12	69
52	387	1.2	5.2	271	22	387	52	387	1.2					27.945	-B450	100-12	69
47	429	1.1	4.7	301	19	429	47	429	1.1					30.985	-B450	100-12	69

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 3.0 \text{ kW}$
87 Hz: $P_N = 5.4 \text{ kW}$

2-stage gearboxes

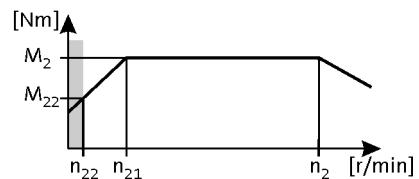

Mains operation 400 V, 50 Hz			Inverter operation												i	Product	
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c		
401	68	2.0	41	48	168	68	401	68	2.0				3.565	-B240	100-32	66	
293	93	1.6	30	65	123	93	293	93	1.6				4.889	-B240	100-32	66	
229	119	1.3	23	83	96	119	229	119	1.3				6.257	-B240	100-32	66	
208	131	1.4	21	92	87	131	208	131	1.4				6.883	-B240	100-32	66	
183	149	1.3	19	104	77	149	183	149	1.3				7.817	-B240	100-32	66	
152	180	1.1	15	126	64	180	152	180	1.1				9.440	-B240	100-32	66	
133	204	1.0	14	143	56	204	133	204	1.0				10.720	-B240	100-32	66	

3-stage gearboxes

Mains operation 400 V, 50 Hz			Inverter operation												i	Product	
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c		
286	95	2.9	29	57	120	95	286	95	2.9	508	96	2.4	5.002	-B450	100-32	69	
209	131	2.4	21	78	88	131	209	131	2.4	370	132	2.0	6.860	-B450	100-32	69	
154	177	2.1	16	124	64	177	154	177	2.1				9.315	-B450	100-32	69	
139	197	2.0	14	138	58	197	139	197	2.0				10.328	-B450	100-32	69	
112	243	1.7	11	170	47	243	112	243	1.7				12.775	-B450	100-32	69	
101	270	1.6	10	189	42	270	101	270	1.6				14.165	-B450	100-32	69	
88	311	1.4	8.9	218	37	311	88	311	1.4				16.349	-B450	100-32	69	
80	340	1.3	8.1	204	34	340	80	340	1.3	142	345	1.1	17.885	-B450	100-32	69	
72	377	1.2	7.3	264	30	377	72	377	1.2				19.831	-B450	100-32	69	
63	434	1.0	6.4	304	26	434	63	434	1.0				22.813	-B450	100-32	69	

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 4.0 \text{ kW}$
87 Hz: $P_N = 7.1 \text{ kW}$

3-stage gearboxes

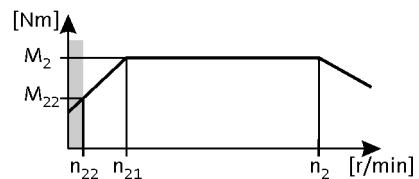

Mains operation 400 V, 50 Hz			Inverter operation									i	Product		
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c
290	125	2.2	29	78	120	125	290	125	2.2			5.002	-B450	112-22	69
211	172	1.8	21	107	88	172	211	172	1.8			6.860	-B450	112-22	69
156	233	1.6	16	146	64	233	156	233	1.6			9.315	-B450	112-22	69
140	258	1.5	14	162	58	258	140	258	1.5			10.328	-B450	112-22	69
114	320	1.3	11	200	47	320	114	320	1.3			12.775	-B450	112-22	69
102	354	1.2	10	222	42	354	102	354	1.2			14.165	-B450	112-22	69
89	409	1.1	8.9	256	37	409	89	409	1.1			16.349	-B450	112-22	69
81	448	1.0	8.1	280	34	448	81	448	1.0			17.885	-B450	112-22	69

g500-B bevel geared motors




Technical data

Selection tables, 4-pole motors

50 Hz: $P_N = 5.5 \text{ kW}$
87 Hz: $P_N = 9.7 \text{ kW}$

3-stage gearboxes

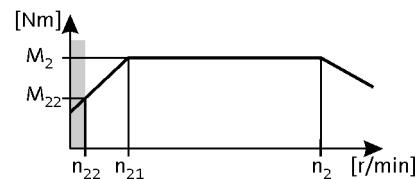

Mains operation 400 V, 50 Hz			Inverter operation									i	Product		
n_2 [r/min]	M_2 [Nm]	c	5 Hz -		- 20 Hz		- 50 Hz (1:10)			- 87 Hz (1:17.4)			n_2 [r/min]	M_2 [Nm]	c
289	173	1.6	29	108	120	173	289	173	1.6			5.002	-B450	112-32	69
211	237	1.3	21	148	88	237	211	237	1.3			6.860	-B450	112-32	69
155	322	1.1	16	201	64	322	155	322	1.1			9.315	-B450	112-32	69
140	357	1.1	14	223	58	357	140	357	1.1			10.328	-B450	112-32	69

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 0.18 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
140	12	5.8	19.556	-B110	063-11	72
122	13	5.8	22.489	-B110	063-11	72
109	15	4.8	25.185	-B110	063-11	72
116	17	4.8	28.963	-B110	063-11	72
106	19	4.2	31.919	-B110	063-11	72
73	22	3.9	37.400	-B110	063-11	72
69	24	3.9	40.000	-B110	063-11	72
60	27	3.7	46.000	-B110	063-11	72
52	31	2.0	52.698	-B110	063-11	72
45	36	2.2	60.603	-B110	063-11	72
45	36	3.0	61.045	-B110	063-11	72
36	46	2.4	76.500	-B110	063-11	72
27	60	1.8	100.786	-B110	063-11	72

3-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
40	40	5.6	68.459	-B240	063-11	75
31	51	4.4	87.563	-B240	063-11	75
24	66	3.6	113.673	-B240	063-11	75
21	75	3.2	129.087	-B240	063-11	75
19	85	2.8	145.674	-B240	063-11	75
17	96	2.5	165.426	-B240	063-11	75
15	109	2.2	188.442	-B240	063-11	75
14	116	3.9	193.948	-B450	063-11	78
13	124	1.9	213.994	-B240	063-11	75
11	142	1.7	245.178	-B240	063-11	75
11	148	3.1	247.882	-B450	063-11	78
12	162	1.5	278.422	-B240	063-11	75
11	185	1.3	317.617	-B240	063-11	75
7.6	210	1.2	360.683	-B240	063-11	75

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 0.25 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
237	10	5.2	11.449	-B110	063-31	72
213	11	4.9	12.698	-B110	063-31	72
186	12	4.9	14.603	-B110	063-31	72
139	16	4.1	19.556	-B110	063-31	72
121	19	4.1	22.489	-B110	063-31	72
108	21	3.4	25.185	-B110	063-31	72
117	24	3.4	28.963	-B110	063-31	72
106	27	3.0	31.919	-B110	063-31	72
74	31	2.9	36.707	-B110	063-31	72
73	31	2.8	37.400	-B110	063-31	72
68	33	2.8	40.000	-B110	063-31	72
59	38	2.7	46.000	-B110	063-31	72
56	40	2.6	48.167	-B110	063-31	72
51	44	1.5	52.698	-B110	063-31	72
45	51	1.6	60.603	-B110	063-31	72
44	51	2.2	61.045	-B110	063-31	72
40	56	2.8	67.113	-B240	063-31	75
36	64	2.8	76.213	-B240	063-31	75
35	64	1.7	76.500	-B110	063-31	72
27	84	1.3	100.786	-B110	063-31	72

3-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
40	56	4.0	68.459	-B240	063-31	75
31	71	3.1	87.563	-B240	063-31	75
27	81	2.8	99.437	-B240	063-31	75
24	93	2.6	113.673	-B240	063-31	75
21	105	2.3	129.087	-B240	063-31	75
19	119	2.0	145.674	-B240	063-31	75
16	135	1.8	165.426	-B240	063-31	75
16	146	3.1	174.919	-B450	063-31	78
14	154	1.6	188.442	-B240	063-31	75
14	162	2.8	193.948	-B450	063-31	78
13	175	1.4	213.994	-B240	063-31	75
12	187	2.4	223.563	-B450	063-31	78
11	200	1.2	245.178	-B240	063-31	75
11	207	2.2	247.882	-B450	063-31	78
12	227	1.1	278.422	-B240	063-31	75

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 0.37 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	M_2 [Nm]	c	i	Product		
				g500	MD□MA□□	
260	13	5.7	10.466	-B110	071-11	72
238	14	5.2	11.449	-B110	071-11	72
214	16	4.7	12.698	-B110	071-11	72
186	18	4.1	14.603	-B110	071-11	72
175	19	3.9	15.556	-B110	071-11	72
152	22	3.6	17.889	-B110	071-11	72
139	24	3.4	19.556	-B110	071-11	72
121	28	3.1	22.489	-B110	071-11	72
108	31	2.9	25.185	-B110	071-11	72
116	36	2.5	28.963	-B110	071-11	72
105	39	2.3	31.919	-B110	071-11	72
74	45	2.0	36.707	-B110	071-11	72
73	46	1.9	37.400	-B110	071-11	72
68	49	1.9	40.000	-B110	071-11	72
59	57	1.8	46.000	-B110	071-11	72
57	59	1.7	48.167	-B110	071-11	72
46	74	3.0	59.630	-B240	071-11	75
45	75	1.5	61.045	-B110	071-11	72
41	83	2.2	67.113	-B240	071-11	75
36	94	2.2	76.213	-B240	071-11	75
36	94	1.2	76.500	-B110	071-11	72

3-stage gearboxes

n_2 [r/min]	M_2 [Nm]	c	i	Product		
				g500	MD□MA□□	
40	82	2.7	68.459	-B240	071-11	75
35	94	2.4	77.741	-B240	071-11	75
31	105	2.1	87.563	-B240	071-11	75
27	120	1.9	99.437	-B240	071-11	75
24	137	1.8	113.673	-B240	071-11	75
22	152	3.0	123.487	-B450	071-11	78
21	155	1.6	129.087	-B240	071-11	75
19	178	2.5	144.128	-B450	071-11	78
19	175	1.4	145.674	-B240	071-11	75
17	197	2.3	159.807	-B450	071-11	78
16	199	1.2	165.426	-B240	071-11	75
16	216	2.1	174.919	-B450	071-11	78
14	227	1.1	188.442	-B240	071-11	75
14	239	1.9	193.948	-B450	071-11	78
12	276	1.6	223.563	-B450	071-11	78
11	306	1.5	247.882	-B450	071-11	78

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 0.55 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
507	10	5.1	5.185	-B110	071-31	72
441	11	5.1	5.963	-B110	071-31	72
370	13	4.7	7.111	-B110	071-31	72
322	16	4.3	8.178	-B110	071-31	72
289	17	4.0	9.101	-B110	071-31	72
251	20	3.7	10.466	-B110	071-31	72
230	22	3.4	11.449	-B110	071-31	72
207	24	3.1	12.698	-B110	071-31	72
180	28	2.7	14.603	-B110	071-31	72
169	30	2.6	15.556	-B110	071-31	72
147	34	2.4	17.889	-B110	071-31	72
135	37	2.2	19.556	-B110	071-31	72
117	43	2.0	22.489	-B110	071-31	72
104	48	1.9	25.185	-B110	071-31	72
112	55	1.7	28.963	-B110	071-31	72
102	61	1.5	31.919	-B110	071-31	72
79	63	3.1	33.433	-B240	071-31	75
72	70	1.3	36.707	-B110	071-31	72
70	71	1.2	37.400	-B110	071-31	72
69	72	2.8	37.967	-B240	071-31	75
66	76	1.2	40.000	-B110	071-31	72
61	82	2.8	43.267	-B240	071-31	75
57	87	1.2	46.000	-B110	071-31	72
55	91	1.1	48.167	-B110	071-31	72
54	93	2.4	49.133	-B240	071-31	75
50	100	2.2	52.510	-B240	071-31	75
44	113	2.0	59.630	-B240	071-31	75
39	127	1.4	67.113	-B240	071-31	75
35	145	1.4	76.213	-B240	071-31	75

3-stage gearboxes

6.7

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
38	127	1.8	68.459	-B240	071-31	75
34	144	1.6	77.741	-B240	071-31	75
30	162	1.4	87.563	-B240	071-31	75
29	170	2.5	89.534	-B450	071-31	78
27	188	2.3	99.274	-B450	071-31	78
26	184	1.2	99.437	-B240	071-31	75
24	211	2.1	111.372	-B450	071-31	78
23	210	1.1	113.673	-B240	071-31	75

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 0.55 \text{ kW}$

3-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
21	234	1.9	123.487	-B450	071-31	78
20	239	1.0	129.087	-B240	071-31	75
18	273	1.7	144.128	-B450	071-31	78
17	303	1.5	159.807	-B450	071-31	78
15	332	1.4	174.919	-B450	071-31	78
14	368	1.2	193.948	-B450	071-31	78
12	424	1.1	223.563	-B450	071-31	78

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 0.75 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
525	13	4.4	5.185	-B110	080-11	72
456	15	4.0	5.963	-B110	080-11	72
383	18	3.6	7.111	-B110	080-11	72
333	20	3.3	8.178	-B110	080-11	72
299	23	3.0	9.101	-B110	080-11	72
260	26	2.8	10.466	-B110	080-11	72
238	29	2.6	11.449	-B110	080-11	72
214	32	2.3	12.698	-B110	080-11	72
186	37	2.0	14.603	-B110	080-11	72
175	39	1.9	15.556	-B110	080-11	72
152	45	1.8	17.889	-B110	080-11	72
139	49	1.7	19.556	-B110	080-11	72
121	56	1.5	22.489	-B110	080-11	72
108	63	1.4	25.185	-B110	080-11	72
101	67	2.9	26.878	-B240	080-11	75
117	72	1.3	28.963	-B110	080-11	72
111	76	2.6	30.522	-B240	080-11	75
101	84	2.4	33.433	-B240	080-11	75
72	95	2.1	37.967	-B240	080-11	75
63	108	2.1	43.267	-B240	080-11	75
55	123	1.8	49.133	-B240	080-11	75
52	131	1.7	52.510	-B240	080-11	75
46	149	1.5	59.630	-B240	080-11	75

3-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
67	101	4.2	40.330	-B450	080-11	78
48	140	3.0	56.154	-B450	080-11	78
44	156	2.7	62.262	-B450	080-11	78
40	172	2.4	68.788	-B450	080-11	78
36	191	2.2	76.271	-B450	080-11	78
31	214	1.1	87.563	-B240	080-11	75
30	224	1.9	89.534	-B450	080-11	78
27	248	1.7	99.274	-B450	080-11	78
24	279	1.6	111.372	-B450	080-11	78
22	309	1.5	123.487	-B450	080-11	78
19	360	1.3	144.128	-B450	080-11	78
17	400	1.1	159.807	-B450	080-11	78
16	437	1.0	174.919	-B450	080-11	78

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 1.1 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
763	13	5.1	3.565	-B240	080-31	75
525	19	3.0	5.185	-B110	080-31	72
456	22	2.7	5.963	-B110	080-31	72
435	23	4.5	6.257	-B240	080-31	75
383	26	2.4	7.111	-B110	080-31	72
333	30	2.2	8.178	-B110	080-31	72
299	33	2.1	9.101	-B110	080-31	72
260	38	1.9	10.466	-B110	080-31	72
238	42	1.8	11.449	-B110	080-31	72
214	47	1.6	12.698	-B110	080-31	72
186	54	1.4	14.603	-B110	080-31	72
175	57	1.3	15.556	-B110	080-31	72
161	62	3.2	16.857	-B240	080-31	75
152	66	1.2	17.889	-B110	080-31	72
142	70	2.8	19.143	-B240	080-31	75
139	72	1.1	19.556	-B110	080-31	72
132	76	2.6	20.650	-B240	080-31	75
121	83	1.0	22.489	-B110	080-31	72
116	86	2.3	23.450	-B240	080-31	75
101	99	2.0	26.878	-B240	080-31	75
110	112	1.8	30.522	-B240	080-31	75
101	123	1.6	33.433	-B240	080-31	75
72	139	1.4	37.967	-B240	080-31	75
63	159	1.4	43.267	-B240	080-31	75
55	180	1.2	49.133	-B240	080-31	75
52	193	1.1	52.510	-B240	080-31	75
46	219	1.0	59.630	-B240	080-31	75

3-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
88	114	3.3	30.985	-B450	080-31	78
75	133	2.8	36.373	-B450	080-31	78
67	148	2.8	40.330	-B450	080-31	78
60	166	2.5	45.245	-B450	080-31	78
54	184	2.3	50.167	-B450	080-31	78
48	206	2.0	56.154	-B450	080-31	78
44	228	1.8	62.262	-B450	080-31	78
40	252	1.7	68.788	-B450	080-31	78
36	280	1.5	76.271	-B450	080-31	78
30	328	1.3	89.534	-B450	080-31	78

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 1.1 \text{ kW}$

3-stage gearboxes

Mains operation 400 V, 50 Hz			i	Product		
n_2 [r/min]	M_2 [Nm]	c		g500	MD□MA□□	
27	364	1.2	99.274	-B450	080-31	78
24	409	1.1	111.372	-B450	080-31	78

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 1.5 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
523	26	2.2	5.185	-B110	090-11	72
455	30	2.0	5.963	-B110	090-11	72
433	31	4.1	6.257	-B240	090-11	75
381	36	1.8	7.111	-B110	090-11	72
331	41	1.6	8.178	-B110	090-11	72
298	46	1.5	9.101	-B110	090-11	72
259	53	1.4	10.466	-B110	090-11	72
253	54	3.1	10.720	-B240	090-11	75
237	57	1.3	11.449	-B110	090-11	72
224	61	2.8	12.081	-B240	090-11	75
213	64	1.2	12.698	-B110	090-11	72
198	69	2.6	13.719	-B240	090-11	75
186	73	1.0	14.603	-B110	090-11	72
181	75	2.4	15.008	-B240	090-11	75
161	85	2.3	16.857	-B240	090-11	75
142	96	2.1	19.143	-B240	090-11	75
131	104	1.9	20.650	-B240	090-11	75
116	118	1.7	23.450	-B240	090-11	75
101	135	1.5	26.878	-B240	090-11	75
108	153	1.3	30.522	-B240	090-11	75
81	168	1.2	33.433	-B240	090-11	75
71	191	1.0	37.967	-B240	090-11	75

3-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
119	115	3.2	22.813	-B450	090-11	78
107	127	2.9	25.294	-B450	090-11	78
118	140	2.6	27.945	-B450	090-11	78
107	156	2.4	30.985	-B450	090-11	78
75	183	2.0	36.373	-B450	090-11	78
67	202	2.1	40.330	-B450	090-11	78
60	227	1.9	45.245	-B450	090-11	78
54	252	1.7	50.167	-B450	090-11	78
48	282	1.5	56.154	-B450	090-11	78
44	313	1.3	62.262	-B450	090-11	78
39	345	1.2	68.788	-B450	090-11	78
36	383	1.1	76.271	-B450	090-11	78

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 2.2 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
766	26	4.3	3.565	-B240	090-31	75
436	46	2.8	6.257	-B240	090-31	75
300	67	1.0	9.101	-B110	090-31	72
289	69	2.3	9.440	-B240	090-31	75
	78	2.1	10.720	-B240	090-31	75
226	88	1.9	12.081	-B240	090-31	75
199	100	1.8	13.719	-B240	090-31	75
182	110	1.7	15.008	-B240	090-31	75
162	123	1.6	16.857	-B240	090-31	75
143	140	1.4	19.143	-B240	090-31	75
132	151	1.3	20.650	-B240	090-31	75
116	171	1.2	23.450	-B240	090-31	75
102	197	1.0	26.878	-B240	090-31	75

3-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
167	120	3.0	16.349	-B450	090-31	78
153	131	2.8	17.885	-B450	090-31	78
138	145	2.5	19.831	-B450	090-31	78
120	167	2.2	22.813	-B450	090-31	78
108	185	2.0	25.294	-B450	090-31	78
119	204	1.8	27.945	-B450	090-31	78
107	226	1.6	30.985	-B450	090-31	78
75	266	1.4	36.373	-B450	090-31	78
68	295	1.4	40.330	-B450	090-31	78
60	331	1.3	45.245	-B450	090-31	78
54	367	1.1	50.167	-B450	090-31	78
49	410	1.0	56.154	-B450	090-31	78

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 3.0 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
591	46	2.6	4.889	-B240	100-31	75
462	59	2.1	6.257	-B240	100-31	75
171	159	1.2	16.857	-B240	100-31	75
151	180	1.1	19.143	-B240	100-31	75

3-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
226	120	2.7	12.775	-B450	100-31	78
204	133	2.5	14.165	-B450	100-31	78
177	154	2.3	16.349	-B450	100-31	78
162	168	2.1	17.885	-B450	100-31	78
146	187	1.9	19.831	-B450	100-31	78
127	215	1.7	22.813	-B450	100-31	78
114	238	1.5	25.294	-B450	100-31	78
103	263	1.4	27.945	-B450	100-31	78
113	292	1.2	30.985	-B450	100-31	78

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 4.0 \text{ kW}$

2-stage gearboxes

Mains operation 400 V, 50 Hz			i	Product		
n_2 [r/min]	M_2 [Nm]	c		g500	MD□MA□□	
581	62	1.9	4.889	-B240	100-41	75
454	80	1.6	6.257	-B240	100-41	75

3-stage gearboxes

Mains operation 400 V, 50 Hz			i	Product		
n_2 [r/min]	M_2 [Nm]	c		g500	MD□MA□□	
414	88	2.8	6.860	-B450	100-41	78
222	163	2.0	12.775	-B450	100-41	78
201	181	1.9	14.165	-B450	100-41	78
174	209	1.7	16.349	-B450	100-41	78
159	228	1.6	17.885	-B450	100-41	78
143	253	1.4	19.831	-B450	100-41	78
125	291	1.3	22.813	-B450	100-41	78
112	323	1.1	25.294	-B450	100-41	78
102	357	1.0	27.945	-B450	100-41	78

g500-B bevel geared motors



Technical data

Selection tables, 2-pole motors

50 Hz: $P_N = 5.5 \text{ kW}$

3-stage gearboxes

Mains operation 400 V, 50 Hz			i	Product		
n_2 [r/min]	M_2 [Nm]	c		g500	MD□MA□□	
423	118	2.1	6.860	-B450	112-31	

g500-B bevel geared motors



Technical data

Selection tables, 6-pole motors

50 Hz: $P_N = 0.18 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
114	14	5.6	8.178	-B110	071-13	81
102	16	5.3	9.101	-B110	071-13	81
109	18	4.8	10.466	-B110	071-13	81
81	20	4.5	11.449	-B110	071-13	81
73	22	4.0	12.698	-B110	071-13	81
64	26	3.5	14.603	-B110	071-13	81
60	27	3.4	15.556	-B110	071-13	81
52	31	3.1	17.889	-B110	071-13	81
48	34	2.9	19.556	-B110	071-13	81
41	39	2.6	22.489	-B110	071-13	81
37	44	2.4	25.185	-B110	071-13	81
32	51	2.2	28.963	-B110	071-13	81
29	56	1.9	31.919	-B110	071-13	81
25	64	1.7	36.707	-B110	071-13	81
25	66	1.6	37.400	-B110	071-13	81
23	70	1.4	40.000	-B110	071-13	81
22	76	3.2	43.267	-B240	071-13	84
20	81	1.4	46.000	-B110	071-13	81
19	85	1.3	48.167	-B110	071-13	81
19	86	2.8	49.133	-B240	071-13	84
18	92	2.5	52.510	-B240	071-13	84
16	105	2.3	59.630	-B240	071-13	84
15	107	1.0	61.045	-B110	071-13	81
14	118	1.5	67.113	-B240	071-13	84
12	134	1.5	76.213	-B240	071-13	84

3-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
14	117	2.1	68.459	-B240	071-13	84
12	133	1.8	77.741	-B240	071-13	84
11	150	1.6	87.563	-B240	071-13	84
10	157	2.9	89.534	-B450	071-13	87
12	174	2.6	99.274	-B450	071-13	87
12	170	1.4	99.437	-B240	071-13	84
10	196	2.3	111.372	-B450	071-13	87
10	195	1.2	113.673	-B240	071-13	84
7.5	217	2.1	123.487	-B450	071-13	87
7.2	221	1.1	129.087	-B240	071-13	84
6.5	253	1.8	144.128	-B450	071-13	87
5.8	281	1.6	159.807	-B450	071-13	87

g500-B bevel geared motors



Technical data

Selection tables, 6-pole motors

50 Hz: $P_N = 0.18 \text{ kW}$

3-stage gearboxes

n_2 [r/min]	M_2 [Nm]	c	i	Product		
				g500	MD□MA□□	
5.3	307	1.5	174.919	-B450	071-13	87
4.8	340	1.3	193.948	-B450	071-13	87
4.2	392	1.2	223.563	-B450	071-13	87
3.8	435	1.0	247.882	-B450	071-13	87

g500-B bevel geared motors



Technical data

Selection tables, 6-pole motors

50 Hz: $P_N = 0.25 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
179	13	4.7	5.185	-B110	071-33	81
156	15	4.7	5.963	-B110	071-33	81
131	17	4.4	7.111	-B110	071-33	81
114	20	4.1	8.178	-B110	071-33	81
102	22	3.8	9.101	-B110	071-33	81
109	26	3.5	10.466	-B110	071-33	81
81	28	3.2	11.449	-B110	071-33	81
73	31	2.9	12.698	-B110	071-33	81
64	36	2.5	14.603	-B110	071-33	81
60	38	2.4	15.556	-B110	071-33	81
52	44	2.2	17.889	-B110	071-33	81
48	48	2.1	19.556	-B110	071-33	81
41	55	1.9	22.489	-B110	071-33	81
37	61	1.8	25.185	-B110	071-33	81
32	71	1.6	28.963	-B110	071-33	81
31	74	3.2	30.522	-B240	071-33	84
29	78	1.4	31.919	-B110	071-33	81
28	82	2.9	33.433	-B240	071-33	84
25	90	1.2	36.707	-B110	071-33	81
25	91	1.2	37.400	-B110	071-33	81
25	93	2.6	37.967	-B240	071-33	84
23	98	1.0	40.000	-B110	071-33	81
22	106	2.3	43.267	-B240	071-33	84
19	120	2.0	49.133	-B240	071-33	84
18	128	1.8	52.510	-B240	071-33	84
16	145	1.7	59.630	-B240	071-33	84
14	164	1.1	67.113	-B240	071-33	84
12	186	1.1	76.213	-B240	071-33	84

3-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
21	110	3.1	45.245	-B450	071-33	87
19	122	3.1	50.167	-B450	071-33	87
15	152	3.0	62.262	-B450	071-33	87
14	163	1.5	68.459	-B240	071-33	84
12	185	1.3	77.741	-B240	071-33	84
11	208	1.2	87.563	-B240	071-33	84
10	218	2.1	89.534	-B450	071-33	87
12	242	1.9	99.274	-B450	071-33	87
12	236	1.0	99.437	-B240	071-33	84

g500-B bevel geared motors



Technical data

Selection tables, 6-pole motors

50 Hz: $P_N = 0.25 \text{ kW}$

3-stage gearboxes

n_2 [r/min]	M_2 [Nm]	c	i	Product		
				g500	MD□MA□□	
10	272	1.7	111.372	-B450	071-33	87
7.5	301	1.5	123.487	-B450	071-33	87
6.5	351	1.3	144.128	-B450	071-33	87
5.8	390	1.2	159.807	-B450	071-33	87
5.3	427	1.1	174.919	-B450	071-33	87

g500-B bevel geared motors



Technical data

Selection tables, 6-pole motors

50 Hz: $P_N = 0.37 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
183	18	3.8	5.185	-B110	080-13	81
159	21	3.4	5.963	-B110	080-13	81
152	22	5.7	6.257	-B240	080-13	84
134	25	3.1	7.111	-B110	080-13	81
116	29	2.8	8.178	-B110	080-13	81
104	32	2.6	9.101	-B110	080-13	81
111	37	2.4	10.466	-B110	080-13	81
101	40	2.2	11.449	-B110	080-13	81
75	45	2.0	12.698	-B110	080-13	81
65	52	1.7	14.603	-B110	080-13	81
61	55	1.7	15.556	-B110	080-13	81
53	63	1.5	17.889	-B110	080-13	81
49	69	1.5	19.556	-B110	080-13	81
42	79	1.3	22.489	-B110	080-13	81
41	83	2.9	23.450	-B240	080-13	84
38	89	1.2	25.185	-B110	080-13	81
35	95	2.5	26.878	-B240	080-13	84
33	102	1.1	28.963	-B110	080-13	81
31	108	2.2	30.522	-B240	080-13	84
28	118	2.0	33.433	-B240	080-13	84
25	134	1.8	37.967	-B240	080-13	84
22	153	1.6	43.267	-B240	080-13	84
19	174	1.4	49.133	-B240	080-13	84
18	186	1.3	52.510	-B240	080-13	84
16	211	1.1	59.630	-B240	080-13	84

3-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
24	142	3.2	40.330	-B450	080-13	87
21	160	2.8	45.245	-B450	080-13	87
19	177	2.5	50.167	-B450	080-13	87
17	198	2.3	56.154	-B450	080-13	87
15	220	2.1	62.262	-B450	080-13	87
14	236	1.0	68.459	-B240	080-13	84
14	243	1.9	68.788	-B450	080-13	87
13	269	1.7	76.271	-B450	080-13	87
11	316	1.4	89.534	-B450	080-13	87
12	351	1.3	99.274	-B450	080-13	87
10	393	1.1	111.372	-B450	080-13	87
7.7	436	1.0	123.487	-B450	080-13	87

g500-B bevel geared motors



Technical data

Selection tables, 6-pole motors

50 Hz: $P_N = 0.55 \text{ kW}$

2-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
261	19	4.2	3.565	-B240	080-33	84
179	28	2.5	5.185	-B110	080-33	81
156	32	2.3	5.963	-B110	080-33	81
149	34	3.7	6.257	-B240	080-33	84
131	38	2.0	7.111	-B110	080-33	81
114	44	1.9	8.178	-B110	080-33	81
102	49	1.7	9.101	-B110	080-33	81
109	56	1.6	10.466	-B110	080-33	81
81	61	1.5	11.449	-B110	080-33	81
77	65	3.2	12.081	-B240	080-33	84
73	68	1.3	12.698	-B110	080-33	81
68	74	3.0	13.719	-B240	080-33	84
64	78	1.2	14.603	-B110	080-33	81
62	81	2.8	15.008	-B240	080-33	84
60	83	1.1	15.556	-B110	080-33	81
55	90	2.7	16.857	-B240	080-33	84
52	96	1.0	17.889	-B110	080-33	81
49	103	2.3	19.143	-B240	080-33	84
45	111	2.2	20.650	-B240	080-33	84
40	126	1.9	23.450	-B240	080-33	84
35	144	1.7	26.878	-B240	080-33	84
31	164	1.5	30.522	-B240	080-33	84
28	179	1.3	33.433	-B240	080-33	84
25	204	1.2	37.967	-B240	080-33	84
22	232	1.0	43.267	-B240	080-33	84

3-stage gearboxes

n_2 [r/min]	Mains operation 400 V, 50 Hz		i	Product		
	M_2 [Nm]	c		g500	MD□MA□□	
33	150	3.0	27.945	-B450	080-33	87
30	166	2.7	30.985	-B450	080-33	87
26	195	2.3	36.373	-B450	080-33	87
23	216	2.1	40.330	-B450	080-33	87
21	243	1.9	45.245	-B450	080-33	87
19	269	1.7	50.167	-B450	080-33	87
17	301	1.5	56.154	-B450	080-33	87
15	334	1.4	62.262	-B450	080-33	87
14	369	1.2	68.788	-B450	080-33	87
12	409	1.1	76.271	-B450	080-33	87

g500-B bevel geared motors




Technical data

Dimensions, notes

Notes on the dimensions

The following legend shows the layout of the dimension sheets.

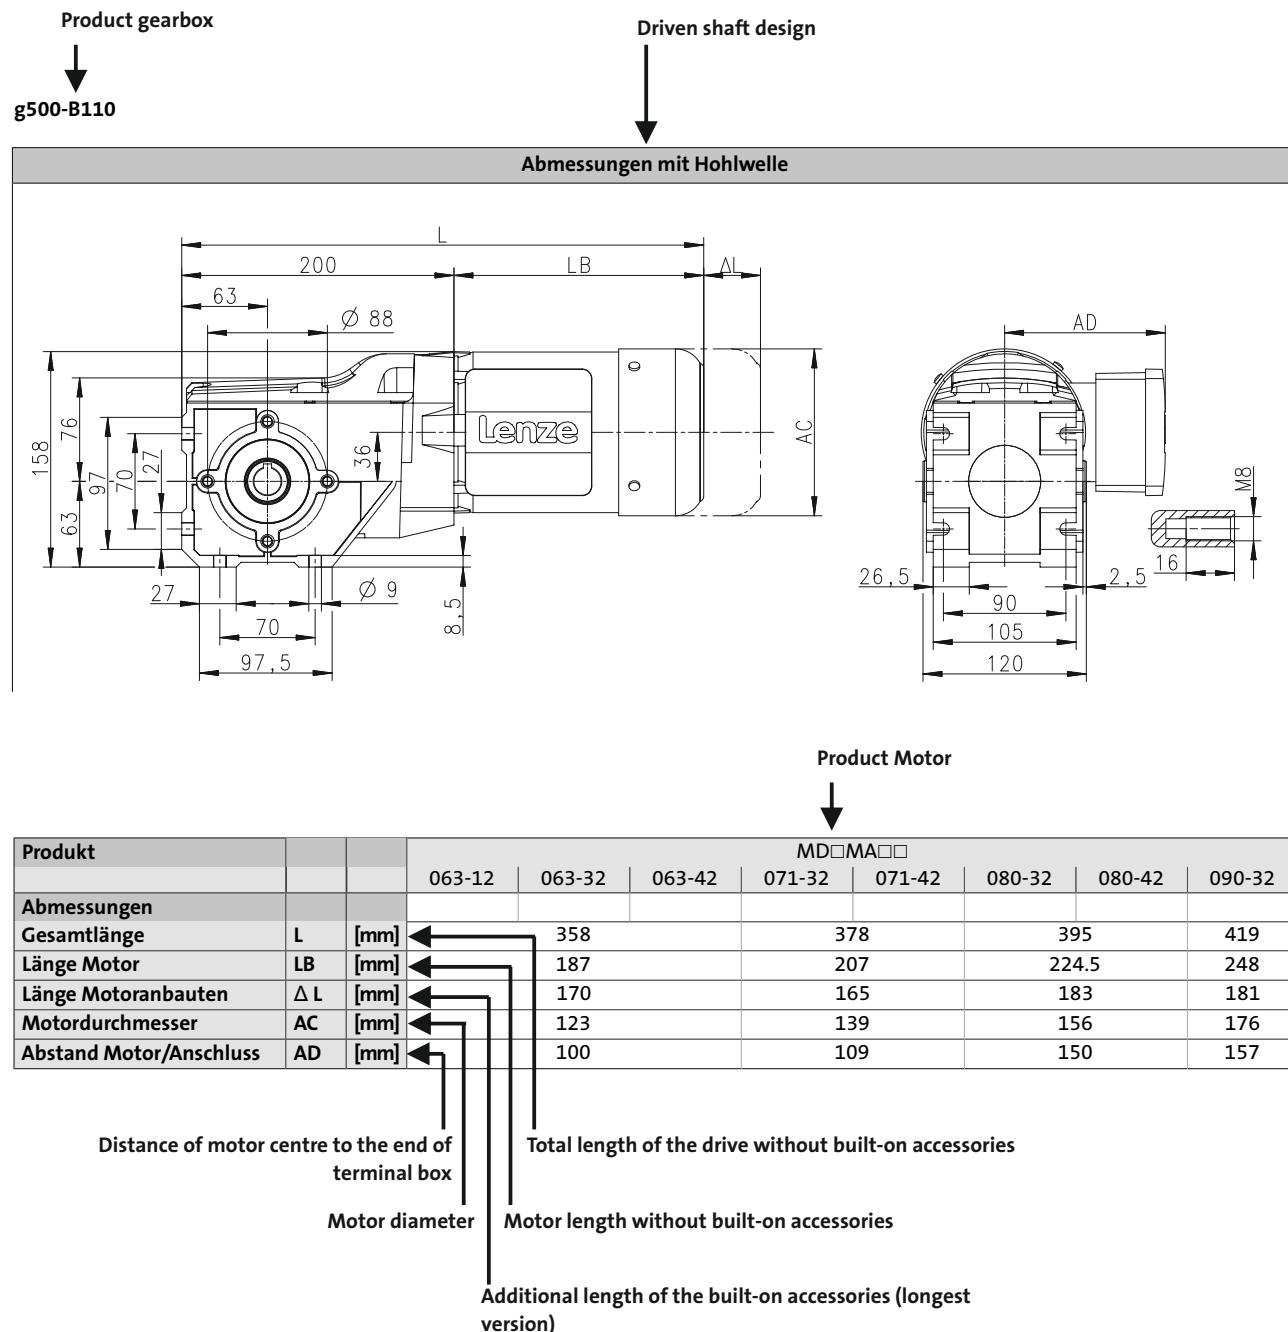


g500-B bevel geared motors



Technical data

Dimensions, 4-pole motors

g500-B45

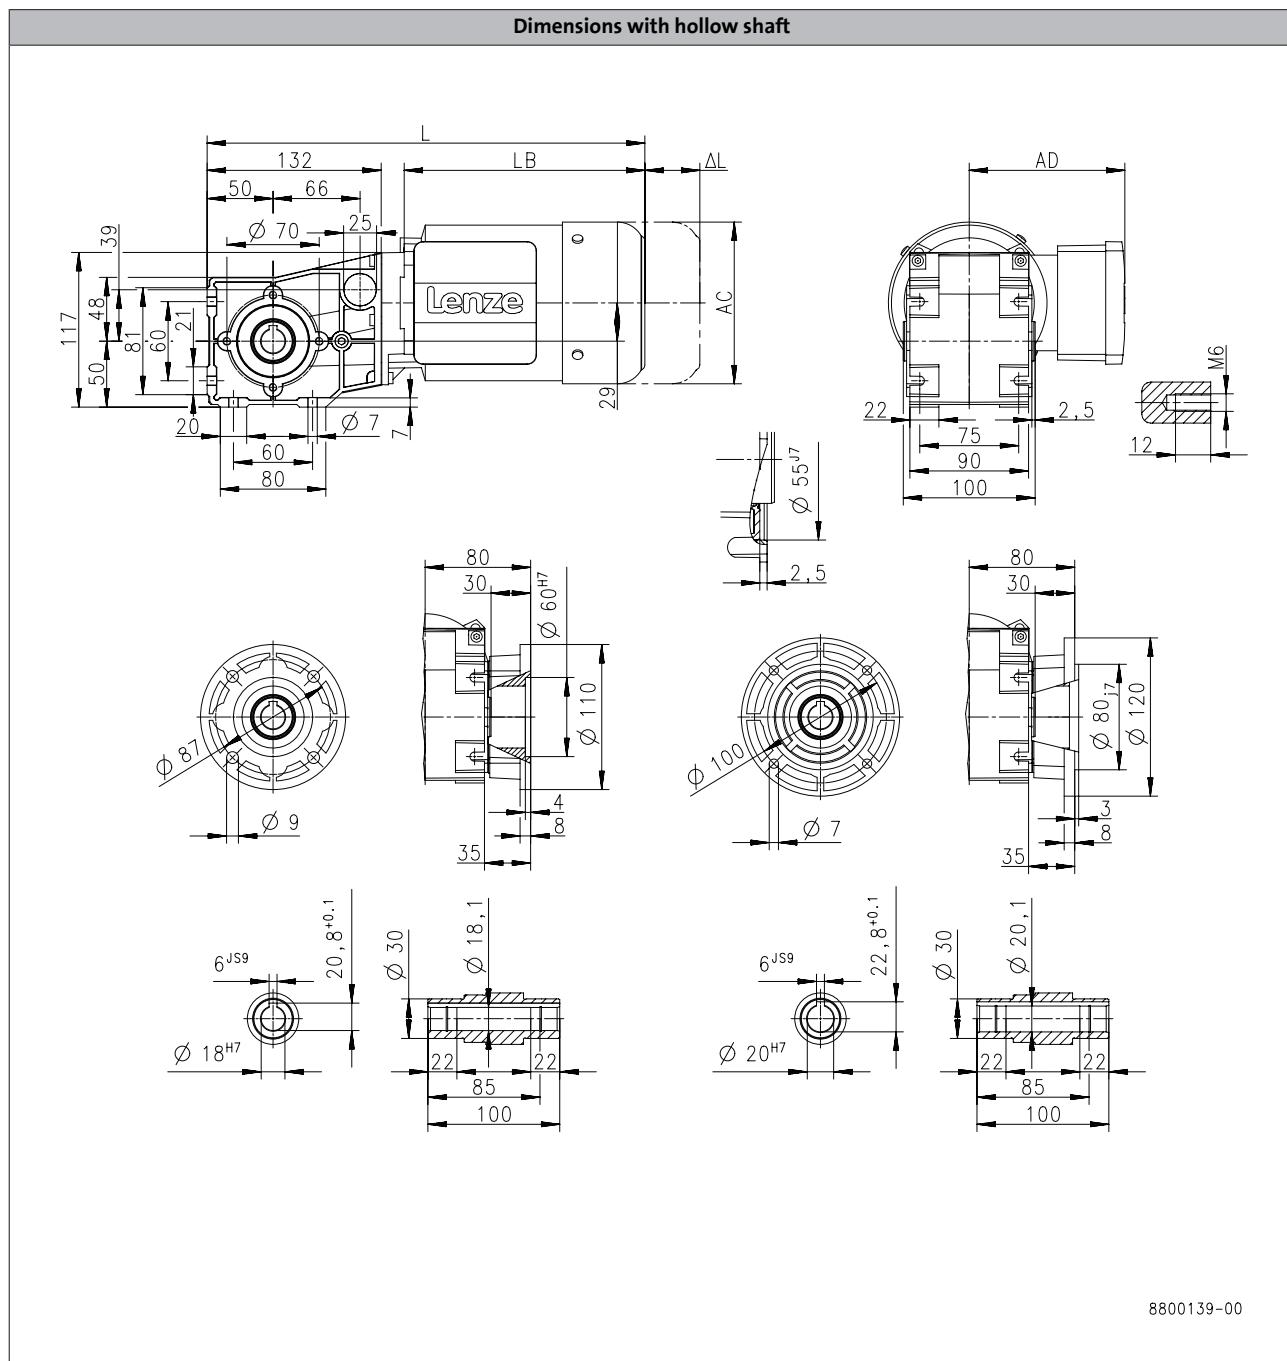

6.7

Product			MD□MA□□						
			063-02	063-12	063-22	063-32	063-42	071-32	071-42
Dimensions									
Total length	L	[mm]	305	332	305	332			352
Motor length	LB	[mm]	156	183	156	183			203
Length of motor options	ΔL	[mm]	135	170	135	170			165
Motor diameter	AC	[mm]			123				139
Distance motor/connection	AD	[mm]			100				109


g500-B bevel geared motors



Technical data

Dimensions, 4-pole motors

g500-B45

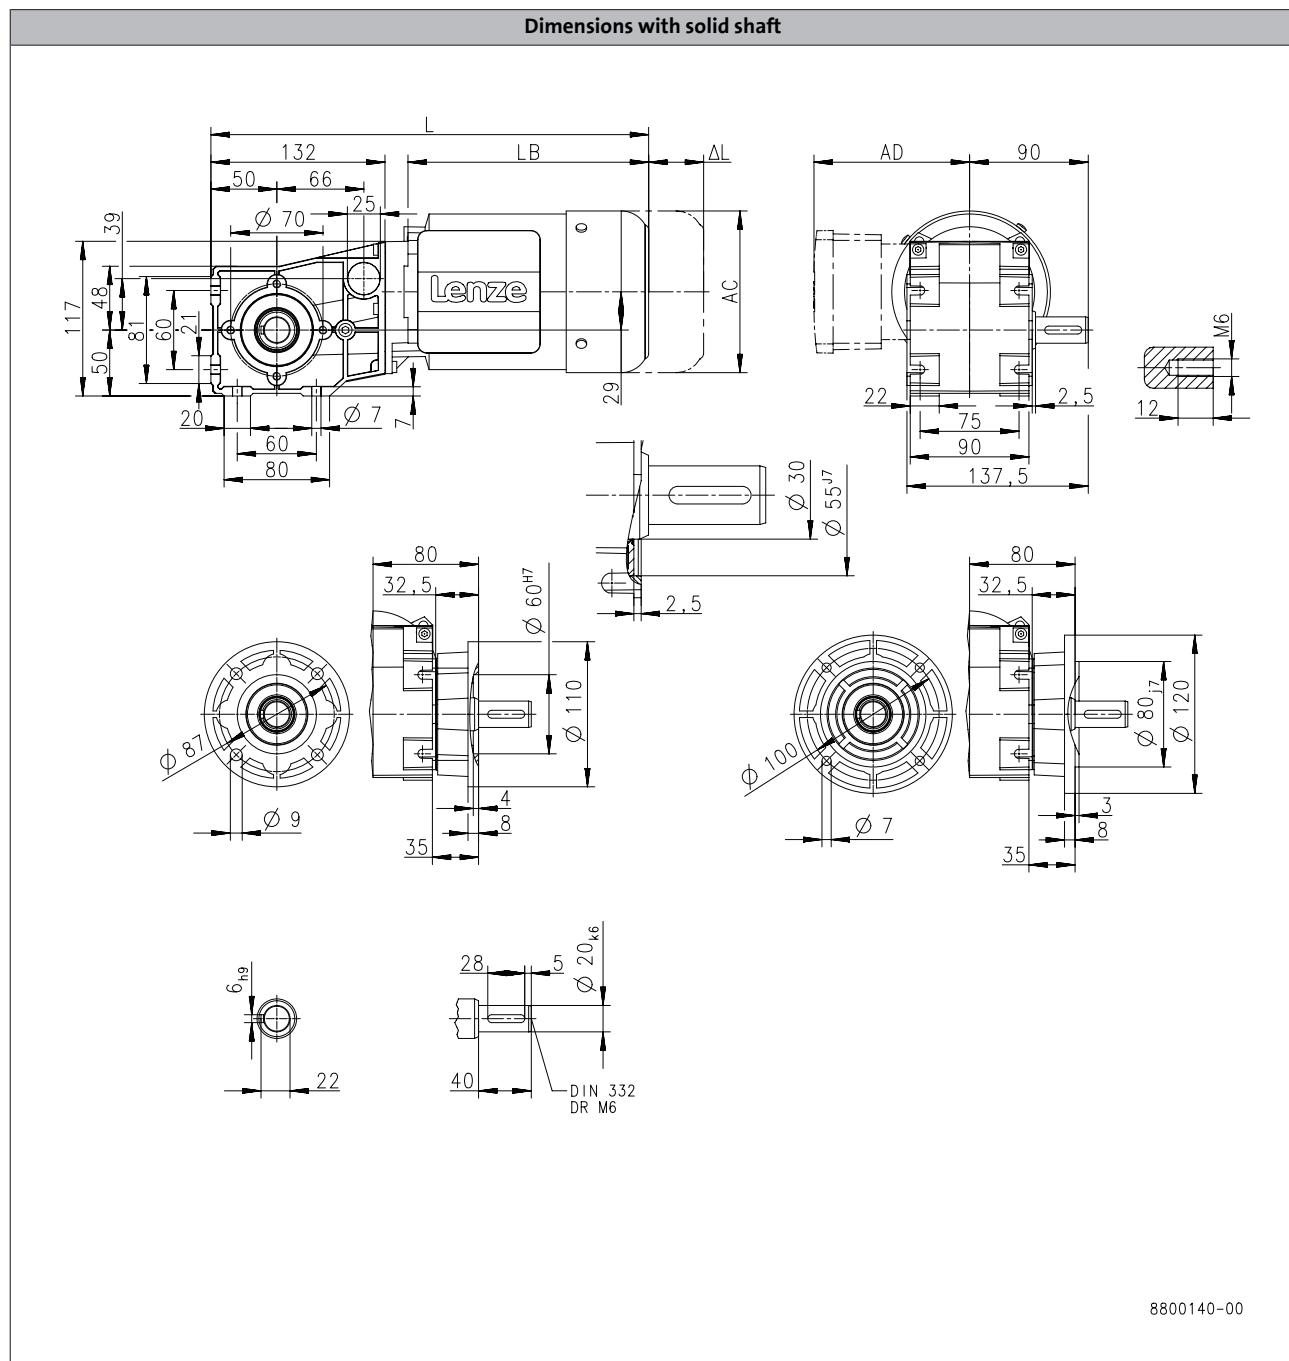

Product			MD□MA□□					
			063-02	063-12	063-22	063-32	063-42	071-32
Dimensions								
Total length	L	[mm]	305	332	305	332		352
Motor length	LB	[mm]	156	183	156	183		203
Length of motor options	ΔL	[mm]	135	170	135	170		165
Motor diameter	AC	[mm]			123		139	
Distance motor/connection	AD	[mm]			100		109	


g500-B bevel geared motors



Technical data

Dimensions, 4-pole motors

g500-B45

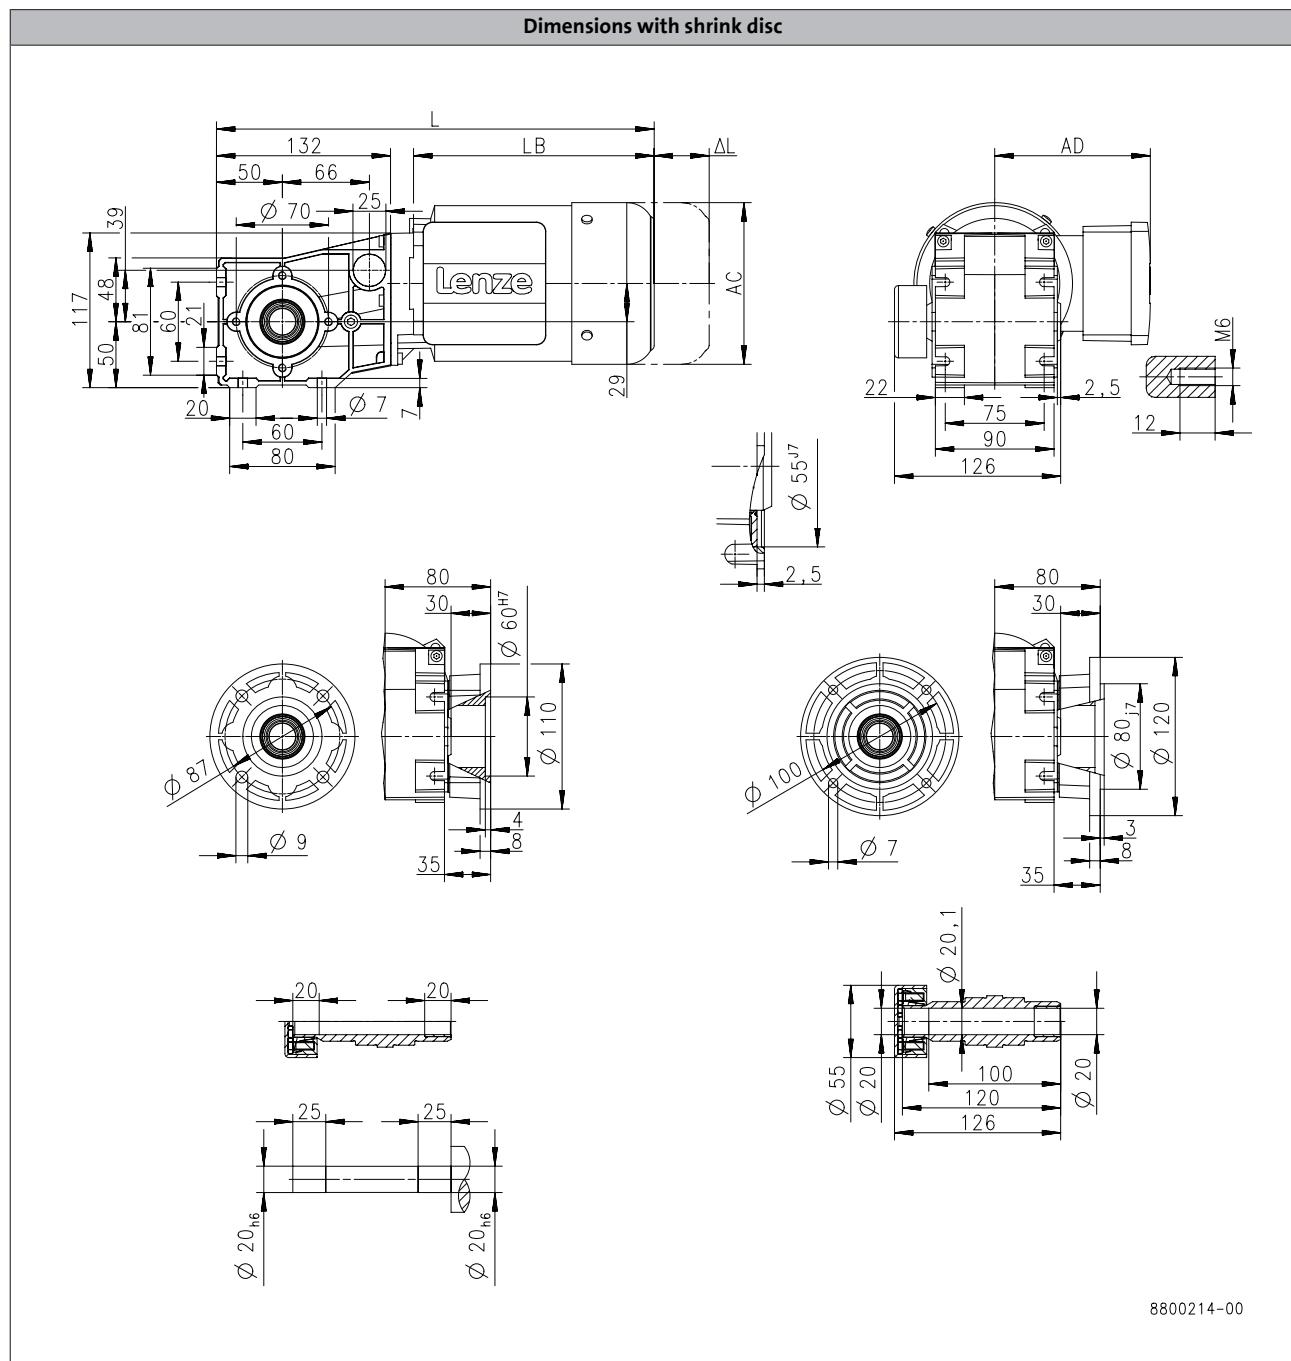

6.7

Product			MD□MA□□					
			063-02	063-12	063-22	063-32	063-42	071-32
Dimensions								
Total length	L	[mm]	305	332	305	332		352
Motor length	LB	[mm]	156	183	156	183		203
Length of motor options	Δ L	[mm]	135	170	135	170		165
Motor diameter	AC	[mm]			123		139	
Distance motor/connection	AD	[mm]			100		109	


g500-B bevel geared motors



Technical data

Dimensions, 4-pole motors

g500-B110

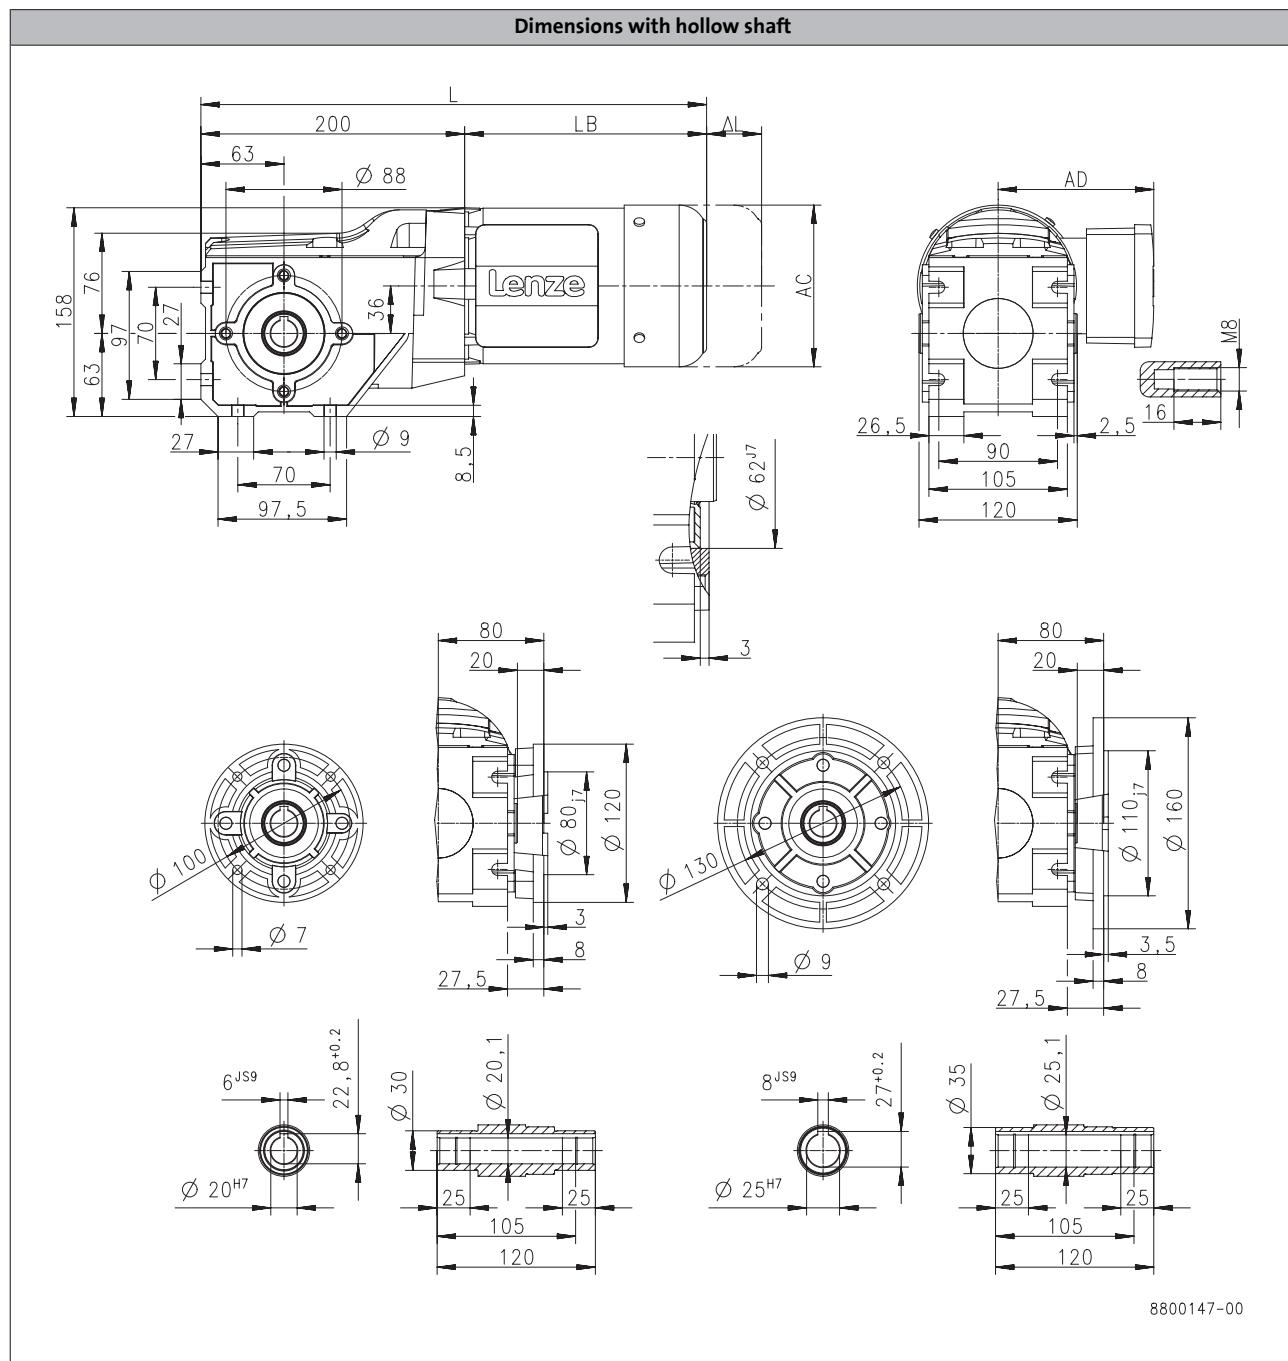

Product			MD□MA□□							
			063-12	063-32	063-42	071-32	071-42	080-32	080-42	090-32
Dimensions										
Total length	L	[mm]		383		403		426		459
Motor length	LB	[mm]		183		203		226		259
Length of motor options	Δ L	[mm]		170		165		183		181
Motor diameter	AC	[mm]		123		139		156		176
Distance motor/connection	AD	[mm]		100		109		150		157


g500-B bevel geared motors



Technical data

Dimensions, 4-pole motors

g500-B110

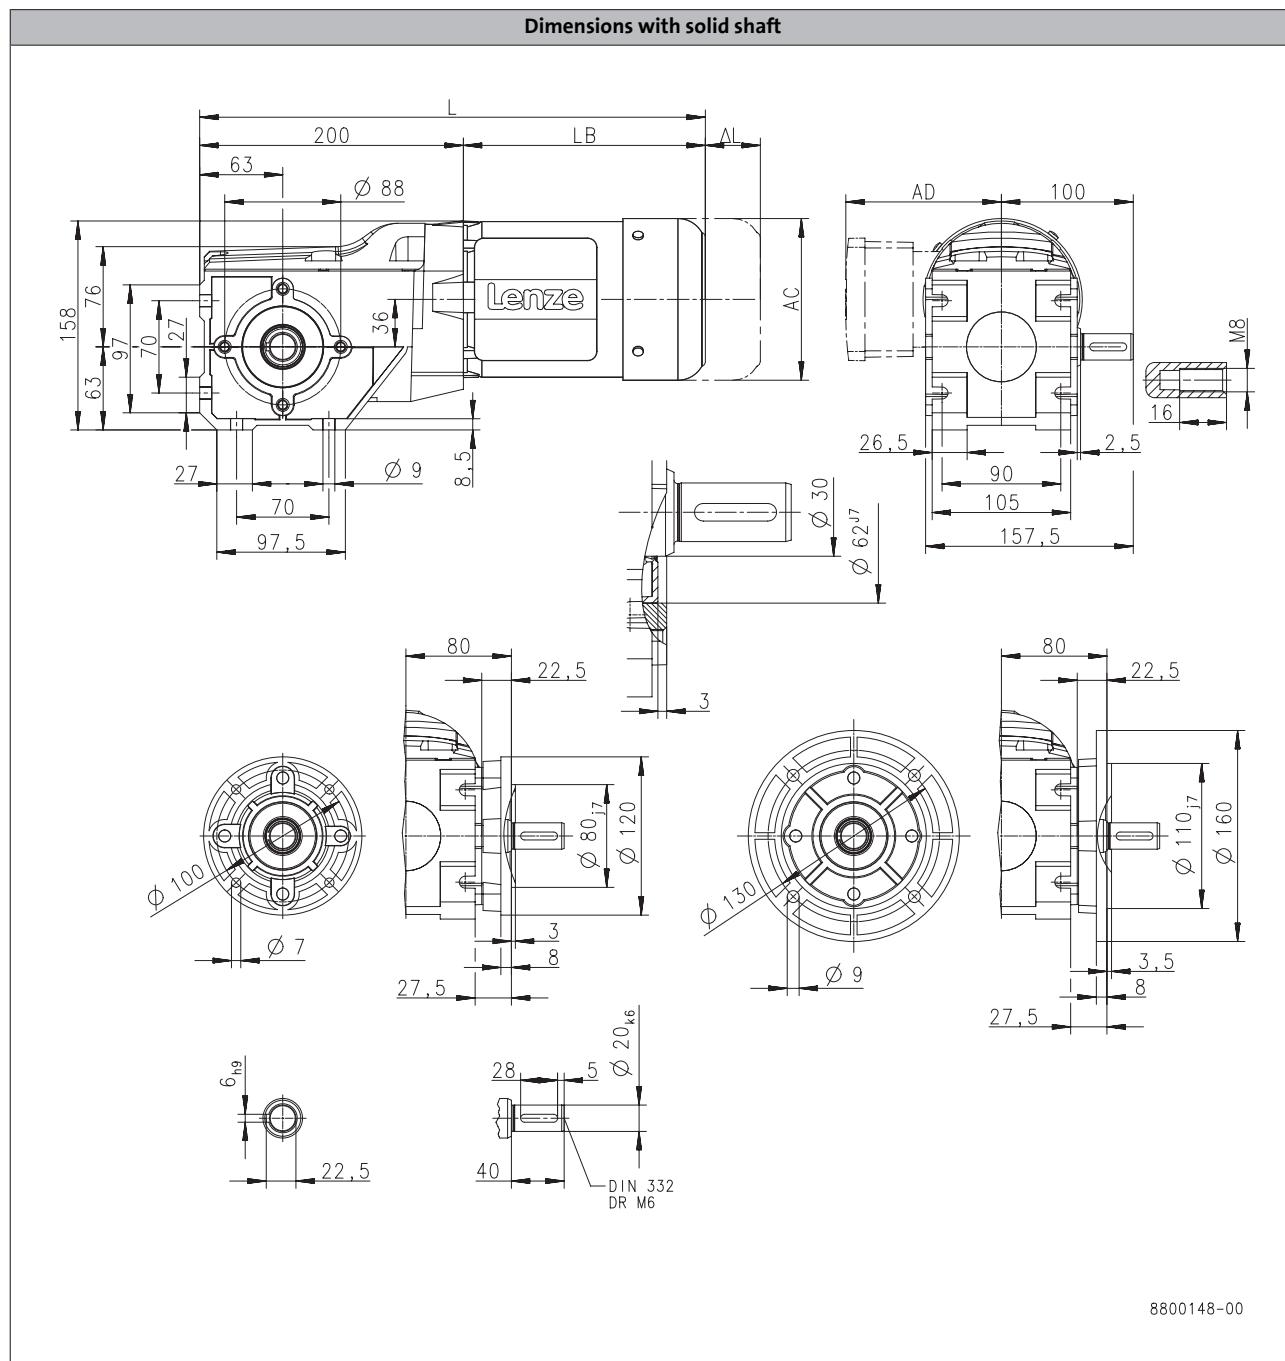

Product			MD□MA□□							
Dimensions			063-12	063-32	063-42	071-32	071-42	080-32	080-42	090-32
Total length	L	[mm]		383		403		426		459
Motor length	LB	[mm]		183		203		226		259
Length of motor options	Δ L	[mm]	170		165		183		181	
Motor diameter	AC	[mm]	123		139		156		176	
Distance motor/connection	AD	[mm]	100		109		150		157	


g500-B bevel geared motors



Technical data

Dimensions, 4-pole motors

g500-B110

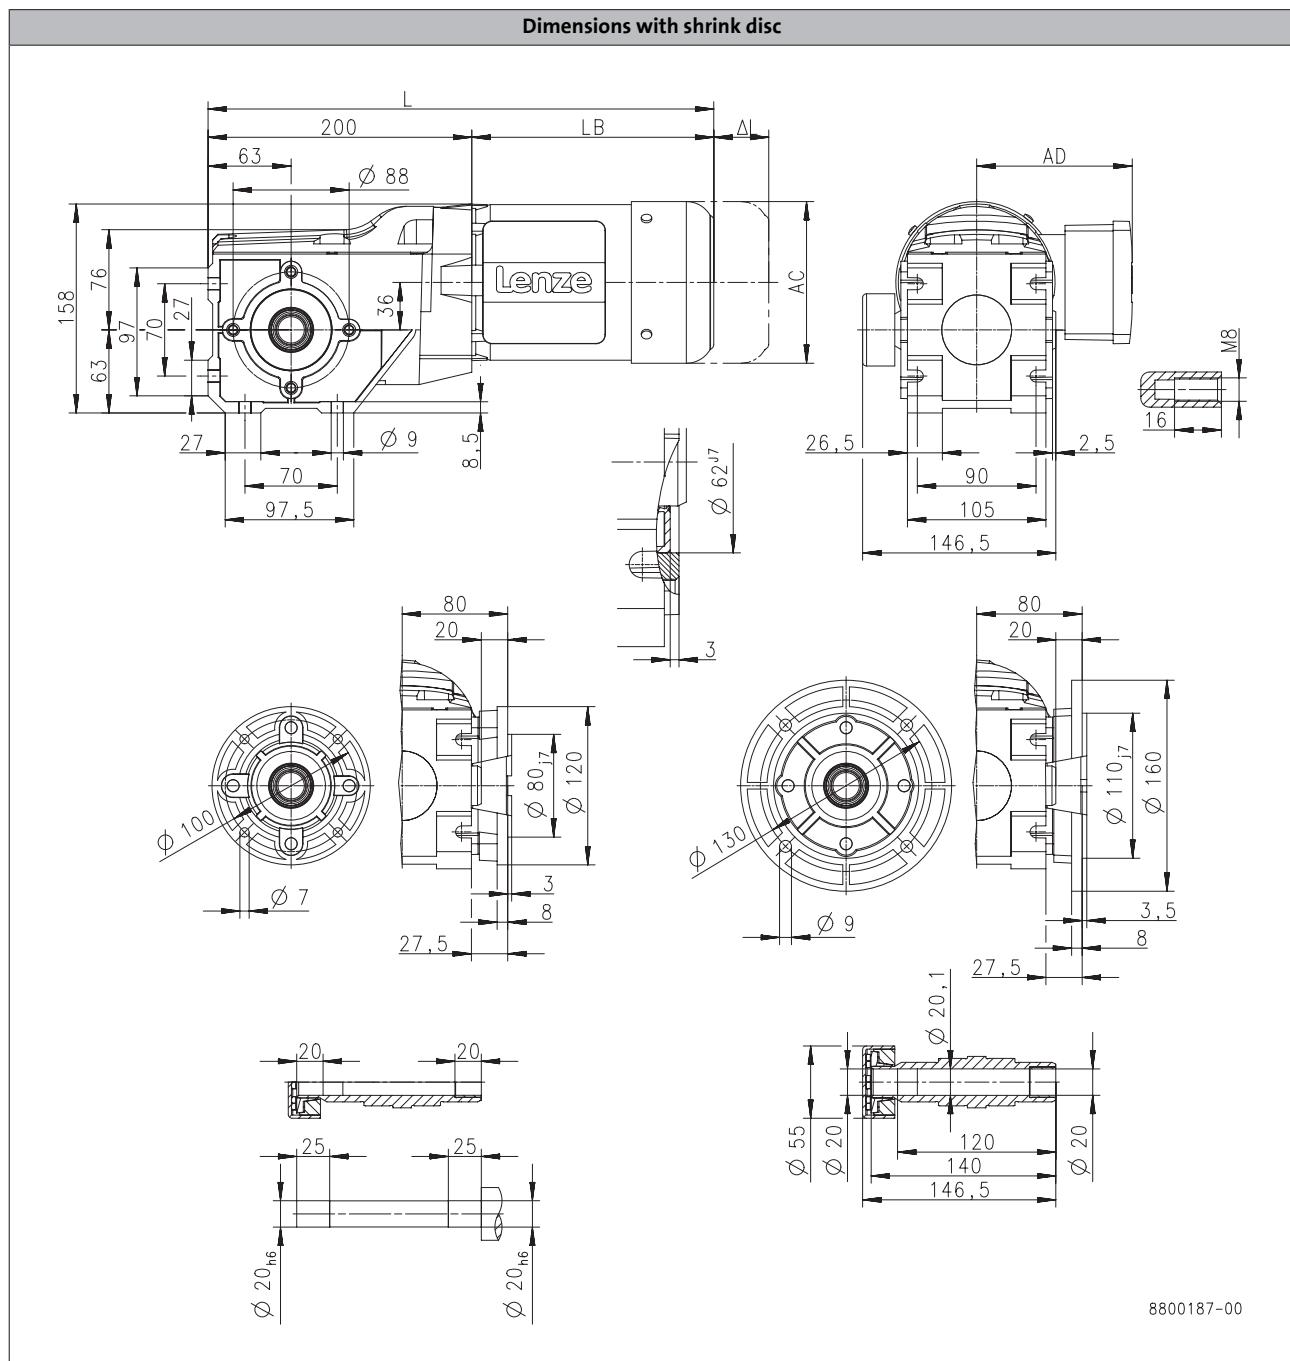

Product			MD□MA□□							
			063-12	063-32	063-42	071-32	071-42	080-32	080-42	090-32
Dimensions										
Total length	L	[mm]		383		403		426		459
Motor length	LB	[mm]		183		203		226		259
Length of motor options	Δ L	[mm]		170		165		183		181
Motor diameter	AC	[mm]		123		139		156		176
Distance motor/connection	AD	[mm]		100		109		150		157


g500-B bevel geared motors



Technical data

Dimensions, 4-pole motors

g500-B240

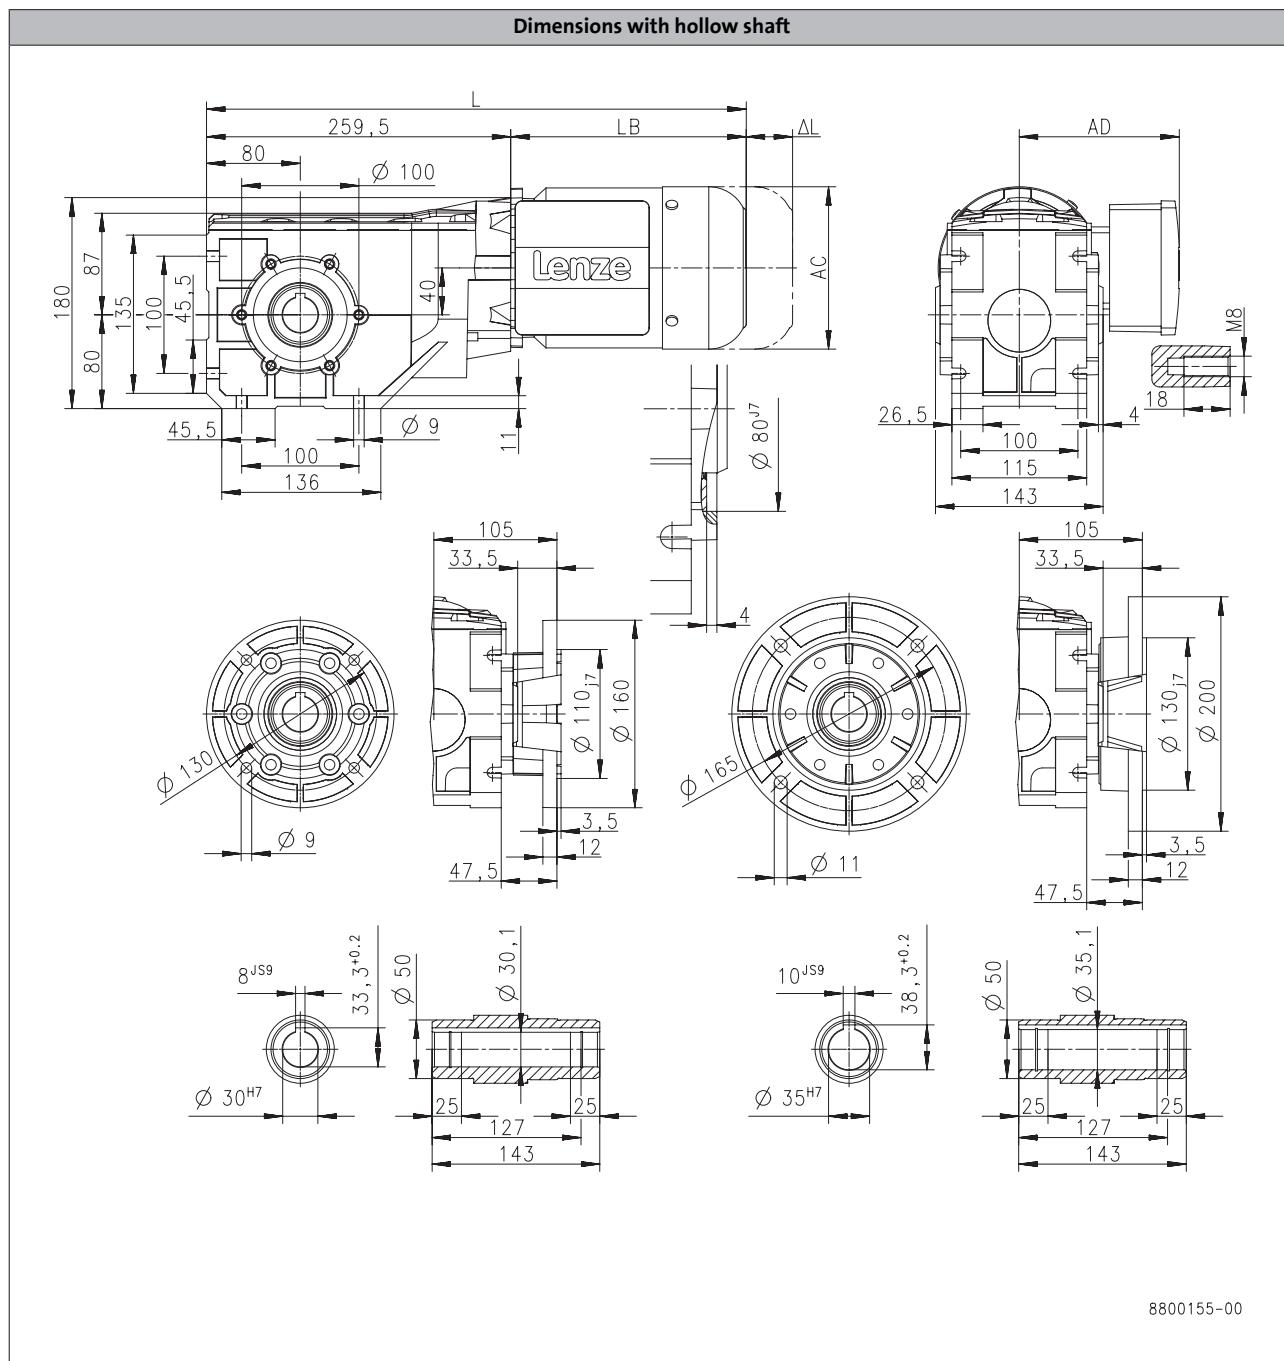

6.7

Product			MD□MA□□								
			063-12	063-32	063-42	071-32	071-42	080-32	080-42	090-32	100-12
Dimensions											
Total length	L	[mm]		443		463		486		519	580
Motor length	LB	[mm]		183		203		226		259	320
Length of motor options	ΔL	[mm]		170		165		183		181	170
Motor diameter	AC	[mm]		123		139		156		176	194
Distance motor/connection	AD	[mm]		100		109		150		157	166


g500-B bevel geared motors



Technical data

Dimensions, 4-pole motors

g500-B240

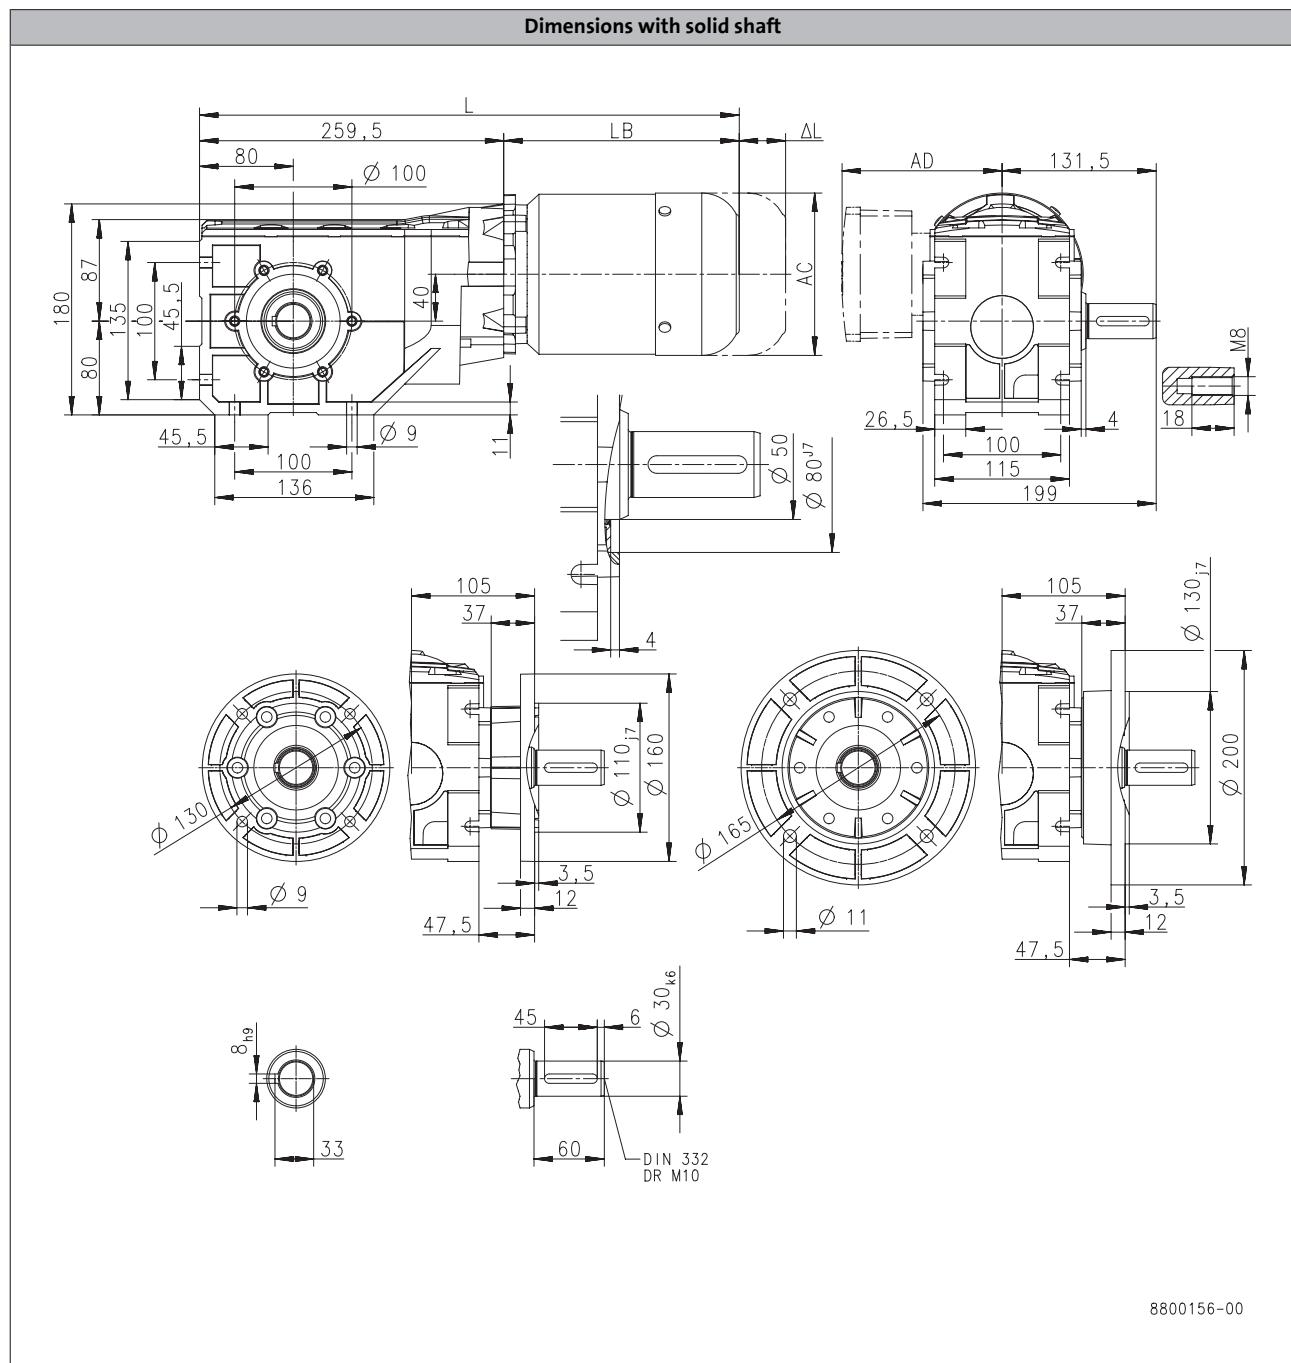

Product			MD□MA□□									
			063-12	063-32	063-42	071-32	071-42	080-32	080-42	090-32	100-12	100-32
Dimensions												
Total length	L	[mm]		443		463		486		519		580
Motor length	LB	[mm]		183		203		226		259		320
Length of motor options	ΔL	[mm]		170		165		183		181		170
Motor diameter	AC	[mm]		123		139		156		176		194
Distance motor/connection	AD	[mm]		100		109		150		157		166


g500-B bevel geared motors



Technical data

Dimensions, 4-pole motors

g500-B240

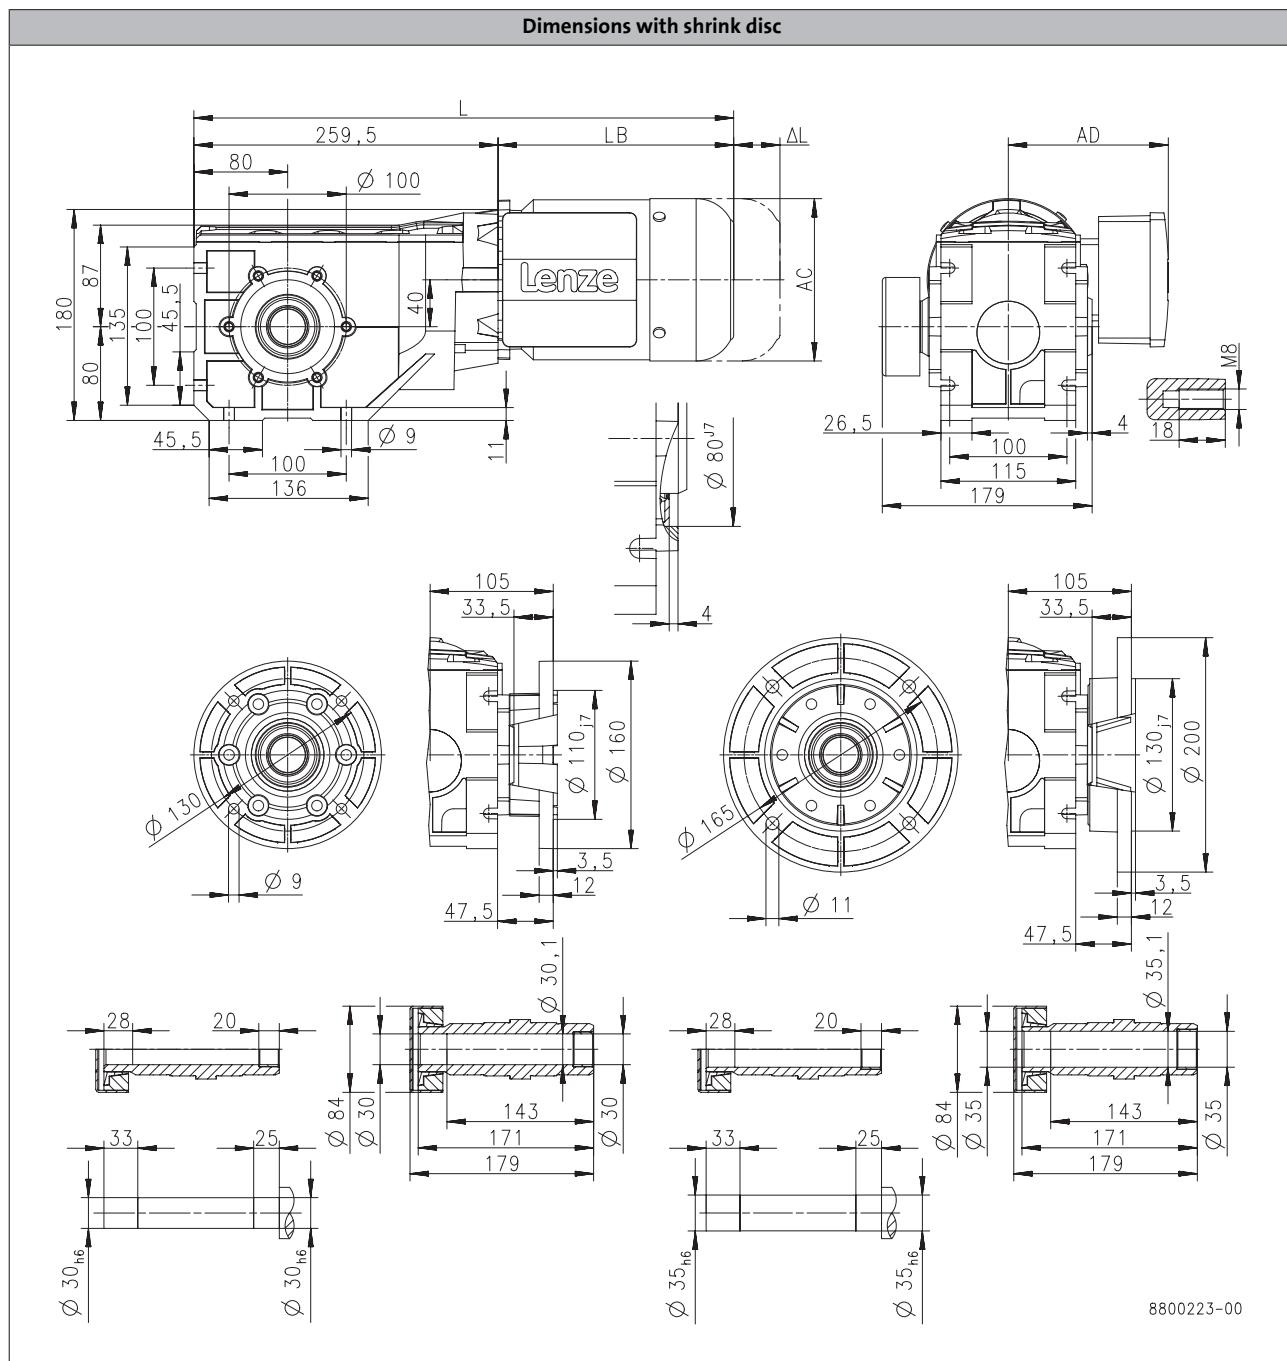

Product			MD□MA□□									
			063-12	063-32	063-42	071-32	071-42	080-32	080-42	090-32	100-12	100-32
Dimensions												
Total length	L	[mm]		443		463		486		519		580
Motor length	LB	[mm]		183		203		226		259		320
Length of motor options	Δ L	[mm]		170		165		183		181		170
Motor diameter	AC	[mm]		123		139		156		176		194
Distance motor/connection	AD	[mm]		100		109		150		157		166


g500-B bevel geared motors



Technical data

Dimensions, 4-pole motors

g500-B450

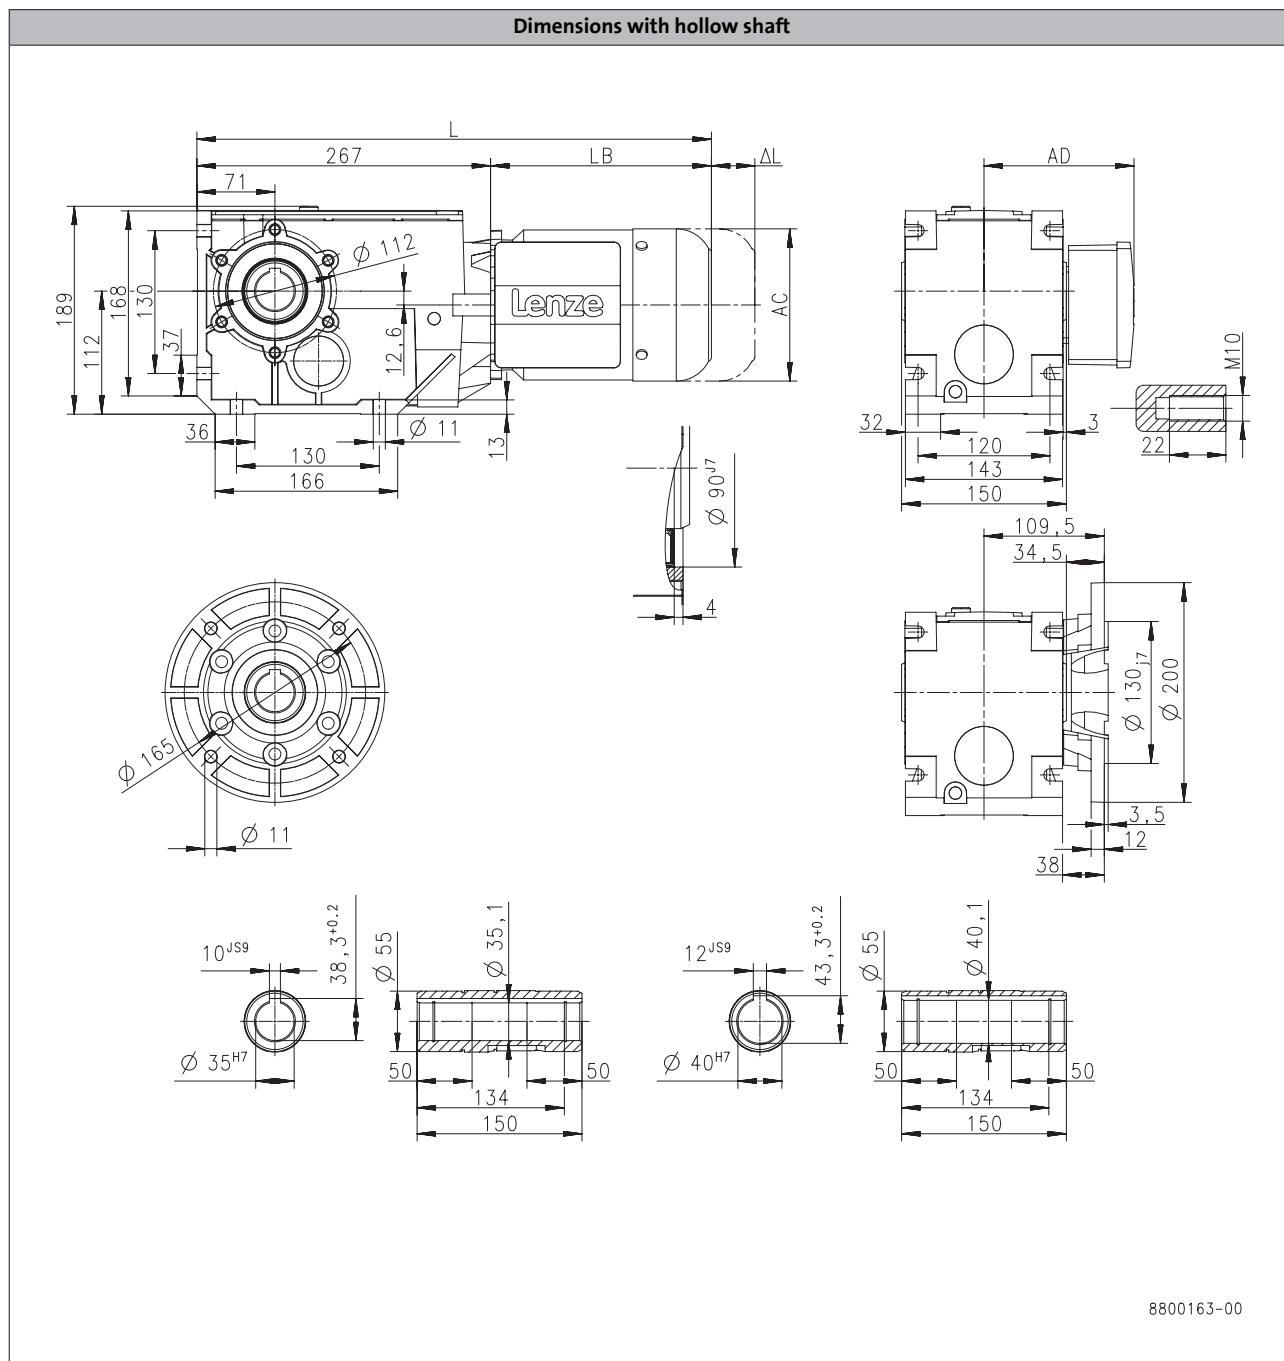

6.7

8800163-00

Product			MD□MA□□											
			063-12	063-32	063-42	071-32	071-42	080-32	080-42	090-32	100-12	100-32	112-22	112-32
Dimensions														
Total length	L	[mm]		450		470		493		526		587	603	647
Motor length	LB	[mm]	183		203		226		259		320		336	380
Length of motor options	Δ L	[mm]	170		165		183		181		170		183	
Motor diameter	AC	[mm]	123		139		156		176		194		218	
Distance motor/connection	AD	[mm]	100		109		150		157		166		176	


g500-B bevel geared motors



Technical data

Dimensions, 4-pole motors

g500-B450

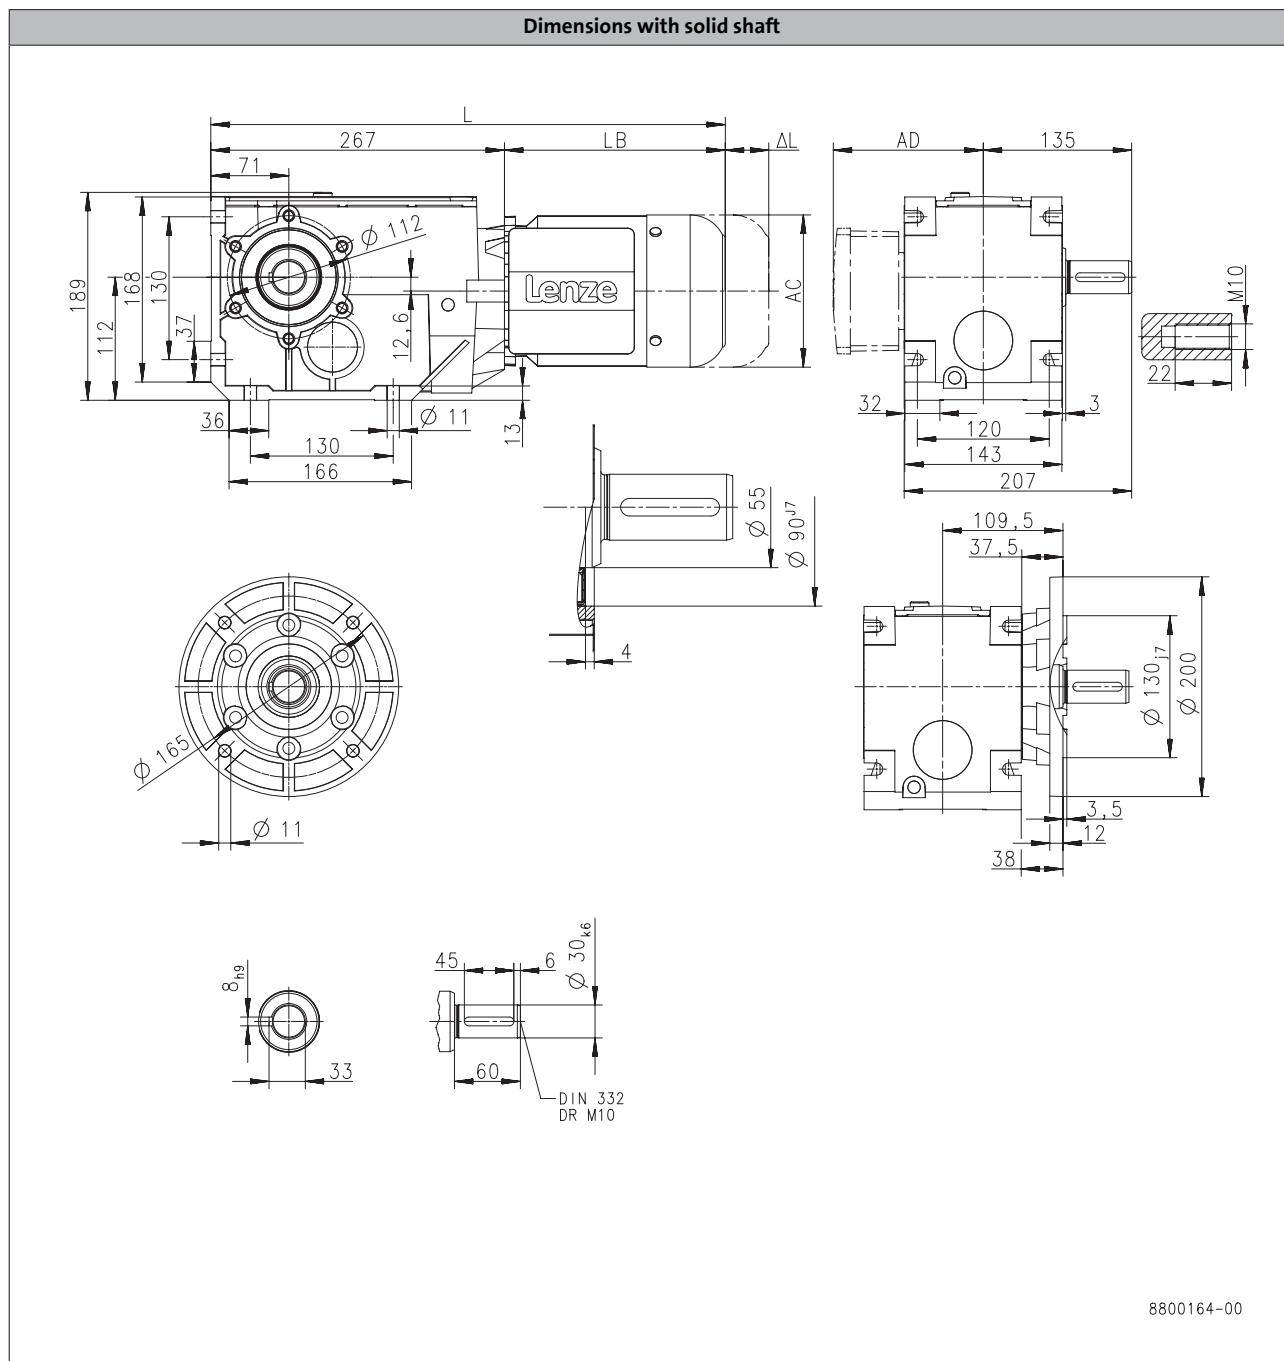

6.7

Product			MD□MA□□											
			063-12	063-32	063-42	071-32	071-42	080-32	080-42	090-32	100-12	100-32	112-22	112-32
Dimensions														
Total length	L	[mm]		450		470		493		526		587		603
Motor length	LB	[mm]		183		203		226		259		320		336
Length of motor options	ΔL	[mm]		170		165		183		181		170		183
Motor diameter	AC	[mm]		123		139		156		176		194		218
Distance motor/connection	AD	[mm]		100		109		150		157		166		176


g500-B bevel geared motors



Technical data

Dimensions, 4-pole motors

g500-B450

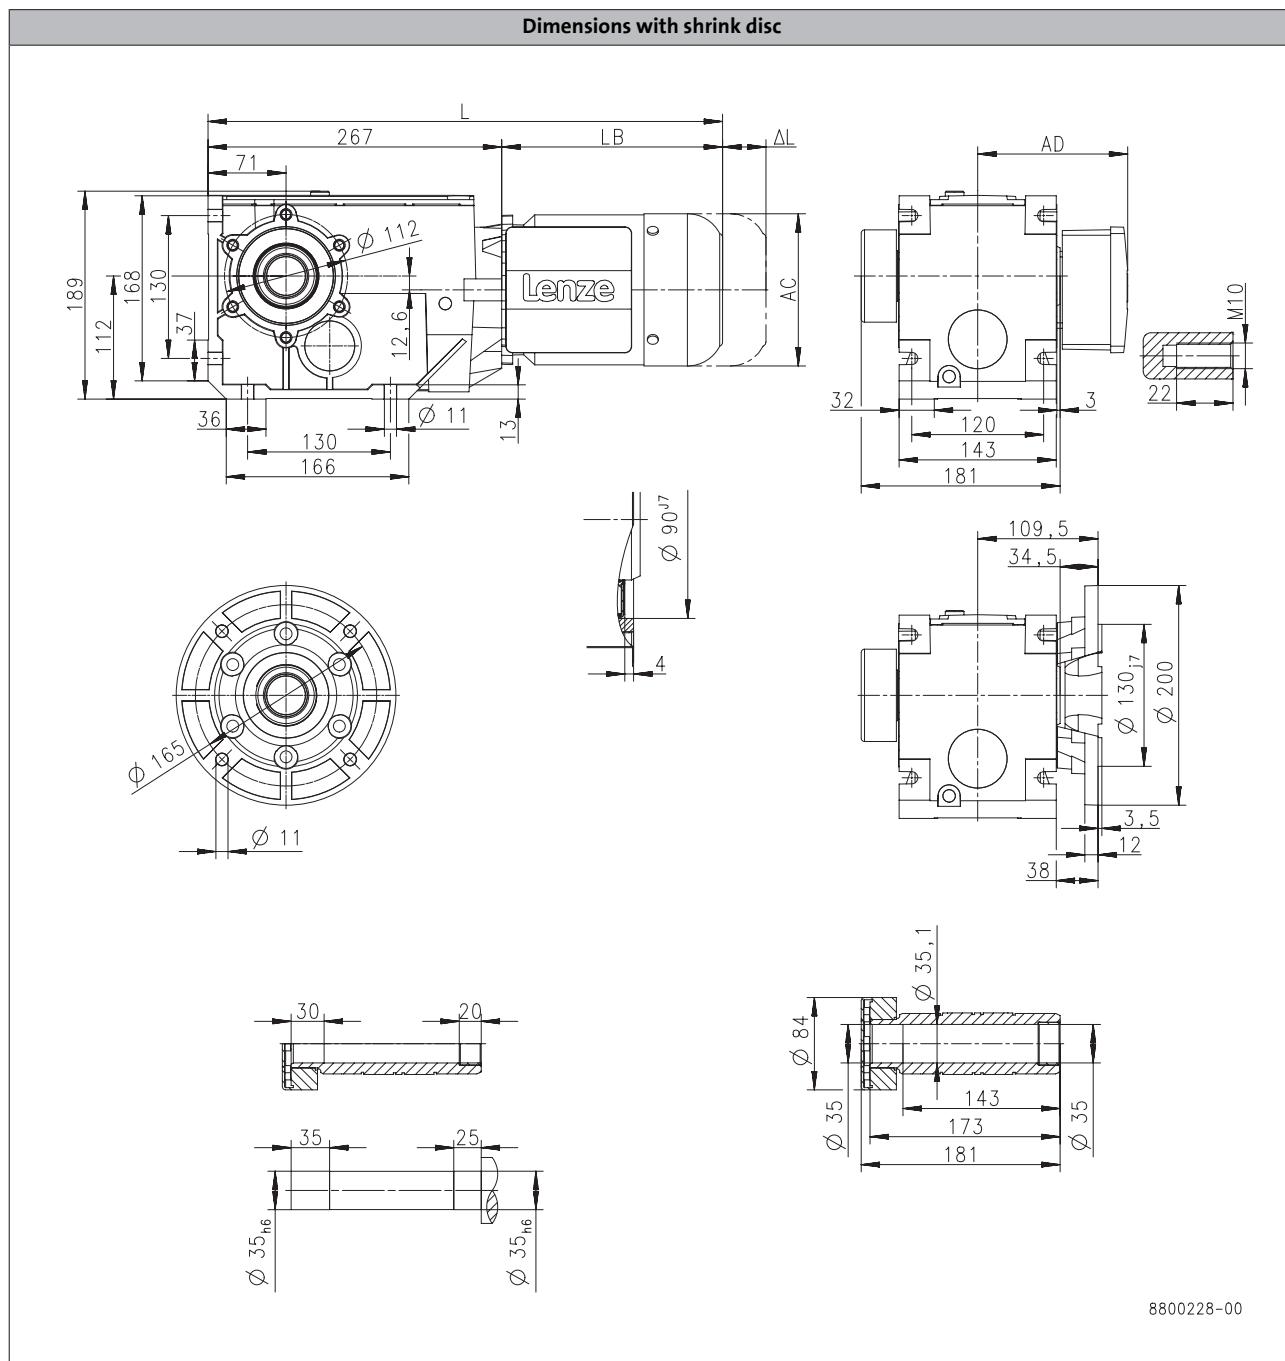

Product			MD□MA□□											
			063-12	063-32	063-42	071-32	071-42	080-32	080-42	090-32	100-12	100-32	112-22	112-32
Dimensions														
Total length	L	[mm]		450		470		493		526		587	603	647
Motor length	LB	[mm]		183		203		226		259		320	336	380
Length of motor options	Δ L	[mm]		170		165		183		181		170		183
Motor diameter	AC	[mm]		123		139		156		176		194		218
Distance motor/connection	AD	[mm]		100		109		150		157		166		176


g500-B bevel geared motors



Technical data

Dimensions, 2-pole motors

g500-B110

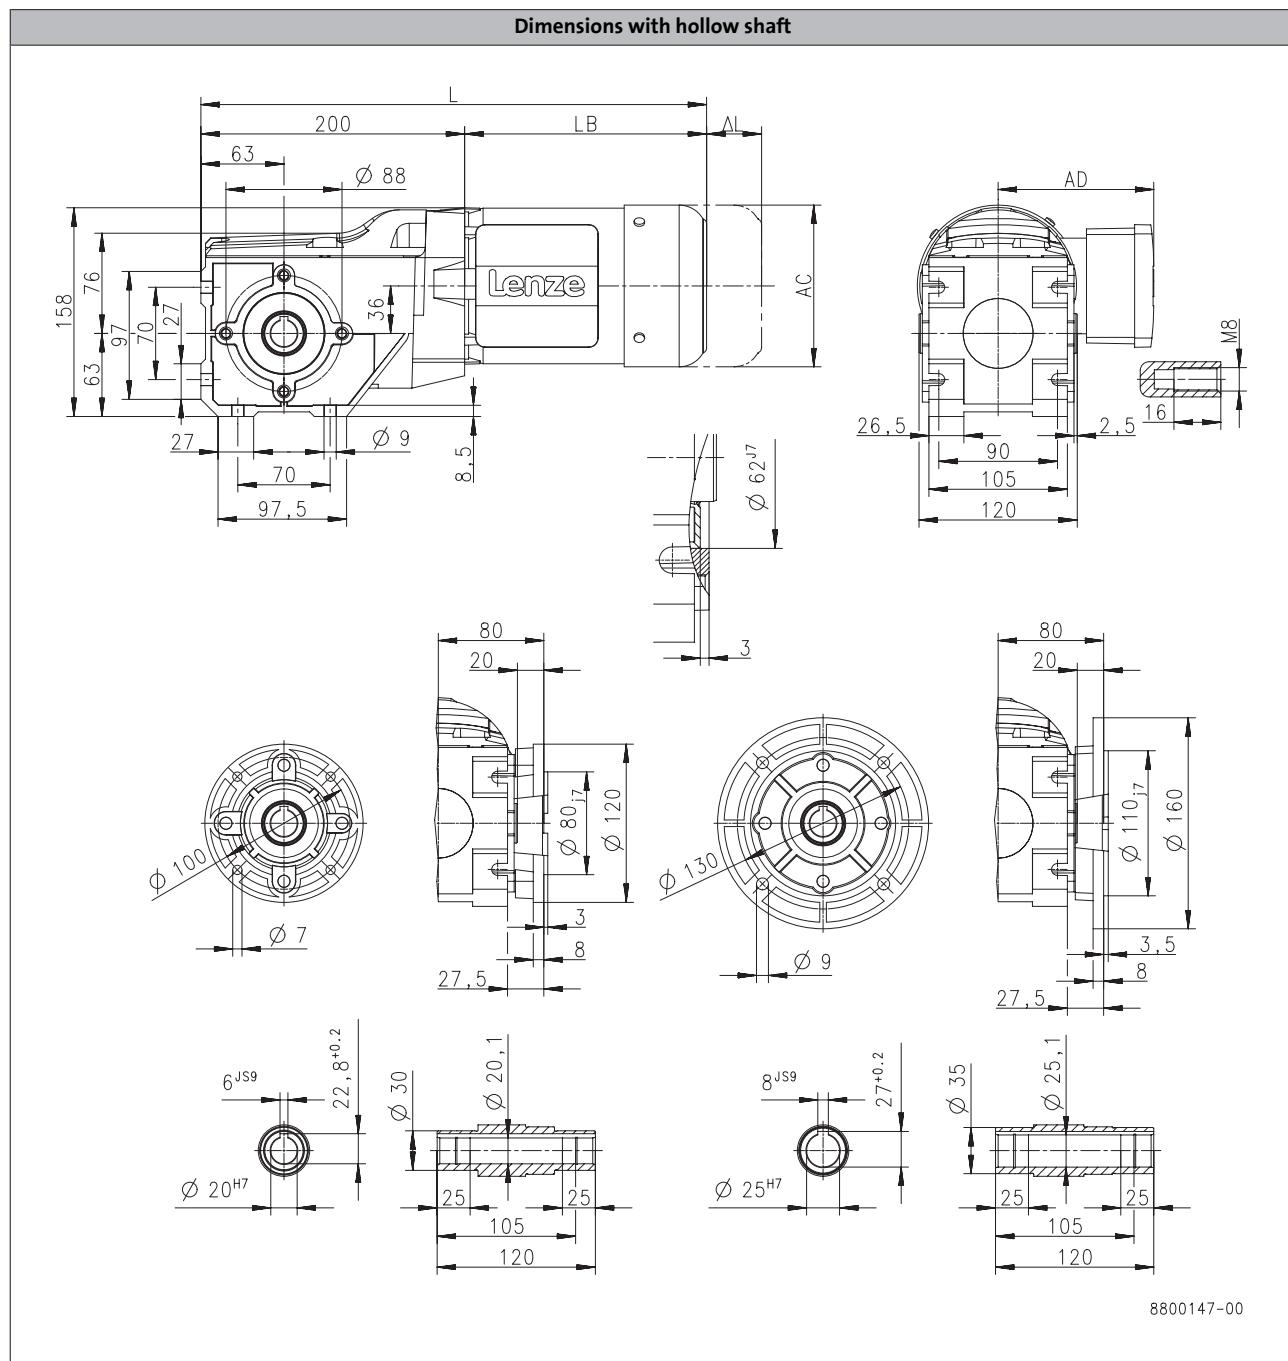

Product			MD□MA□□							
Dimensions			063-11	063-31	071-11	071-31	080-11	080-31	090-11	090-31
Total length	L	[mm]		383		403		426		485
Motor length	LB	[mm]		183		203		226		285
Length of motor options	Δ L	[mm]		170		165		183		181
Motor diameter	AC	[mm]		123		139		156		176
Distance motor/connection	AD	[mm]		100		109		150		157


g500-B bevel geared motors



Technical data

Dimensions, 2-pole motors

g500-B110

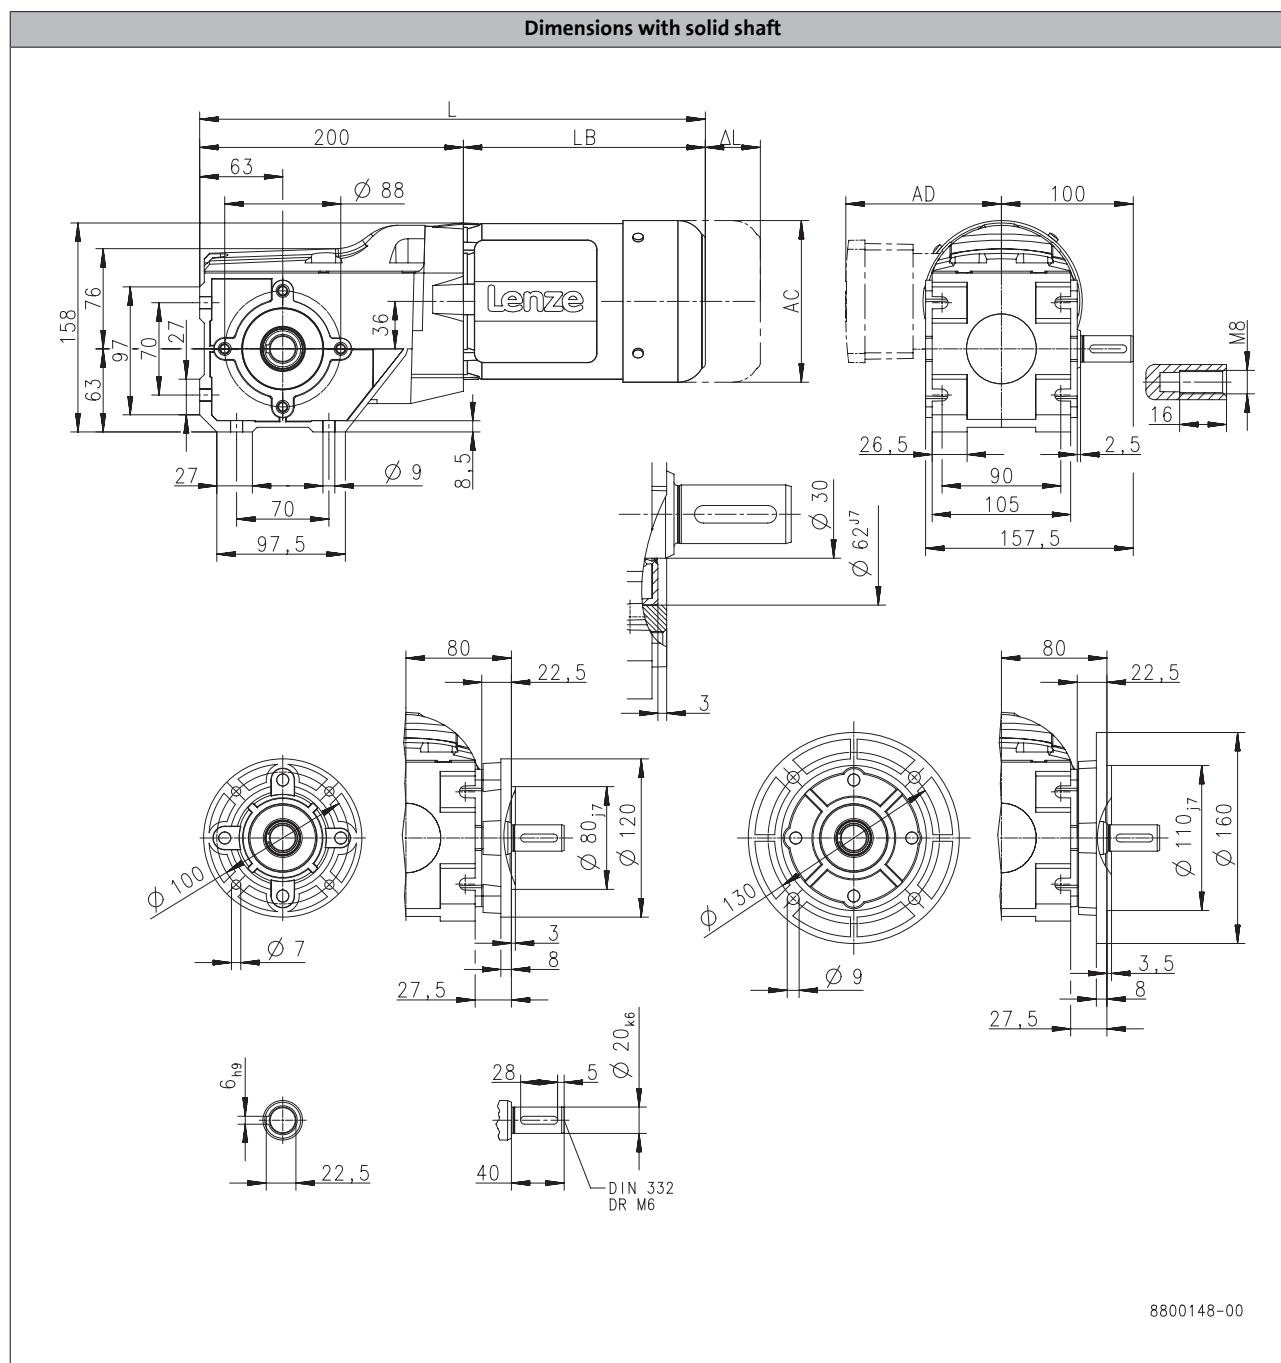

6.7

Product			MD□MA□□							
			063-11	063-31	071-11	071-31	080-11	080-31	090-11	090-31
Dimensions										
Total length	L	[mm]	383		403		426		485	
Motor length	LB	[mm]	183		203		226		285	
Length of motor options	Δ L	[mm]	170		165		183		181	
Motor diameter	AC	[mm]	123		139		156		176	
Distance motor/connection	AD	[mm]	100		109		150		157	


g500-B bevel geared motors



Technical data

Dimensions, 2-pole motors

g500-B110

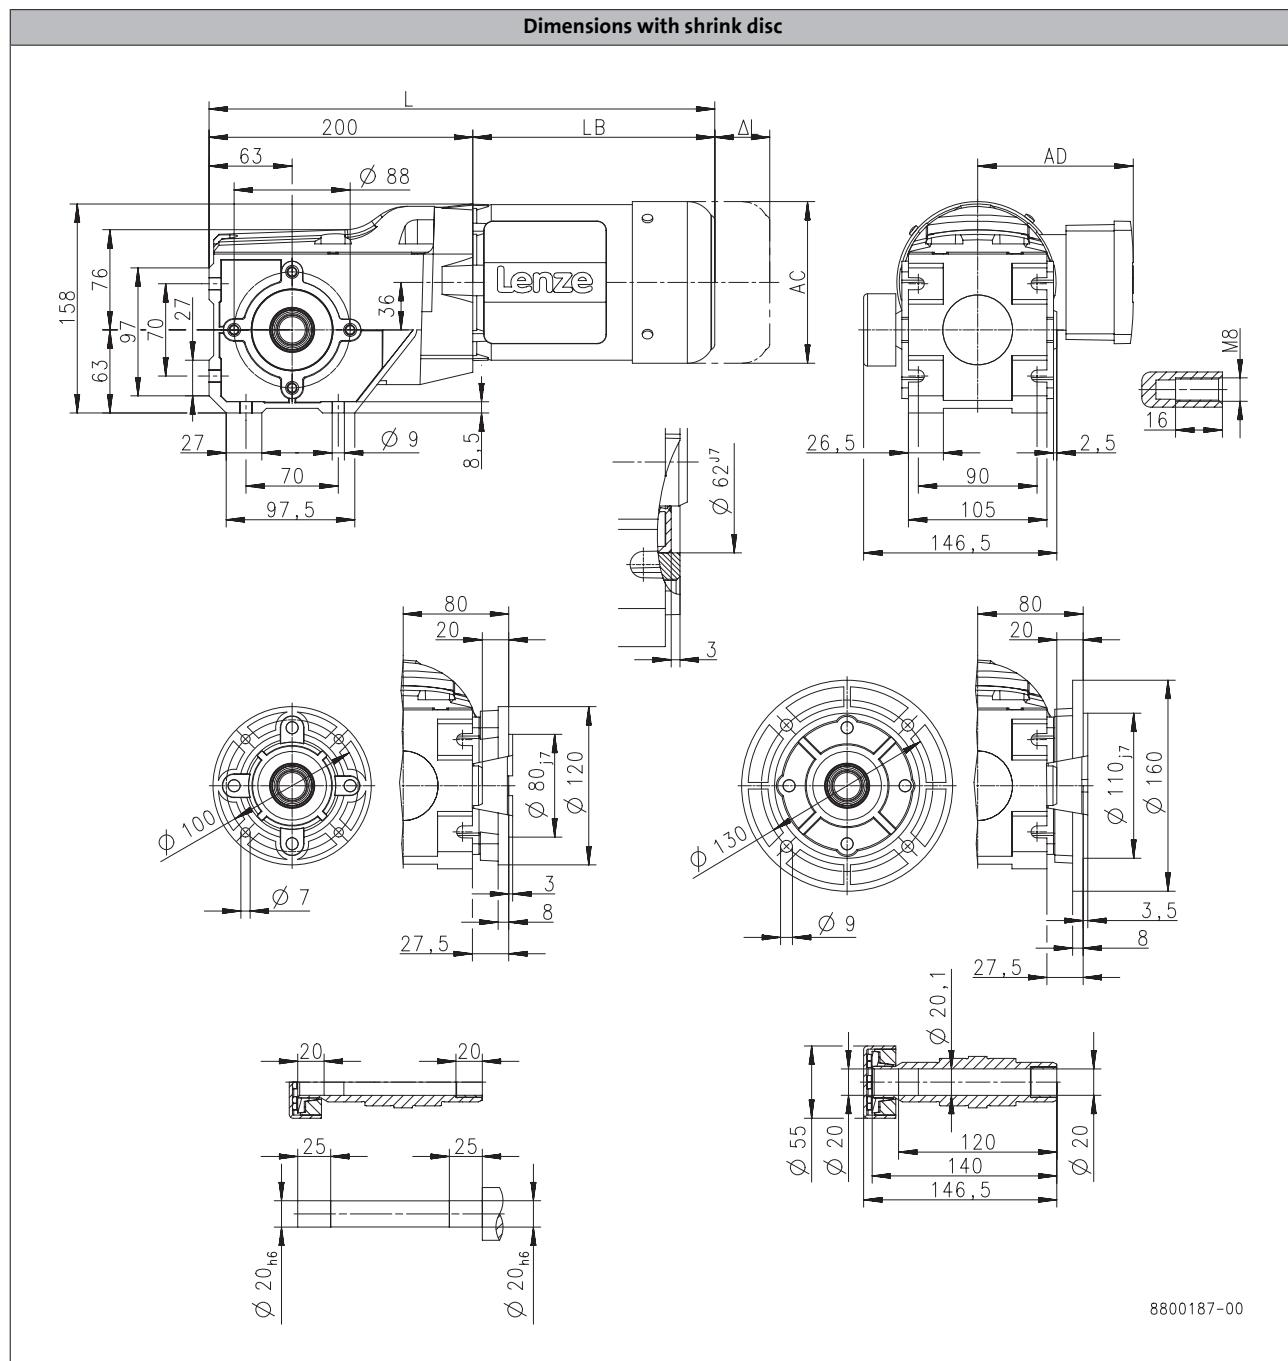

6.7

Product			063-11	063-31	071-11	071-31	080-11	080-31	090-11	090-31
Dimensions										
Total length	L	[mm]		383		403		426		485
Motor length	LB	[mm]		183		203		226		285
Length of motor options	ΔL	[mm]		170		165		183		181
Motor diameter	AC	[mm]		123		139		156		176
Distance motor/connection	AD	[mm]		100		109		150		157


g500-B bevel geared motors



Technical data

Dimensions, 2-pole motors

g500-B240

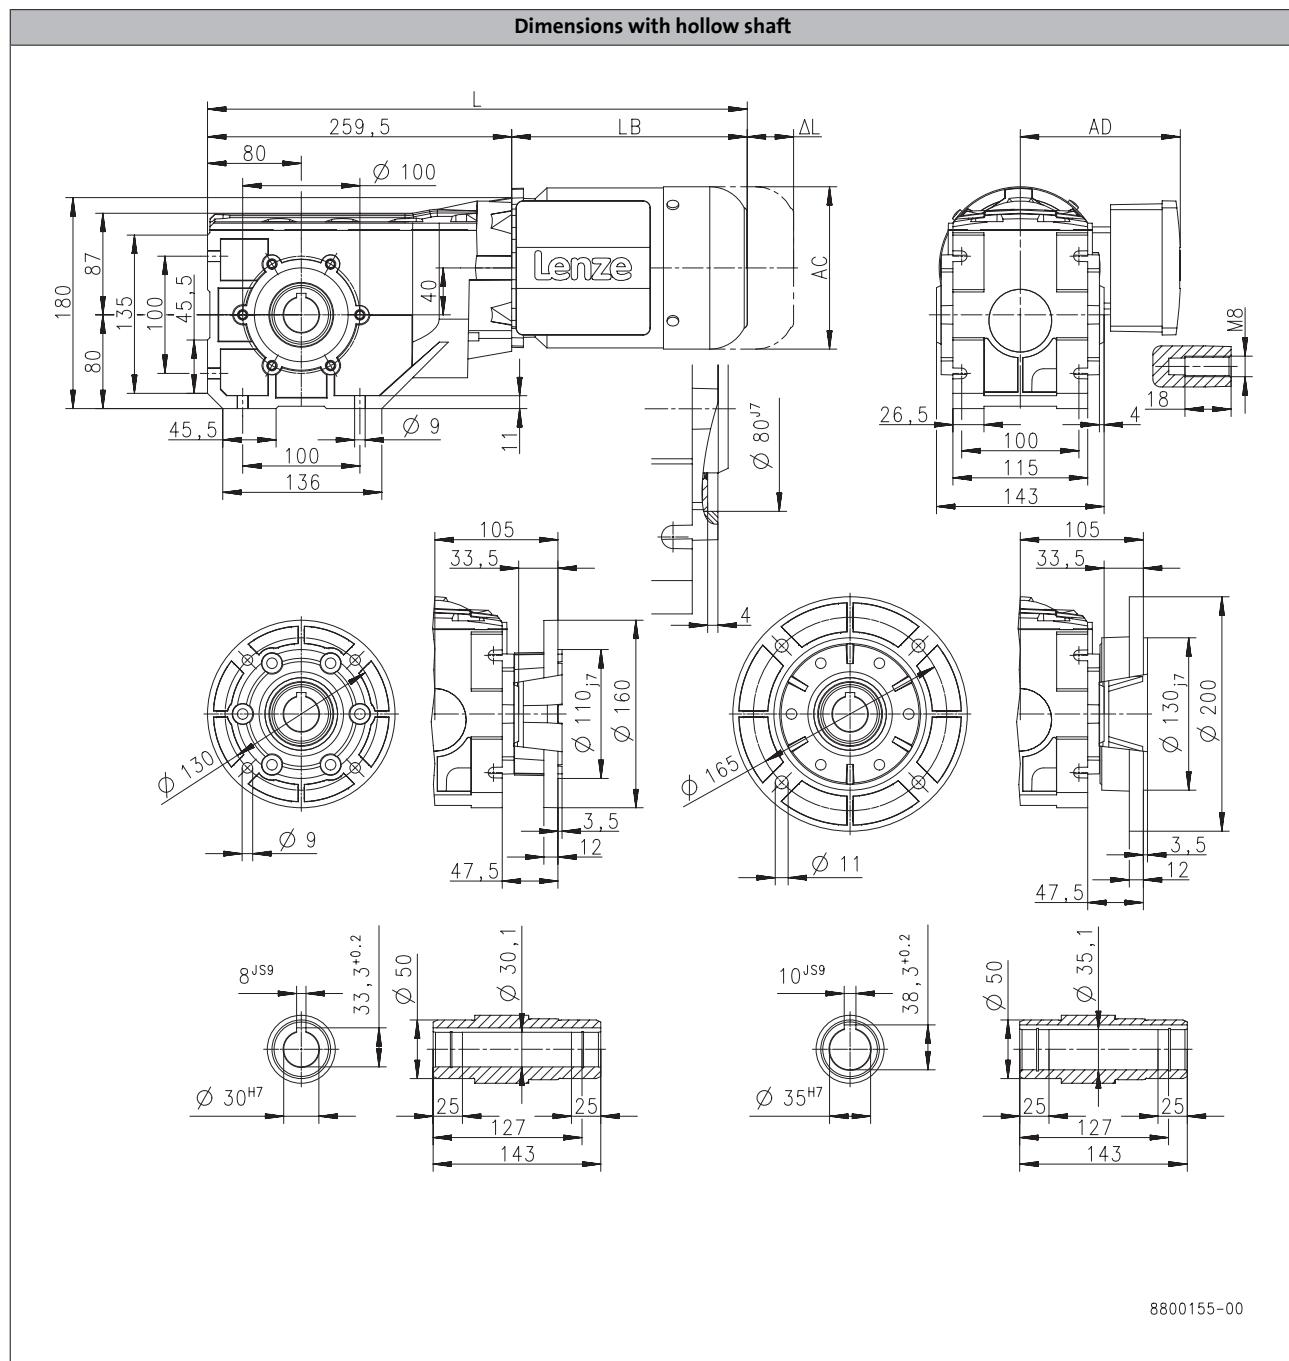

Product			MD□MA□□									
			063-11	063-31	071-11	071-31	080-11	080-31	090-11	090-31	100-31	100-41
Dimensions												
Total length	L	[mm]	443		463		486		545		580	
Motor length	LB	[mm]	183		203		226		285		320	
Length of motor options	Δ L	[mm]	170		165		183		181		170	
Motor diameter	AC	[mm]	123		139		156		176		194	
Distance motor/connection	AD	[mm]	100		109		150		157		166	


g500-B bevel geared motors



Technical data

Dimensions, 2-pole motors

g500-B240

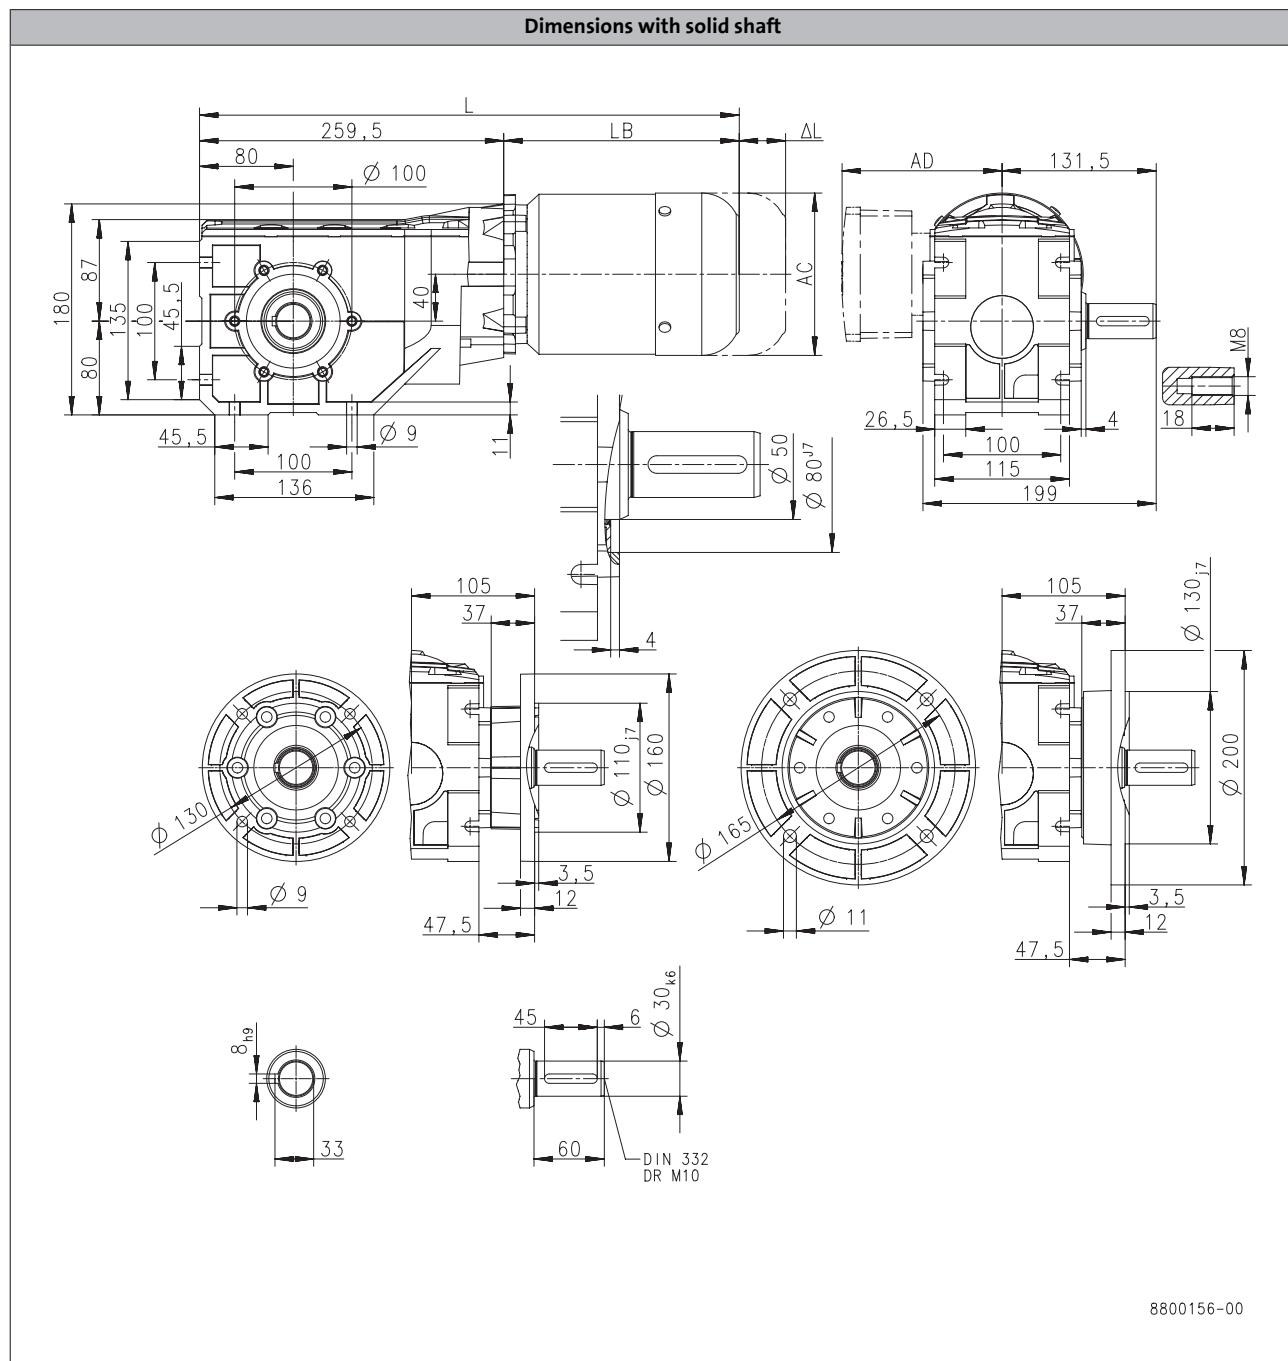

6.7

Product			MD□MA□□									
			063-11	063-31	071-11	071-31	080-11	080-31	090-11	090-31	100-31	100-41
Dimensions												
Total length	L	[mm]	443		463		486		545		580	
Motor length	LB	[mm]	183		203		226		285		320	
Length of motor options	Δ L	[mm]	170		165		183		181		170	
Motor diameter	AC	[mm]	123		139		156		176		194	
Distance motor/connection	AD	[mm]	100		109		150		157		166	


g500-B bevel geared motors



Technical data

Dimensions, 2-pole motors

g500-B240

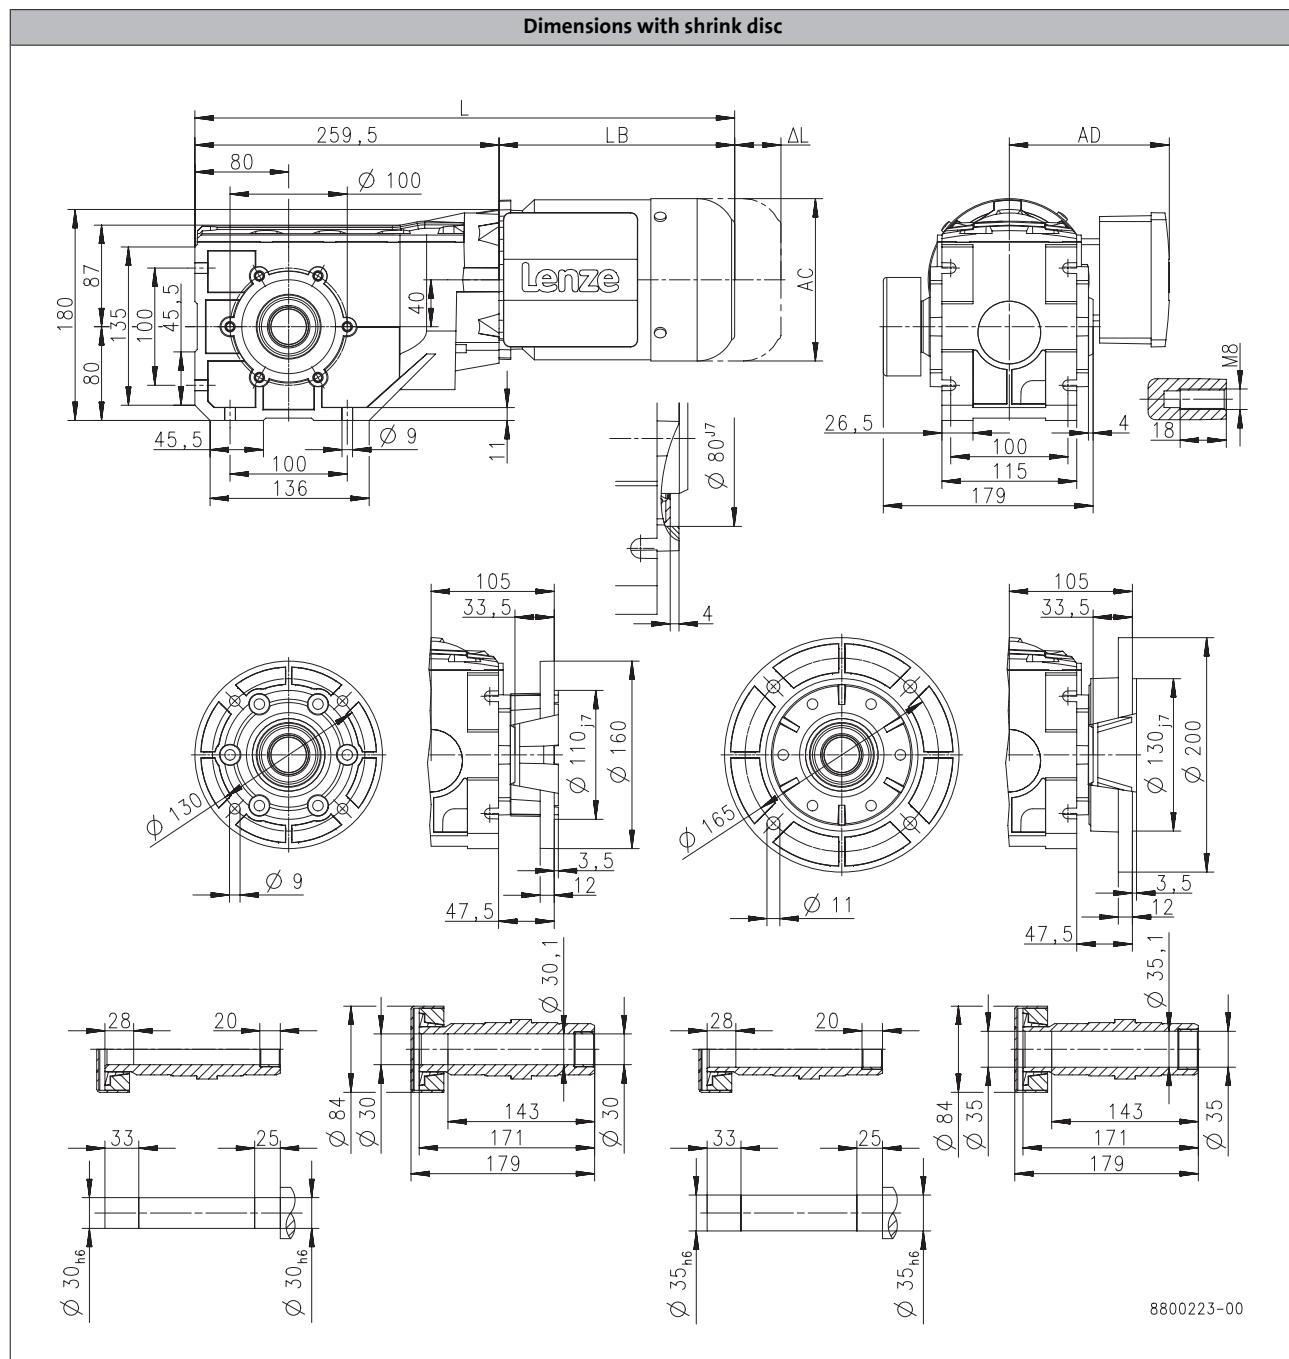

6.7

Product			MD□MA□□									
			063-11	063-31	071-11	071-31	080-11	080-31	090-11	090-31	100-31	100-41
Dimensions												
Total length	L	[mm]	443		463		486		545		580	
Motor length	LB	[mm]	183		203		226		285		320	
Length of motor options	ΔL	[mm]	170		165		183		181		170	
Motor diameter	AC	[mm]	123		139		156		176		194	
Distance motor/connection	AD	[mm]	100		109		150		157		166	


g500-B bevel geared motors



Technical data

Dimensions, 2-pole motors

g500-B450

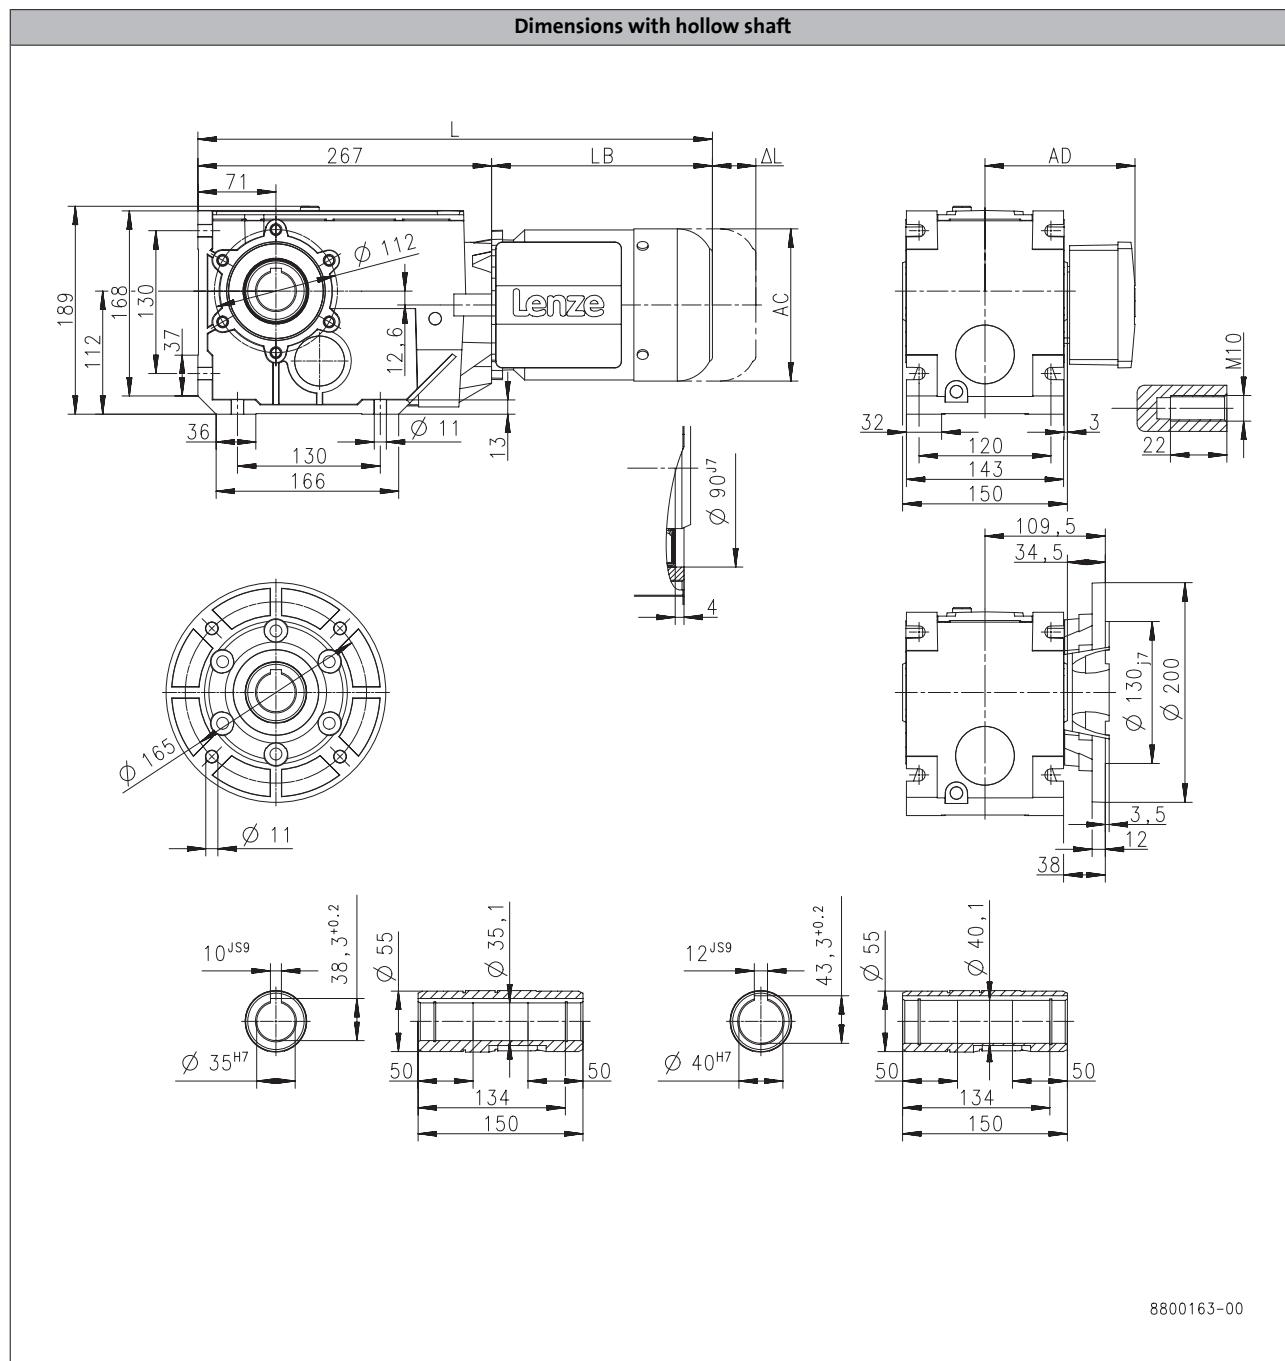

Product			MD□MA□□										
			063-11	063-31	071-11	071-31	080-11	080-31	090-11	090-31	100-31	100-41	112-31
Dimensions													
Total length	L	[mm]	450		470		493		552		587		603
Motor length	LB	[mm]	183		203		226		285		320		336
Length of motor options	Δ L	[mm]	170		165		183		181		170		183
Motor diameter	AC	[mm]	123		139		156		176		194		218
Distance motor/connection	AD	[mm]	100		109		150		157		166		176


g500-B bevel geared motors



Technical data

Dimensions, 2-pole motors

g500-B450

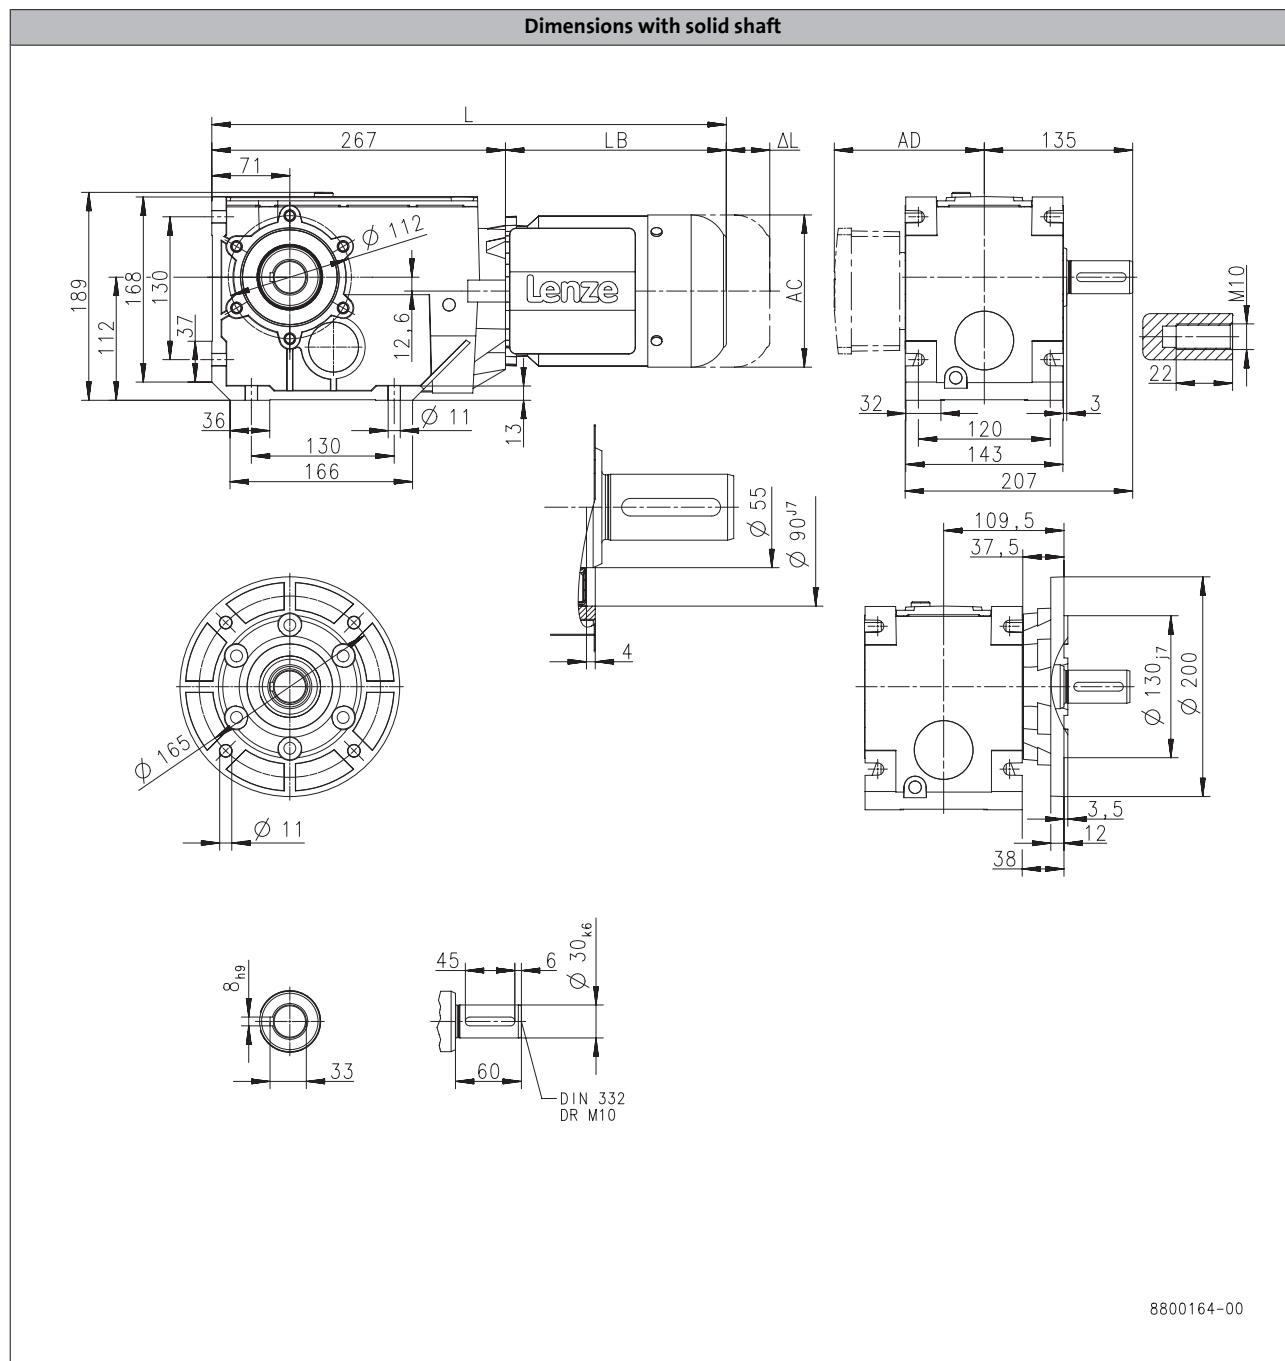

Product			MD□MA□□										
			063-11	063-31	071-11	071-31	080-11	080-31	090-11	090-31	100-31	100-41	112-31
Dimensions													
Total length	L	[mm]	450		470		493		552		587		603
Motor length	LB	[mm]	183		203		226		285		320		336
Length of motor options	Δ L	[mm]	170		165		183		181		170		183
Motor diameter	AC	[mm]	123		139		156		176		194		218
Distance motor/connection	AD	[mm]	100		109		150		157		166		176


g500-B bevel geared motors



Technical data

Dimensions, 2-pole motors

g500-B450

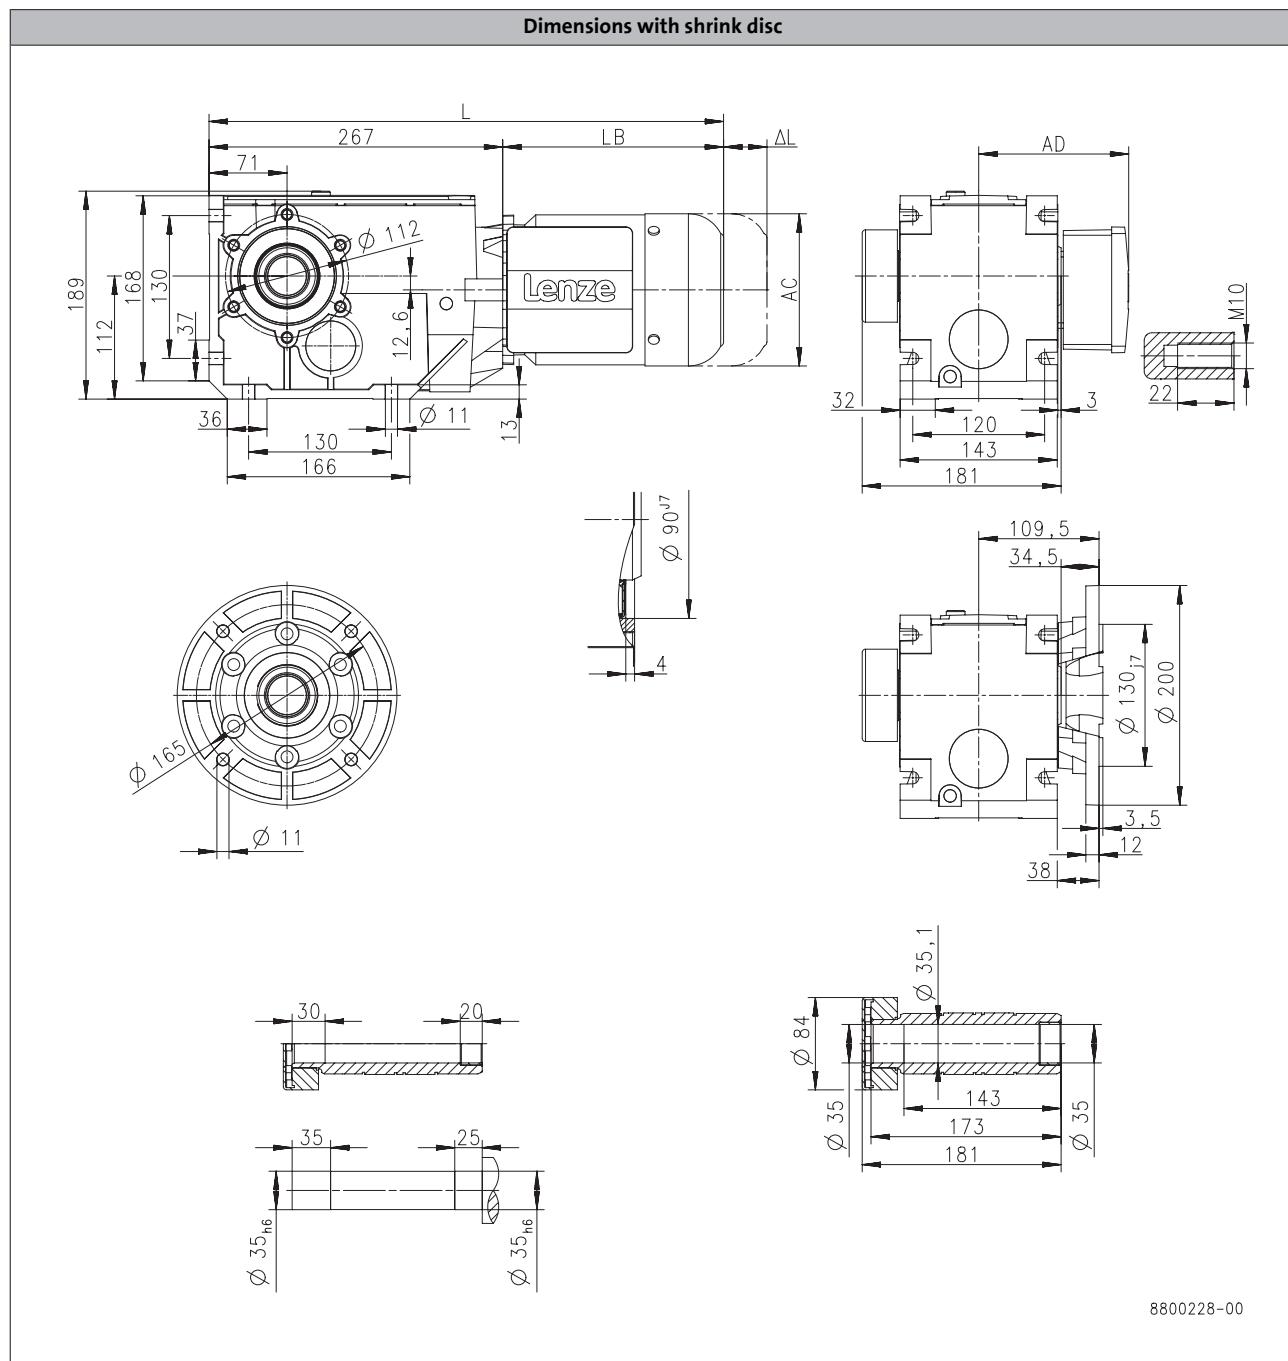

6.7

Product				MD□MA□□										
				063-11	063-31	071-11	071-31	080-11	080-31	090-11	090-31	100-31	100-41	112-31
Dimensions														
Total length	L	[mm]		450		470		493		552		587		603
Motor length	LB	[mm]		183		203		226		285		320		336
Length of motor options	Δ L	[mm]		170		165		183		181		170		183
Motor diameter	AC	[mm]		123		139		156		176		194		218
Distance motor/connection	AD	[mm]		100		109		150		157		166		176


g500-B bevel geared motors



Technical data

Dimensions, 6-pole motors

g500-B110

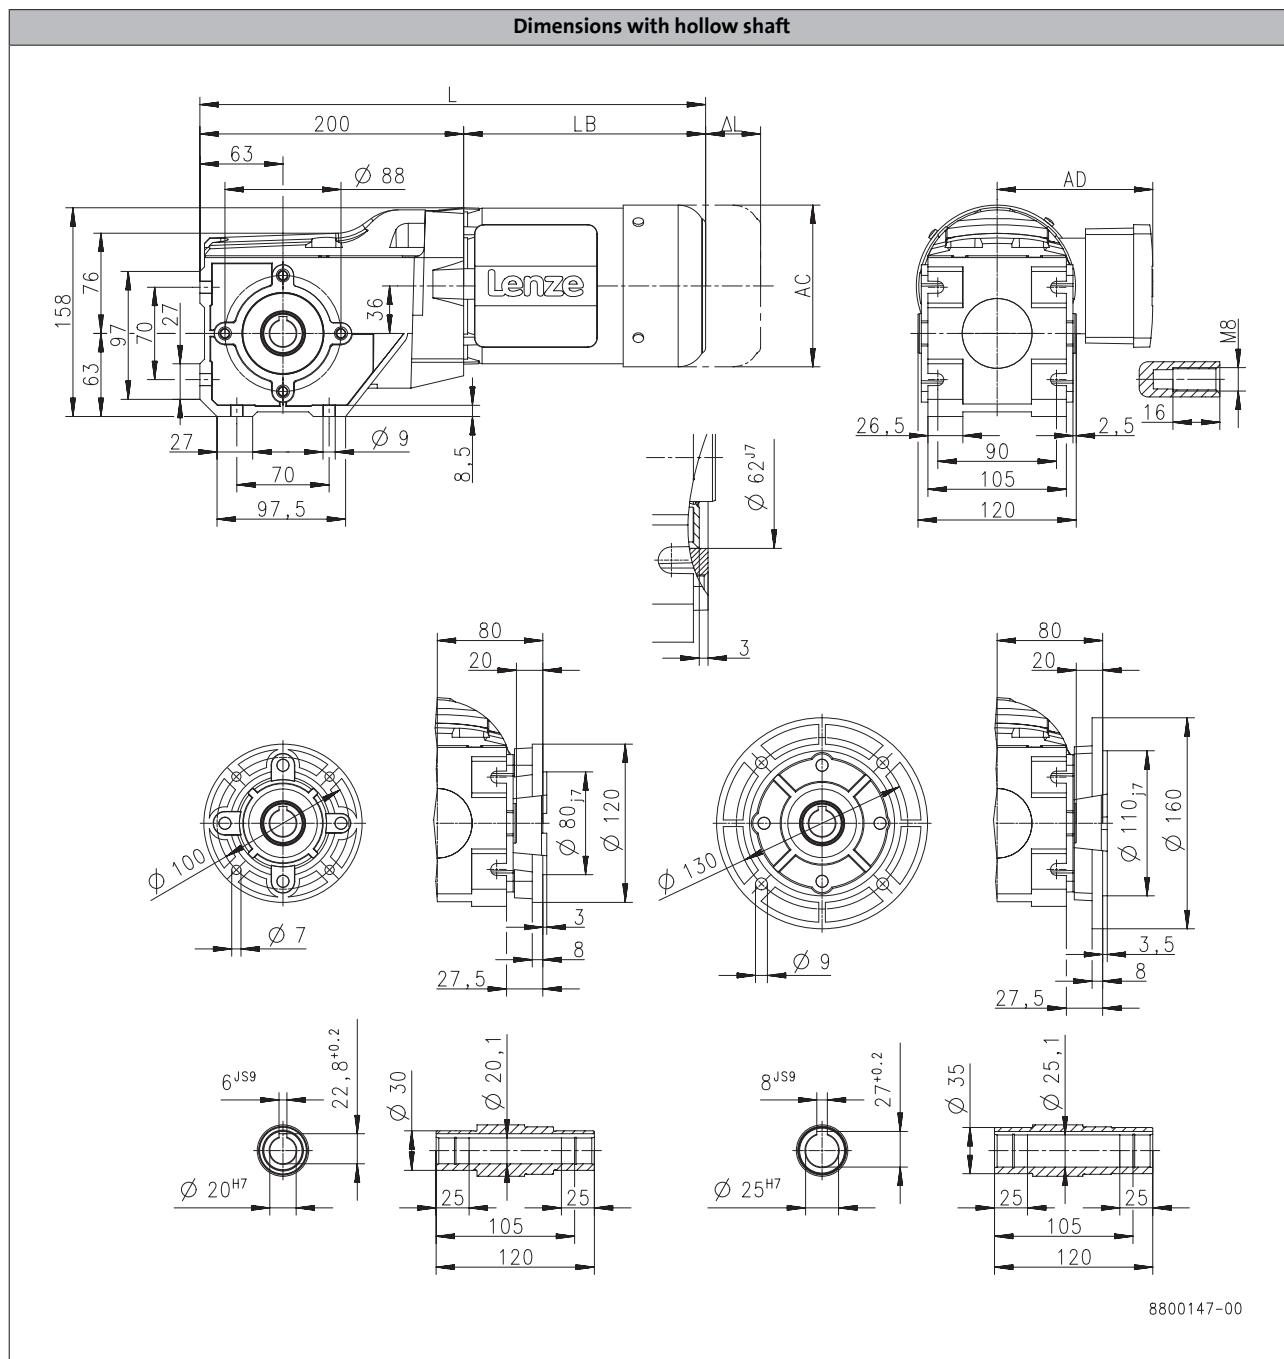

Product			MD□MA□□		
Dimensions		071-13	071-33	080-13	080-33
Total length	L [mm]		403		426
Motor length	LB [mm]		203		226
Length of motor options	ΔL [mm]		165		183
Motor diameter	AC [mm]		139		156
Distance motor/connection	AD [mm]		109		150


g500-B bevel geared motors



Technical data

Dimensions, 6-pole motors

g500-B110

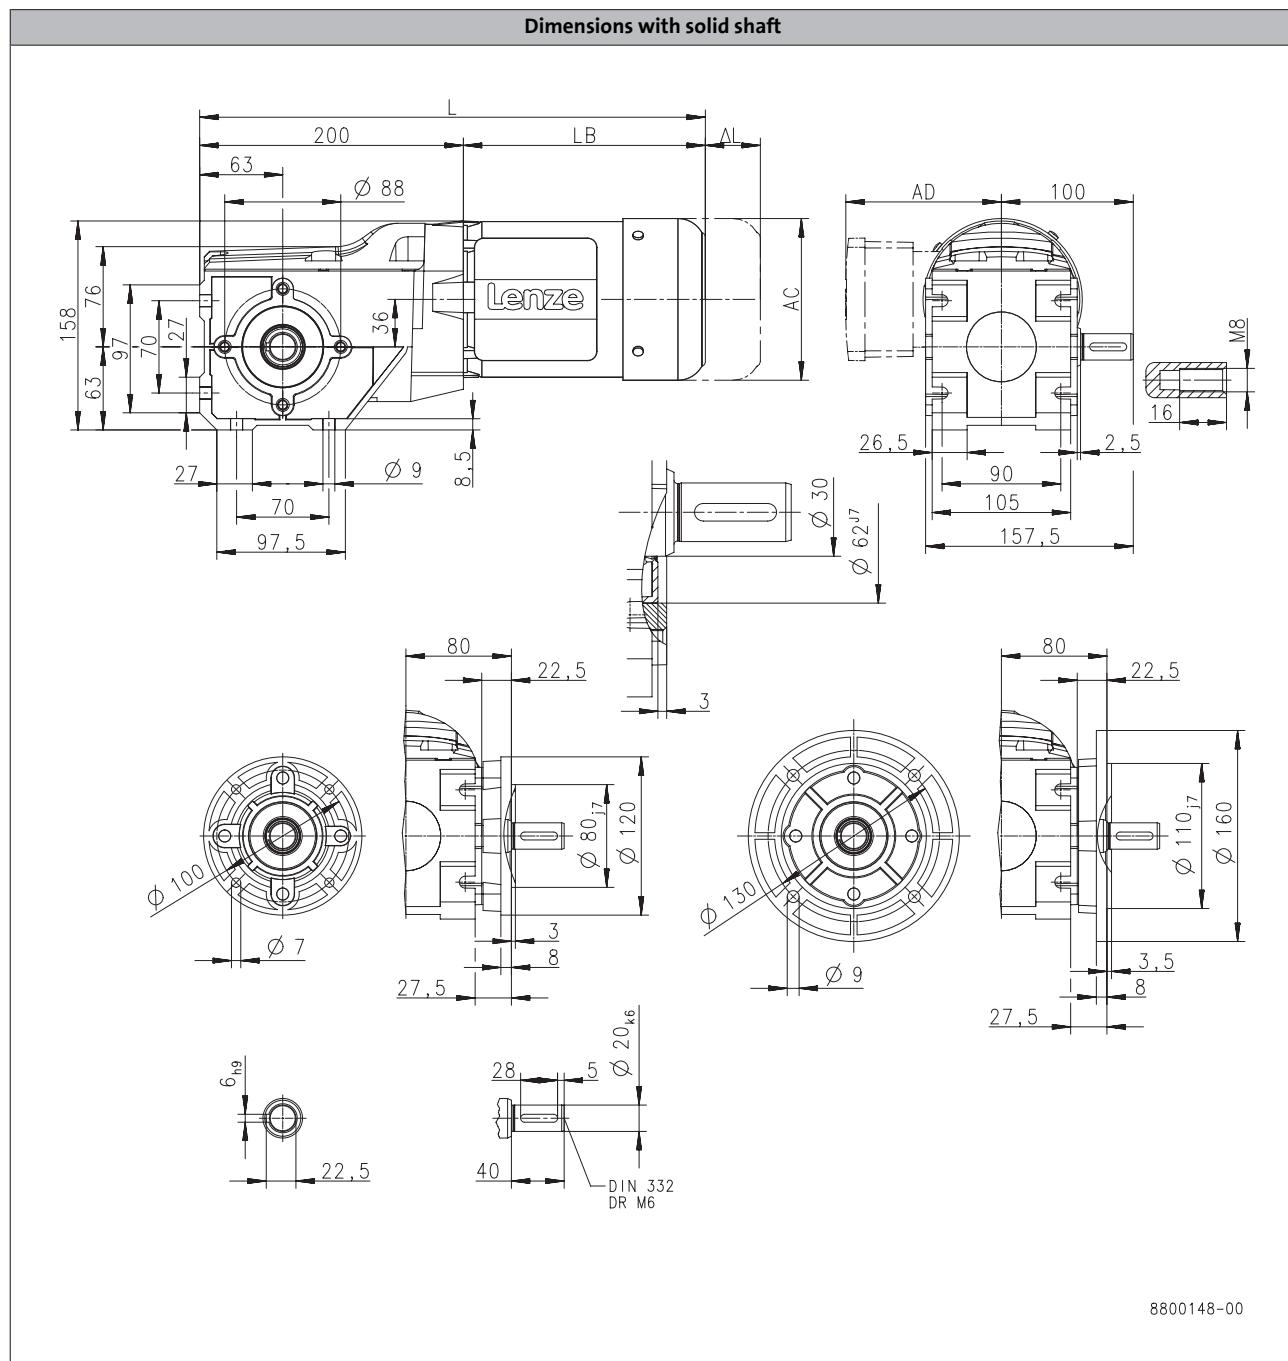

6.7

Product			MD□MA□□	071-13	071-33	080-13	080-33
Dimensions							
Total length	L	[mm]		403		426	
Motor length	LB	[mm]		203		226	
Length of motor options	ΔL	[mm]		165		183	
Motor diameter	AC	[mm]		139		156	
Distance motor/connection	AD	[mm]		109		150	


g500-B bevel geared motors



Technical data

Dimensions, 6-pole motors

g500-B110

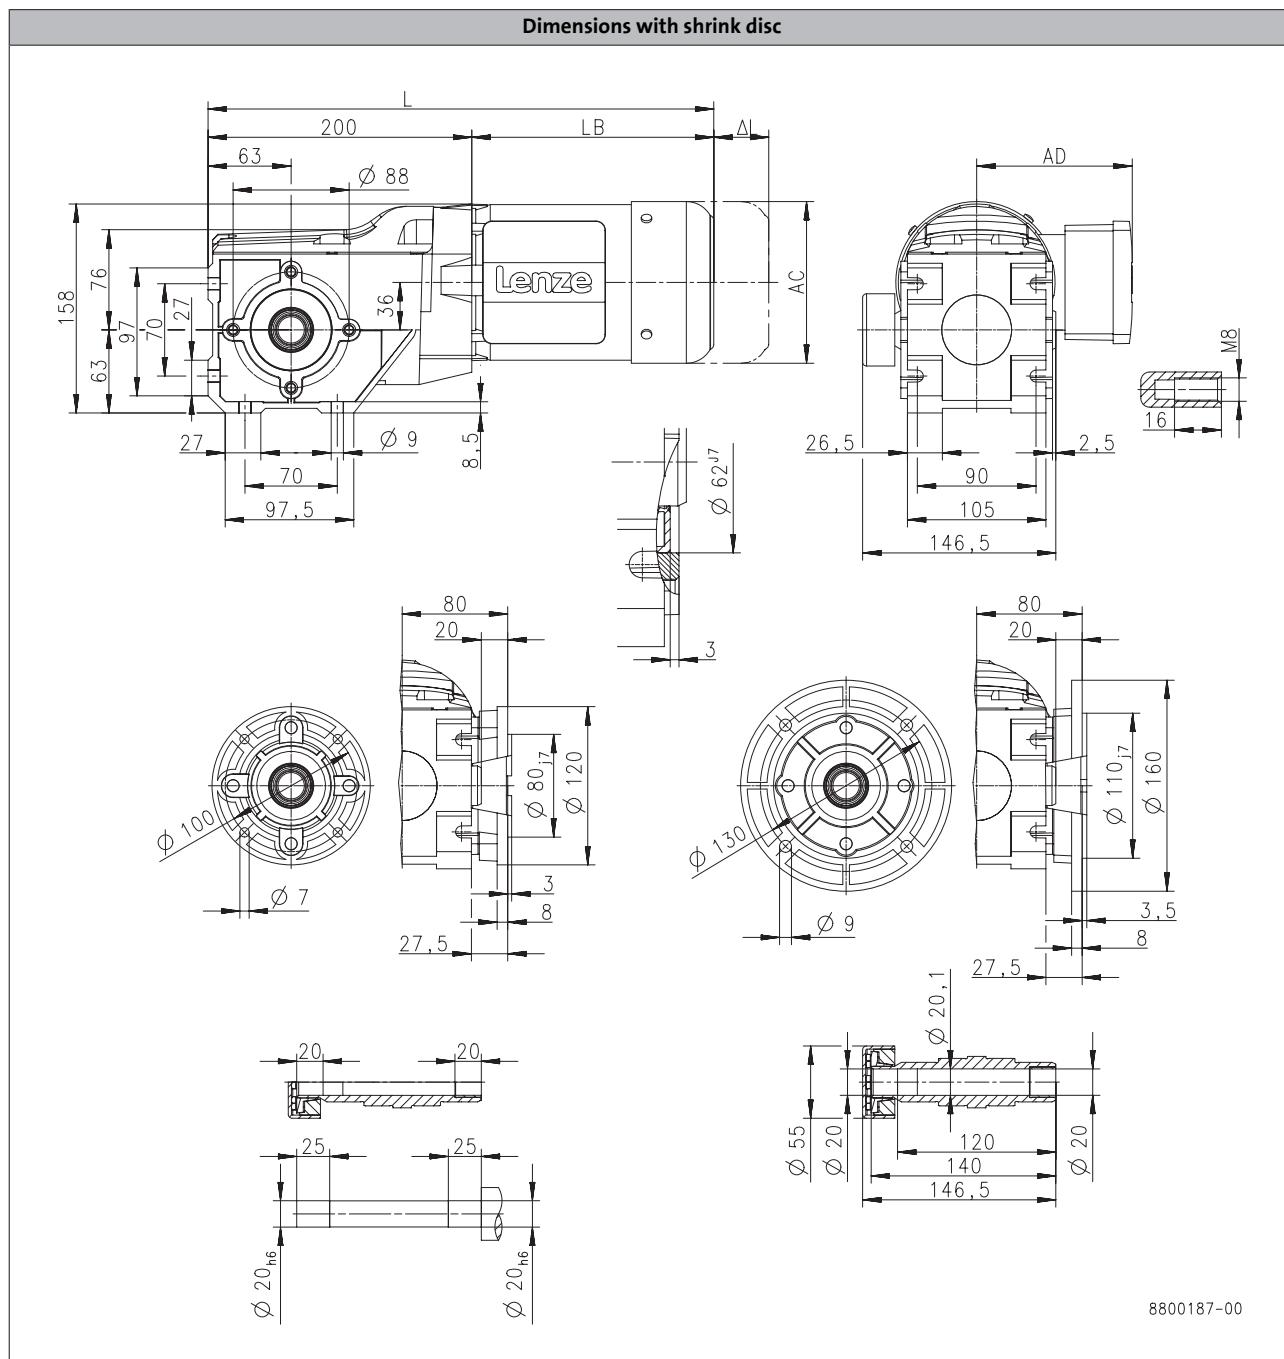

Product		MD□MA□□			
		071-13	071-33	080-13	080-33
Dimensions					
Total length	L [mm]		403		426
Motor length	LB [mm]		203		226
Length of motor options	ΔL [mm]		165		183
Motor diameter	AC [mm]		139		156
Distance motor/connection	AD [mm]		109		150


g500-B bevel geared motors



Technical data

Dimensions, 6-pole motors

g500-B240

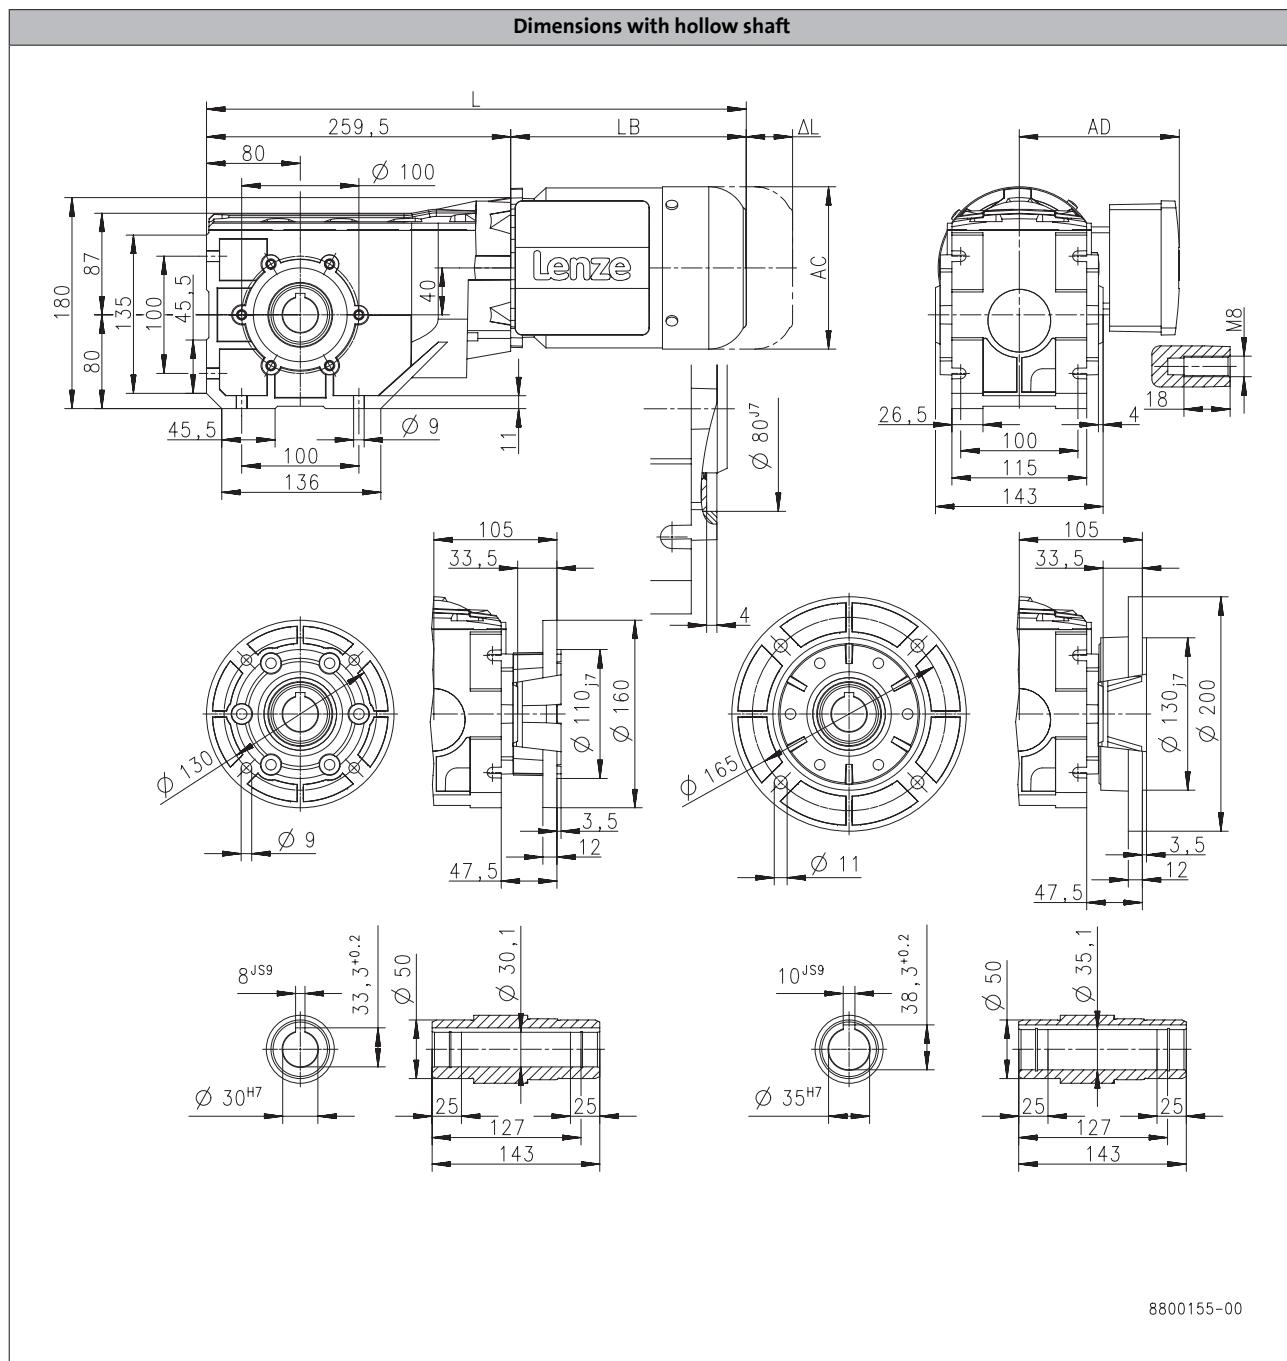

6.7

Product			MD□MA□□			
			071-13	071-33	080-13	080-33
Dimensions						
Total length	L [mm]		463		486	
Motor length	LB [mm]		203		226	
Length of motor options	ΔL [mm]		165		183	
Motor diameter	AC [mm]		139		156	
Distance motor/connection	AD [mm]		109		150	


g500-B bevel geared motors



Technical data

Dimensions, 6-pole motors

g500-B240

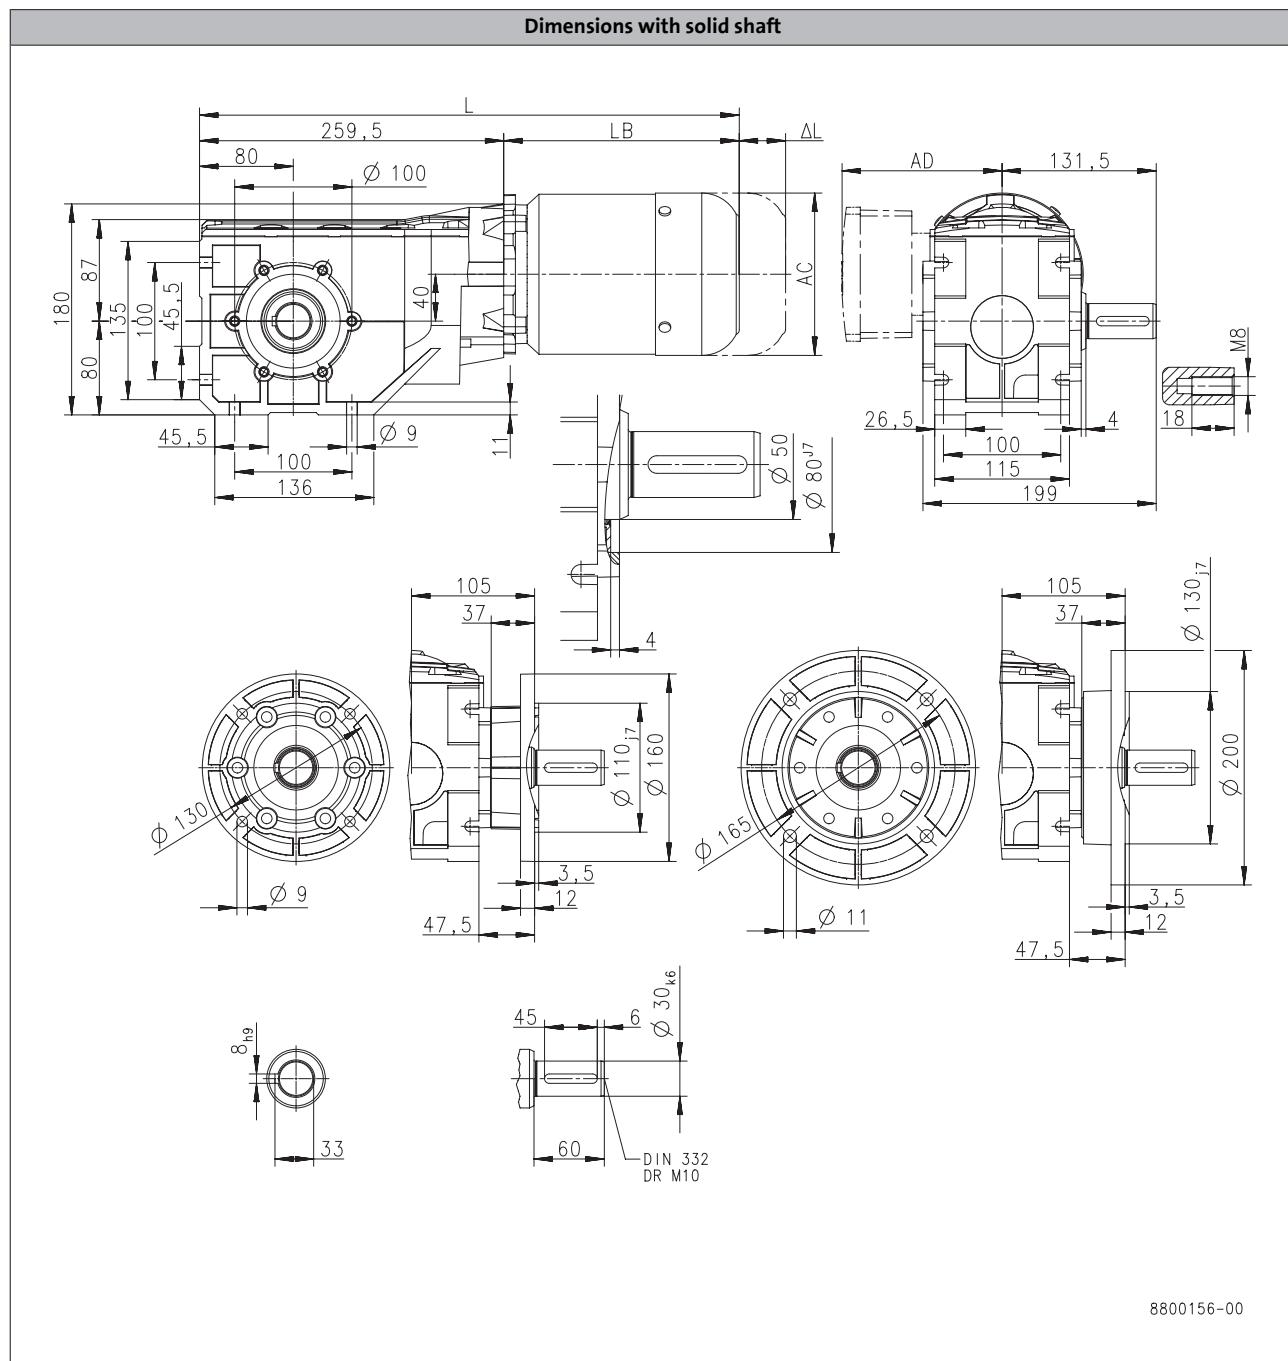

Product			MD □ MA □ □			
			071-13	071-33	080-13	080-33
Dimensions						
Total length	L	[mm]	463		486	
Motor length	LB	[mm]	203		226	
Length of motor options	Δ L	[mm]	165		183	
Motor diameter	AC	[mm]	139		156	
Distance motor/connection	AD	[mm]	109		150	


g500-B bevel geared motors



Technical data

Dimensions, 6-pole motors

g500-B240

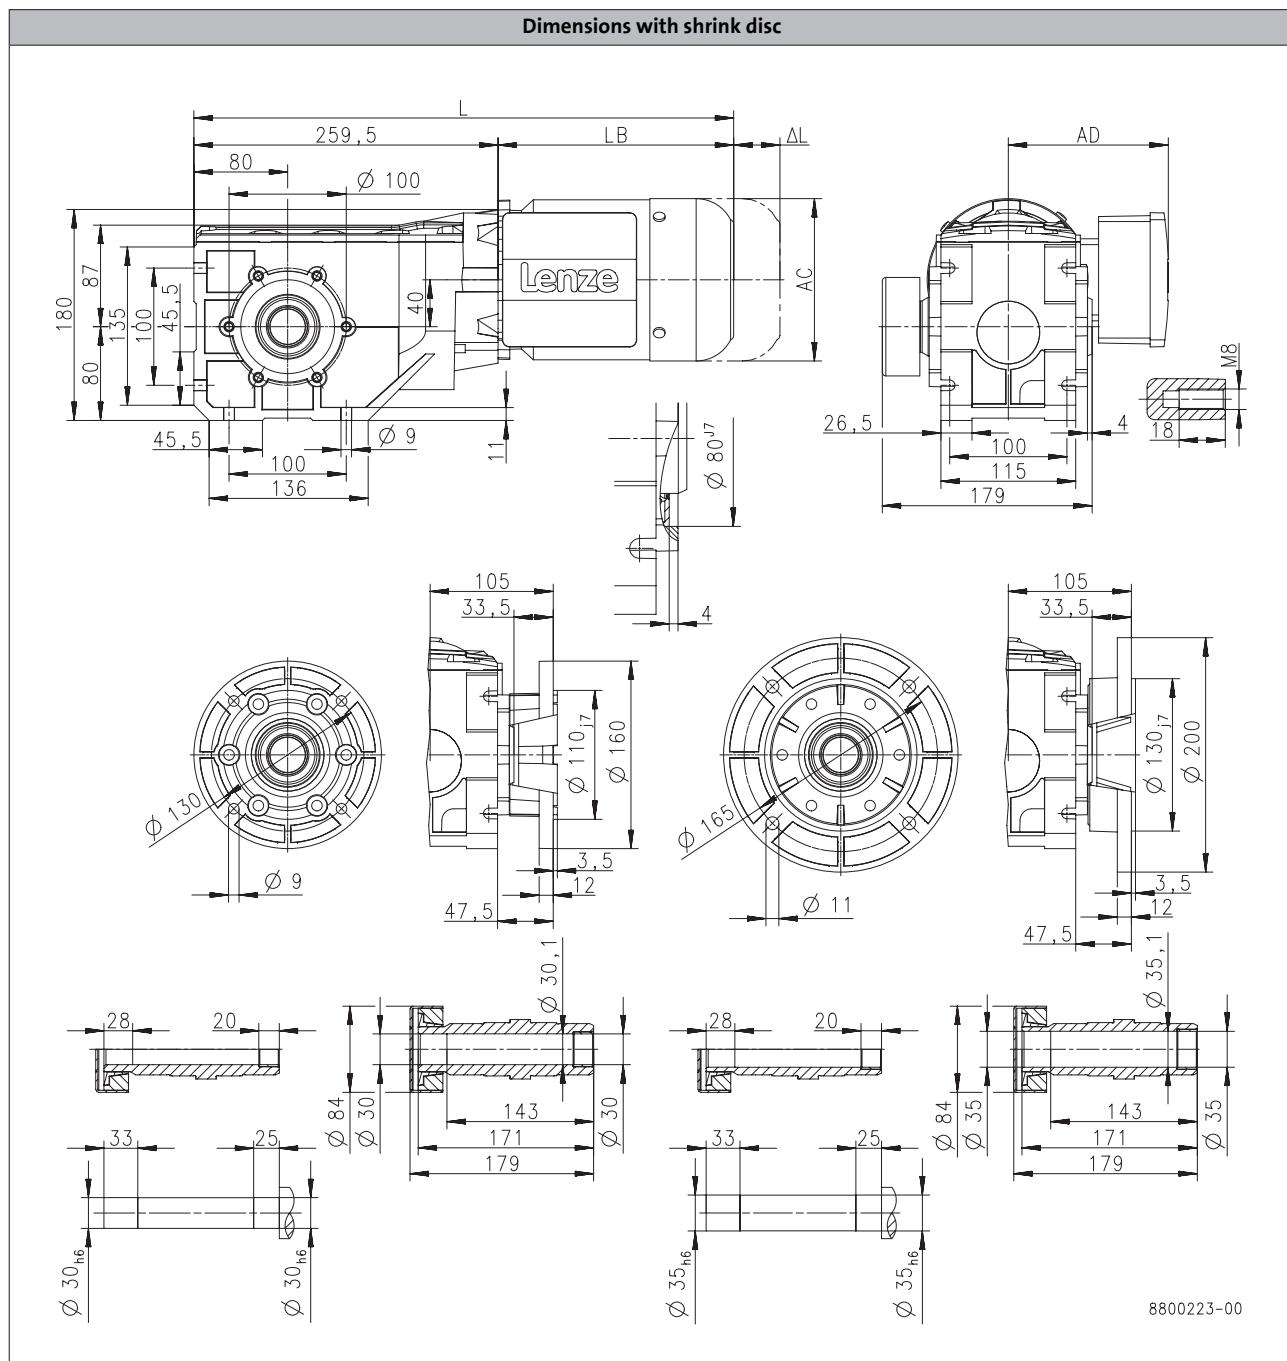

Product			MD□MA□□	071-13	071-33	080-13	080-33
Dimensions							
Total length	L	[mm]		463		486	
Motor length	LB	[mm]		203		226	
Length of motor options	ΔL	[mm]		165		183	
Motor diameter	AC	[mm]		139		156	
Distance motor/connection	AD	[mm]		109		150	


g500-B bevel geared motors



Technical data

Dimensions, 6-pole motors

g500-B450

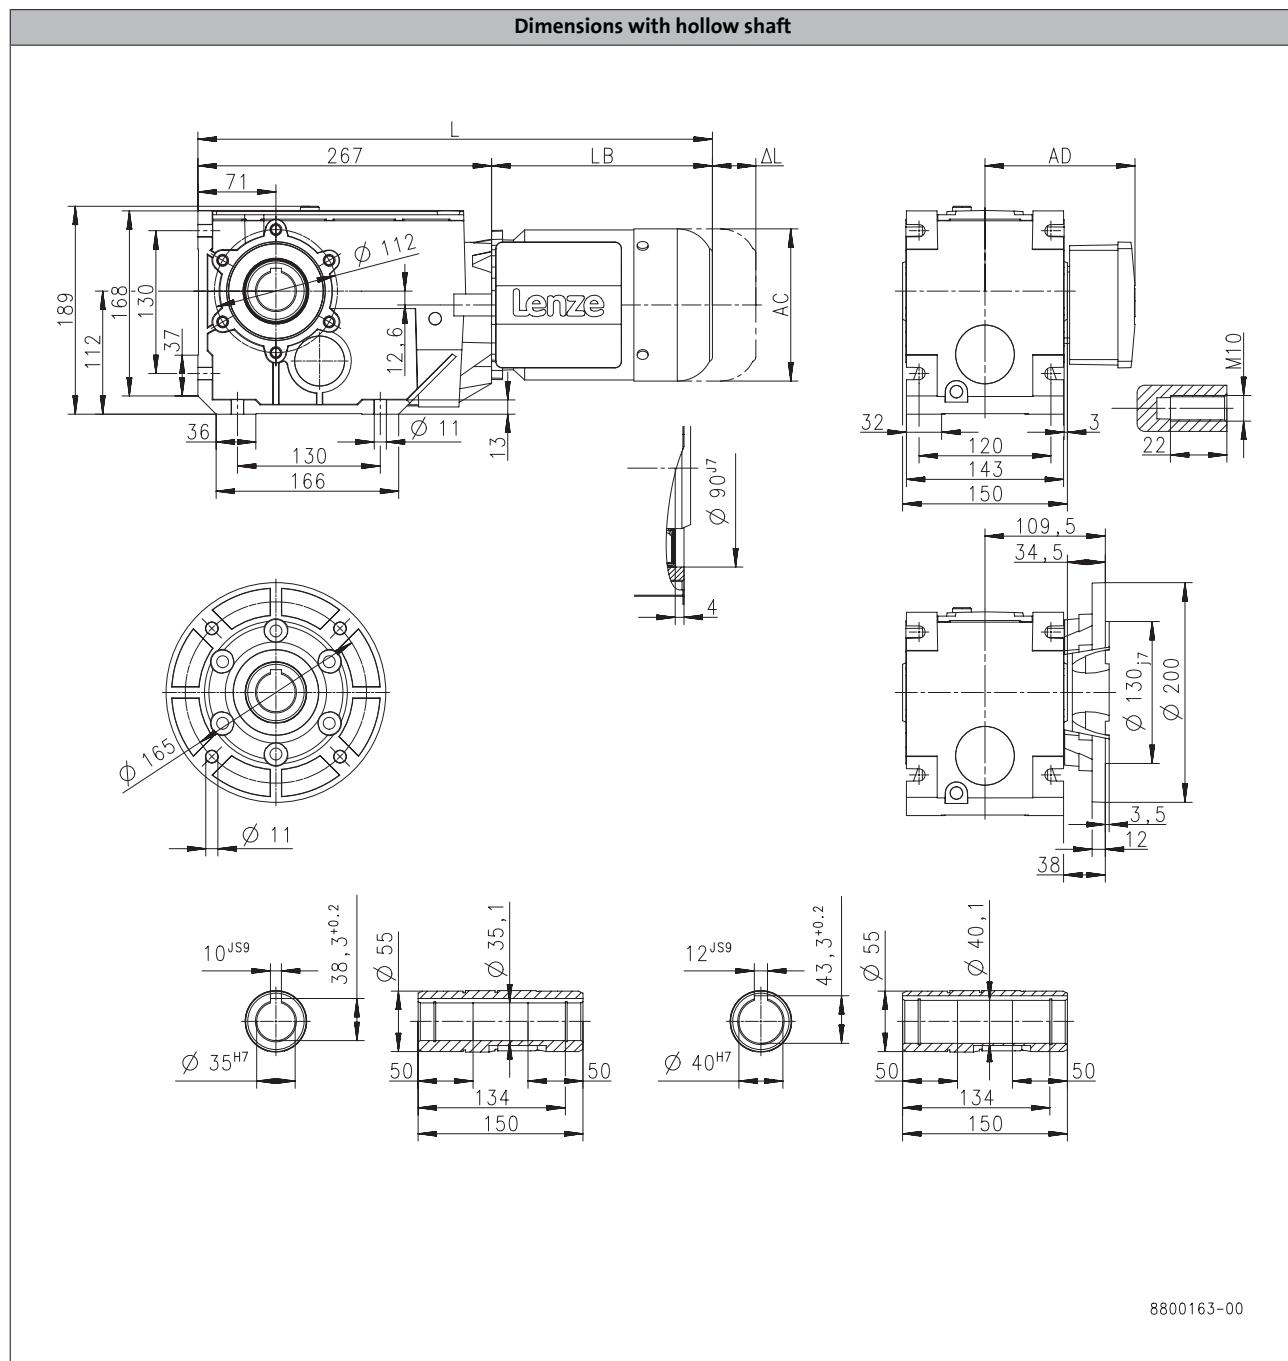

Product		MD□MA□□			
		071-13	071-33	080-13	080-33
Dimensions					
Total length	L [mm]		470		493
Motor length	LB [mm]		203		226
Length of motor options	ΔL [mm]		165		183
Motor diameter	AC [mm]		139		156
Distance motor/connection	AD [mm]		109		150


g500-B bevel geared motors



Technical data

Dimensions, 6-pole motors

g500-B450

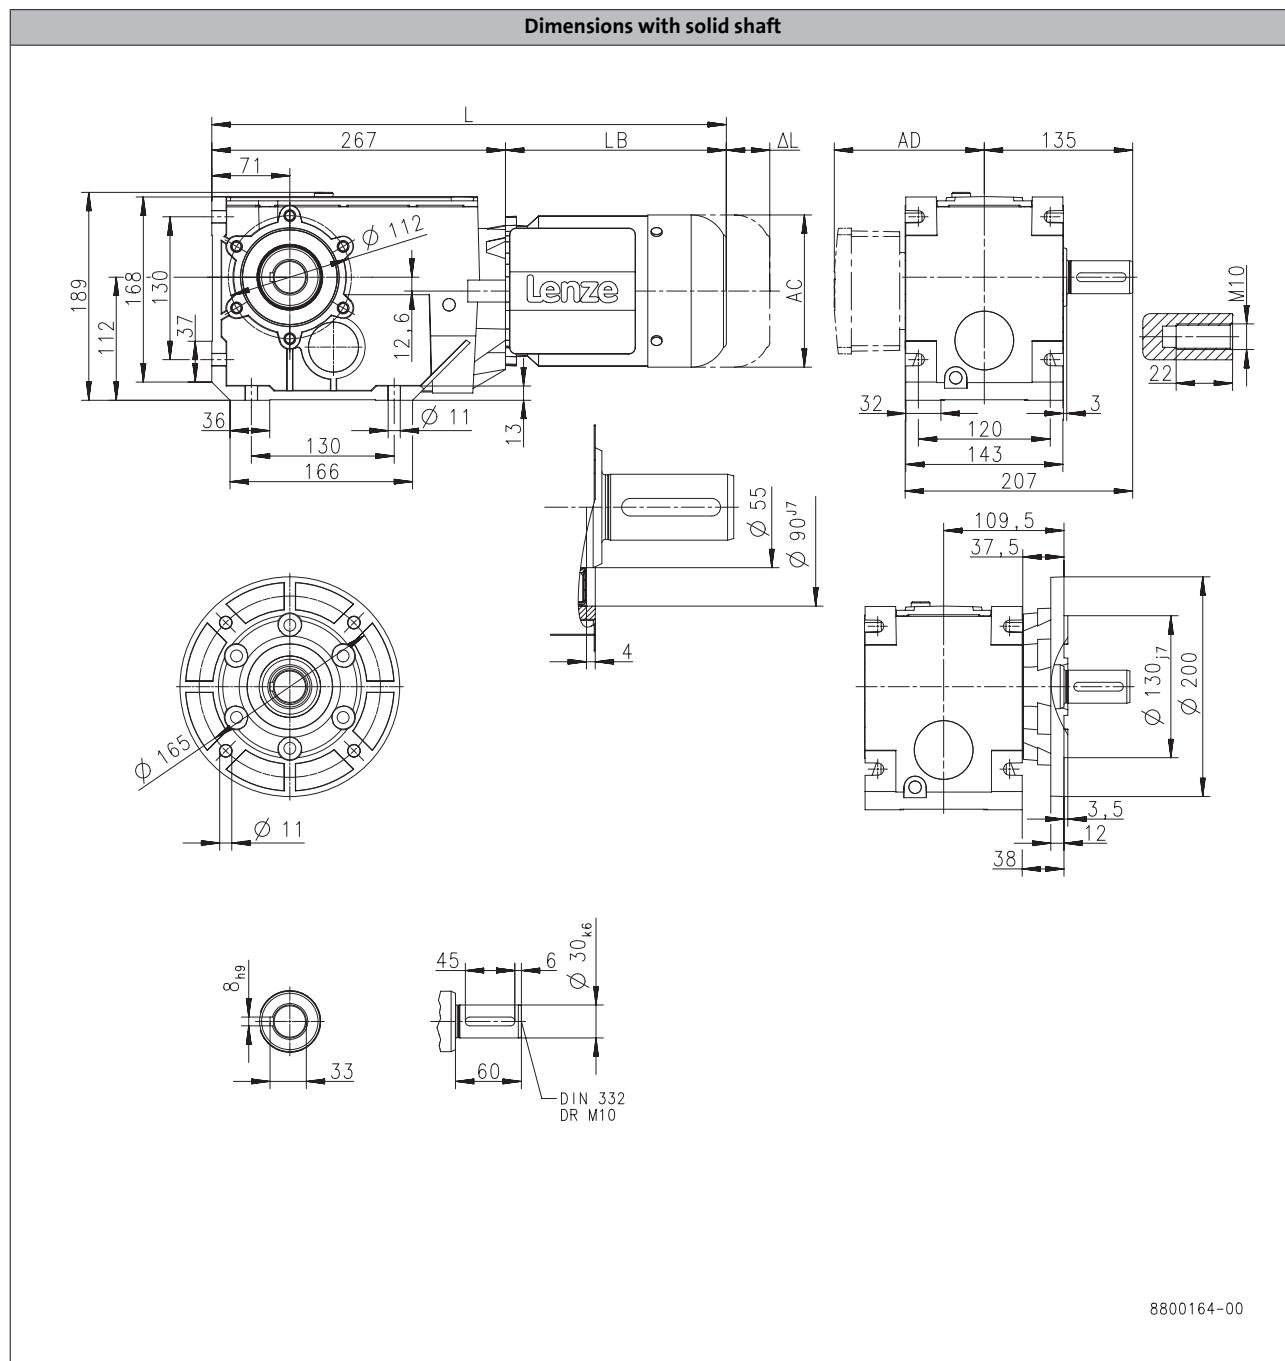

Product			MD□MA□□		
		071-13	071-33	080-13	080-33
Dimensions					
Total length	L [mm]		470		493
Motor length	LB [mm]		203		226
Length of motor options	Δ L [mm]		165		183
Motor diameter	AC [mm]		139		156
Distance motor/connection	AD [mm]		109		150


g500-B bevel geared motors



Technical data

Dimensions, 6-pole motors

g500-B450

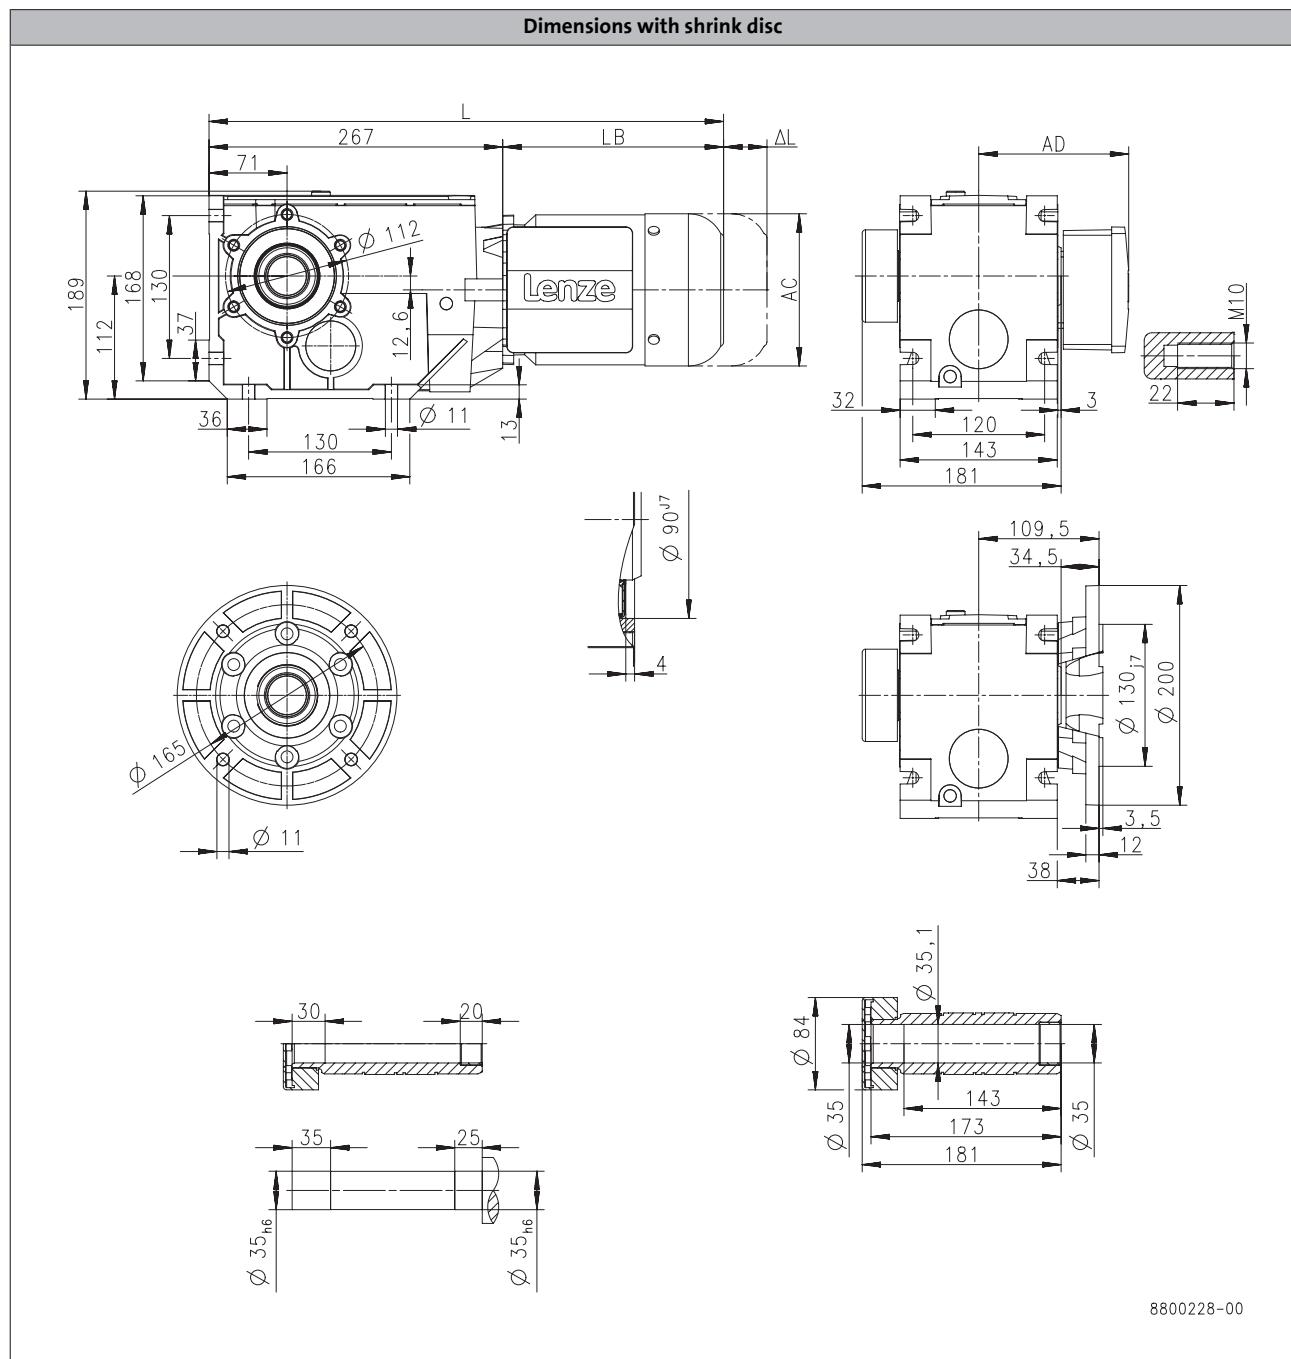

Product			MD□MA□□	071-13	071-33	080-13	080-33
Dimensions							
Total length	L	[mm]		470		493	
Motor length	LB	[mm]		203		226	
Length of motor options	ΔL	[mm]		165		183	
Motor diameter	AC	[mm]		139		156	
Distance motor/connection	AD	[mm]		109		150	

g500-B bevel geared motors



Technical data

Weights, 4-pole motors

2-stage gearboxes

				MD□MA□□									
				063-02	063-12	063-22	063-32	063-42	071-32	071-42	080-32 080-42	090-32	100-12 100-32
g500	-B45	m	[kg]	6.7	7.0	6.7	7.0	7.3	8.7	9.3			
	-B110	m	[kg]		8.6		8.6	8.9	10	11	15	19	
	-B240	m	[kg]		12		12	13	14	15	19	23	32

3-stage gearboxes

				MD□MA□□								
				063-12 063-32 063-42	071-32	071-42	080-32 080-42	090-32	100-12 100-32	112-22	112-32	
g500	-B240	m	[kg]	13	14	15						
	-B450	m	[kg]	16	17	18	22	26	35	42	49	

Weights, 2-pole motors

2-stage gearboxes

				MD□MA□□						
				063-11	063-31	071-11	071-31	080-11 080-31	090-11 090-31	100-31 100-41
g500	-B110	m	[kg]	8.4	8.3	10	11	14	21	
	-B240	m	[kg]		12	14	15	18	25	29

3-stage gearboxes

				MD□MA□□							
				063-11 063-31	071-11	071-31	080-11	080-31	090-11 090-31	100-31 100-41	112-31
g500	-B240	m	[kg]	12	14	15	18				
	-B450	m	[kg]	15		18		21	28	32	39

Weights, 6-pole motors

2-stage gearboxes

				MD□MA□□			
				071-13 071-33			080-13 080-33
g500	-B110	m	[kg]	11			15
	-B240	m	[kg]	15			19

3-stage gearboxes

				MD□MA□□		
				071-13 071-33	080-13	080-33
g500	-B240	m	[kg]	15	19	
	-B450	m	[kg]	18		22

g500-B bevel geared motors



Technical data

Surface and corrosion protection

For optimum protection of geared motors against ambient conditions, the surface and corrosion protection system (OKS) offers tailor-made solutions.

Various surface coatings combined with other protective measures ensure that the geared motors operate reliably even at high air humidity, in outdoor installations or in the presence of atmospheric impurities. Any colour from the RAL Classic collection can be chosen for the top coat. The geared motors are also available unpainted (no surface and corrosion protection).

Surface and corrosion protection	Applications	Measures
OKS-G (primed)	<ul style="list-style-type: none">Dependent on subsequent top coat applied	<ul style="list-style-type: none">2K PUR priming coat (grey)Zinc-coated screwsRust-free breather elements <p>Optional measures</p> <ul style="list-style-type: none">Stainless steel nameplate
OKS-S (small)	<ul style="list-style-type: none">Standard applicationsInternal installation in heated buildingsAir humidity up to 90%	<ul style="list-style-type: none">Surface coating as per corrosivity category C1 (in line with EN 12944-2)Zinc-coated screwsRust-free breather elements <p>Optional measures</p> <ul style="list-style-type: none">Stainless steel nameplate
OKS-M (medium)	<ul style="list-style-type: none">Internal installation in non-heated buildingsCovered, protected external installationAir humidity up to 95%	<ul style="list-style-type: none">Surface coating as per corrosivity category C2 (in line with EN 12944-2)Zinc-coated screwsRust-free breather elements <p>Optional measures</p> <ul style="list-style-type: none">Stainless steel shaftStainless steel nameplateRust-free shrink disc (on request)
OKS-L (large)	<ul style="list-style-type: none">External installationAir humidity above 95%Chemical industry plantsFood industry	<ul style="list-style-type: none">Surface coating as per corrosivity category C3 (in line with EN 12944-2)Blower cover and B end shield additionally primedCable glands with gasketsCorrosion-resistant brake with cover ring, stainless friction plate, and chrome-plated armature plate (on request)All screws/screw plugs zinc-coatedStainless breather elementsThreaded holes that are not used are closed by means of plastic plugs <p>Optional measures</p> <ul style="list-style-type: none">Sealed recesses on motor (on request)Stainless steel shaftStainless steel nameplateRust-free shrink disc (on request)Additional priming coat on cast iron fanOil expansion tank and torque plates painted separately and supplied loose

g500-B bevel geared motors



Technical data

Surface and corrosion protection


Structure of surface coating

Surface and corrosion protection	Corrosivity category	Surface coating	Colour
	DIN EN ISO 12944-2	Structure	
Without OKS(uncoated)		Dipping primed gearbox	
OKS-G (primed)		Dipping primed gearbox 2K PUR priming coat	
OKS-S (small)	C1	Dipping primed gearbox 2K-PUR top coat	Standard: RAL 7012 Optional: RAL Classic
OKS-M (medium)	C2	Dipping primed gearbox 2K PUR priming coat	
OKS-L (large)	C3	2K-PUR top coat	

Gearboxes

g500-B bevel gearboxes

45 to 450 Nm

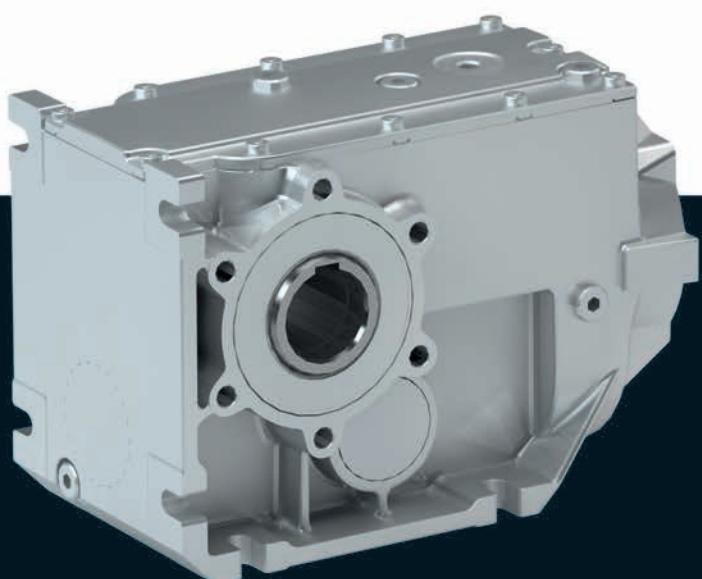

g500-B bevel gearbox



Contents

General information	List of abbreviations	6.7 - 5
	Product information	6.7 - 6
	Equipment	6.7 - 7
	The gearbox kit	6.7 - 8
	Functions and features	6.7 - 10
	Lubricants	6.7 - 11
	Ventilation	6.7 - 12
Technical data	Permissible radial and axial forces at output	6.7 - 15
	Moments of inertia	6.7 - 17
	Additional weights for gearboxes	6.7 - 19
Accessories	Torque plate	6.7 - 21
	Shaft cover	6.7 - 26

g500-B bevel gearbox

Contents



g500-B bevel gearbox

General information



List of abbreviations

$F_{ax,max}$	[N]	Max. axial force
$F_{rad,max}$	[N]	Max. radial force
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass

g500-B bevel gearbox



General information

Product information

The efficient bevel gearboxes feature high reliable radial forces, closely stepped gear reductions and a low backlash. They are available in 2-pole and 3-pole design with a torque up to 450 Nm and a ratio of up to $i = 360$.

Versions

- High-efficient right-angle gearbox in a compact design for space-saving installation
- Standardised shaft and flange dimensions for an easy machine integration
- Low backlash and high torsional stiffness provide for exact results in positioning applications

The product name

Gearbox type	Product range		Design	Rated torque [Nm]	Product
Bevel gearbox	g500	-	B	45	g500-B45
				110	g500-B110
				240	g500-B240
				450	g500-B450

g500-B bevel gearbox


General information



Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

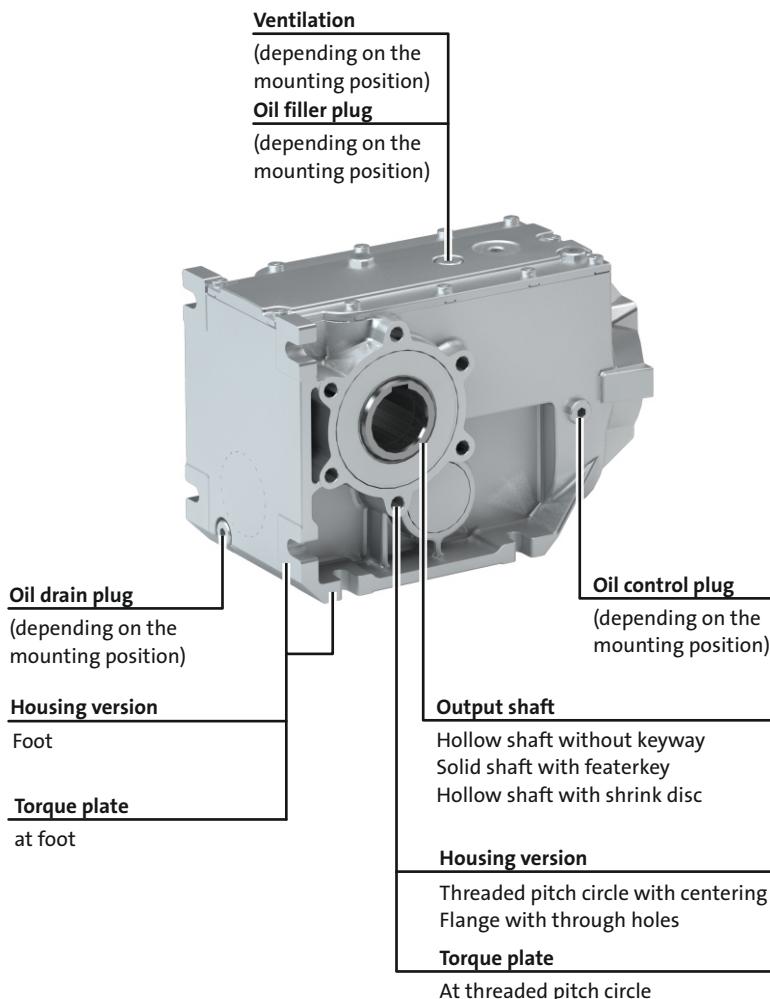

g500-B bevel gearbox



General information

The gearbox kit

Gearbox details

Product	g500-B45	g500-B110	g500-B240	g500-B450
Driven shaft				
Solid shaft without keyway [mm]				
Solid shaft with featherkey [mm]	20x40		30x60	
Hollow shaft with keyway [mm]	18/20	20/25	30/35	35/40
Hollow shaft with shrink disc [mm]	20		30/35	35
Design		Standard stainless steel		
Gasket		Standard FPM (Viton)		
Bearing		Standard		
Fitting grease		Not enclosed Enclosed		
Housing				
Housing version		With foot With foot and centering		
Output flange				
flange diameter [mm]	110/120	120/160	160/200	200
Lubricant				
Type		CLP 460 ¹⁾ CLP HC 320 CLP HC 220 CLP HC 220 USDA H1		
Oil-level inspection		Without inspection		Without inspection With inspection
Breather element		Without		Standard mounting position: Mounted Combined mounting position: loosely enclosed
Backlash				
Backlash		Standard		
Accessories				
Torque plate	Rubber buffers At threaded pitch circle	At threaded pitch circle	At threaded pitch circle At foot	At foot
Shaft cover		Hollow shaft Shrink disc: Rotating cover Shrink disc: Fixed cover		

¹⁾ Not suitable for geared servo motors.

- ▶ Further information and installation feasibilities can be found in the Gearboxes chapter.

g500-B bevel gearbox

General information



The gearbox kit

Gearbox details

Solid shaft			
Foot mounting without centring	Foot mounting With centering	Flange with through holes	
Hollow shaft			
Foot mounting without centring	Foot mounting With centering	Flange with through holes	
Hollow shaft with shrink disc			
Foot mounting without centring	Foot mounting With centering	Flange with through holes	
Accessories			
2nd output shaft end	Torque plate at foot	Torque plate at threaded pitch circle	Cover Hollow shaft/shrink disc

g500-B bevel gearbox




General information

Functions and features

Product	g500-B45	g500-B110	g500-B240	g500-B450
Housing				
Design		Cuboid		
Material		Aluminium		
Solid shaft				
Design		with keyway to DIN 6885		
Tolerance		Shaft diameter \leq 50 mm: k6 Shaft diameter $>$ 50 mm: m6		
Material		Tempered steel C45 Nirosta X46Cr13		
Hollow shaft				
Design		With keyway Without keyway (for shrink disc)		
Tolerance		Bore H7		
Material		Tempered steel C45 Nirosta X46Cr13		
Toothed parts				
Design		Ground tooth flanks Optimised tooth flank geometry		
Material		Case-hardened steel		
Shaft-hub joint		1st and 2nd step: Force-fit 3rd step: positive-fit		
Shaft sealing rings		With dust lip		
Design		NB / FP		
Bearing		Ball bearing / tapered-roller bearing depending on size and design		
Lubricants		Standard: mineral oil Optional: synthetic oil ¹⁾		
Quantities		Corresponding to mounting position (see nameplate)		
Mechanical efficiency				
2-stage gearboxes [$\eta_c=1$]		0.96		
3-stage gearboxes [$\eta_c=1$]				0.95

¹⁾ Standard for geared servo motors.

Direction of rotation

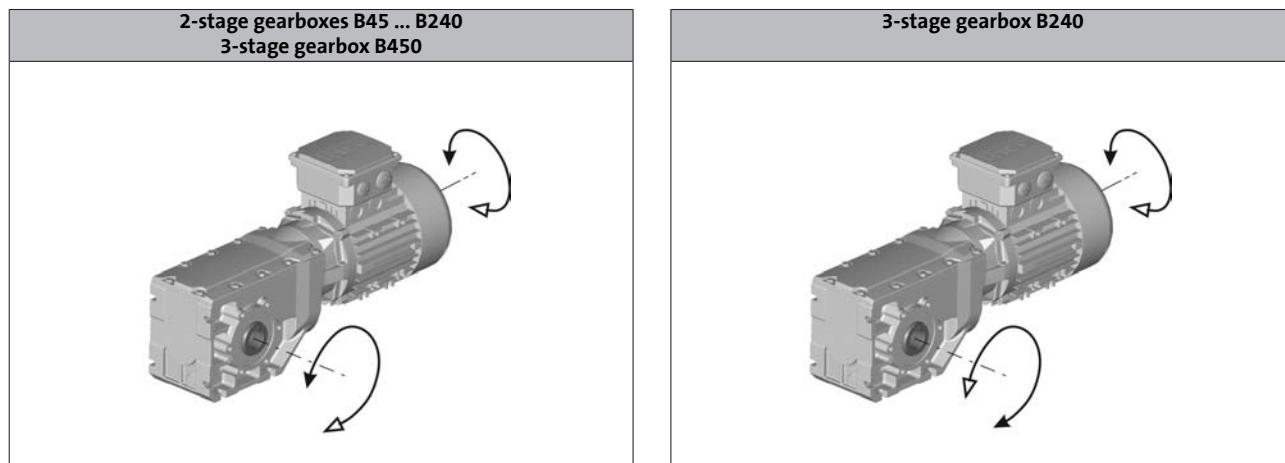

g500-B bevel gearbox



General information

Lubricants

Lenze gearboxes and geared motors are ready for operation on delivery and are filled with lubricants specific to both the drive and the design. The mounting position and design specified in the order are key factors in choosing the volume of lubricant.

The lubricants listed in the lubricant table are approved for use in Lenze drives.

Lubricant table

Mode	CLP 460	CLP HC 320	CLP HC 220 USDA H1
Ambient temperature [°C]	0 ... +40	-25 ... +50	-20 ... +40
Specification	Mineral based oil with additives	Synthetic-based oil (synthetic hydrocarbon / poly-alpha-olefin oil)	
Changing interval	16000 operating hours not later than after three years (oil temperature 70 to 80 °C)	25000 operating hours not later than after three years (oil temperature 70 to 80 °C)	16000 operating hours not later than after three years (oil temperature 70 to 80 °C)
Fuchs	Fuchs Renolin CLP 460	Fuchs Renolin Unisyn CLP 320	bremer & leguil Cassida Fluid GL 220
Klüber	Klüberoil GEM1-460 N	Klübersynth GEM4-320 N	Klüberoil 4 UH1-220 N
Shell	Shell Omala S2 G 460	Shell Omala S4 GX HD 320	

- Please contact your Lenze sales office if you are operating at ambient temperatures in areas up to < -20 °C bzw. > or up to +40°C.

Shaft sealing rings

By default, the gearboxes come with NBR shaft sealing rings at the output end. At high speed and unfavourable ambient conditions as high temperature, reduced circulation of air etc., Lenze recommends the use of Viton shaft sealing rings.

Please consider this in your order.

g500-B bevel gearbox

General information



Ventilation

Non-ventilated gearboxes

No ventilation is required for gearboxes g500-B45 to B240.

Ventilated gearboxes

The g500-B450 gearbox is supplied with a breather element as standard.

Gearboxes in combined mounting position

To reduce the number of different versions, the gearboxes can also be ordered with combined mounting positions.

Depending on the gearbox in question, the following combinations are available:

- g500-B45 in combined mounting position ABCDEF
- g500-B110 ... B450 in combined mounting position AEF

The breather elements are supplied loose.

g500-B bevel gearbox




General information

Ventilation

g500-B240

- A ... F mounting position

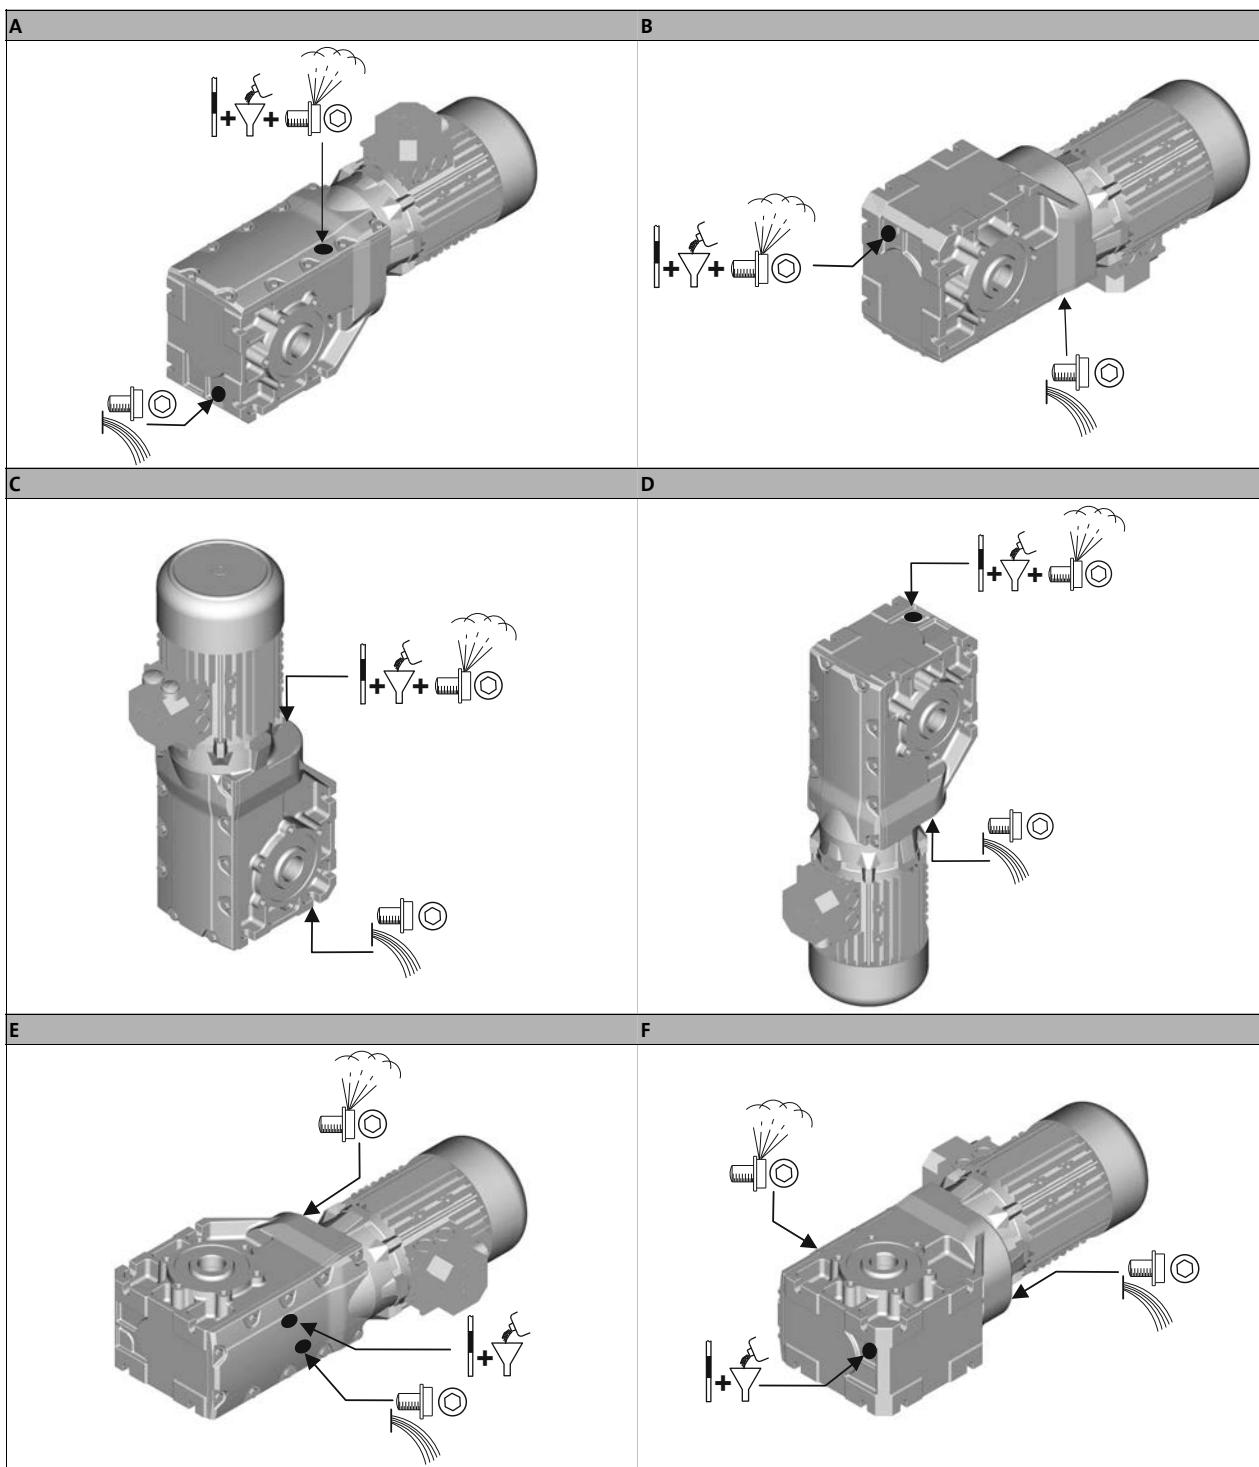

Filler	Drain
Breather element	Check

g500-B bevel gearbox


General information



Ventilation

g500-B450

► A ... F mounting position

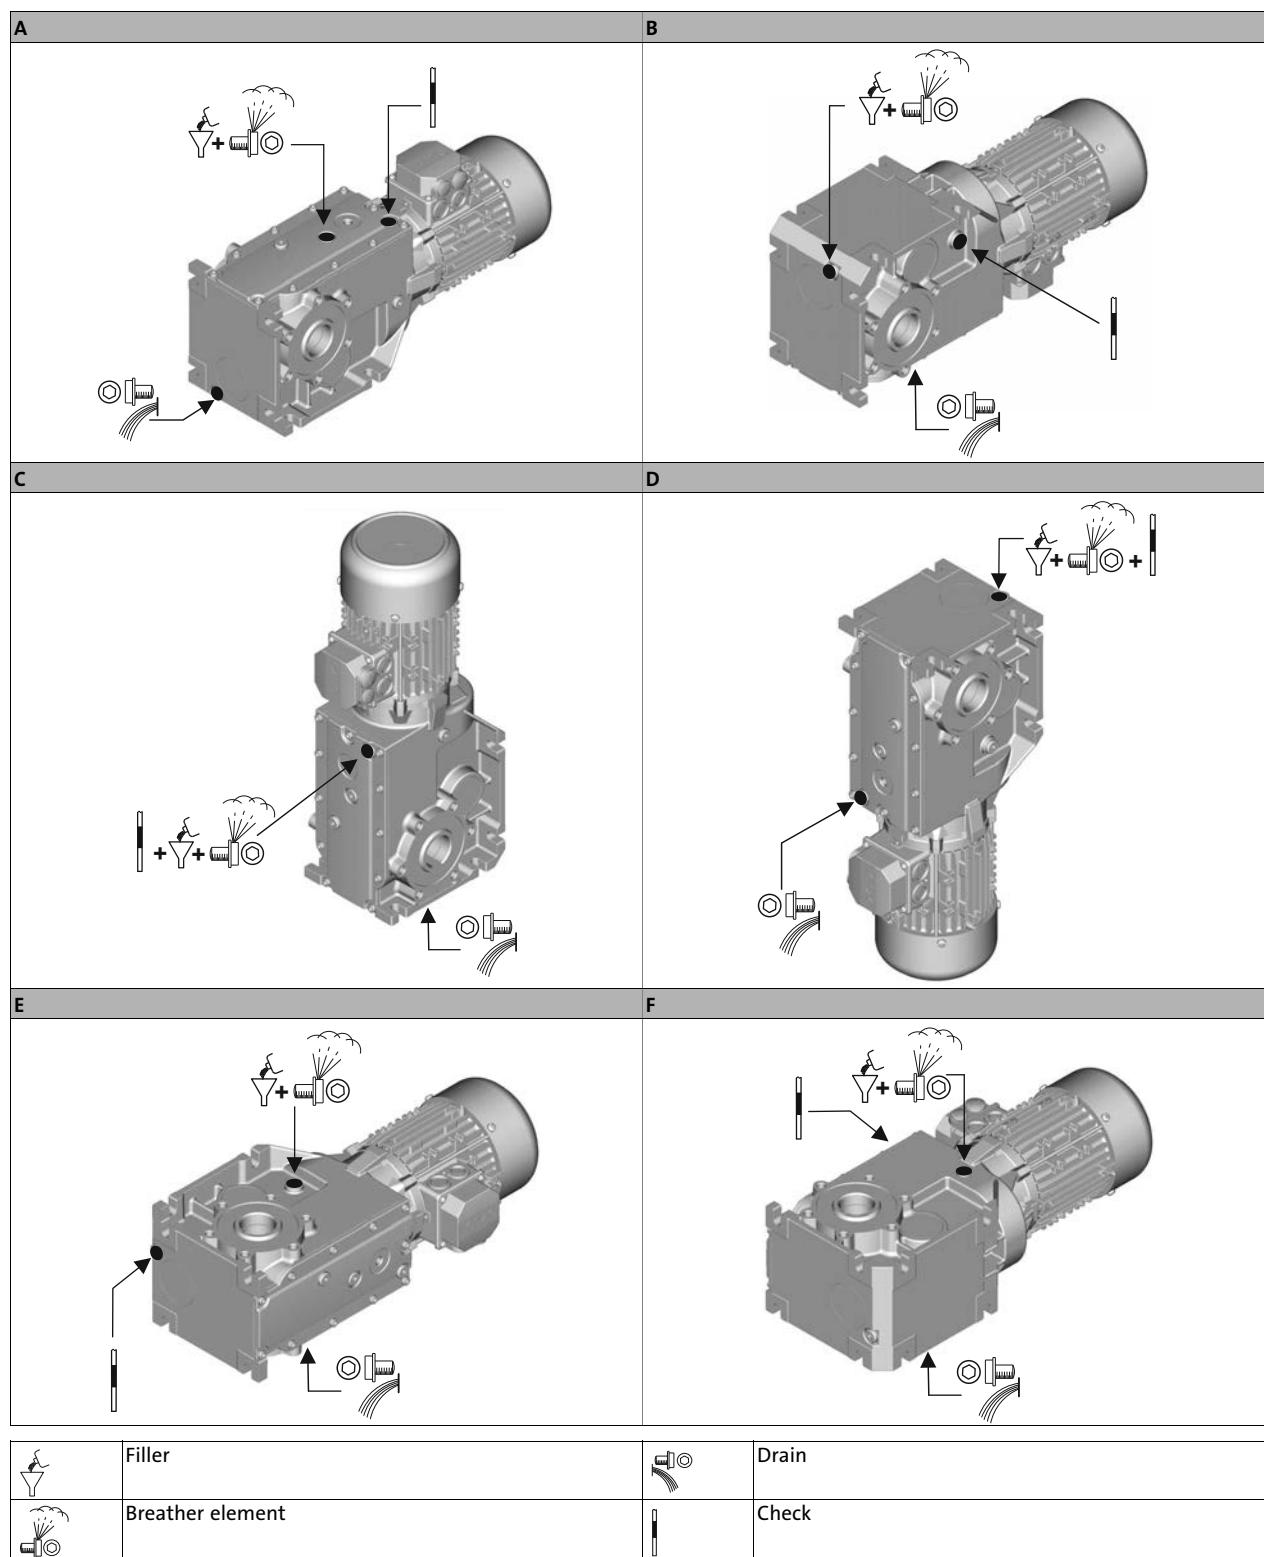

g500-B bevel gearbox



Technical data

Permissible radial and axial forces at output



Permissible radial force

$$F_{\text{rad,perm}} = f_w \times F_{\text{rad,max}}$$

► If F_{rad} and $F_{\text{ax}} \neq 0$, please contact Lenze.

Permissible axial force

If there is no radial force, the maximum permissible axial force is 50 % of the table value $F_{\text{rad,max}}$

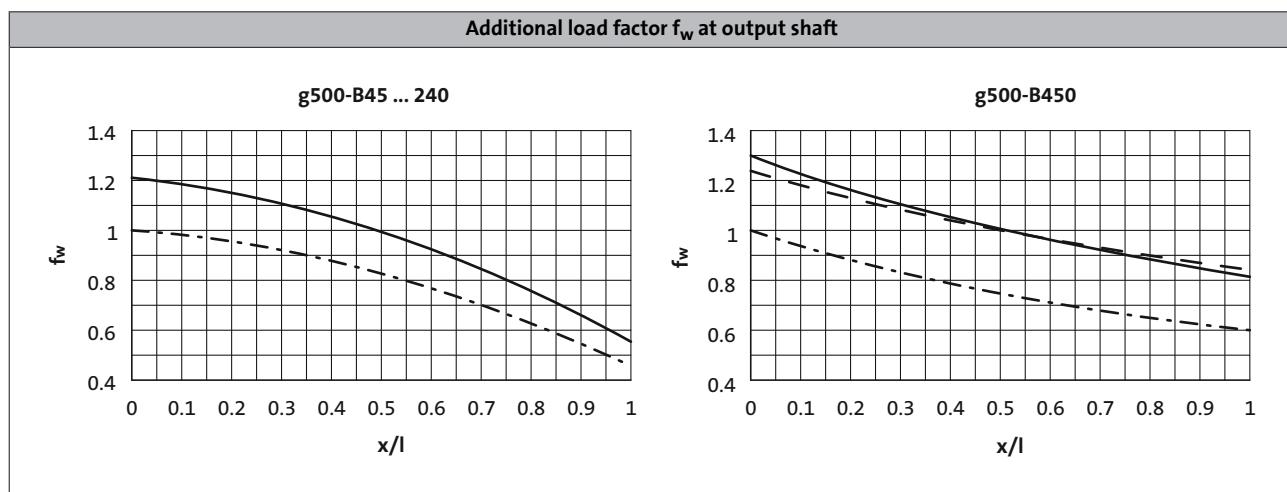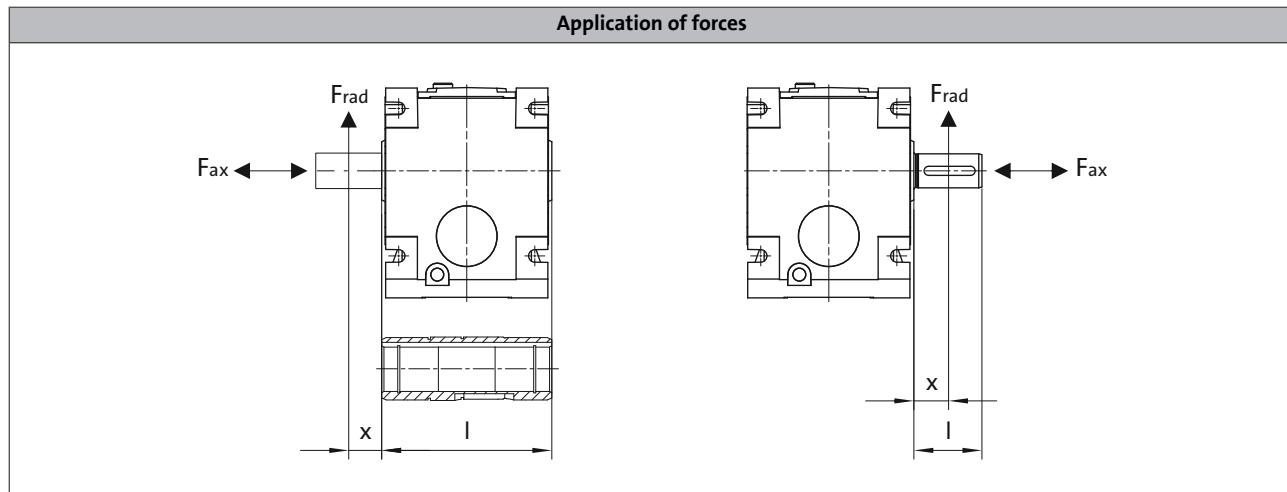

- Solid shaft
- - - Solid shaft with flange
- · - Hollow shaft

g500-B bevel gearbox



Technical data

Permissible radial and axial forces at output

The values given in the table refer to the center shaft end force application point and are minimum values calculated according to the most unfavourable conditions (force application angle, mounting position, direction of rotation). The values were calculated for the motor/gearbox combination with a load capacity of $c = 1.3$ and an input speed of 1400 rpm.

In case of different operating conditions, considerably higher forces can be transmitted. Please contact Lenze.

- If the torque is transmitted via the flange face, max 50 % of the radial force $F_{rad,max}$ are permissible.
- Neither radial nor axial forces are permissible for the hollow shaft with shrink disc.

Product	n_2 [r/min]									
	1000	630	400	250	160	100	63	40	25	≤ 16

	Max. radial force, Hollow shaft									
	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$
	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]
g500-B45	900	1200	2200	2500	2800	3000	3000	3000	3000	3000
g500-B110	1000	2200	2550	3000	3300	3600	3600	3600	3600	3600
g500-B240	1500	2250	3800	4500	5100	6200	7400	7800	7800	7800
g500-B450	3000	3800	5000	5200	5200	5500	7000	9000	9000	9000

	Max. radial force, Solid shaft without flange									
	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$
	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]
g500-B45	900	1200	1800	2100	2400	2800	3000	3000	3000	3000
g500-B110	1000	1800	2100	2500	2700	3000	3000	3000	3000	3000
g500-B240	1500	2350	3000	3600	4500	5000	6000	6500	6500	6500
g500-B450	1800	2800	3600	4200	5100	6000	7200	7800	7800	7800

	Max. radial force, Solid shaft with flange									
	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$
	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]
g500-B45	900	1200	1800	2100	2400	2800	3000	3000	3000	3000
g500-B110	1000	1800	2100	2500	2700	3000	3000	3000	3000	3000
g500-B240	2400	3600	5200	6000	6500	6500	6500	6500	6500	6500
g500-B450	3000	4000	5500	6200	7000	7500	7800	7800	7800	7800

g500-B bevel gearbox

Technical data



Moments of inertia

- The moments of inertia relate to the drive shaft of the gearbox.
- The total moment of inertia is calculated by adding the values of the gearbox, motor and accessories.

2-stage gearboxes

Product	Ratio	Moment of inertia	
		i	J
		[kgcm ²]	
g500-B45	5.411	0.31	
	6.222	0.28	
	7.111	0.20	
	8.178	0.18	
	9.101	0.13	
	10.466	0.12	
	11.640	0.086	
	13.386	0.079	
	15.111	0.059	
	17.378	0.055	
	19.365	0.038	
	22.270	0.054	
	25.051	0.025	
	28.808	0.023	
	32.593	0.016	
	37.481	0.015	
	42.222	0.010	
	48.556	0.009	
	53.889	0.006	
	61.972	0.006	
g500-B110	5.185	0.79	
	5.963	0.70	
	7.111	0.48	
	8.178	0.43	
	9.101	0.32	
	10.466	0.29	
	11.449	0.26	
	12.698	0.19	
	14.603	0.18	
	15.556	0.14	
	17.889	0.13	
	19.556	0.095	
	22.489	0.088	
	25.185	0.063	
	28.963	0.060	
	31.919	0.041	
	36.707	0.039	
	37.400	0.072	
	40.000	0.028	
	46.000	0.027	
	48.167	0.050	
	52.698	0.017	
	60.603	0.016	
	61.045	0.033	
	76.500	0.023	
	100.786	0.014	

Product	Ratio	Moment of inertia	
		i	J
		[kgcm ²]	
g500-B240	3.565	2.97	
	4.889	1.74	
	6.257	1.15	
	6.883	1.67	
	7.817	1.51	
	9.440	1.05	
	10.720	0.97	
	12.081	0.73	
	13.719	0.68	
	15.008	0.59	
	16.857	0.45	
	19.143	0.42	
	20.650	0.34	
	23.450	0.32	
	26.878	0.21	
	30.522	0.20	
	33.433	0.15	
	37.967	0.15	
	43.267	0.096	
	49.133	0.092	
	52.510	0.070	
	59.630	0.067	
	67.113	0.045	
	76.213	0.043	

g500-B bevel gearbox



Technical data

Moments of inertia

3-stage gearboxes

Product	Ratio	Moment of inertia	
		i	J
		[kgcm ²]	
g500-B240	68.459	0.093	
	77.741	0.091	
	87.563	0.062	
	99.437	0.061	
	113.673	0.044	
	129.087	0.043	
	145.674	0.030	
	165.426	0.030	
	188.442	0.021	
	213.994	0.020	
	245.178	0.014	
	278.422	0.014	
	317.617	0.003	
	360.683	0.003	

Product	Ratio	Moment of inertia	
		i	J
		[kgcm ²]	
g500-B450	5.002	4.36	
	6.860	2.48	
	9.315	3.21	
	10.328	3.06	
	12.775	1.87	
	14.165	1.79	
	16.349	1.23	
	17.885	1.05	
	19.831	1.01	
	22.813	0.70	
	25.294	0.68	
	27.945	0.51	
	30.985	0.49	
	36.373	0.31	
	40.330	0.30	
	45.245	0.22	
	50.167	0.21	
	56.154	0.47	
	62.262	0.47	
	68.788	0.36	
	76.271	0.36	
	89.534	0.22	
	99.274	0.22	
	111.372	0.16	
	123.487	0.16	
	144.128	0.10	
	159.807	0.099	
	174.919	0.073	
	193.948	0.072	
	223.563	0.046	
	247.882	0.046	

g500-B bevel gearbox

Technical data



Additional weights for gearboxes

Product			g500-B45	g500-B110	g500-B240	g500-B450
Mass						
Solid shaft	m	[kg]	0.4	0.5	1.4	1.3
Shrink disc	m	[kg]	0.2	0.2	0.7	0.6
Flange	m	[kg]	0.3	0.4	0.7	0.9

g500-B bevel gearbox

General information



g500-B bevel gearbox

Accessories



Torque plate

Torque support is usually effected by means of the foot or flange. Another simple possibility is provided by the attachable torque plates. Here, torque support is implemented solely via one point, which, among other things, is suitable for shaft-mounted gearboxes. Supplied rubber buffers provide for mounting with minimum stress and absorb light shocks.

The torque plates are available in two designs, for mounting on the available threaded pitch circle, or for the gearbox foot.

In addition, torque support for the g500-B45 gearbox can be effected via the holding fixture of the housing, which is integrated on both sides, by means of a rubber buffer.

The rubber buffers can be ordered optionally.


g500-B bevel gearbox



Accessories

Torque plate

Torque plate on threaded pitch circle

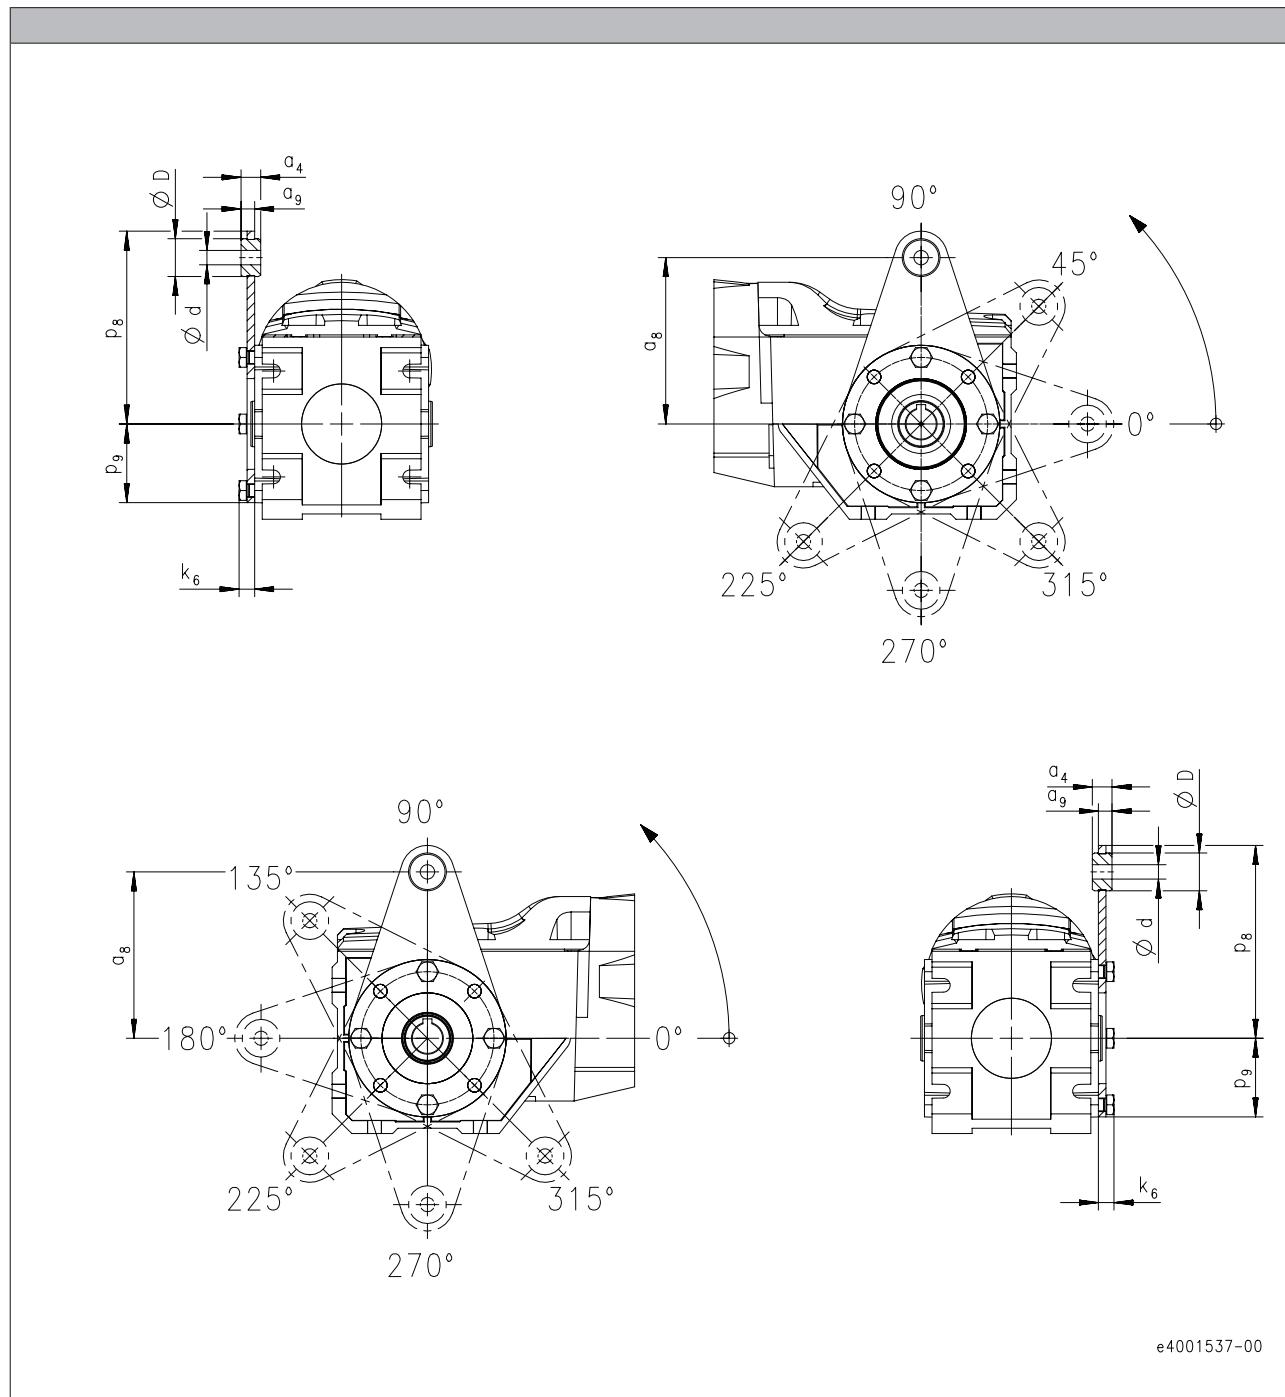

Product	Dimensions								Mass m
	a_4 [mm]	a_8 [mm]	a_9 [mm]	d [mm]	D [mm]	p_8 [mm]	p_9 [mm]	k_6 [mm]	
g500-B45	12.0	100	8.0	8.0	20.0	115	42.0	9.0	0.30
g500-B110	13.0	110	9.0	10.0	25.0	128	54.0	11.0	0.50


g500-B bevel gearbox



Accessories

Torque plate

Torque plate on threaded pitch circle

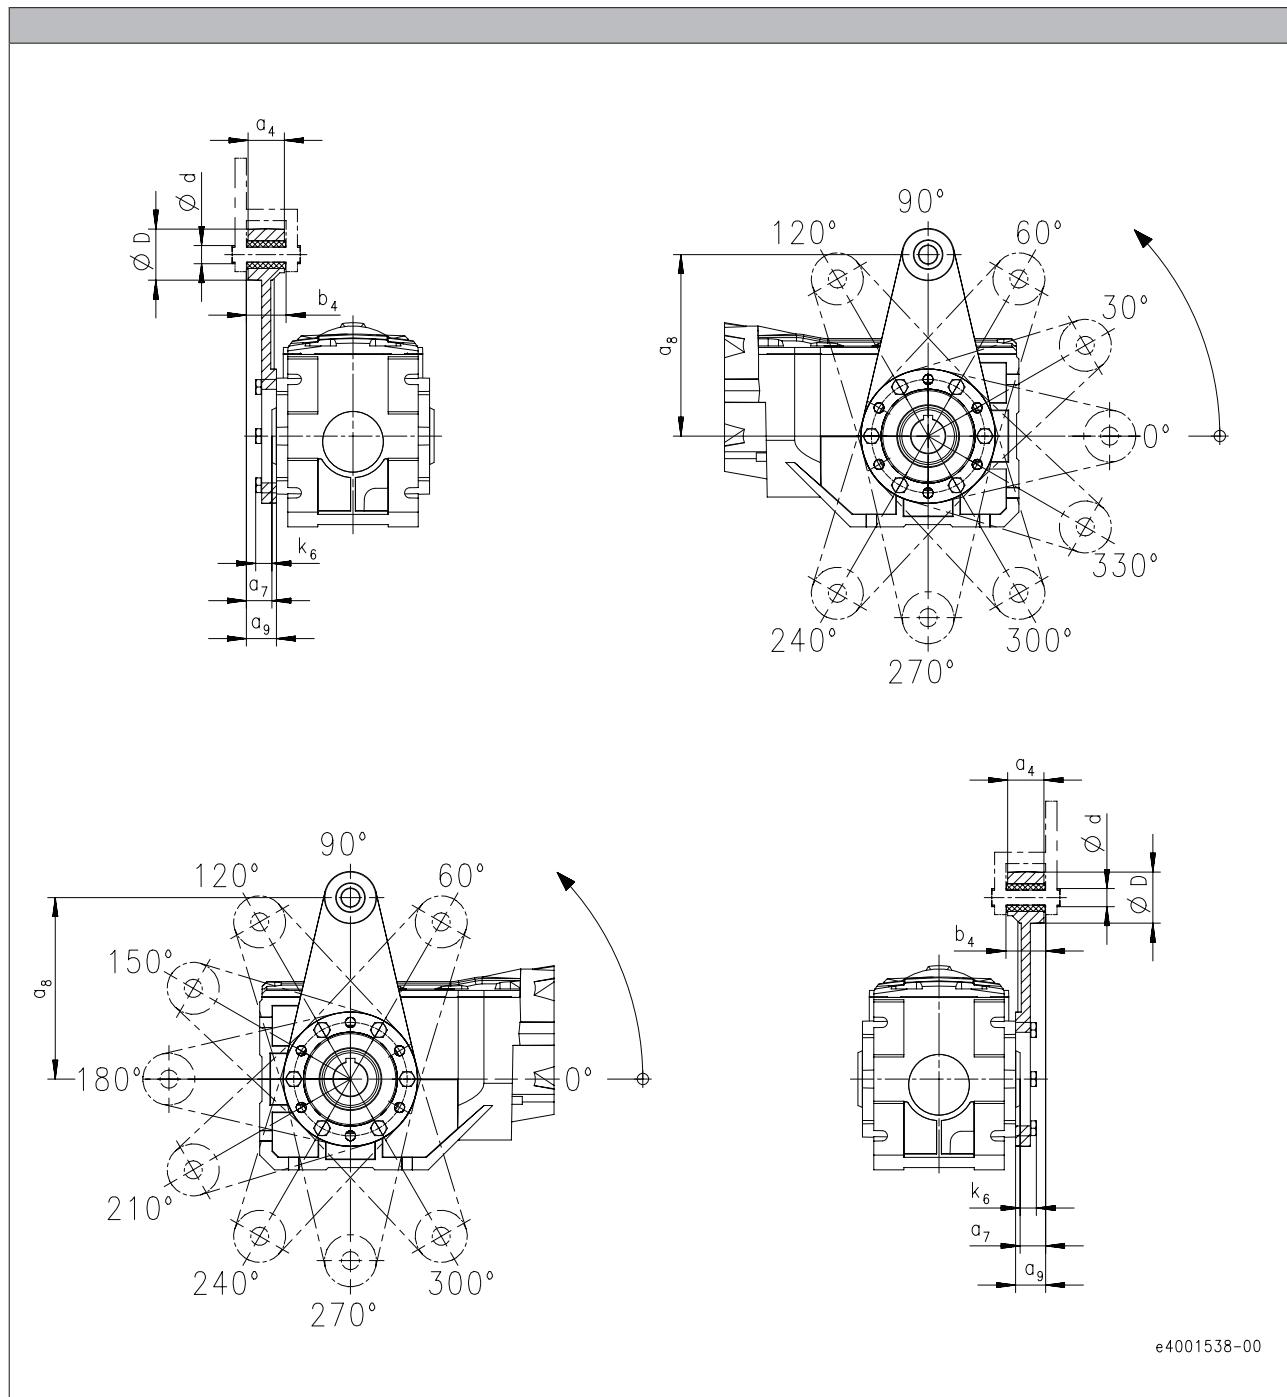

6.7

Product	Dimensions								Mass m
	a_4 [mm]	a_7 [mm]	a_8 [mm]	a_9 [mm]	b_4 [mm]	d [mm]	D [mm]	k_6 [mm]	
g500-B240	34.0	23.5	160	27.5	38.5	16.0	45.0	15.0	1.30



g500-B bevel gearbox



Accessories

Torque plate

Torque plate at housing foot

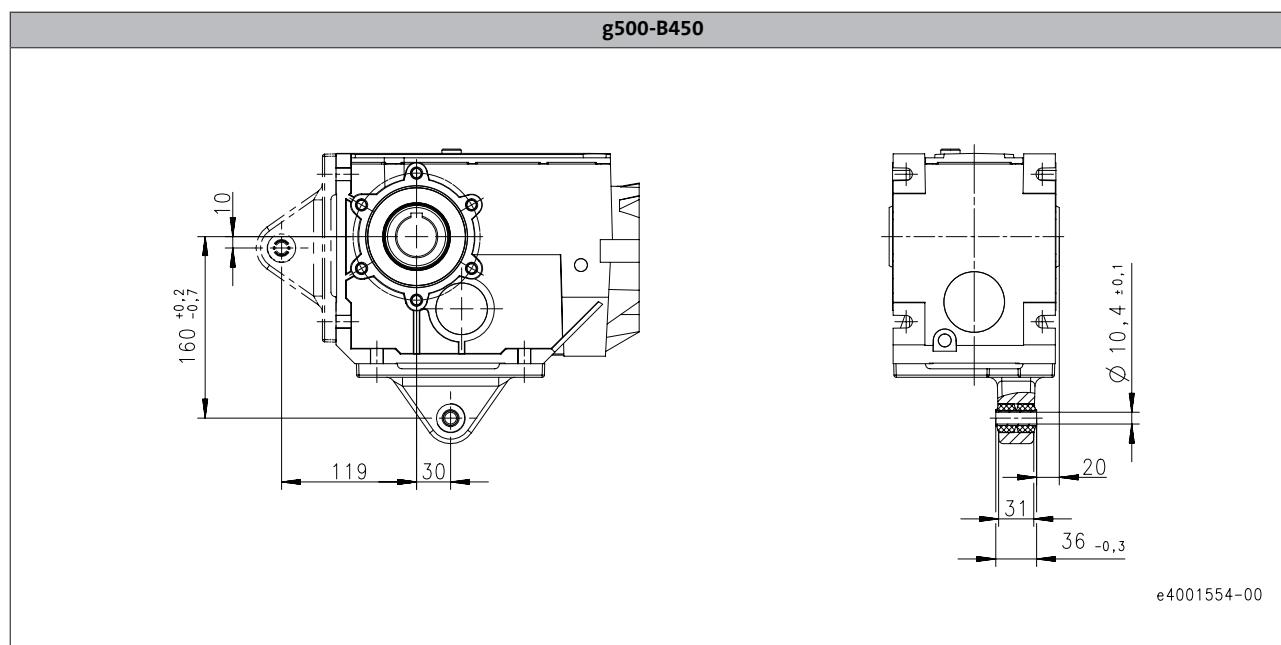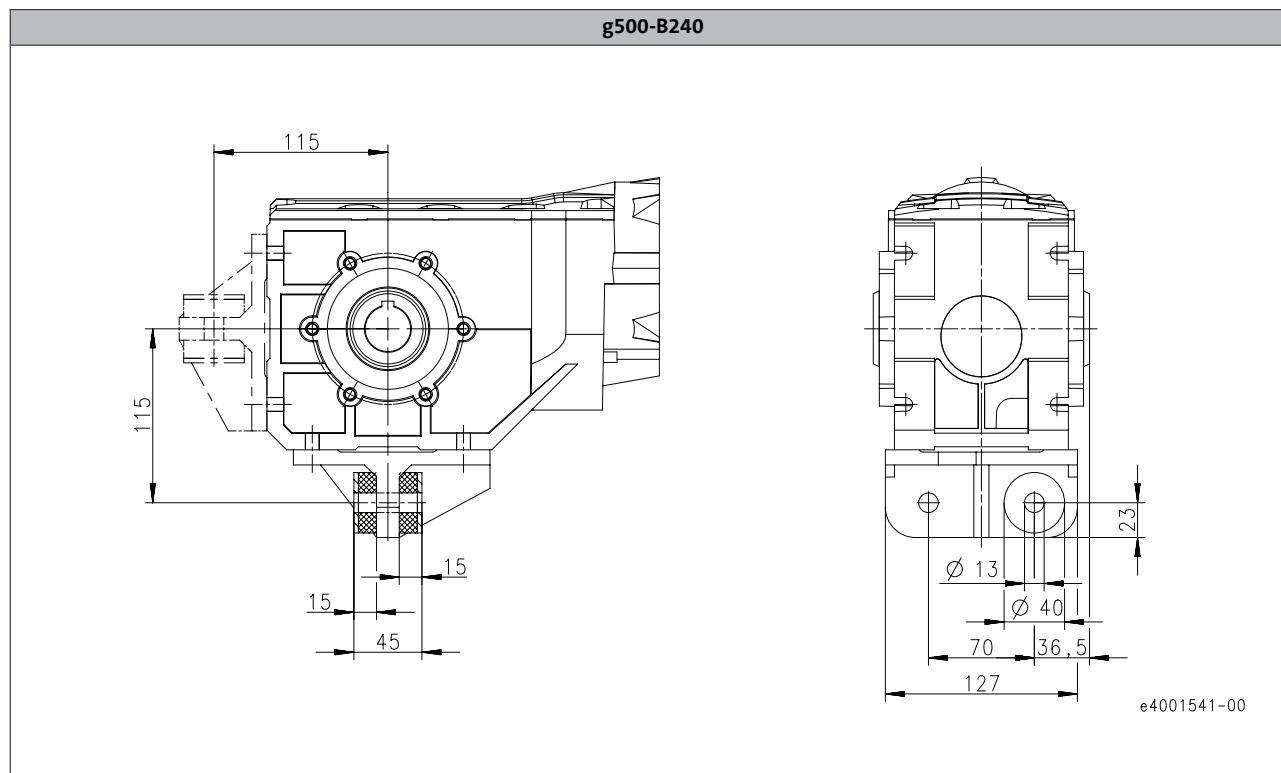

Product	Mass
	m [kg]
g500-B240	2.40
g500-B450	1.10


g500-B bevel gearbox

Accessories



Torque plate

Rubber buffer for torque plate

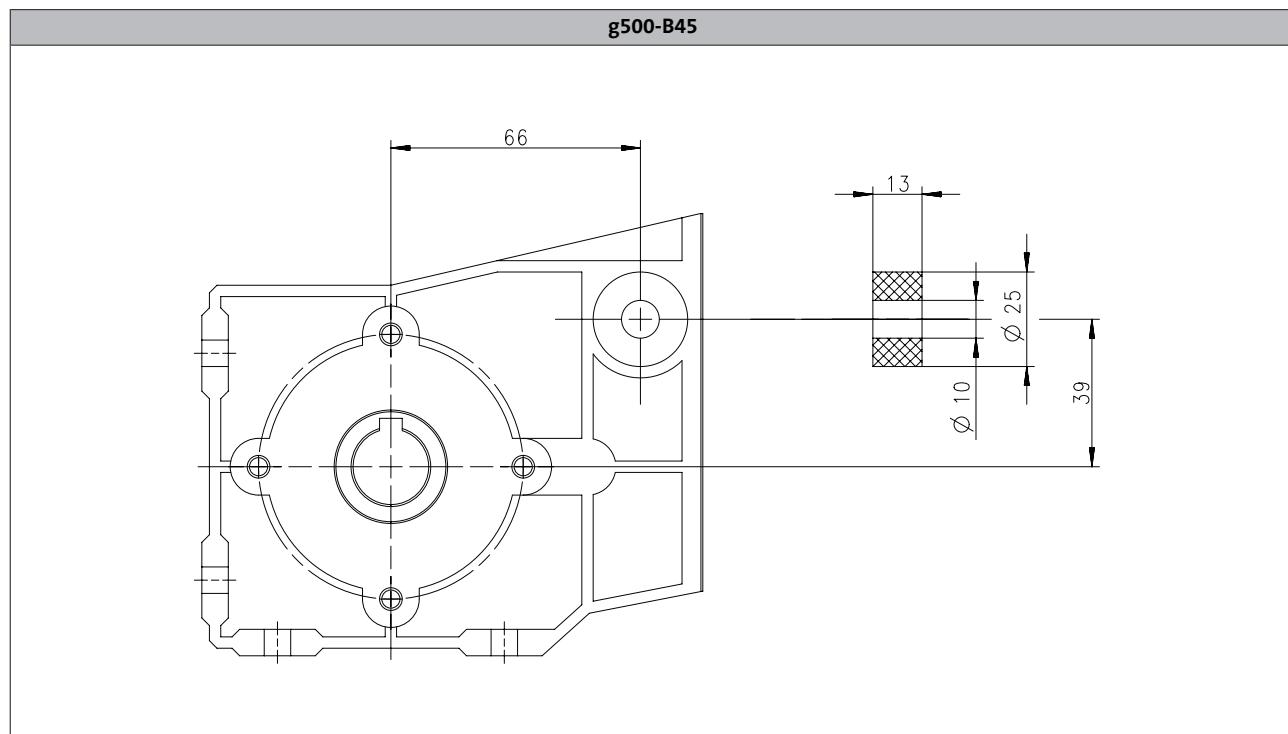

g500-B bevel gearbox




Accessories

Shaft cover

Hoseproof hollow shaft cover

The cover protects the hollow shaft from objects falling in. It is sealed by a flat gasket between cover and housing. Thus, the hollow shaft is protected from dust and water jets.

The cover is loosely enclosed and can be mounted on both sides of the hollow shaft bore.

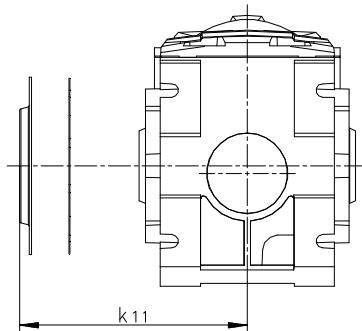

Product	Dimensions	Mass
	k_{11}	m
	[mm]	[kg]
g500-B45	55.0	0.050
g500-B110	65.0	0.050
g500-B240	75.0	0.10
g500-B450	79.5	0.15

g500-B bevel gearbox




Accessories

Shaft cover

Shrink disc cover

The cover is provided for the shrink disc to be protected from contact.

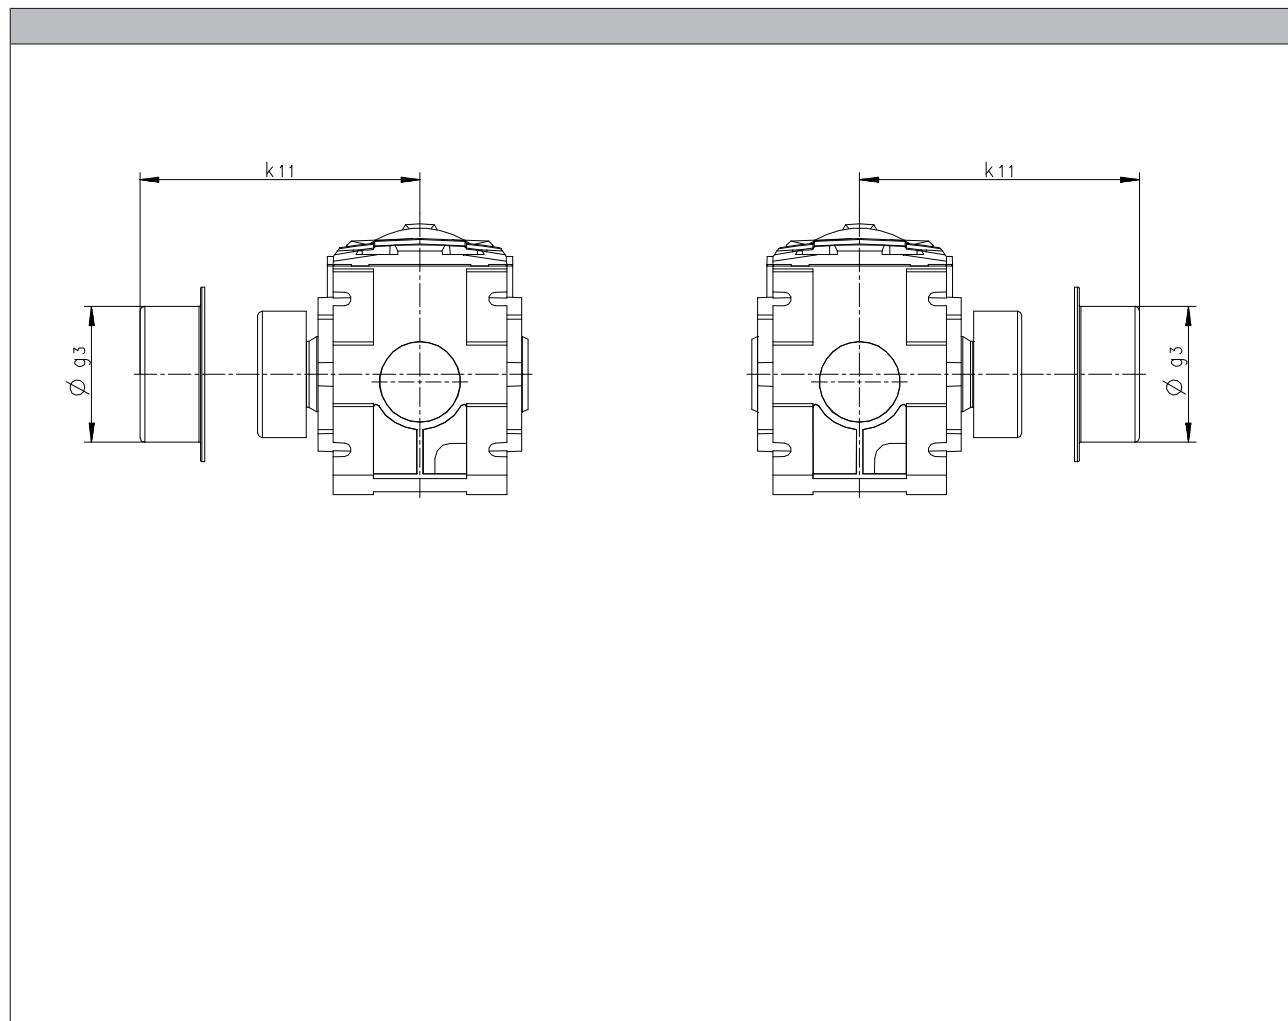

Product	Dimensions		Mass m [kg]
	g ₃ [mm]	k ₁₁ [mm]	
g500-B45	65.0	87.5	0.050
g500-B110	79.0	97.5	0.050
g500-B240	90.0	111	0.050
g500-B450	90.0	108	0.050

g500-B bevel gearbox


Accessories



6.7

MD three-phase AC motors

0.06 to 45 kW

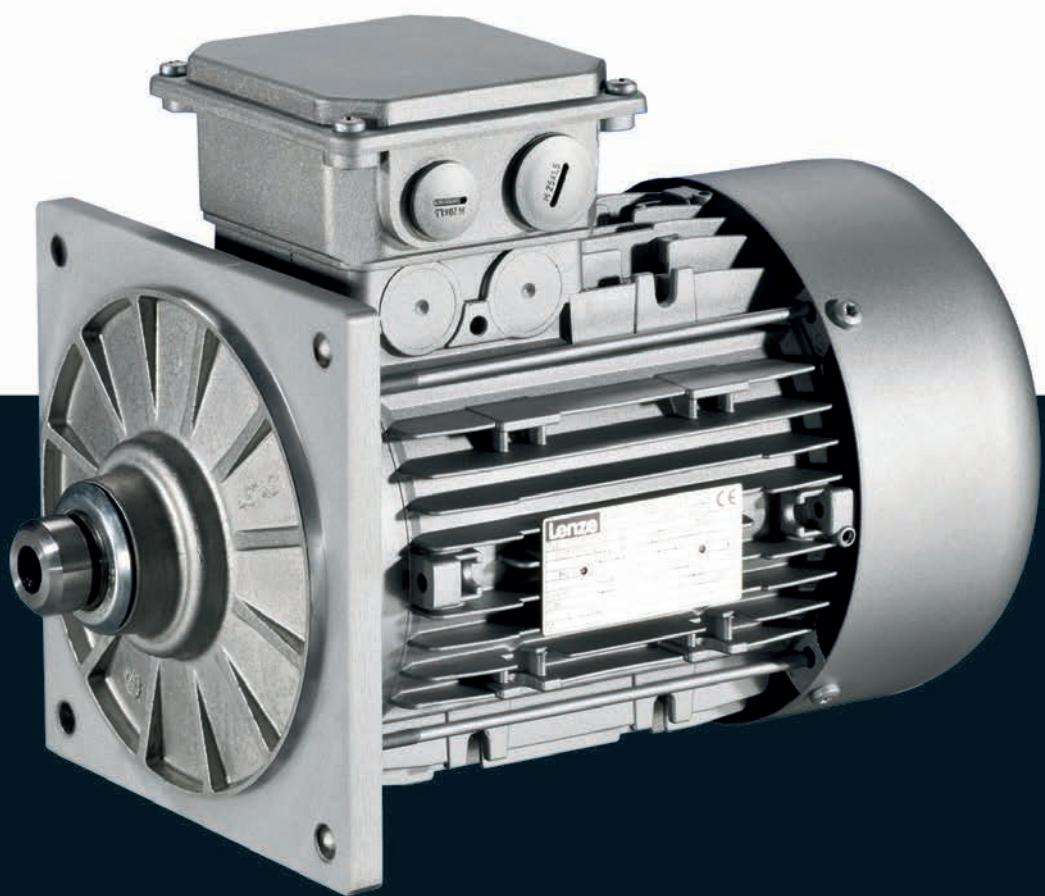

MD three-phase AC motors

Contents



General information	List of abbreviations	6.11 - 4
	Product key	6.11 - 5
	Product information	6.11 - 6
	Functions and features	6.11 - 7
	Motor – inverter assignment	6.11 - 11
	Dimensioning	6.11 - 13
Technical data	Standards and operating conditions	6.11 - 15
	Rated data for 50 Hz	6.11 - 16
	Rated data for 60 Hz	6.11 - 20
	Rated data for 87 Hz	6.11 - 24
	Dimensions, self-ventilated (2-pole)	6.11 - 25
	Dimensions, self-ventilated (4-pole)	6.11 - 26
	Dimensions, self-ventilated (6-pole)	6.11 - 27
	Dimensions, forced ventilated (2-pole)	6.11 - 28
	Dimensions, forced ventilated (4-pole)	6.11 - 29
	Dimensions, forced ventilated (6-pole)	6.11 - 30
	Dimensions, 8400 motec inverter	6.11 - 31
Accessories	Spring-applied brakes	6.11 - 33
	Resolver	6.11 - 46
	Incremental encoder and SinCos absolute value encoder	6.11 - 47
	Blowers	6.11 - 48
	Temperature monitoring	6.11 - 50
	Terminal box	6.11 - 52
	Plug connectors	6.11 - 59
	ICN connector	6.11 - 59
	M12 connector	6.11 - 70
	HAN connector	6.11 - 71
	Handwheel	6.11 - 77
	Centrifugal mass	6.11 - 79
	2nd shaft end	6.11 - 80
	Protection cover	6.11 - 82

MD three-phase AC motors



General information

List of abbreviations

$\eta_{100\%}$	[%]	Efficiency
$\eta_{75\%}$	[%]	Efficiency
$\eta_{50\%}$	[%]	Efficiency
$\cos \varphi$		Power factor
I_N	[A]	Rated current
I_{max}	[A]	Max. current consumption
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass
M_a	[Nm]	Starting torque
M_b	[Nm]	Stalling torque
M_{max}	[Nm]	Max. torque
M_N	[Nm]	Rated torque
n_N	[r/min]	Rated speed
P_N	[kW]	Rated power
P_{max}	[kW]	Max. power input

U_{max}	[V]	Max. mains voltage
U_{min}	[V]	Min. mains voltage
$U_{N,\Delta}$	[V]	Rated voltage
$U_{N,Y}$	[V]	Rated voltage


CE	Communauté Européenne
CSA	Canadian Standards Association
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)
CCC	China Compulsory Certificate
GOST	Certificate for Russian Federation
cURus	Combined certification marks of UL for the USA and Canada
UkrSEPRO	Certificate for Ukraine

MD three-phase AC motors

General information



Product key

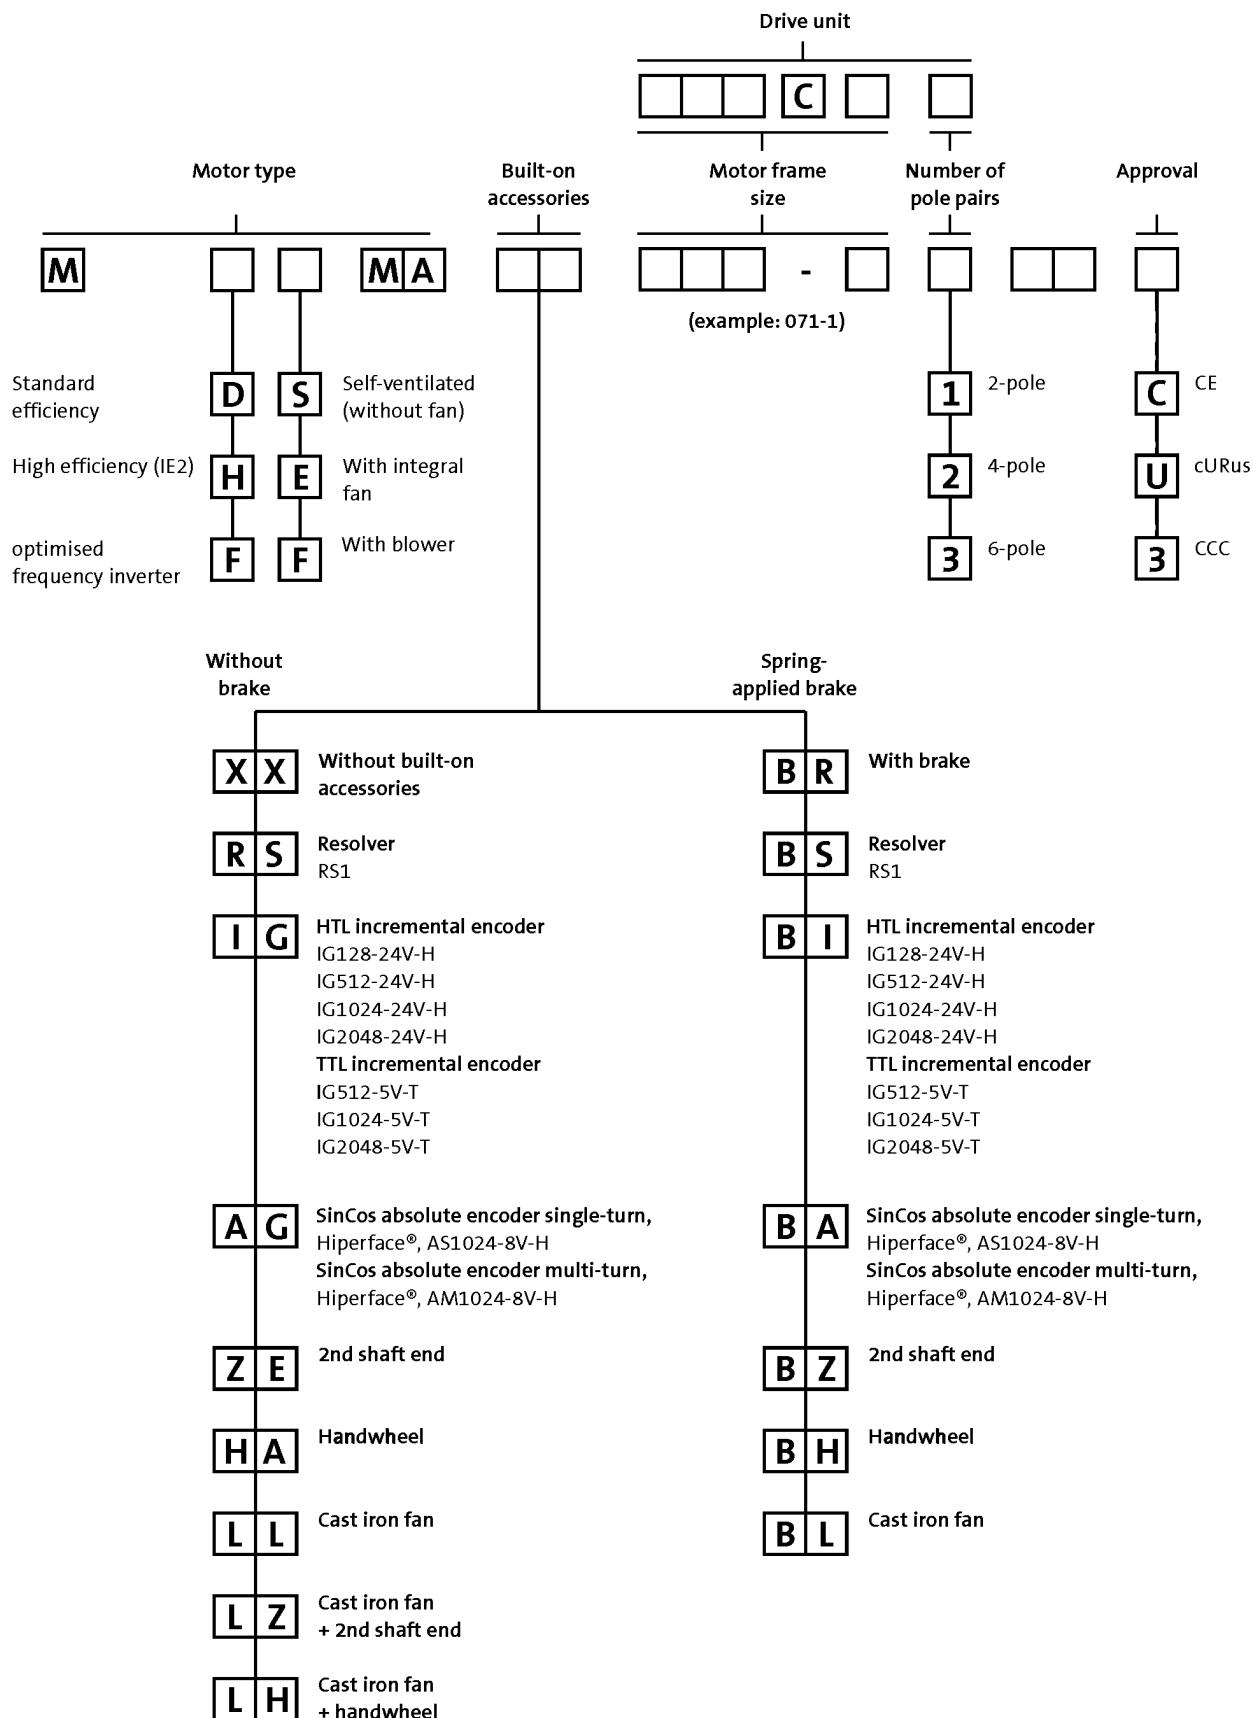

MD three-phase AC motors



General information

Product information

Special motors have been designed for direct attachment to Lenze gearboxes.

These motors are attached to the gearbox without the use of a clutch. Torque transmission between the toothings and the motor shaft is friction-locked via a tapered connection here. This motor design means that the geared motors only require a small installation space.



L-force MD three-phase AC motors are available in a power range from 0.06 to 45 kW and comply with efficiency class 4IE1 (standard efficiency) as per IEC 60034-30.

Basic versions

- The thermal sensors integrated as standard allow for permanent temperature monitoring and are coordinated to the motor winding's temperature class F (155°C).
- The motors of the basic version are adapted to ambient conditions by enclosure IP55.
- In tough operating conditions, the surface and corrosion protection system is provided to reliably protect the motor from corrosive media.

Options

- Various brake sizes – each available with several braking torques – can be combined with the three-phase AC motors.
- The LongLife version of the brake can easily reach 10×10^6 switching cycles.
- A resolver and various incremental and absolute value encoders can be fitted for speed and position detection.
- For fast commissioning, the motors are also available with connectors for the power connection, brake, blower and feedback.
- Instead of an integral fan, the motor can optionally be equipped with a blower. No torque reduction is then necessary, even at speeds below 20 Hz.
- For drive tasks in decentralised applications, the motor can be ordered with the motec inverter connected to the terminal box.
- The motors are available with cURus, GOST-R, CCC and UkrSepro approval.
- Smooth start/braking is possible by increasing the motor's centrifugal mass with a cast iron fan.
- The motor can be equipped with a handwheel for manual setup or emergency operations.
- To protect the fan from objects falling in, the fan cover can be equipped with a protection cover.
- A 2nd shaft end is available for further modifications.

MD three-phase AC motors

General information



Functions and features

Size	063	071	080	090
Motor				
Spring-applied brake				
Design	Standard or LongLife design Reduced or standard braking torque With rectifier With manual release lever Low noise		Standard or LongLife design Reduced, standard or increased braking torque With rectifier With manual release lever Low noise	
Feedback				
Design		Resolver ¹⁾ Incremental encoder ¹⁾ Absolute value encoder (multi-turn) ¹⁾		
Thermal sensor				
Thermal contact		TKO		
Thermal detector		KTY83-110 KTY84-130		
PTC thermistor		PTC		
Motor connection				
Power connection		Terminal box ICN connector HAN10E connector HAN modular connector		
Brake connection		Terminal box ICN connector HAN modular connector HAN10E connector		
Blower connection		Terminal box ICN connector		
Feedback connection		Terminal box ICN connector		
Temperature sensor connection		Terminal box TKO or PTC at connector in the power connection KTY at connector in the feedback connection		
Shaft bearings				
Position of the locating bearing		Standard motors (B3, B5, B14): side B Motors for gearbox direct mounting: side A		
Bearing type	Deep-groove ball bearing with high-temperature resistant grease, 2 sealing discs or cover plates			
Colour		Not coated Primed Paint in various corrosion-protection designs in accordance with RAL colours		
Further options	Protection cover		Protection cover Increased centrifugal mass Handwheel ¹⁾ 2nd shaft end	

¹⁾ With 2-pole motors not available.

MD three-phase AC motors

General information



Functions and features

Size	100	112	132
Motor			
Spring-applied brake			
Design	Standard or LongLife design Reduced, standard or increased braking torque With rectifier With manual release lever Low noise	Standard design Reduced, standard or increased braking torque With rectifier With manual release lever Low noise	
Feedback			
Design		Resolver ¹⁾ Incremental encoder ¹⁾ Absolute value encoder (multi-turn) ¹⁾	
Thermal sensor			
Thermal contact		TKO	
Thermal detector		KTY83-110 KTY84-130	
PTC thermistor		PTC	
Motor connection			
Power connection	Terminal box ICN connector HAN10E connector HAN modular connector		Terminal box ICN connector HAN modular connector
Brake connection	Terminal box ICN connector HAN modular connector HAN10E connector		Terminal box ICN connector HAN modular connector
Blower connection		Terminal box ICN connector	
Feedback connection		Terminal box ICN connector	
Temperature sensor connection		Terminal box TKO or PTC at connector in the power connection KTY at connector in the feedback connection	
Shaft bearings			
Position of the locating bearing		Standard motors (B3, B5, B14): side B Motors for gearbox direct mounting: side A	
Bearing type	Deep-groove ball bearing with high-temperature resistant grease, 2 sealing discs or cover plates		
Colour		Not coated Primed Paint in various corrosion-protection designs in accordance with RAL colours	
Further options		Protection cover Increased centrifugal mass Handwheel ¹⁾ 2nd shaft end	

¹⁾ With 2-pole motors not available.

MD three-phase AC motors

General information



Functions and features

Size	160	180	225		
Motor					
Spring-applied brake	Standard design Reduced, standard or increased braking torque With rectifier With manual release lever Low noise				
Design					
Feedback	Resolver Incremental encoder Absolute value encoder (multi-turn)				
Design					
Thermal sensor					
Thermal contact	TKO				
Thermal detector	KTY83-110 KTY84-130				
PTC thermistor	PTC				
Motor connection					
Power connection	Terminal box HAN modular connector	Terminal box			
Brake connection	Terminal box HAN modular connector	Terminal box			
Blower connection	Terminal box ICN connector				
Feedback connection	Terminal box ICN connector				
Temperature sensor connection	Terminal box TKO or PTC at connector in the power connection KTY at connector in the feedback connection	Terminal box			
Shaft bearings					
Position of the locating bearing	Standard motors (B3, B5, B14): side B Motors for gearbox direct mounting: side A		Drive end		
Bearing type	Deep-groove ball bearing with high-temperature resistant grease, 2 sealing discs or cover plates				
Colour	Not coated Primed Paint in various corrosion-protection designs in accordance with RAL colours				
Further options	Protection cover				

MD three-phase AC motors



General information

Functions and features

Surface and corrosion protection

For optimum protection of three-phase AC motors against ambient conditions, the surface and corrosion protection system (OKS) offers tailor-made solutions.

Various surface coatings ensure that the motors operate reliably even at high air humidity, in outdoor installation or in the presence of atmospheric impurities. Any colour from the RAL Classic collection can be chosen for the top coat. The three-phase AC motors are also available unpainted (no surface and corrosion protection).

Surface and corrosion protection system	Applications	Measures
OKS-G (primed)	<ul style="list-style-type: none">Dependent on subsequent top coat applied	<ul style="list-style-type: none">2K PUR priming coat (grey)
OKS-S (small)	<ul style="list-style-type: none">Standard applicationsInternal installation in heated buildingsAir humidity up to 90%	<ul style="list-style-type: none">Surface coating as per corrosivity category C1 (in line with EN 12944-2)
OKS-M (medium)	<ul style="list-style-type: none">Internal installation in non-heated buildingsCovered, protected external installationAir humidity up to 95%	<ul style="list-style-type: none">Surface coating as per corrosivity category C2 (in line with EN 12944-2)
OKS-L (high)	<ul style="list-style-type: none">External installationAir humidity above 95%Chemical industry plantsFood industry	<ul style="list-style-type: none">Surface coating as per corrosivity category C3 (in line with EN 12944-2)Blower cover and B end shield additionally primedScrews zinc-coatedCable glands with gasketsCorrosion-resistant brake with cover ring, stainless friction plate, and chrome-plated armature plate (on request) <p>Optional measures:</p> <ul style="list-style-type: none">Motor recesses sealed off (on request)

Structure of surface coating

Surface and corrosion protection system	Corrosivity category	Surface coating	Colour
	DIN EN ISO 12944-2	Structure	
Without OKS (uncoated)			
OKS-G (primed)		2K PUR priming coat	
OKS-S (small)	C1	2K-PUR top coat	
OKS-M (medium)	C2	2K PUR priming coat 2K-PUR top coat	Standard: RAL 7012 Optional: RAL Classic
OKS-L (high)	C3		

MD three-phase AC motors



General information

Motor – inverter assignment

Rated frequency 50/60 Hz

- Decentralised inverter 8400 motec (E84DVB)
- Inverter Drives 8400 (E84AV)

Rated power P_N [kW]	Product key		
	Motor	Inverter	
0.12	MD□□□□□063-12		
0.18	MD□□□□□063-32		E84AV□□□2512□□0
0.25	MD□□□□□063-42		
0.37	MD□□□□□071-32	E84DVB□3714S□□□2□	E84AV□□□3714□□0
0.55	MD□□□□□071-42	E84DVB□5514S□□□2□	E84AV□□□5514□□0
0.75	MD□□□□□080-32	E84DVB□7514S□□□2□	E84AV□□□7514□□0
1.10	MD□□□□□080-42	E84DVB□1124S□□□2□	E84AV□□□1124□□0
1.50	MD□□□□□090-32	E84DVB□1524S□□□2□	E84AV□□□1524□□0
2.20	MD□□□□□100-12	E84DVB□2224S□□□2□	E84AV□□□2224□□0
3.00	MD□□□□□100-32	E84DVB□3024S□□□2□	E84AV□□□3024□□0
4.00	MD□□□□□112-22	E84DVB□4024S□□□2□	E84AV□□□4024□□0
5.50	MD□□□□□112-32	E84DVB□5524S□□□2□	E84AV□□□5524□□0
7.50	MD□□□□□132-22	E84DVB□7524S□□□2□	E84AV□□□7524□□0
11.0	MD□□□□□160-22		E84AV□□□1134□□0
15.0	MD□□□□□160-32		E84AV□□□1534□□0
18.5	MD□□□□□180-12		E84AV□□□1834□□0
22.0	MD□□□□□180-32		E84AV□□□2234□□0
30.0	MD□□□□□180-42		E84AV□□□3034□□0
37.0	MD□□□□□225-12		E84AV□□□3734□□0
45.0	MD□□□□□225-22		E84AV□□□4534□□0

MD three-phase AC motors



General information

Motor – inverter assignment

Rated frequency 87 Hz

- Decentralised inverter 8400 motec (E84DVB)
- Inverter Drives 8400 (E84AV)

Rated power P_N [kW]	Product key		
	Motor	Inverter	
0.21	MD□□□□□063-12		
0.33	MD□□□□□063-32	E84DVB□5514S□□□2□	E84AV□□□5514□□0
0.45	MD□□□□□063-42		
0.66	MD□□□□□071-32	E84DVB□7514S□□□2□	E84AV□□□7514□□0
1.00	MD□□□□□071-42	E84DVB□1124S□□□2□	E84AV□□□1124□□0
1.35	MD□□□□□080-32	E84DVB□1524S□□□2□	E84AV□□□1524□□0
2.00	MD□□□□□080-42	E84DVB□2224S□□□2□	E84AV□□□2224□□0
2.70	MD□□□□□090-32	E84DVB□3024S□□□2□	E84AV□□□3024□□0
3.90	MD□□□□□100-12	E84DVB□4024S□□□2□	E84AV□□□4024□□0
5.40	MD□□□□□100-32	E84DVB□5524S□□□2□	E84AV□□□5524□□0
7.10	MD□□□□□112-22	E84DVB□7524S□□□2□	E84AV□□□7524□□0
9.70	MD□□□□□112-32		E84AV□□□1134□□0
13.2	MD□□□□□132-22		E84AV□□□1534□□0
19.3	MD□□□□□160-22		E84AV□□□2234□□0
26.4	MD□□□□□160-32		E84AV□□□3034□□0
32.4	MD□□□□□180-12		E84AV□□□3734□□0
38.7	MD□□□□□180-32		E84AV□□□4534□□0

MD three-phase AC motors




General information

Dimensioning

Torque derating at low motor frequencies

Motor size-dependent torque reduction, taking into account the thermal response during operation on the inverter.

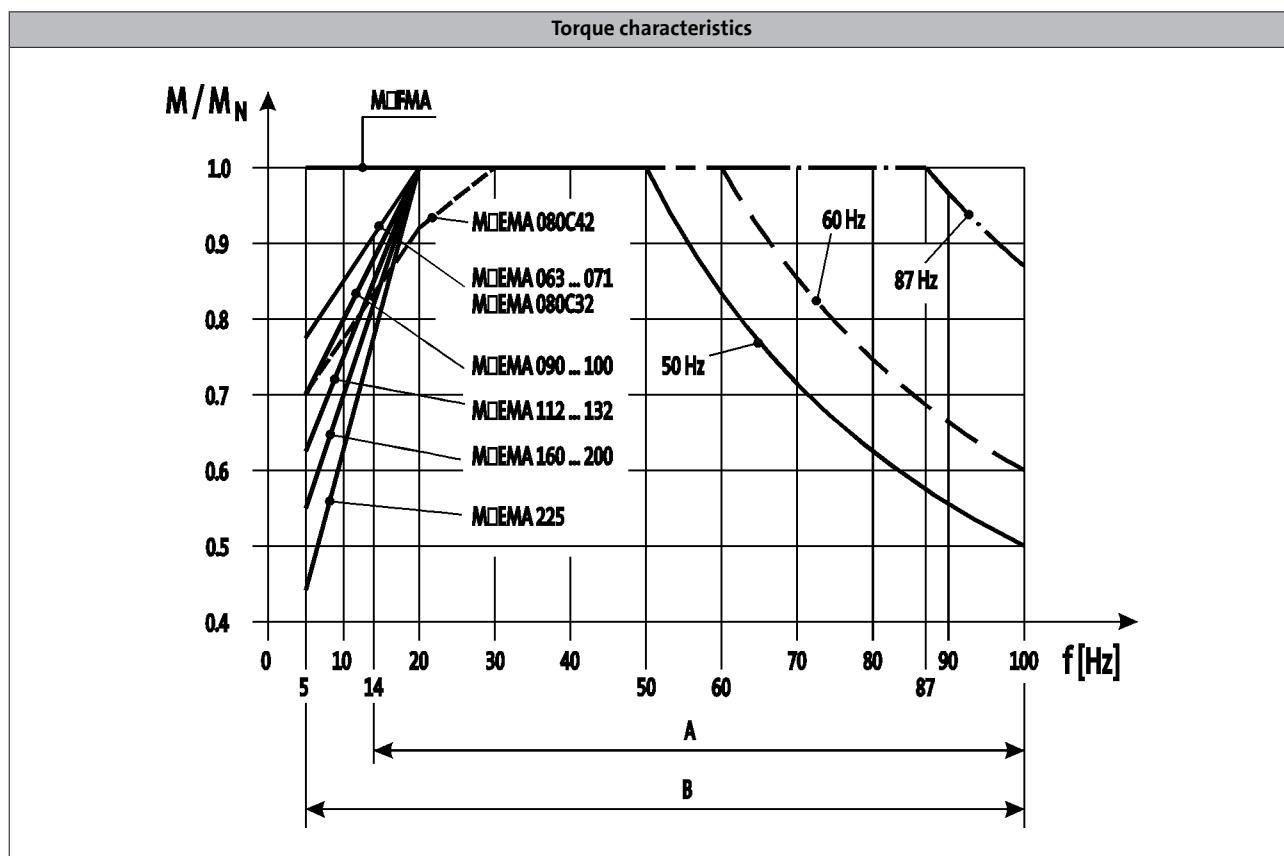

A = Operation with integral fan and brake

B = Operation with integral fan and brake control "Holding current reduction"

- The motor specifications stated in this catalogue for inverter operation apply to operation with a Lenze inverter. If you are uncertain, get in touch with the manufacturer of the inverter to ask whether the device is capable of driving the motor with the stated specifications (e.g. setting range, base frequency).

You can use the Drive Solution Designer for precise drive dimensioning.

The Drive Solution Designer helps you to carry out a fast and high-quality drive dimensioning.

The software includes well-founded and proven knowledge on drive applications and electro-mechanical drive components.

Please contact your Lenze sales office.

MD three-phase AC motors

General information



MD three-phase AC motors

Technical data



Standards and operating conditions

Enclosure			
EN 60529			IP55 ¹⁾ IP65 ¹⁾ IP66 ¹⁾
Energy efficiency class			IE1 ²⁾
IEC 60034-30			Methodology for measuring efficiency
IEC 60034-2-1			
Conformity			Low-Voltage Directive 2006/95/EC
CE			
EAC			TP TC 004/2011 (TR C)
Approval			UkrSEPRO
CCC			GB Standard 12350-2009
CSA			CSA 22.2 No. 100
cURus ³⁾			UL 1004-1 UL 1004-8 Power Conversion Equipment (File-No. E210321)
Temperature class			
IEC/EN 60034-1; utilisation			B
IEC/EN 60034-1; insulation system (enamel-insulated wire)			F
Min. ambient operating temperature	$T_{opr,min}$	[°C]	-20
Max. ambient temperature for operation	$T_{opr,max}$	[°C]	40
With power reduction	$T_{opr,max}$	[°C]	60
Site altitude			
Amsl	H_{max}	[m]	4000
Max. speed	n_{max}	[r/min]	4500

¹⁾ Designs with different degrees of protection:

IP55 with brake (IP54 with manual release lever).

IP54 with resolver RS1.

IP54 with HTL incremental encoder IG128-24V-H.

²⁾ Only applies to 4-pole motors.

³⁾ Motor frame size 225, in preparation.

- In the European Union, the ErP Directive stipulates minimum efficiency levels for three-phase AC motors. Geared three-phase AC motors that do not conform with this Directive do not meet CE requirements and must not be marketed in the European Economic Area. For further information about the ErP Directive and the Lenze products to which it relates, please refer to the brochure entitled "International efficiency directives for three-phase AC motors".

MD three-phase AC motors

Technical data



Rated data for 50 Hz

2-pole motors

	P _N	n _N	U _{N, Δ}	I _{N, Δ}	U _{N, Y}	I _{N, Y}	I _a /I _N
	[kW]	[r/min]	± 10 %		± 10 %		
MD□□□□□063-11	0.18	2740	230	0.80	400	0.46	4.30
MD□□□□□063-31	0.25	2710	230	1.10	400	0.60	3.70
MD□□□□□071-11	0.37	2720	230	1.50	400	0.90	4.40
MD□□□□□071-31	0.55	2630	230	2.40	400	1.40	3.80
MD□□□□□080-11	0.75	2720	230	3.10	400	1.80	4.70
MD□□□□□080-31	1.10	2720	230	4.50	400	2.60	4.70
MD□□□□□090-11	1.50	2710	230	5.50	400	3.20	4.50
MD□□□□□090-31	2.20	2730	230	8.30	400	4.80	3.70
MD□□□□□100-31	3.00	2890	230	10.2	400	5.90	7.00
MD□□□□□100-41	4.00	2840	230	14.2	400	8.30	6.60
MD□□□□□112-31	5.50	2900	400 ²⁾	11.5			6.00
MD□□□□□112-41	7.50	2890	400 ²⁾	16.5			6.00
MD□□□□□132-21	9.00	2890	400 ²⁾	17.0			6.50

	M _N	M _a	M _b	cos φ	η _{75 %}	η _{100 %}	J ¹⁾	m ¹⁾
	[Nm]	[Nm]	[Nm]		[%]	[%]	[kgcm ²]	[kg]
MD□□□□□063-11	0.63	1.50	1.50	0.88	66.5	66.0	1.70	3.90
MD□□□□□063-31	0.90	1.90	2.00	0.89	67.0	66.0	1.70	3.80
MD□□□□□071-11	1.29	3.10	2.90	0.92	71.0	69.0	5.10	6.00
MD□□□□□071-31	2.00	3.80	4.20	0.93	70.0	63.0	5.10	6.50
MD□□□□□080-11	2.65	5.40	6.50	0.89	70.0	70.0	9.70	10.0
MD□□□□□080-31	3.90	7.50	8.50	0.89	75.0	73.0	9.70	10.0
MD□□□□□090-11	5.20	10.1	10.4	0.95	76.5	75.0	35.0	17.0
MD□□□□□090-31	7.60	16.4	15.5	0.90	77.0	76.0	35.0	17.0
MD□□□□□100-31	9.90	19.0	27.0	0.90	83.0	82.0	32.6	21.0
MD□□□□□100-41	13.6	24.0	29.0	0.91	77.0	78.0	32.6	21.0
MD□□□□□112-31	18.1	46.0	49.0	0.83	86.0	86.0	53.8	28.0
MD□□□□□112-41	24.8	71.0	77.0	0.78	87.0	87.0	70.0	35.0
MD□□□□□132-21	29.8	72.0	72.0	0.92	88.0	88.0	205	68.0

¹⁾ Without accessories

²⁾ Star/delta start-up possible at 400 V.

MD three-phase AC motors

Technical data



Rated data for 50 Hz

4-pole motors

	P _N	n _N	U _{N, Δ} ²⁾	I _{N, Δ}	U _{N, Y}	I _{N, Y}	I _a /I _N
	[kW]	[r/min]	± 10 %		± 10 %		
MD□□□□□063-02	0.060	1425	230	0.42	400	0.24	3.50
MD□□□□□063-22	0.090	1375	230	0.48	400	0.28	2.90
MD□□□□□063-12	0.12	1425	230	0.85	400	0.49	3.10
MD□□□□□063-32	0.18	1365	230	1.00	400	0.58	2.70
MD□□□□□063-42	0.25	1370	230	1.40	400	0.82	2.90
MD□□□□□071-32	0.37	1410	230	1.60	400	0.95	3.30
MD□□□□□071-42	0.55	1405	230	2.40	400	1.40	3.50
MD□□□□□080-32	0.75	1410	230	3.30	400	1.90	4.60
MD□□□□□080-42	1.10	1390	230	4.80	400	2.80	4.40
MD□□□□□090-32	1.50	1410	230	6.60	400	3.80	4.80
MD□□□□□100-12	2.20	1440	230	9.20	400	5.30	6.00
MD□□□□□100-32	3.00	1430	230	12.5	400	7.20	4.60
MD□□□□□112-22	4.00	1450	230	16.1	400	9.30	6.20
MD□□□□□112-32	5.50	1445	230 400 ³⁾	21.7 12.5	400	12.5	6.10
MD□□□□□132-22	7.50	1455	230 400 ³⁾	28.6 16.5	400	16.5	5.90
MD□□□□□132-32	9.20	1450	230 400 ³⁾	34.1 19.7	400	19.7	5.10

	M _N	M _a	M _b	cos φ	η _{75 %}	η _{100 %}	J ¹⁾	m ¹⁾
	[Nm]	[Nm]	[Nm]		[%]	[%]	[kgcm ²]	[kg]
MD□□□□□063-02	0.40	1.30	1.36	0.57	59.0	63.0	3.30	3.90
MD□□□□□063-22	0.63	1.30	1.39	0.71	63.0	65.0	3.30	3.90
MD□□□□□063-12	0.80	2.50	2.64	0.56	58.0	63.0	3.30	4.10
MD□□□□□063-32	1.26	2.50	2.61	0.70	63.0	64.0	3.30	4.10
MD□□□□□063-42	1.74	3.80	4.10	0.67	65.0	66.0	3.70	4.40
MD□□□□□071-32	2.51	4.76	5.81	0.77	73.0	73.0	10.7	5.80
MD□□□□□071-42	3.74	7.85	9.12	0.77	74.0	74.0	12.8	6.40
MD□□□□□080-32	5.10	11.0	12.1	0.80	73.0	74.0	26.0	11.0
MD□□□□□080-42	7.50	16.5	18.4	0.80	77.0	77.0	26.0	11.0
MD□□□□□090-32	10.1	23.7	27.1	0.76	78.0	79.0	28.4	15.0
MD□□□□□100-12	14.6	38.0	44.0	0.73	83.0	84.0	61.0	24.0
MD□□□□□100-32	20.5	43.0	50.0	0.75	83.0	83.0	61.0	24.0
MD□□□□□112-22	26.3	70.0	95.0	0.73	85.0	86.0	107	31.0
MD□□□□□112-32	36.6	95.0	120	0.77	85.0	86.0	135	38.0
MD□□□□□132-22	49.2	100	150	0.76	87.0	88.0	336	66.0
MD□□□□□132-32	60.6	100	150	0.80	88.0	88.0	336	66.0

¹⁾ Without accessories

²⁾ Operation at 87 Hz is possible with 4-pole motors whose rated data at 50 Hz displays the voltage values Δ 230 V.

With motor frame sizes 132-12 to 180-32, the required voltage must also be specified in your order.

³⁾ Star/delta start-up possible at 400 V.

MD three-phase AC motors

Technical data



Rated data for 50 Hz

4-pole motors

	P _N	n _N	U _{N, Δ} ²⁾	I _{N, Δ}	U _{N, Y}	I _{N, Y}	I _a /I _N
	[kW]	[r/min]	[V]	[A]	[V]	[A]	
MD□□□□□160-22	11.0	1460	230 400 ³⁾	36.5 21.0	400	21.0	7.00
MD□□□□□160-32	15.0	1460	230 400 ³⁾	48.4 27.8	400	27.8	7.10
MD□□□□□180-12	18.5	1470	230 400 ³⁾	57.8 32.8	400	32.8	6.80
MD□□□□□180-32	22.0	1465	230 400 ³⁾	67.4 38.8	400	38.8	7.30
MD□□□□□180-42	30.0	1465	230 400 ³⁾	91.1 52.6	400	52.6	7.50
MD□□□□□225-12	37.0	1475	230 400 ³⁾	114 66.0	400	66.0	6.30
MD□□□□□225-22	45.0	1480	230 400 ³⁾	137 79.0	400	79.0	7.60

	M _N	M _a	M _b	cos φ	η _{75 %}	η _{100 %}	J ¹⁾	m ¹⁾
	[Nm]	[Nm]	[Nm]		[%]	[%]	[kgcm ²]	[kg]
MD□□□□□160-22	71.9	150	204	0.85	89.2	89.0	610	110
MD□□□□□160-32	98.1	214	288	0.87	89.7	90.0	750	130
MD□□□□□180-12	120	260	313	0.90	90.7	90.5	1350	165
MD□□□□□180-32	144	330	360	0.90	91.2	91.0	1550	175
MD□□□□□180-42	196	548	547	0.90	91.6	91.0	1850	200
MD□□□□□225-12	240	504	528	0.88	93.0	93.0	4400	320
MD□□□□□225-22	290	698	669	0.88	94.5	94.3	5300	415

¹⁾ Without accessories

²⁾ Operation at 87 Hz is possible with 4-pole motors whose rated data at 50 Hz displays the voltage values Δ 230 V.

With motor frame sizes 132-12 to 180-32, the required voltage must also be specified in your order.

³⁾ Star/delta start-up possible at 400 V.

MD three-phase AC motors

Technical data



Rated data for 50 Hz

6-pole motors

	P _N	n _N	U _{N, Δ}	I _{N, Δ}	U _{N, Y}	I _{N, Y}	I _a /I _N
	[kW]	[r/min]	± 10 %		± 10 %		
MD□□□□□071-13	0.18	930	230	1.10	400	0.60	3.90
MD□□□□□071-33	0.25	930	230	1.80	400	1.10	2.80
MD□□□□□080-13	0.37	950	230	2.20	400	1.30	4.00
MD□□□□□080-33	0.55	930	230	2.90	400	1.70	3.50

	M _N	M _a	M _b	cos φ	η _{75 %}	η _{100 %}	J ¹⁾	m ¹⁾
	[Nm]	[Nm]	[Nm]		[%]	[%]	[kgcm ²]	[kg]
MD□□□□□071-13	1.80	5.00	5.00	0.66	67.0	69.0	12.5	6.50
MD□□□□□071-33	2.50	6.60	6.60	0.66	67.0	68.0	12.5	6.50
MD□□□□□080-13	3.70	10.1	10.7	0.63	68.0	69.0	26.0	11.0
MD□□□□□080-33	5.60	12.2	12.8	0.70	68.0	68.0	26.0	11.0

¹⁾ Without accessories

MD three-phase AC motors

Technical data



Rated data for 60 Hz

2-pole motors

- The motors are designed for an operation at 265/460 V but are also able to be operated at 230 V, 60 Hz. The same technical data apply, the starting torque is a bit lower.
- The motors have a service factor of 1.15 at 60 Hz. The service factor indicates the permissible overload during operation within the mains voltage fluctuations.

	P _N	n _N	U _{N, Δ} ± 10 %	I _{N, Δ}	U _{N, Y}	I _{N, Y}	I _a /I _N
	[kW]	[r/min]	[V]	[A]	[V]	[A]	
MD□□□□□063-11	0.18	3370	265	0.72	460	0.41	5.50
MD□□□□□063-31	0.25	3390	265	0.88	460	0.51	4.80
MD□□□□□071-11	0.37	3360	265	1.30	460	0.76	5.50
MD□□□□□071-31	0.55	3240	265	2.10	460	1.20	4.80
MD□□□□□080-11	0.75	3380	265	2.60	460	1.50	5.90
MD□□□□□080-31	1.10	3370	265	3.80	460	2.20	5.90
MD□□□□□090-11	1.50	3310	265	4.80	460	2.80	5.30
MD□□□□□090-31	2.20	3320	265	7.20	460	4.10	4.30
MD□□□□□100-31	3.00	3510	265	8.80	460	5.10	8.10
MD□□□□□100-41	4.00	3440	265	12.4	460	7.10	7.70
MD□□□□□112-31	5.50	3510	460 ²⁾	9.90			6.90
MD□□□□□112-41	7.50	3500	460 ²⁾	14.4			6.80
MD□□□□□132-21	9.00	3500	460 ²⁾	14.8			7.60

	M _N	M _a	M _b	cos φ	η _{75 %}	η _{100 %}	J ¹⁾	m ¹⁾
	[Nm]	[Nm]	[Nm]		[%]	[%]	[kgcm ²]	[kg]
MD□□□□□063-11	0.51	1.38	1.38	0.84	68.3	67.8	1.70	3.90
MD□□□□□063-31	0.72	1.74	1.84	0.86	71.1	70.0	1.70	3.80
MD□□□□□071-11	1.05	2.85	2.66	0.91	74.4	72.3	5.10	6.00
MD□□□□□071-31	1.62	3.49	3.86	0.90	73.6	66.3	5.10	6.50
MD□□□□□080-11	2.13	4.96	5.97	0.88	74.4	74.4	9.70	10.0
MD□□□□□080-31	3.14	6.89	7.81	0.87	79.2	77.1	9.70	10.0
MD□□□□□090-11	4.31	9.28	9.55	0.94	78.3	76.7	35.0	17.0
MD□□□□□090-31	6.25	15.1	14.2	0.89	78.7	77.7	35.0	17.0
MD□□□□□100-31	8.13	17.4	24.8	0.89	84.5	83.5	32.6	21.0
MD□□□□□100-41	11.3	22.0	26.6	0.90	78.6	79.7	32.6	21.0
MD□□□□□112-31	14.9	42.2	45.0	0.83	87.5	87.5	53.8	28.0
MD□□□□□112-41	20.5	65.2	70.7	0.77	88.5	88.5	70.0	35.0
MD□□□□□132-21	24.7	66.1	66.1	0.91	88.9	88.9	205	68.0

¹⁾ Without accessories

²⁾ Star/delta start-up possible at 460 V.

MD three-phase AC motors



Technical data

Rated data for 60 Hz

4-pole motors

- The motors are designed for an operation at 265/460 V but are also able to be operated at 230 V, 60 Hz. The same technical data apply, the starting torque is a bit lower.
- The motors have a service factor of 1.15 at 60 Hz. The service factor indicates the permissible overload during operation within the mains voltage fluctuations.

	P _N	n _N	U _{N, Δ} ²⁾	I _{N, Δ}	U _{N, Y}	I _{N, Y}	I _a /I _N
	[kW]	[r/min]	[V]	[A]	[V]	[A]	
MD□□□□□063-02	0.060	1735	265	0.37	460	0.21	4.40
MD□□□□□063-22	0.090	1695	265	0.43	460	0.25	4.20
MD□□□□□063-12	0.12	1735	265	0.69	460	0.40	4.00
MD□□□□□063-32	0.18	1695	265	0.80	460	0.46	3.60
MD□□□□□063-42	0.25	1680	265	1.30	460	0.75	3.80
MD□□□□□071-32	0.37	1720	265	1.50	460	0.84	3.90
MD□□□□□071-42	0.55	1720	265	2.10	460	1.20	4.10
MD□□□□□080-32	0.75	1720	265	2.90	460	1.70	5.60
MD□□□□□080-42	1.10	1705	265	4.20	460	2.40	5.40
MD□□□□□090-32	1.50	1720	265	5.80	460	3.40	5.70
MD□□□□□100-12	2.20	1745	265	8.10	460	4.70	6.90
MD□□□□□100-32	3.00	1740	265	10.8	460	6.30	5.30
MD□□□□□112-22	4.00	1755	265	14.1	460	8.20	6.90
MD□□□□□112-32	5.50	1750	265 460 ³⁾	18.9 10.9	460	10.9	6.90
MD□□□□□132-22	7.50	1760	265 460 ³⁾	25.7 14.8	460	14.8	6.50
MD□□□□□132-32	9.20	1750	265 460 ³⁾	29.6 17.1	460	17.1	5.70

	M _N	M _a	M _b	cos φ	η _{75 %}	η _{100 %}	J ¹⁾	m ¹⁾
	[Nm]	[Nm]	[Nm]		[%]	[%]	[kgcm ²]	[kg]
MD□□□□□063-02	0.33	1.10	1.36	0.54	60.0	63.0	3.30	3.90
MD□□□□□063-22	0.51	1.10	1.40	0.67	64.9	67.0	3.30	3.90
MD□□□□□063-12	0.66	2.25	2.64	0.55	58.0	63.0	3.30	4.10
MD□□□□□063-32	1.00	2.21	2.56	0.68	65.0	66.0	3.30	4.10
MD□□□□□063-42	1.40	3.71	4.20	0.60	64.0	66.0	3.70	4.40
MD□□□□□071-32	2.05	4.40	5.80	0.74	74.0	75.0	10.7	5.80
MD□□□□□071-42	3.05	7.00	9.00	0.73	76.0	77.0	12.8	6.40
MD□□□□□080-32	4.16	10.3	12.2	0.78	78.0	78.0	26.0	11.0
MD□□□□□080-42	6.16	15.5	18.5	0.78	79.0	80.0	26.0	11.0
MD□□□□□090-32	8.33	22.0	27.0	0.73	79.0	81.0	28.4	15.0
MD□□□□□100-12	12.0	33.0	43.0	0.71	83.0	85.0	61.0	24.0
MD□□□□□100-32	16.5	38.0	48.0	0.73	84.0	85.0	61.0	24.0
MD□□□□□112-22	21.8	57.0	89.0	0.72	85.0	87.0	107	31.0
MD□□□□□112-32	30.0	79.0	114	0.75	87.0	87.0	135	38.0
MD□□□□□132-22	40.7	83.0	137	0.75	88.0	89.0	336	66.0
MD□□□□□132-32	50.2	83.0	137	0.79	88.0	89.0	336	66.0

¹⁾ Without accessories

²⁾ Operation at 87 Hz is possible with 4-pole motors whose rated data at 60 Hz displays the voltage values Δ 265 V.

With motor frame sizes 112-32 to 180-42, the required voltage must also be specified in your order.

³⁾ Star/delta start-up possible at 460 V.

MD three-phase AC motors



Technical data

Rated data for 60 Hz

4-pole motors

- The motors are designed for an operation at 265/460 V but are also able to be operated at 230 V, 60 Hz. The same technical data apply, the starting torque is a bit lower.
- The motors have a service factor of 1.15 at 60 Hz. The service factor indicates the permissible overload during operation within the mains voltage fluctuations.

	P _N	n _N	U _{N, Δ} ²⁾	I _{N, Δ}	U _{N, Y}	I _{N, Y}	I _a /I _N
	[kW]	[r/min]	[V]	[A]	[V]	[A]	
MD□□□□□160-22	11.0	1770	265 460 ³⁾	31.7 18.3	460	18.3	7.60
MD□□□□□160-32	15.0	1760	265 460 ³⁾	40.7 23.5	460	23.5	7.60
MD□□□□□180-12	18.5	1780	265 460 ³⁾	48.5 28.0	460	28.0	7.20
MD□□□□□180-32	22.0	1760	265 460 ³⁾	57.2 33.0	460	33.0	7.60
MD□□□□□180-42	30.0	1770	265 460 ³⁾	78.8 45.5	460	45.5	7.80
MD□□□□□225-12	37.0	1780	265 460 ³⁾	97.2 56.1	460	56.1	6.50
MD□□□□□225-22	45.0	1784	265 460 ³⁾	111 64.2	460	64.2	8.80

	M _N	M _a	M _b	cos φ	η _{75 %}	η _{100 %}	J ¹⁾	m ¹⁾
	[Nm]	[Nm]	[Nm]		[%]	[%]	[kgcm ²]	[kg]
MD□□□□□160-22	59.5	122	187	0.84	91.1	90.0	610	110
MD□□□□□160-32	81.2	171	265	0.87	92.6	92.0	750	130
MD□□□□□180-12	99.3	203	287	0.90	93.0	92.0	1350	165
MD□□□□□180-32	119	248	331	0.90	94.0	93.0	1550	175
MD□□□□□180-42	162	395	502	0.90	91.8	92.0	1850	200
MD□□□□□225-12	199	358	485	0.88	94.0	94.0	4400	320
MD□□□□□225-22	241	660	635	0.88	93.5	93.6	5300	415

¹⁾ Without accessories

²⁾ Operation at 87 Hz is possible with 4-pole motors whose rated data at 60 Hz displays the voltage values Δ 265 V.

With motor frame sizes 112-32 to 180-42, the required voltage must also be specified in your order.

³⁾ Star/delta start-up possible at 460 V.

MD three-phase AC motors



Technical data

Rated data for 60 Hz

6-pole motors

- The motors are designed for an operation at 265/460 V but are also able to be operated at 230 V, 60 Hz. The same technical data apply, the starting torque is a bit lower.
- The motors have a service factor of 1.15 at 60 Hz. The service factor indicates the permissible overload during operation within the mains voltage fluctuations.

	P _N	n _N	U _{N, Δ}	I _{N, Δ}	U _{N, Y}	I _{N, Y}	I _a /I _N
	[kW]	[r/min]	[V]	[A]	[V]	[A]	
MD□□□□□071-13	0.18	1140	265	0.95	460	0.55	4.60
MD□□□□□071-33	0.25	1140	265	1.70	460	1.00	3.40
MD□□□□□080-13	0.37	1160	265	2.00	460	1.20	4.60
MD□□□□□080-33	0.55	1140	265	2.60	460	1.50	4.10

	M _N	M _a	M _b	cos φ	η _{75 %}	η _{100 %}	J ¹⁾	m ¹⁾
	[Nm]	[Nm]	[Nm]		[%]	[%]	[kgcm ²]	[kg]
MD□□□□□071-13	1.47	4.59	4.59	0.62	68.4	70.5	12.5	6.50
MD□□□□□071-33	2.04	6.06	6.06	0.61	69.1	70.1	12.5	6.50
MD□□□□□080-13	3.03	9.28	9.83	0.59	69.5	70.5	26.0	11.0
MD□□□□□080-33	4.56	11.2	11.8	0.66	70.7	70.7	26.0	11.0

¹⁾ Without accessories

MD three-phase AC motors

Technical data



Rated data for 87 Hz

4-pole motors

	P _N	n _N	M _N	M _{max}	U _{N, Δ}	I _{N, Δ}	cos φ	η _{75 %}	η _{100 %}	J ¹⁾	m ¹⁾
	[kW]	[r/min]	[Nm]	[Nm]	[V]	[A]		[%]	[%]	[kgcm ²]	[kg]
MD□□□□□063-02	0.11	2535	0.40	1.60	400	0.42	0.55	62.0	67.0	3.30	3.90
MD□□□□□063-22	0.16	2485	0.63	2.50	400	0.48	0.67	66.0	70.0	3.30	3.90
MD□□□□□063-12	0.21	2535	0.80	3.20	400	0.85	0.52	61.0	66.0	3.30	4.10
MD□□□□□063-32	0.33	2475	1.26	5.00	400	1.00	0.65	68.0	71.0	3.30	4.10
MD□□□□□063-42	0.45	2480	1.74	7.00	400	1.40	0.63	66.0	73.0	3.70	4.40
MD□□□□□071-32	0.66	2520	2.51	10.0	400	1.60	0.72	76.0	78.0	10.7	5.80
MD□□□□□071-42	1.00	2515	3.74	15.0	400	2.40	0.74	79.0	80.0	12.8	6.40
MD□□□□□080-32	1.35	2520	5.10	20.0	400	3.30	0.80	75.0	77.0	26.0	11.0
MD□□□□□080-42	2.00	2500	7.50	30.0	400	4.80	0.80	81.0	82.0	26.0	11.0
MD□□□□□090-32	2.70	2520	10.1	40.0	400	6.70	0.73	83.0	85.0	28.4	15.0
MD□□□□□100-12	3.90	2550	14.6	60.0	400	9.20	0.71	87.0	88.0	61.0	24.0
MD□□□□□100-32	5.40	2540	20.5	80.0	400	12.5	0.73	87.0	88.0	61.0	24.0
MD□□□□□112-22	7.10	2560	26.3	105	400	16.1	0.71	87.0	88.0	107	31.0
MD□□□□□112-32	9.70	2555	36.6	145	400	21.7	0.75	87.0	89.0	135	38.0
MD□□□□□132-22	13.2	2565	49.2	200	400	28.6	0.75	90.0	90.0	336	66.0
MD□□□□□132-32	16.2	2560	60.6	242	400	34.1	0.79	90.0	91.0	336	66.0
MD□□□□□160-22	19.3	2565	71.9	280	400	36.5	0.85	91.7	90.0	610	110
MD□□□□□160-32	26.4	2565	98.1	390	400	48.4	0.86	91.9	92.0	750	130
MD□□□□□180-12	32.4	2575	120	480	400	57.8	0.89	92.8	92.0	1350	165
MD□□□□□180-32	38.7	2560	144	572	400	67.4	0.89	92.8	92.0	1550	175
MD□□□□□180-42	52.7	2565	196	780	400	91.1	0.89	93.0	93.0	1850	200


¹⁾ Without accessories

MD three-phase AC motors

Technical data



Dimensions, self-ventilated (2-pole)

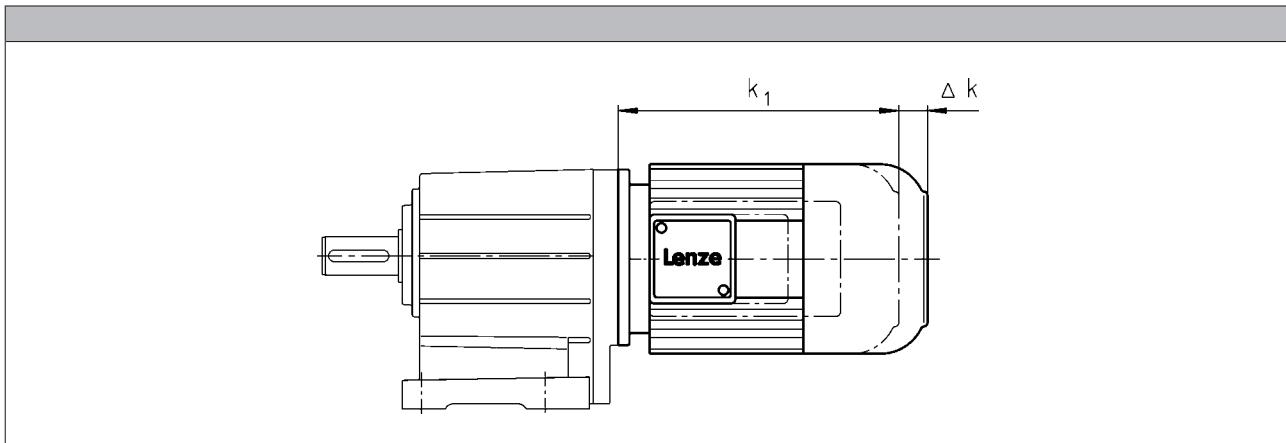


Motor frame size	Motor type			
	MDEMAXX	MDEMABR	MDEMABL	MDEMALL
	Δ k [mm]	Δ k [mm]	Δ k [mm]	Δ k [mm]
063-11	0	40		
063-31		52	52	0
071-11		73	73	4
071-31		68	68	0
080-11		76	76	76
080-31		90	90	0
090-11		110	110	
090-31				
100-31				
100-41				
112-31				
112-41				
132-21				

MD three-phase AC motors

Technical data



Dimensions, self-ventilated (4-pole)

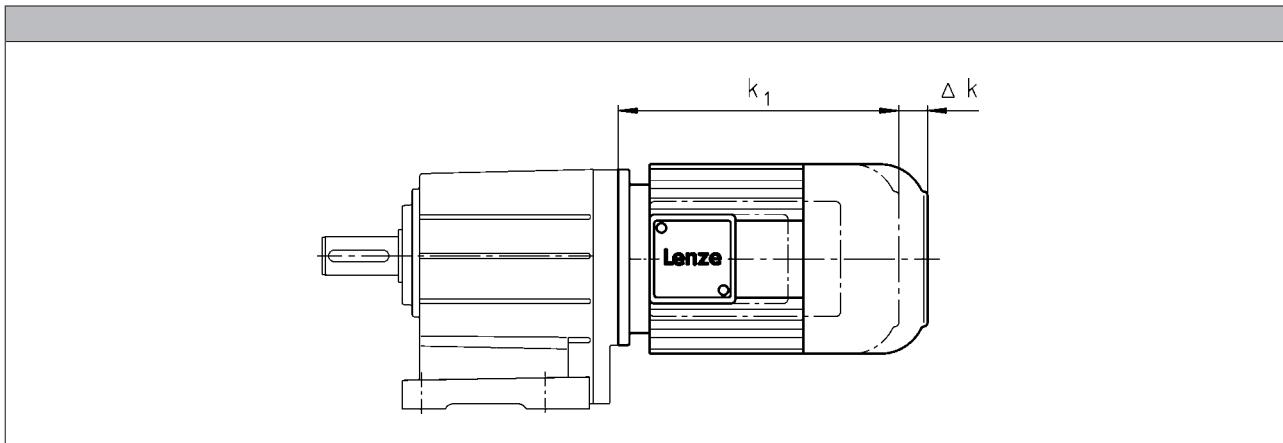


	Motor type					
	MDEMAXX	MDEMABR	MDEMABS MDEMABI MDEMABA	MDEMABL	MDEMARS MDEMAIG MDEMAAG	MDEMALL
Motor frame size	Δk [mm]	Δk [mm]	Δk [mm]	Δk [mm]	Δk [mm]	Δk [mm]
063-02		71	135		71	
063-22						
063-12		40	103		56	
063-32						
063-42						
071-32		52	96	52	52	0
071-42						
080-32		73	111	73	111	4
080-42						
090-32		68	105	68	87	0
100-12		76	101	76	81	76
100-32						
112-22		90	120	90	80	
112-32						
132-22		110	125	110	103	0
132-32						
160-22		105	191		83	
160-32						
180-12			192		79	
180-32						
180-42						
225-12			193		80	
225-22						

MD three-phase AC motors

Technical data



Dimensions, self-ventilated (6-pole)

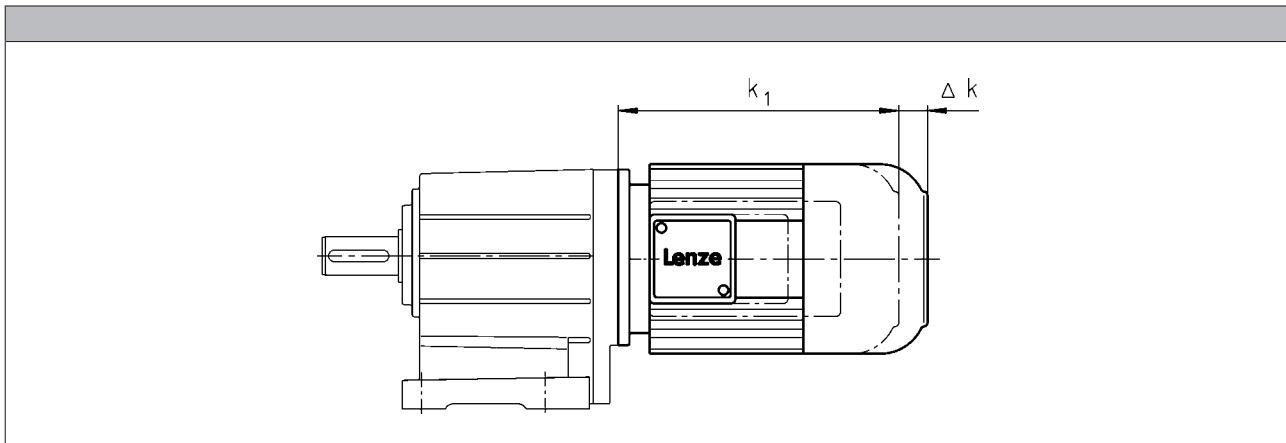


	Motor type					
	MDEMAXX	MDEMABR	MDEMABS MDEMABI MDEMABA	MDEMABL	MDEMARS MDEMAIG MDEMAAG	MDEMALL
Motor frame size						
	Δk [mm]	Δk [mm]	Δk [mm]	Δk [mm]	Δk [mm]	Δk [mm]
071-13 071-33	0	52	96	52	52	0
080-13 080-33		73	111	73	111	4

MD three-phase AC motors

Technical data



Dimensions, forced ventilated (2-pole)

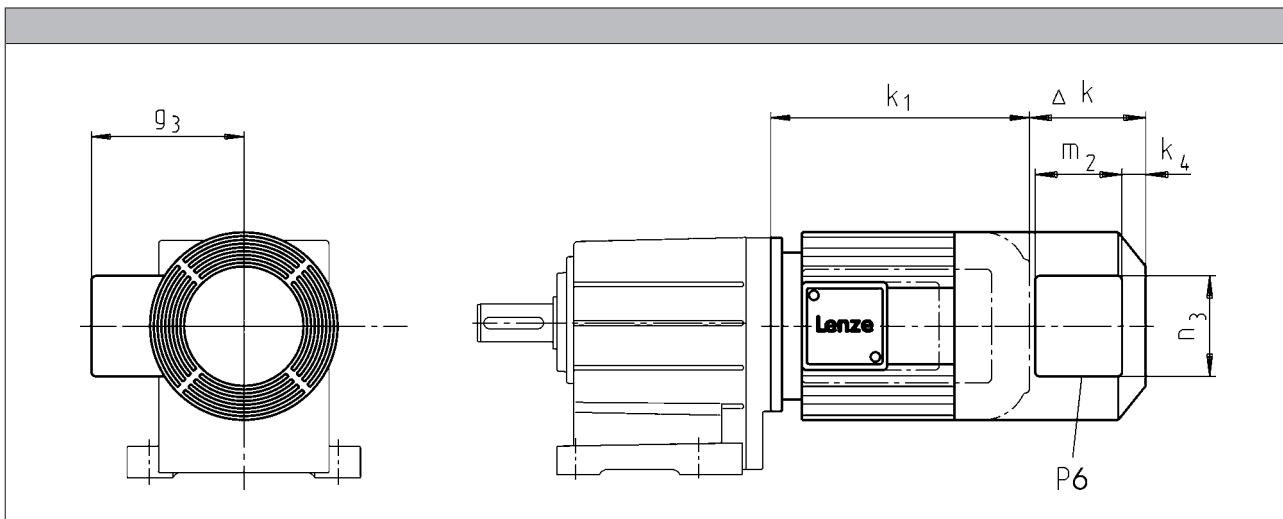


	Motor type						
	MDFMAXX	MDFMABR					
Motor frame size	Δ k [mm]	Δ k [mm]	k ₄ [mm]	g ₃ [mm]	m ₂ [mm]	n ₃ [mm]	P ₆ [mm]
063-11		170		115			
063-31			12		95	105	
071-11		165		122			
071-31							
080-11		183	13	132	96	106	
080-31							
090-11		181		141			1x M16x1.5
090-31							
100-31	109	170		150			
100-41			22		95	105	
112-31	102	183		162			
112-41							
132-21	115	202	32	182			

MD three-phase AC motors

Technical data



Dimensions, forced ventilated (4-pole)

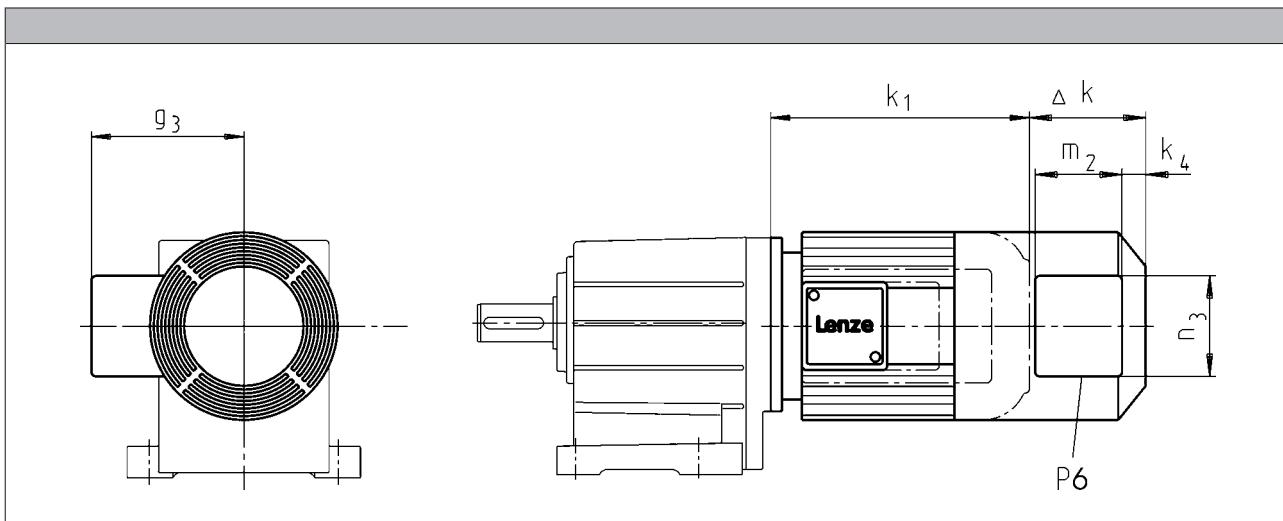

	Motor type								
	MDFMAXX	MDFMABR	MDFMABS MDFMABI MDFMABA	MDFMARS MDFMAIG MDFMAAG					


Motor frame size	Δk	Δk	Δk	Δk	k_4	g_3	m_2	n_3	P_6
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
063-12									
063-32		170	170			115			
063-42						12			
071-32		165	165			122			
071-42						13	95	105	
080-32		183	183			132	96	106	
080-42		181	181			141			
090-32						150			
100-12	109	170	170	109		162			
100-32						22			
112-22	102	183	183	183		182			
112-32						32			
132-22	115	202	202	202		209			
132-32						31	96	106	
160-22		179	237	224					
160-32									
180-12		215	275	215					
180-32			260						
180-42	155								
225-12	213	213	213	213					
225-22									

MD three-phase AC motors

Technical data



Dimensions, forced ventilated (6-pole)

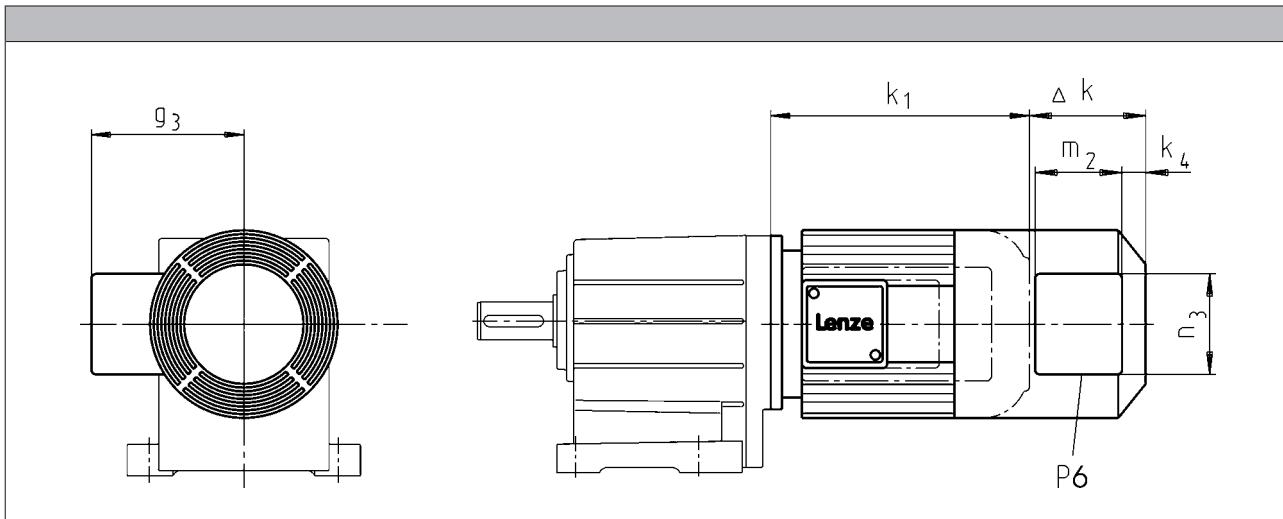

	Motor type								
	MDFMAXX	MDFMABR	MDFMABS MDFMABI MDFMABA	MDFMARS MDFMAIG MDFMAAG					

Motor frame size	Δk	Δk	Δk	Δk	k_4	g_3	m_2	n_3	P_6
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
071-13 071-33	128	165	165	128	12	122	95	105	1xM16x1.5
080-13 080-33		183	183		13	132	96	106	


MD three-phase AC motors

Technical data



Dimensions, 8400 motec inverter

Rated frequency 50/60 Hz

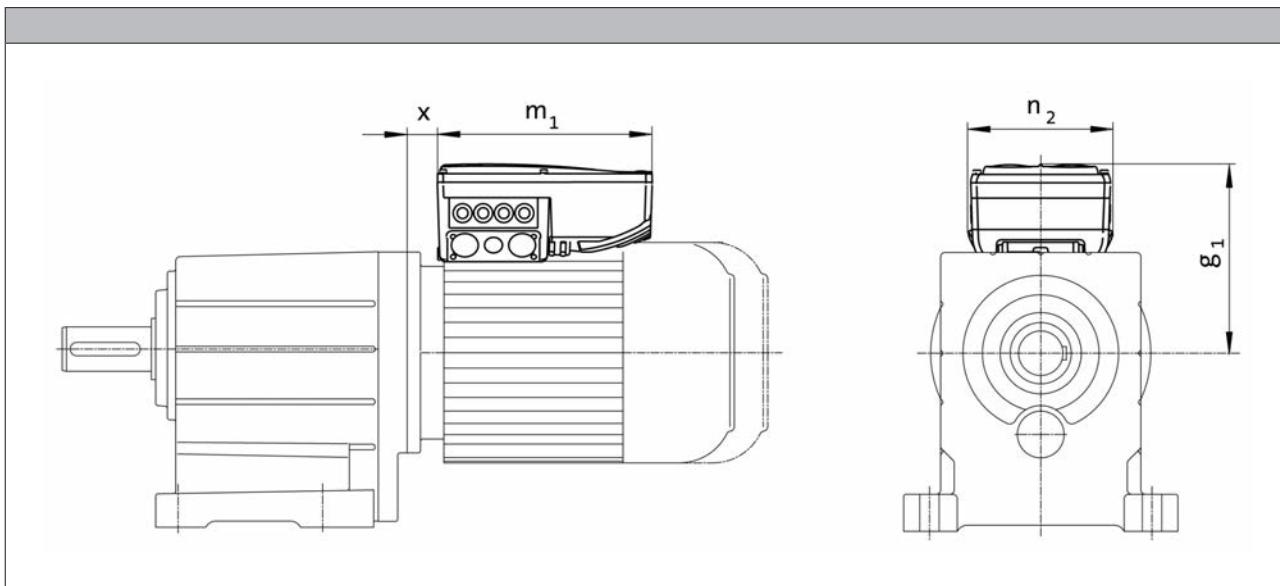

Product key					
Motor	Inverter	$g_1, 50\text{Hz}$ [mm]	$m_1, 50\text{Hz}$ [mm]	$n_2, 50\text{Hz}$ [mm]	$x_{50\text{Hz}}$ [mm]
MD□□□□□071-32	E84DVB□3714S□□□2□	163			21.0
MD□□□□□071-42	E84DVB□5514S□□□2□				
MD□□□□□080-32	E84DVB□7514S□□□2□	172	241	161	25.5
MD□□□□□080-42	E84DVB□1124S□□□2□				
MD□□□□□090-32	E84DVB□1524S□□□2□	177			28.8
MD□□□□□100-12	E84DVB□2224S□□□2□	217	260	176	29.6
MD□□□□□100-32	E84DVB□3024S□□□2□				
MD□□□□□112-22	E84DVB□4024S□□□2□	282	325	195	19.0
MD□□□□□112-32	E84DVB□5524S□□□2□				
MD□□□□□132-22	E84DVB□7524S□□□2□	301			34.5


MD three-phase AC motors

Technical data



Dimensions, 8400 motec inverter

Rated frequency 87 Hz

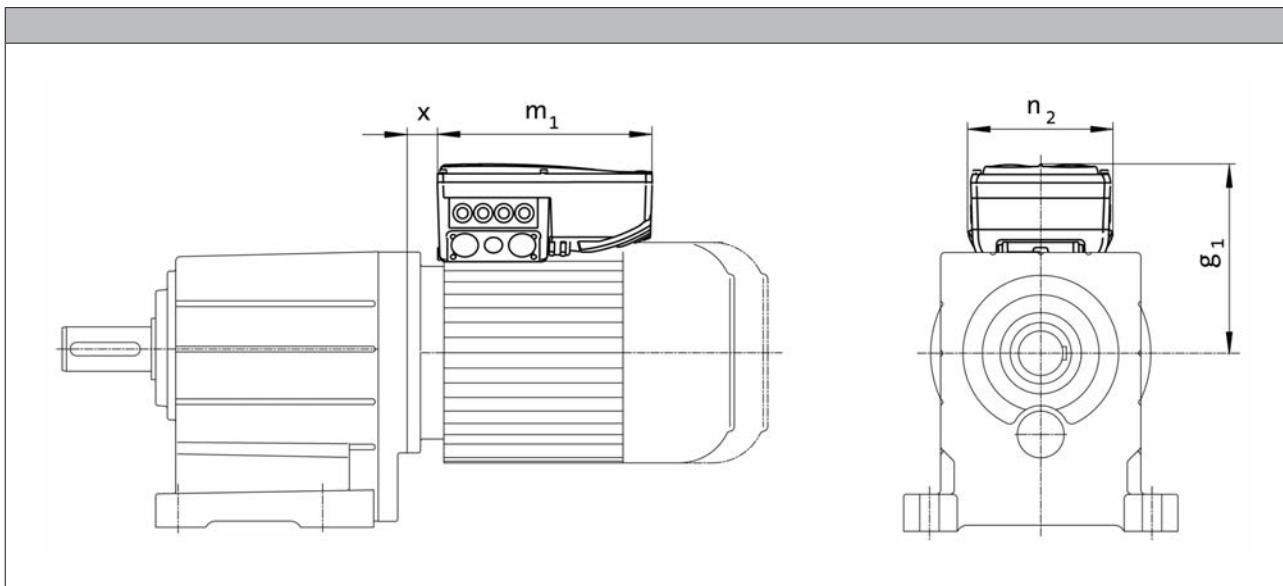

Product key							
Motor	Inverter	$g_{1,87\text{Hz}}$ [mm]	$m_{1,87\text{Hz}}$ [mm]	$n_{2,87\text{Hz}}$ [mm]	$x_{87\text{Hz}}$ [mm]		
MD□□□□□063-32	E84DVB□3714S□□□2□	154	241	161	18.8		
MD□□□□□063-42	E84DVB□5514S□□□2□						
MD□□□□□071-32	E84DVB□7514S□□□2□	163	260	176	21.0		
MD□□□□□071-42	E84DVB□1124S□□□2□						
MD□□□□□080-32	E84DVB□1524S□□□2□	172	325	195	25.5		
MD□□□□□080-42	E84DVB□2224S□□□2□	201			24.5		
MD□□□□□090-32	E84DVB□3024S□□□2□	206	272	195	27.8		
MD□□□□□100-12	E84DVB□4024S□□□2□	272			17.1		
MD□□□□□100-32	E84DVB□5524S□□□2□						
MD□□□□□112-22	E84DVB□7524S□□□2□	282			19.0		

MD three-phase AC motors

Accessories



Spring-applied brakes

Three-phase AC motors can be fitted with a spring-applied brake. This is activated after the supply voltage is switched off (closed-circuit principle). For optimum adjustment of the brake motor to the application, a range of braking torques and control modes is available for every motor frame size. For applications with very high operating frequencies the brake is also available in a LongLife version, with reinforced mechanical brake components.

Features

Versions

- **Standard**
 - 1×10^6 repeating switching cycles
 - 1×10^6 reversing switching cycles
- **LongLife**
 - 10×10^6 repeating switching cycles
 - 15×10^6 reversing switching cycles

Control

- DC supply
- AC supply via rectifier in the terminal box

Enclosure

- Without manual release IP55
- With manual release IP54

Friction lining

- Non-asbestos, low wearing

Options

- Manual release
- UL/CSA approval
- Noise-reduced

Assignment of 4-pole motors and brakes

Design	Standard			LongLife
	Motor frame size	Size Brake	Rated torque	
			M _k	
			[Nm]	[Nm]
063-02				
063-12				
063-22	06		2.50	
063-32	06		4.00	
063-42				
071-12				
071-32	06		2.50	
	06		4.00	4.00
	08		3.50	3.50
071-42				
	06		2.50	4.00
	06		4.00	3.50
	08		3.50	8.00
	08		8.00	
080-12				
080-32	08		3.50	
	08		8.00	8.00
	10		7.00	7.00
080-42				
	08		3.50	8.00
	08		8.00	7.00
	10		7.00	
	10		16.0	16.0

MD three-phase AC motors

Accessories



Spring-applied brakes

Assignment of 4-pole motors and brakes

Design	Standard			LongLife	
	Motor frame size	Size	Rated torque	Size	Rated torque
	Brake			Brake	
		M_k			M_k
		[Nm]			[Nm]
090-12	08	3.50		08	8.00
090-12	08	8.00			7.00
090-32	10	7.00		10	16.0
090-32	10	16.0			
090-32	10	23.0			
100-12	10	7.00			
100-12	10	16.0			
100-12	12	14.0			
100-12	12	32.0		10	16.0
100-32	10	7.00		12	14.0
100-32	10	16.0		12	32.0
100-32	12	14.0			
100-32	12	32.0			
100-32	12	46.0			
112-22	12	14.0			
112-32	12	32.0			
112-32	14	35.0			
112-32	14	60.0			
132-12	14	35.0			
132-12	14	60.0			
132-12	16	60.0			
132-12	16	80.0			
132-22	14	35.0			
132-22	14	60.0			
132-32	16	60.0			
132-32	16	80.0			
132-32	16	100			
160-22	16	60.0			
160-22	16	80.0			
160-22	18	80.0			
160-22	18	150			
160-32	18	80.0			
160-32	18	150			
160-32	18	200			
180-12	18	80.0			
180-12	18	150			
180-12	20	145			
180-12	20	260			
180-32	18	80.0			
180-32	18	150			
180-32	20	145			
180-32	20	260			
180-32	20	315			
180-42	18	80.0			
180-42	18	150			
180-42	20	145			
180-42	20	260			
180-42	20	315			
180-42	20	400			

MD three-phase AC motors

Accessories



Spring-applied brakes

Assignment of 4-pole motors and brakes

Design		Standard		LongLife			
Motor frame size	Size Brake	Rated torque		Size Brake	Rated torque M_k [Nm]		
		M_k					
		[Nm]					
225-12	25	265					
	25	400					
	25	490					
	25	265					
	25	400					
	25	490					
225-22	25	600					

Assignment of 2-pole motors and brakes

Design		Standard		LongLife			
Motor frame size	Size Brake	Rated torque		Size Brake	Rated torque M_k [Nm]		
		M_k					
		[Nm]					
063-11	06	2.50		06	2.50		
	06	4.00			4.00		
071-11	06	2.50		06	4.00		
	06	4.00			3.50		
	08	3.50					
080-11	08	3.50		08	8.00		
	08	8.00			7.00		
	10	7.00					
090-31	08	3.50		08	8.00		
	08	8.00			7.00		
	10	7.00			16.0		
	10	16.0					
100-31	12	14.0		12	14.0		
	12	32.0			32.0		
112-31	12	14.0					
	12	32.0					
	14	35.0					
	14	60.0					
132-21	14	35.0					
	16	60.0					
	14	60.0					
	16	80.0					

MD three-phase AC motors



Accessories

Spring-applied brakes

Direct connection without rectifier

If the brake is activated directly without a rectifier, a freewheeling diode or a spark suppressor is required to protect against induction peaks.

- Supply voltages
 - DC 24 V
 - DC 180 V
 - DC 205 V

Connection via mains voltage with brake rectifier

If the brake is not directly supplied with DC voltage, a rectifier is required. This is included in the scope of supply and is located in the terminal box of the motor. The rectifier converts the AC voltage of the connection into DC voltage. The following rectifiers are available:

Half-wave rectifier, 6-pole

- Ratio of supply voltage to brake coil voltage = 2.22
- Approved by UL/CSA
- Supply voltages
 - AC 230 V
 - AC 400 V
 - AC 460 V




Bridge rectifier, 6-pole

- Ratio of supply voltage to brake coil voltage = 1.11
- Supply voltage
 - AC 230 V



Bridge/half-wave rectifier, 6-pole

- Ratio of supply voltage to brake coil voltage
 - up to overexcitation time = 1.11
 - beyond overexcitation time = 2.22



Supply voltages:

- AC 230 V
- AC 400 V

MD three-phase AC motors

Accessories



Spring-applied brakes

Connection via mains voltage with brake rectifier

Bridge/half-wave rectifier, 6-pole

- Ratio of supply voltage to brake coil voltage up to overexcitation time = 1.11 beyond overexcitation time = 2.22



Supply voltages:

- AC 230 V
- AC 400 V

During the switching operation the bridge/half-wave rectifier functions as a bridge rectifier for the overexcitation time $t_{\bar{u}}$ and then as a half-wave rectifier. This combination optimises the performance of the brake – depending on the assignment of brake coil voltage and supply voltage:

• Short-time overexcitation of the brake coil

Activating the brake coil for the overexcitation time $t_{\bar{u}}$ with twice the rated voltage allows the disengagement time to be reduced. The brake opens more quickly and wear on the friction lining is reduced.

These features make this activation version particularly suitable for lifting applications. It is therefore only available in combination with a brake with increased braking torque.

• Holding current reduction (cold brake)

By reducing the holding current, the bridge/half-wave rectifier is able to reduce the power input to the open brake. As the brake heats up less, this type of activation is known as "cold brake".

MD three-phase AC motors

Accessories



Spring-applied brakes

Rated data with reduced braking torque

- Please enquire for braking torques and maximum switching work values not listed here.

Size					06	08	10	12	14	16	18	20	25
Power input			P _{in}	[kW]	0.020	0.025	0.030	0.040	0.050	0.055	0.085	0.10	0.11
Braking torque													
100	M _B	[Nm]			2.50	3.50	7.00	14.0	35.0	60.0	80.0	145	265
1000	M _B	[Nm]			2.30	3.10	6.10	12.0	30.0	50.0	65.0	115	203
1200	M _B	[Nm]			2.30	3.10	6.00	12.0	29.0	48.0	63.0	112	199
1500	M _B	[Nm]			2.20	3.00	5.80	11.0	28.0	47.0	61.0	109 ¹⁾	193 ¹⁾
1800	M _B	[Nm]			2.10	2.90	5.70	11.0	28.0	46.0	60.0 ¹⁾		
3000	M _B	[Nm]			2.00	2.80	5.30	10.0	26.0 ¹⁾	43.0 ¹⁾			
3600	M _B	[Nm]			2.00	2.70	5.20	10.0 ¹⁾					
Maximum switching energy													
100	Q _E	[kJ]			3.00	7.50	12.0	24.0	30.0	36.0	60.0	80.0	120
1000	Q _E	[kJ]			3.00	7.50	12.0	24.0	30.0	36.0	60.0	80.0	120
1200	Q _E	[kJ]			3.00	7.50	12.0	24.0	30.0	36.0	60.0	80.0	120
1500	Q _E	[kJ]			3.00	7.50	12.0	24.0	30.0	36.0	60.0	24.0 ¹⁾	36.0 ¹⁾
1800	Q _E	[kJ]			3.00	7.50	12.0	24.0	30.0	36.0	36.0 ¹⁾		
3000	Q _E	[kJ]			3.00	7.50	12.0	24.0	18.0 ¹⁾	11.0 ¹⁾			
3600	Q _E	[kJ]			3.00	7.50	12.0	7.00 ¹⁾					
Transition operating frequency													
	S _{hü}	[1/h]			79.0	50.0	40.0	30.0	28.0	27.0	20.0	19.0	15.0
Moment of inertia													
	J	[kgcm ²]			0.015	0.061	0.20	0.45	0.63	1.50	2.90	7.30	20.0
Mass													
	m	[kg]			0.90	1.50	2.60	4.20	5.80	8.70	12.6	19.5	31.0

¹⁾ In the region of the load limit the value for friction energy Q_{BW} can be reduced to 40 %.

MD three-phase AC motors

Accessories



Spring-applied brakes

Rated data with reduced braking torque

- Activation via half-wave or bridge rectifier

Size			06	08	10	12	14	16	18	20	25
Friction energy			113	210	264	706	761	966	1542	2322	3522
Delay time											
Engaging	t_{11}	[ms]	11.0	14.0	20.0	21.0	37.0	53.0	32.0	47.0	264
Rise time											
Braking torque	t_{12}	[ms]	13.0	10.0	17.0	19.0	22.0	30.0	20.0	100	120
Engagement time											
	t_1	[ms]		24.0		37.0	40.0	59.0	83.0	52.0	147
Disengagement time											
	t_2	[ms]	35.0	37.0	57.0	65.0	148	169	230	207	269

- Activation via bridge/half-wave rectifier

Design			Holding current reduction (cold brake)								
Size			06	08	10	12	14	16	18	20	25
Friction energy			113	210	264	706	761	966	1542	2322	3522
Overexcitation time											
	$t_{\ddot{u}}$	[ms]			300				1300		
Min. rest time						900			3900		
Delay time											
Engaging	t_{11}	[ms]	12.0	22.0	35.0	49.0	61.0	114	83.0	126	304
Rise time											
Braking torque	t_{12}	[ms]	14.0	16.0	30.0	45.0	37.0	65.0	52.0	269	138
Engagement time											
	t_1	[ms]	26.0	38.0	66.0	93.0	97.0	180	134	395	443
Disengagement time											
	t_2	[ms]	35.0	37.0	57.0	65.0	148	169	230	207	269

- The brake response and application times are guide values. The engagement time is 10 times longer with AC-side switching.
With the maximum air gap the disengagement time t_2 – depending on the brake and control – is up to 4 times longer than the disengagement time with the rated air gap.

MD three-phase AC motors

Accessories



Spring-applied brakes

Rated data with standard braking torque

- Please enquire for braking torques and maximum switching work values not listed here.

Size					06	08	10	12	14	16	18	20	25
Power input			P _{in}	[kW]	0.020	0.025	0.030	0.040	0.050	0.055	0.085	0.10	0.11
Braking torque													
100	M _B	[Nm]			4.00	8.00	16.0	32.0	60.0	80.0	150	260	400
1000	M _B	[Nm]			3.70	7.20	14.0	27.0	51.0	66.0	121	206	307
1200	M _B	[Nm]			3.60	7.00	14.0	27.0	50.0	65.0	118	201	300
1500	M _B	[Nm]			3.50	6.80	13.0	26.0	48.0	63.0	115	195 ¹⁾	291 ¹⁾
1800	M _B	[Nm]			3.40	6.70	13.0	26.0	47.0	61.0	112 ¹⁾		
3000	M _B	[Nm]			3.20	6.30	12.0	24.0	44.0 ¹⁾	57.0 ¹⁾			
3600	M _B	[Nm]			3.20	6.10	12.0	23.0 ¹⁾					
Maximum switching energy													
100	Q _E	[kJ]			3.00	7.50	12.0	24.0	30.0	36.0	60.0	80.0	120
1000	Q _E	[kJ]			3.00	7.50	12.0	24.0	30.0	36.0	60.0	80.0	120
1200	Q _E	[kJ]			3.00	7.50	12.0	24.0	30.0	36.0	60.0	80.0	120
1500	Q _E	[kJ]			3.00	7.50	12.0	24.0	30.0	36.0	60.0	24.0 ¹⁾	36.0 ¹⁾
1800	Q _E	[kJ]			3.00	7.50	12.0	24.0	30.0	36.0	36.0 ¹⁾		
3000	Q _E	[kJ]			3.00	7.50	12.0	24.0	18.0 ¹⁾	11.0 ¹⁾			
3600	Q _E	[kJ]			3.00	7.50	12.0	7.00 ¹⁾					
Transition operating frequency													
	S _{hü}	[1/h]			79.0	50.0	40.0	30.0	28.0	27.0	20.0	19.0	15.0
Moment of inertia													
	J	[kgcm ²]			0.015	0.061	0.20	0.45	0.63	1.50	2.90	7.30	20.0
Mass													
	m	[kg]			0.90	1.50	2.60	4.20	5.80	8.70	12.6	19.5	31.0

¹⁾ In the region of the load limit the value for friction energy Q_{BW} can be reduced to 40 %.

MD three-phase AC motors

Accessories



Spring-applied brakes

Rated data with standard braking torque

- Activation via half-wave or bridge rectifier

Size			06	08	10	12	14	16	18	20	25
Friction energy			85.0	158	264	530	571	966	1542	2322	3522
Delay time											
Engaging	t_{11}	[ms]		15.0		28.0		17.0	27.0	33.0	65.0
Rise time											
Braking torque	t_{12}	[ms]	13.0	16.0	19.0		25.0		30.0	45.0	100
Engagement time											
	t_1	[ms]	28.0	31.0	47.0	53.0	42.0	57.0	78.0	165	230
Disengagement time											
	t_2	[ms]	45.0	57.0	76.0	115	210	220	270	340	390

- Activation via bridge/half-wave rectifier

Design			Holding current reduction (cold brake)								
Size			06	08	10	12	14	16	18	20	25
Friction energy			85.0	158	264	530	571	966	1542	2322	3522
Overexcitation time											
	$t_{\ddot{u}}$	[ms]		300					1300		
Min. rest time					900				3900		
Delay time											
Engaging	t_{11}	[ms]	16.0	25.0	31.0	48.0	33.0	58.0	80.0	102	154
Rise time											
Braking torque	t_{12}	[ms]	14.0	27.0	21.0	43.0	49.0	64.0	109	157	168
Engagement time											
	t_1	[ms]	30.0		52.0		90.0	82.0	122	189	259
Disengagement time											
	t_2	[ms]	45.0	57.0	76.0	115	210	220	270	340	390

- The brake response and application times are guide values. The engagement time is 10 times longer with AC-side switching.
With the maximum air gap the disengagement time t_2 – depending on the brake and control – is up to 4 times longer than the disengagement time with the rated air gap.

MD three-phase AC motors

Accessories



Spring-applied brakes

Rated data with increased braking torque

- ▶ Please enquire for braking torques and maximum switching work values not listed here.

Size			10	12	14	16	16	18	20	20	25	25
Power input	P _{in}	[kW]	0.030	0.040	0.050	0.055	0.055	0.085	0.10	0.10	0.11	0.11
Braking torque												
100	M _B	[Nm]	23.0	46.0	75.0	100	125	200	315	400	490	600
1000	M _B	[Nm]	20.0	39.0	64.0	83.0	103	162	249	317	376	461
1200	M _B	[Nm]	20.0	39.0	62.0	81.0	101	158	244	309	367	449
1500	M _B	[Nm]	19.0	38.0	60.0	78.0	98.0	153	237 ¹⁾	300 ¹⁾	356 ¹⁾	436 ¹⁾
1800	M _B	[Nm]	19.0	37.0	59.0	77.0	96.0	150 ¹⁾				
3000	M _B	[Nm]	17.0	34.0	55.0 ¹⁾	71.0 ¹⁾	89.0 ¹⁾					
3600	M _B	[Nm]	17.0	33.0 ¹⁾								
Maximum switching energy												
100	Q _E	[kJ]	12.0	24.0	30.0	36.0	36.0	60.0	80.0	80.0	120	120
1000	Q _E	[kJ]	12.0	24.0	30.0	36.0	36.0	60.0	80.0	80.0	120	120
1200	Q _E	[kJ]	12.0	24.0	30.0	36.0	36.0	60.0	80.0	80.0	120	120
1500	Q _E	[kJ]	12.0	24.0	30.0	36.0	36.0	60.0	24.0 ¹⁾	24.0 ¹⁾	36.0 ¹⁾	36.0 ¹⁾
1800	Q _E	[kJ]	12.0	24.0	30.0	36.0	36.0	36.0 ¹⁾				
3000	Q _E	[kJ]	12.0	24.0	18.0 ¹⁾	11.0 ¹⁾	11.0 ¹⁾					
3600	Q _E	[kJ]	12.0	7.00 ¹⁾								
Transition operating frequency												
	S _{hü}	[1/h]	40.0	30.0	28.0	27.0	27.0	20.0	19.0	19.0	15.0	15.0
Moment of inertia												
	J	[kgcm ²]	0.20	0.45	0.63	1.50	1.50	2.90	7.30	7.30	20.0	20.0
Mass												
	m	[kg]	2.60	4.20	5.80	8.70	8.70	12.6	19.5	19.5	31.0	31.0

¹⁾ In the region of the load limit the value for friction energy Q_{BW} can be reduced to 40 %.

- ▶ Activation via half-wave or bridge rectifier

Size			10	12	14	16	18	20	25			
Friction energy	Q _{BW}	[MJ]	198	353	253	563	241	578	1596	580	2465	1409
Delay time												
Engaging	t ₁₁	[ms]	10.0	16.0	11.0	22.0	17.0	24.0	46.0	17.0	77.0	38.0
Rise time												
Braking torque	t ₁₂	[ms]	19.0	25.0		30.0	45.0	100		120		
Engagement time												
	t ₁	[ms]	29.0	41.0	36.0	52.0	47.0	69.0	146	117	197	158
Disengagement time												
	t ₂	[ms]	109	193	308	297	435	356	378	470	451	532

MD three-phase AC motors

Accessories



Spring-applied brakes

Rated data with increased braking torque

- Activation via bridge/half-wave rectifier

Design			Holding current reduction (cold brake)									
Size			10	12	14	16	18	20	25			
Friction energy	Q_{BW}	[MJ]	198	353	253	563	241	578	1596	580	2465	1409
Overexcitation time	$t_{ü}$	[ms]	300				1300					
Min. rest time	t	[ms]	900				3900					
Delay time												
Engaging	t_{11}	[ms]	24.0	27.0	17.0	41.0	21.0	60.0	69.0	17.0	123	85.0
Rise time												
Braking torque	t_{12}	[ms]	44.0	43.0	37.0	55.0	37.0	113	148	100	190	270
Engagement time	t_1	[ms]	68.0	70.0	54.0	97.0	57.0	173	217	334	313	355
Disengagement time	t_2	[ms]	109	193	308	297	435	356	378	470	451	532

Design			Over-excitation									
Size			10	12	14	16	18	20	25			
Friction energy	Q_{BW}	[MJ]	264	706	761	966	1542	2322	3522			
Overexcitation time	$t_{ü}$	[ms]	300			1300						
Min. rest time	t	[ms]	900			3900						
Delay time												
Engaging	t_{11}	[ms]	29.0	54.0	31.0	70.0	46.0	86.0	103	55.0	171	135
Rise time												
Braking torque	t_{12}	[ms]	53.0	87.0	68.0	93.0	83.0	160	222	319	266	430
Engagement time	t_1	[ms]	82.0	141	99.0	163	129	246	325	374	437	565
Disengagement time	t_2	[ms]	53.0	81.0	117	141	168	151	160	167	184	204


- The brake response and application times are guide values. The engagement time is 10 times longer with AC-side switching.
With the maximum air gap the disengagement time t_2 – depending on the brake and control – is up to 4 times longer than the disengagement time with the rated air gap.

MD three-phase AC motors

Accessories



Spring-applied brakes

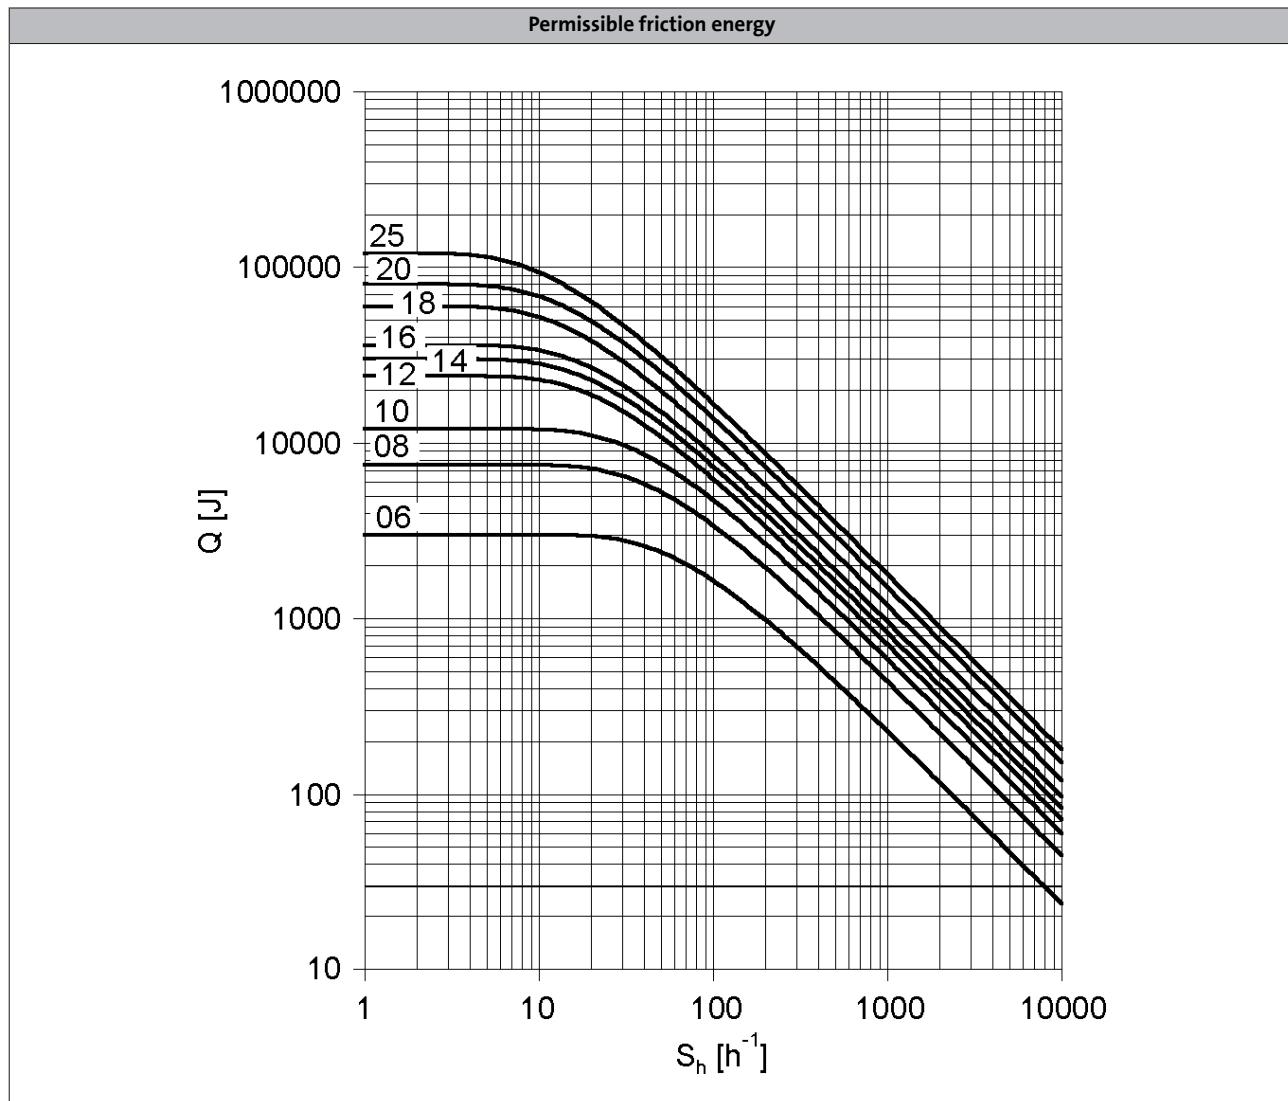

Q = Switching energy per switching cycle

S_h = Operating frequency

Brake size = 06 to 25


MD three-phase AC motors



Accessories

Spring-applied brakes

Manual release lever

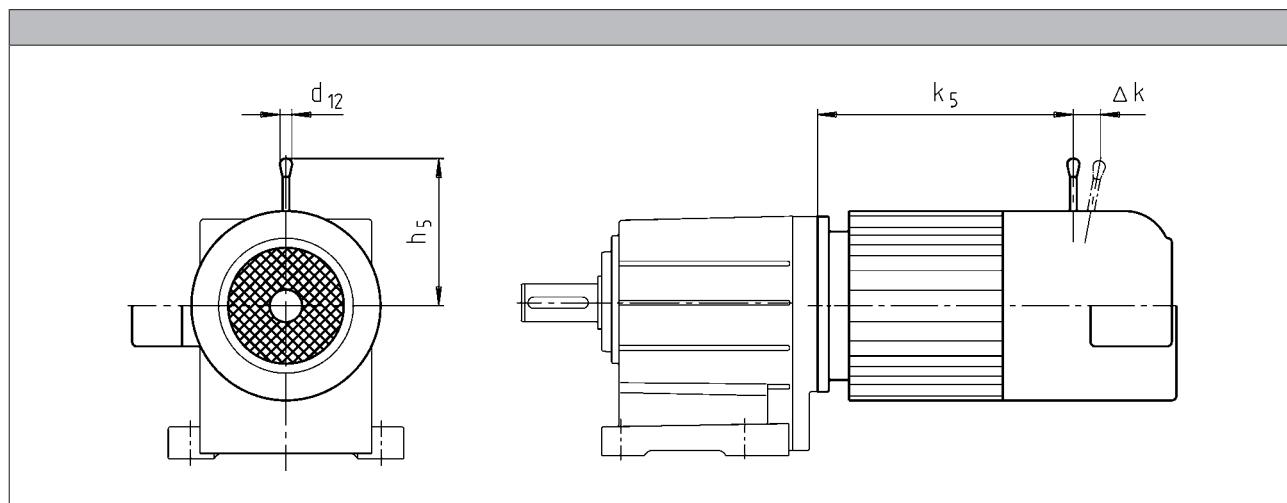

Motor frame size		Size Brake				
			k ₅ [mm]	Δ k [mm]	h ₅ [mm]	d ₁₂ [mm]
	063-02 063-22	06	185	29	107	13.0
063-11 063-31	063-12 063-32 063-42	06	173	29	107	13.0
071-11 071-31	071-32 071-42	071-13 071-33	06 08	186 187	29 27	107 116
080-11 080-31	080-32 080-42	080-13 080-33	06 08	207 218	29 27	107 116
090-11 090-31	090-32		08 10	245 256	27 28	116 132
100-31 100-41	100-12 100-32		10 12	279 281	28 37	13.0 13.0
112-31	112-22		12 14	292 296	37 41	161 195
112-41	112-32		12 14	336 340	37 41	161 195
132-21	132-22 132-32		14 16	373 373	41 55	195 240
	160-22		16 18	420 423	59 55	279 240
	160-32		16 18	464 467	55 59	240 279
	180-12 180-32		18 20	539 546	59 74	279 319
	180-42		18 20	596 603	59 74	24.0 24.0
	225-12 225-22		25 25	785 785	103 103	445 445
						24.0 24.0

The following combinations with manual release lever and motor connection in the same position are not possible:

- HAN connector with connection in position 1
- Inverter motec
- Terminal box of motor sizes 071, 080, 090 for brake and retracting (M□□MA BR/BS/BA/B1)

MD three-phase AC motors



Accessories

Resolver

Stator-fed resolver with two stator windings offset by 90° and one rotor winding with transformer winding.

- The three-phase AC motors with resolver cannot be used for speed-dependent safety functions in connection with the SM 301 safety module.

Product key				RS1
Accuracy		[']		-10 ... 10
Absolute positioning				1 revolution
Max. input voltage				
DC	$U_{in,max}$	[V]		10.0
Max. input frequency				
	$f_{in,max}$	[kHz]		4.00
Ratio				
Stator / rotor		$\pm 5\%$		0.30
Rotor impedance				
	Z_{ro}	[Ω]		$51 + j90$
Stator impedance				
	Z_{so}	[Ω]		$102 + j150$
Impedance				
	Z_{rs}	[Ω]		$44 + j76$
Min. insulation resistance				
At DC 500 V	R	[M Ω]		10.0
Number of pole pairs				1

MD three-phase AC motors

Accessories



Incremental encoder and SinCos absolute value encoder

- The three-phase AC motors with incremental encoders or SinCos absolute value encoders cannot be used for speed-dependent safety functions in connection with the SM 301 safety module.

Encoder type			HTL incremental				TTL incremental			SinCos absolute value			
Product key			IG128-24V-H	IG512-24V-H	IG1024-24V-H	IG2048-24V-H	IG512-5V-T	IG1024-5V-T	IG2048-5V-T	AM1024-8V-H			
Encoder type													
Pulses			128	512	1024	2048	512	1024	2048	1024			
Output signals			HTL				TTL		1 Vss				
Interfaces			A, B track	A, B, N track and inverted					Hiperface				
Absolute revolutions													
Accuracy		[']	-22.5 ... 22.5	0					-0.8 ... 0.8				
Min. input voltage													
DC	U _{in,min}	[V]	8.00				4.75		7.00				
Max. input voltage													
DC	U _{in,max}	[V]	26.0	30.0				5.25		12.0			
Max. current consumption			I _{max}	[A]	0.040	0.15							
Limit frequency		f _{max}	[kHz]	30.0	160				300	200			
Inverter assignment				E84AVSC E84AVHC	E84AVHC			E84AVTC E94A ECS EV593					

Inverters

- Inverter Drives 8400 StateLine (E84AVSC)
- Inverter Drives 8400 HighLine (E84AVHC)
- Inverter Drives 8400 TopLine (E84AVTC)

Servo-Inverters

- Servo Drives 9400 (E94A)
- 9300 servo inverters (EV593)
- Servo Drives ECS

MD three-phase AC motors



Accessories

Blowers

- The use of a blower enables operation below 20 Hz without torque derating.

Rated data for 50 Hz

Size	Number of phases	Connection method	U _{min} [V]	U _{max} [V]	P _{max} [kW]	I _{max} [A]	m [kg]
Motor							
063	1		230	277	0.027	0.11	2.00
	3	Δ	200	303	0.028	0.12	
		Y	346	525		0.070	
071	1		230	277	0.027	0.10	2.10
	3	Δ	200	303	0.031	0.11	
		Y	346	525		0.060	
080	1		230	277	0.029	0.11	2.30
	3	Δ	200	303	0.031	0.060	
		Y	346	525			
090	1		220	277	0.065	0.29	2.70
	3	Δ	200	303	0.091	0.38	
		Y	346	525		0.22	
100	1		220	277	0.066	0.28	3.00
	3	Δ	200	303	0.091	0.37	
		Y	346	525		0.22	
112	1		220	277	0.071	0.28	3.10
	3	Δ	200	303	0.097	0.35	
		Y	346	525		0.20	
132	1		230	277	0.098	0.40	4.20
	3	Δ	200	303	0.12	0.58	
		Y	346	525		0.33	
160	1		230	277	0.25	0.97	6.20
	3	Δ	200	303		0.87	
		Y	346	525		0.50	
180	1		230	277		0.97	8.00
	3	Δ	200	303		0.87	
		Y	346	525		0.50	

MD three-phase AC motors



Accessories

Blowers

Rated data for 50 Hz

Size	Number of phases	Connection method	U _{min} [V]	U _{max} [V]	P _{max} [kW]	I _{max} [A]	m [kg]
Motor							
200	1		230	277	0.25	0.97	8.00
		Δ	200	303		0.87	
		Y	346	525		0.50	
	3	Δ	200	400	0.28	1.10	15.0
		Y	346	525	0.17	0.35	

Rated data for 60 Hz

Size	Number of phases	Connection method	U _{min} [V]	U _{max} [V]	P _{max} [kW]	I _{max} [A]	m [kg]
Motor							
063	1		230	277	0.032	0.12	2.00
		Δ	220	332		0.10	
		Y	380	575		0.060	
	3	1	230	277	0.033	0.12	2.10
		Δ	220	332	0.029	0.10	
071		Y	380	575		0.060	
1	1	230	277	0.037	0.14	2.30	
	Δ	220	332	0.034	0.10		
	Y	380	575		0.060		
080	3	1	230	277	0.065	0.25	2.70
		Δ	220	332		0.33	
		Y	380	575		0.060	
090	1		220	277	0.075	0.30	3.00
		Δ		332	0.087	0.31	
		Y		575		0.18	
100	3	1	220	277	0.094	0.37	3.10
		Δ		332	0.10	0.31	
		Y		575		0.18	
112	1		220	277	0.15	0.57	4.20
		Δ		332		0.44	
		Y		575		0.25	
132	3	1	220	277	0.36	0.93	6.20
		Δ		332		0.56	
		Y		575		0.56	
160	3	Δ	220	332	0.36	0.93	8.00
		Y		575		0.56	
		Δ		332		0.93	
180	3	Y	220	332	0.36	0.56	15.0
		Δ		575		0.93	
		Y		575		0.56	
200	3	Δ	220	332	0.28	0.76	15.0
		Y		575		0.26	
		Δ		400		0.43	
225		Y		575			

6.11

MD three-phase AC motors

Accessories



Temperature monitoring

- The thermal sensors are integrated in the windings. The use of an additional motor protection switch is recommended.

TKO thermal contacts

Function	Operating temperature	Min. reset temperature	Max. reset temperature	Max. input current	Max. input voltage
					AC
	T	T_{min}	T_{max}	$I_{in,max}$	$U_{in,max}$
	-5 ... 5				
	[°C]	[°C]	[°C]	[A]	[V]
NC contact	150	90.0	135	2.50	250

PTC thermistor

Function	Operating temperature	Rated resistance			Standard
		155 °C	-20 °C	140 °C	
	T	R_N	R_N	R_N	
	-5 ... 5				
	[°C]	[Ω]	[Ω]	[Ω]	
Sudden change in resistance	150	550	30.0	250	DIN 44080 DIN VDE 0660 Part 303

MD three-phase AC motors


Accessories



Temperature monitoring

KTY temperature sensor

	Function	Rated resistance			Max. input current	
		25 °C	150 °C	170 °C	25 °C	170 °C
		R _N [Ω]	R _N [Ω]	R _N [Ω]	I _{in,max} [A]	I _{in,max} [A]
KTY83-110	Continuous resistance change	1000	2225	2471	0.010	0.002
KTY84-130	Continuous resistance change	603	1334	1482	0.010	0.002

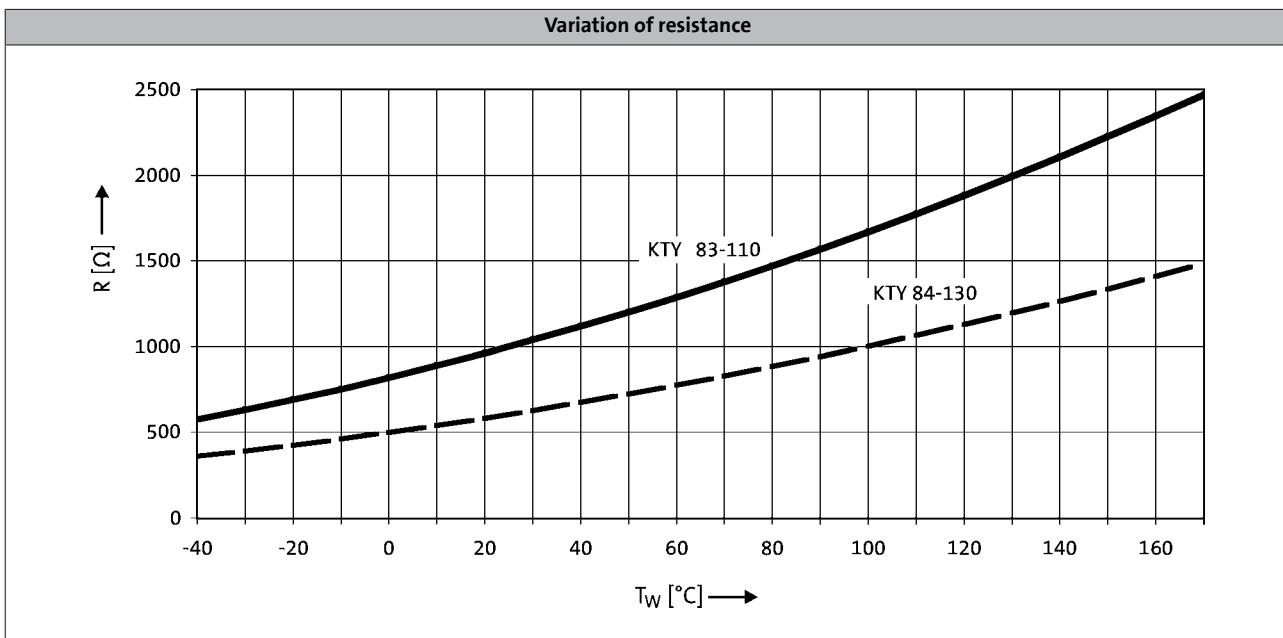

- If the detector is supplied with a measured current of 1 mA, the above relationship between the temperature and the resistance applies.

MD three-phase AC motors

Accessories



Terminal box

The three-phase AC motors are designed for operation at a constant mains frequency and with an inverter.

For 50 Hz operation, the motors are operated in Δ configuration at 230 V or in star configuration at 400 V.

For inverter operation, the base frequency has been specified as 87 Hz at a rated voltage of 400 V in Δ configuration.

In the standard version, the motors are connected in the terminal box. As an option, the motors are also available with the connectors described on the following pages as long as the permissible ratings are not exceeded.

Motor terminal box - built-on accessories assignment: 4-pole / 6-pole motors

Motor type	M□□MAXX	M□□MARS M□□MAIG M□□MAAG	M□□MAZE M□□MAHA	M□□MALL	M□□MALZ M□□MALH
Motor frame size	Terminal box				
063-02 063-22	KK1	KK2			
063-12 063-32 063-42	KK1	KK2			
071-32 071-42 071-13 071-33	KK1	KK2	KK2	KK1	KK1
080-13 080-32 080-33 080-42	KK1	KK2	KK2	KK1	KK1
090-12 090-32	KK1	KK2	KK2	KK1	KK1
100-12 100-32	KK1	KK2	KK2	KK2	KK2
112-22 112-32	KK1	KK2	KK2	KK1	KK1
132-12 132-22 132-32	KK1	KK3	KK3	KK1	KK1
160-22 160-32	KK3	KK3			
180-12 180-32 180-42 180-42	KK3	KK3			
225-12 225-22	KK3	KK3			

MD three-phase AC motors

Accessories



Terminal box

Motor terminal box - built-on accessories assignment: 4-pole / 6-pole motors

Motor type	M□□MABR	M□□MABS M□□MABI M□□MABA	M□□MABZ M□□MABH	M□□MABL
------------	---------	-------------------------------	--------------------	---------

Motor frame size	Terminal box			
	KK2	KK3	KK2	KK2
063-02				
063-22				
063-12				
063-32				
063-42	KK2	KK3		
071-32				
071-42				
071-13			KK2	
071-33	KK2	KK3		KK2
080-13				
080-32			KK2	
080-33	KK2	KK3		KK2
080-42				
090-12			KK2	
090-32	KK2	KK3		KK2
100-12			KK2	
100-32	KK2	KK3		KK2
112-22			KK2	
112-32	KK2	KK3		KK2
132-12				
132-22			KK3	
132-32	KK3	KK3		KK3
160-22				
160-32	KK3	KK3		
180-12				
180-32				
180-42	KK3	KK3		
225-12				
225-22	KK3	KK3		

MD three-phase AC motors

Accessories



Terminal box

Motor terminal box - built-on accessories assignment: 2-pole motors

Motor type	M□□MAXX	M□□MAZE	M□□MALL	M□□MALZ
------------	---------	---------	---------	---------

Motor frame size	Terminal box			
	063-11 063-31	KK1	KK2	KK1
071-11 071-31	KK1	KK2	KK1	KK2
080-11 080-31	KK1	KK2	KK1	KK2
090-31 090-11	KK1	KK2	KK1	KK2
100-31 100-41	KK1	KK2	KK1	KK2
112-31 112-41	KK1	KK2	KK1	KK2
132-21	KK1	KK3	KK1	KK3

Motor type	MD□MABR	MD□MABZ	MD□MABL
------------	---------	---------	---------

Motor frame size	Terminal box			
	063-11 063-31	KK2	KK2	KK2
071-11 071-31	KK2	KK2	KK2	KK2
080-11 080-31	KK2	KK2	KK2	KK2
090-31 090-11	KK2	KK2	KK2	KK2
100-31 100-41	KK2	KK2	KK2	KK2
112-31 112-41	KK2	KK2	KK2	KK2
132-21	KK3	KK3	KK3	KK3

MD three-phase AC motors




Accessories

Terminal box

Dimensions of KK1

- For motors with motor terminal box KK1, the connector position can be selected in accordance with the terminal box position.
- If preferred positions are not specified in the order, the cable entry will be positioned as circled on the diagram below.

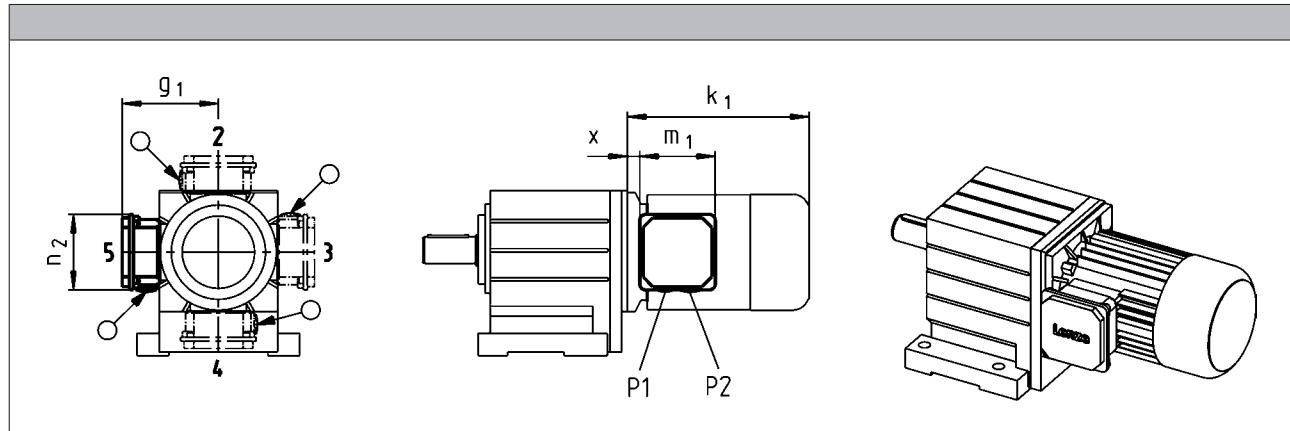

Size						
Motor	x	g ₁	m ₁	n ₂	P ₁	P ₂
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
063	21	100	75.0 93.0 ¹⁾	75.0 93.0 ¹⁾	M16x1.5 M20x1.5 ¹⁾	M20x1.5 M20x1.5
	12 ¹⁾	117 ¹⁾				
071	24	109	115	115	M20x1.5	M25x1.5
	15 ¹⁾	126 ¹⁾				
080	14	150	115	122	M32x1.5	M32x1.5
090	19	157				
100	20	166				
112	22	176				
132	33	195				

¹⁾ UL/CSA approval: cURus





MD three-phase AC motors

Accessories



Terminal box

Cable entry position when using KK1

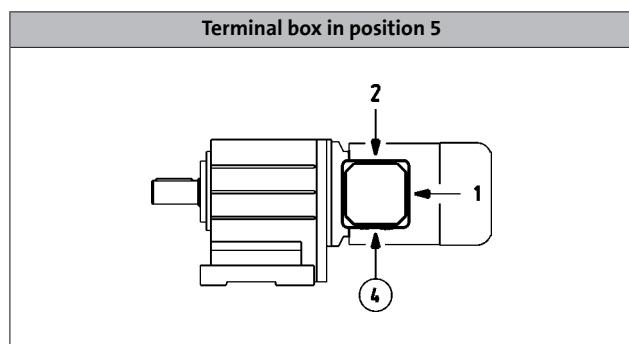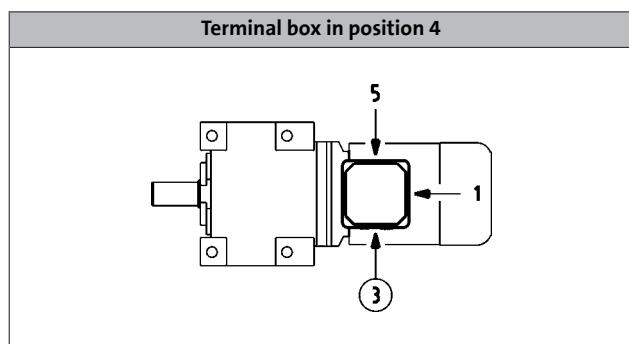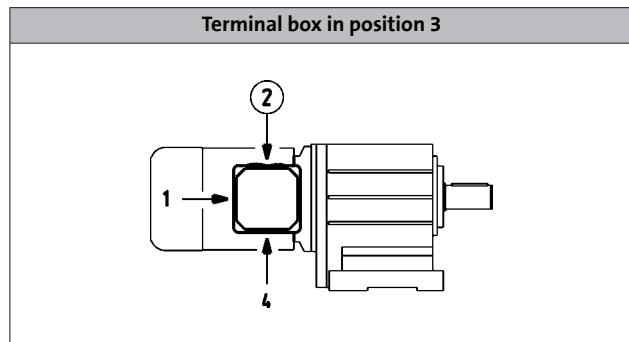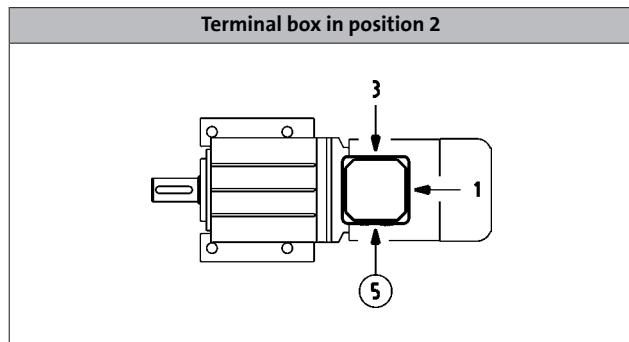


MD three-phase AC motors

Accessories



Terminal box

Dimensions of KK2

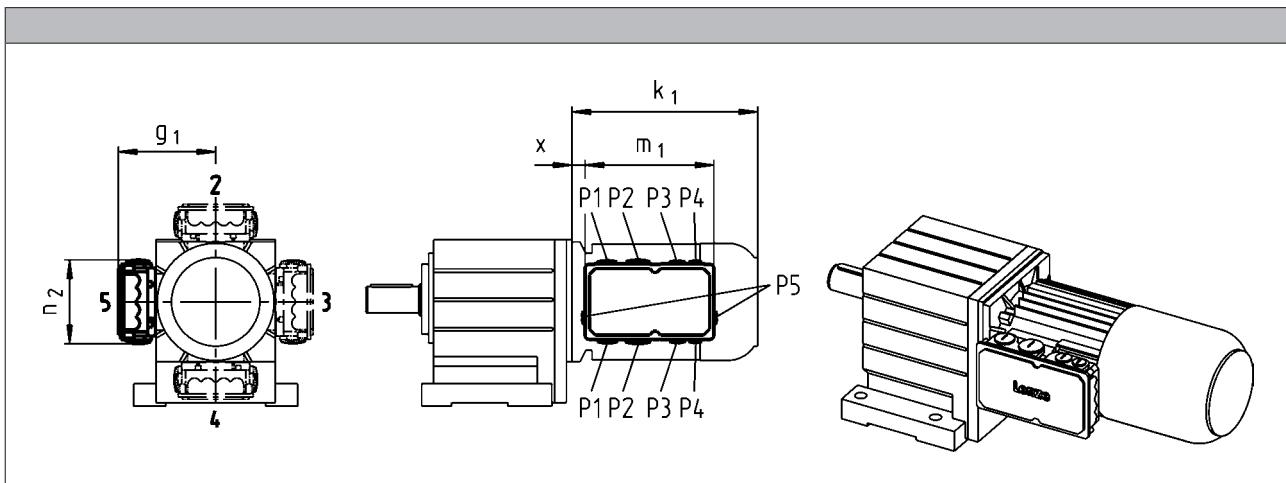

Size	Motor					
	x [mm]	g ₁ [mm]	m ₁ [mm]	n ₂ [mm]	P ₁ [mm]	P ₂ [mm]
063	13	107	136	103	M16x1.5	M20x1.5
071	15	118				
080	17	132	152	121	M20x1.5	M25x1.5
090	22	137				
100	23	147				
112	25	158				


MD three-phase AC motors

Accessories



Terminal box

Dimensions of KK3

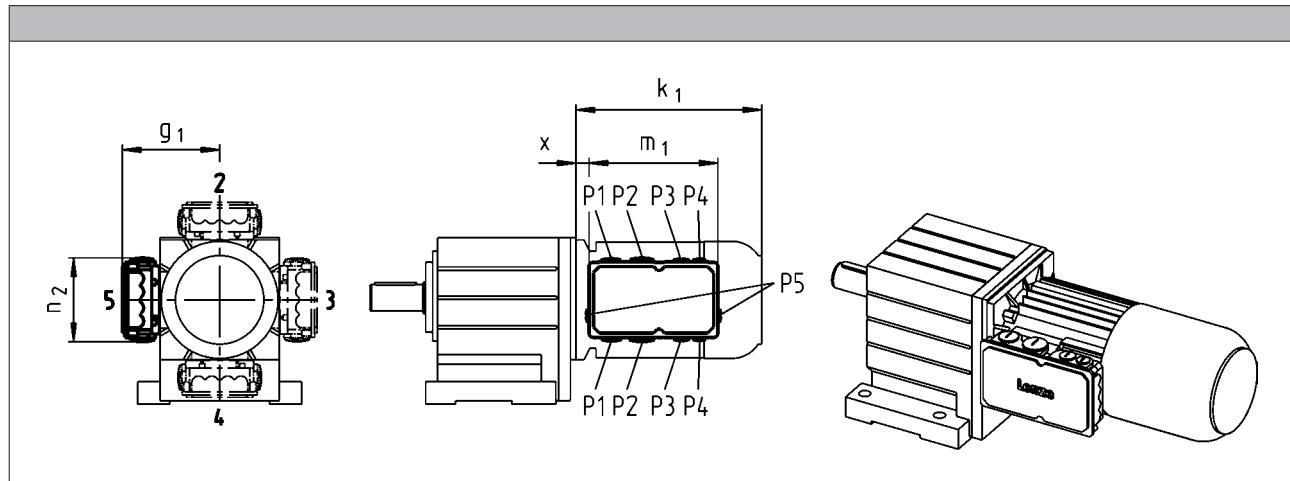

Size Motor									
	x [mm]	g ₁ [mm]	m ₁ [mm]	n ₂ [mm]	P ₁ [mm]	P ₂ [mm]	P ₃ [mm]	P ₄ [mm]	P ₅ [mm]
063	2	124							
071	5	133							
080	15	142							
090	20	147							
100	21	158							
112	23	168							
132	38	187							
160	35	210							
180	73	230							
225	95	346	354	205		M63x1.5 ¹⁾	M50x1.5 ¹⁾		M16x1.5

¹⁾ Cable entry only possible at one position.

Terminal box position 2: cable entry at position 5.

Terminal box position 3: cable entry at position 2.

Terminal box position 4: cable entry at position 3.

Terminal box position 5: cable entry at position 4.

MD three-phase AC motors




Accessories

Plug connectors

ICN, HAN and M12 connectors (only for IG128-24V-H incremental encoder) are available for the three-phase AC motors.

ICN connector

A connector is used for power, brake and temperature monitoring. The connections to the feedback system and the blower each employ a separate connector.

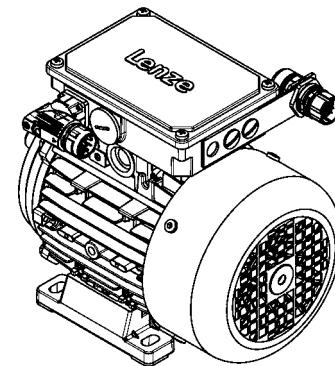


Connection for power, brake and temperature monitoring

The connectors can be rotated through 270° and are fitted with a bayonet catch for SpeedTec connectors. As this connector is also compatible with conventional union nuts, existing mating connectors can continue to be used without difficulty. The motor connection is determined in the terminal box and must be checked before commissioning.


► ICN 6-pole

Pin assignment		
Contact	Designation	Meaning
1	BD1 / BA1	Brake +/AC
2	BD2 / BA2	Brake /AC
PE	PE	PE conductor
4	U	Phase U power
5	V	Phase V power
6	W	Phase W power



► ICN 8-pole

Pin assignment		
Contact	Designation	Meaning
1	U	Phase U power
PE	PE	PE conductor
3	V	Phase V power
4	W	Phase W power
A	TB1 / TP1 / R1	Thermal sensor: TKO/PTC/ +KTY
B	TB2 / TP2 / R2	Thermal sensor: TKO/PTC/-KTY
C	BD1 / BA1	Brake +/AC
D	BD2 / BA2	Brake /AC



MD three-phase AC motors




Accessories

ICN connector


Feedback connection

All encoder systems (apart from IG128-24V-H) are also available with an ICN connector fixed to the motor terminal box for exceptionally fast commissioning. The connectors are fitted with a bayonet fixing, which is also compatible with conventional union nuts. Existing mating connectors can therefore continue to be used without difficulty.

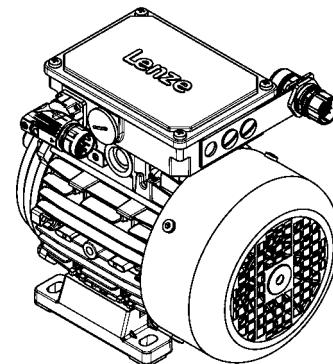


► Resolver

Pin assignment		
Contact	Designation	Meaning
1	+Ref	Transformer windings
2	-Ref	
3	+VCC ETS	Supply: Electronic nameplate
4	+COS	Cosine stator windings
5	-COS	
6	+SIN	Sine stator windings
7	-SIN	
8		
9		Not assigned
10		
11	+KTY	KTY temperature sensor
12	-KTY	



► Hiperface incremental encoder and SinCos absolute value encoder

Pin assignment		
Contact	Designation	Meaning
1	B	Track B/+SIN
2	A ⁻	Track A inverse/-COS
3	A	Track A/+COS
4	+U _B	Supply +
5	GND	Mass
6	Z ⁻	Zero track inverse/-RS485
7	Z	Zero track/+RS485
8		Not assigned
9	B ⁻	Track B inverse/-SIN
10		Not assigned
11	+KTY	KTY temperature sensor
12	-KTY	



MD three-phase AC motors

Accessories



ICN connector

Motor terminal box with ICN connectors - built-on accessories assignment: 2-pole motors

Motor type	M□□MAXX	M□□MAZE	M□□MALL	M□□MALZ
Motor frame size	Terminal box with ICN connector			
063-11 063-31	KK1			
071-11 071-31	KK1	KK2	KK1	KK2
080-11 080-31	KK1	KK2	KK1	KK2
090-31 090-11	KK1	KK2	KK1	KK2
100-31 100-41	KK1	KK2	KK1	KK2
112-31 112-41	KK1	KK2	KK1	KK2
132-21	KK1	KK3	KK1	KK3

Motor type	M□□MABR	M□□MABZ	M□□MABL
Motor frame size	Terminal box with ICN connector		
063-11 063-31	KK2		
071-11 071-31	KK2	KK2	
080-11 080-31	KK2	KK2	KK2
090-31 090-11	KK2	KK2	KK2
100-31 100-41	KK2	KK2	KK2
112-31 112-41	KK2	KK2	KK2
132-21	KK3	KK3	KK3

MD three-phase AC motors

Accessories



ICN connector

Motor terminal box with ICN connectors - built-on accessories assignment: 4-pole / 6-pole motors

Motor type	M□□MAXX	M□□MARS M□□MAIG M□□MAAG	M□□MAZE M□□MAHA	M□□MALL	M□□MALZ M□□MALH
Motor frame size	Terminal box with ICN connector				
063-02 063-22	KK1	KK2			
063-12 063-32 063-42	KK1	KK2			
071-32 071-42 071-13 071-33	KK1	KK2	KK2	KK1	KK1
080-13 080-32 080-33 080-42	KK1	KK2	KK2	KK1	KK1
090-12 090-32	KK1	KK2	KK2	KK1	KK1
100-12 100-32	KK1	KK2	KK2	KK2	KK2
112-22 112-32	KK1	KK2	KK2	KK1	KK1
132-12 132-22 132-32	KK1	KK3	KK3	KK1	KK1

MD three-phase AC motors

Accessories



ICN connector

Motor terminal box with ICN connectors - built-on accessories assignment: 4-pole / 6-pole motors

Motor type size	M□□MABR	M□□MABS M□□MABI M□□MABA	M□□MABZ M□□MABH	M□□MABL
Terminal box with ICN connector				
063-02	KK2	KK2		
063-22				
063-12	KK2	KK2		
063-32				
063-42				
071-32	KK2	KK2	KK2	KK2
071-42				
071-13				
071-33				
080-13	KK2	KK2	KK2	KK2
080-32				
080-33				
080-42				
090-12	KK2	KK2	KK2	KK2
090-32				
100-12	KK2	KK2	KK2	KK2
100-32				
112-22	KK2	KK2	KK2	KK2
112-32				
132-12	KK3	KK3	KK3	KK3
132-22				
132-32				

MD three-phase AC motors




Accessories

ICN connector

Dimensions of KK1

- ▶ For motors with connectors, the connector position can be selected in accordance with the terminal box position.
- ▶ If preferred positions are not specified in the order, the connector will be positioned as circled on the diagram below.

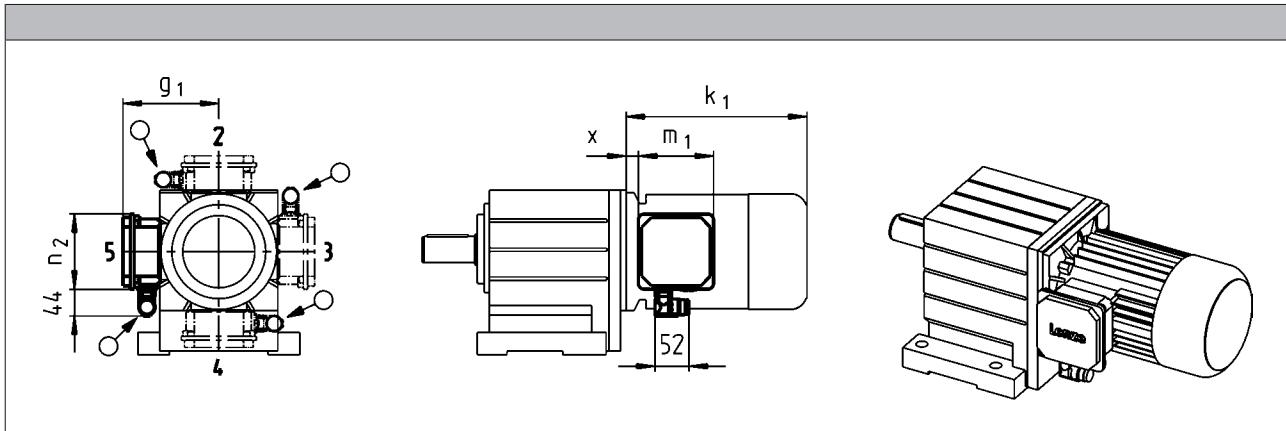

Size	Motor			
	x [mm]	g ₁ [mm]	m ₁ [mm]	n ₂ [mm]
063	12	117	93.0	93.0
071	15	126		
080	14	150	115	115
090	19	157		
100	20	166		
112	22	176		
132	33	195	122	122


MD three-phase AC motors

Accessories



ICN connector

Connector position when using KK1

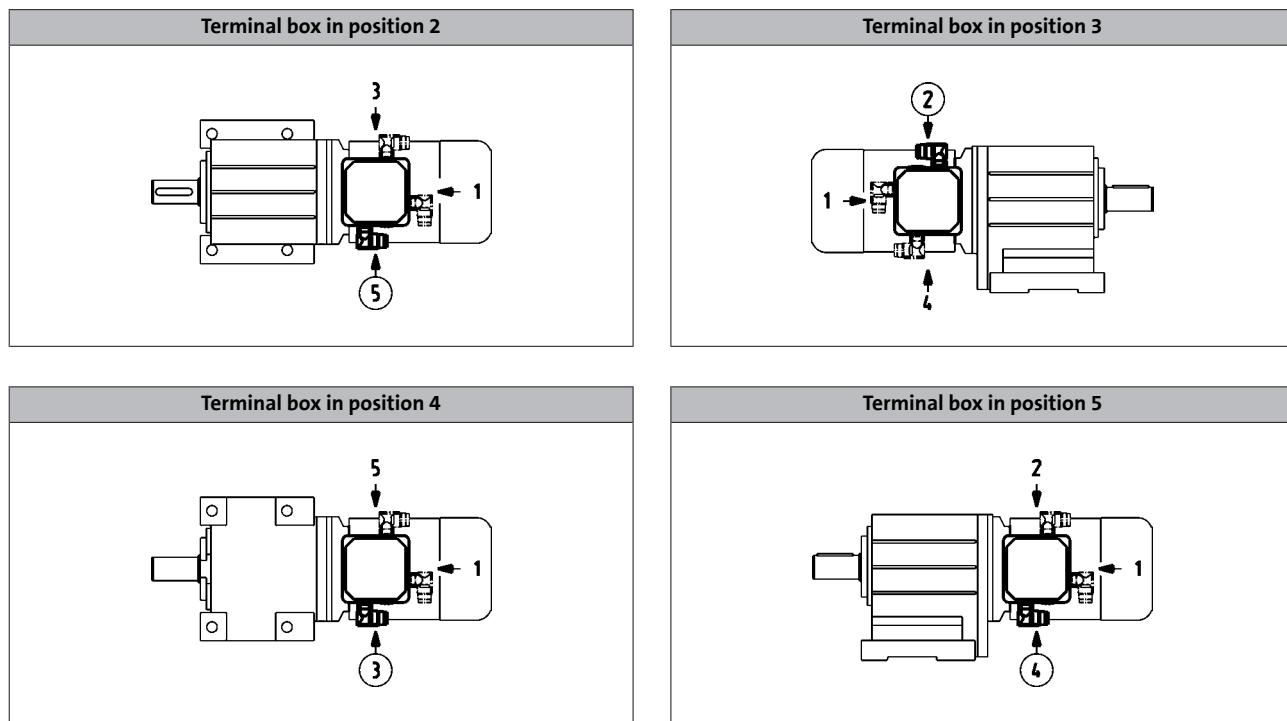

MD three-phase AC motors




Accessories

ICN connector

Dimensions of KK2/KK3

- ▶ For motors with connectors, the connector position can be selected in accordance with the terminal box position.
- ▶ If preferred positions are not specified in the order, the connector will be positioned as circled on the diagram below.

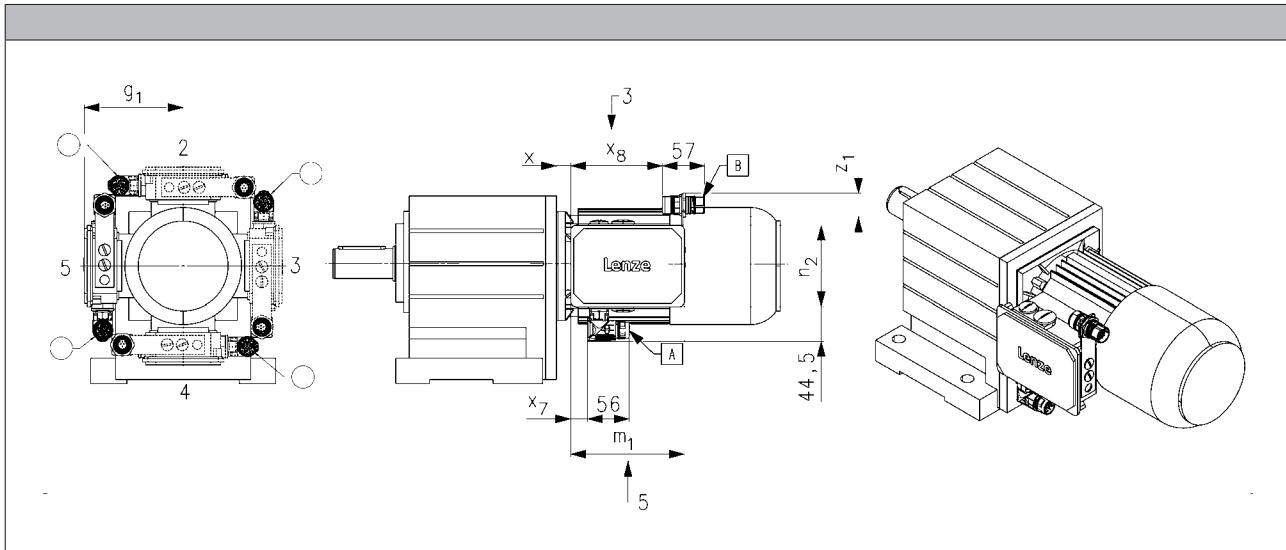

Size								
Motor	x	g ₁	m ₁	n ₂	x ₇	x ₈	z _{1, max}	
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
063	13	107	136	103	16	109	43	
071	15	118						
080	17	132	152	121	23	125	41	
090	22	137						
100	23	147						
112	25	158						
132	38	187	195	125	27	166	71	





MD three-phase AC motors

Accessories



ICN connector

Connector position when using KK2/KK3

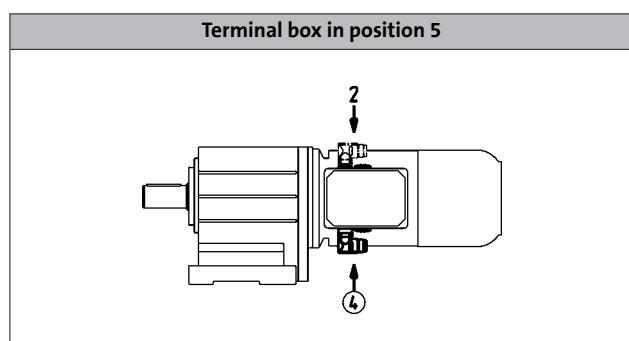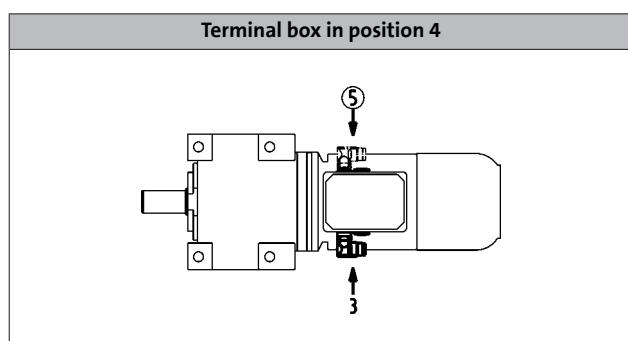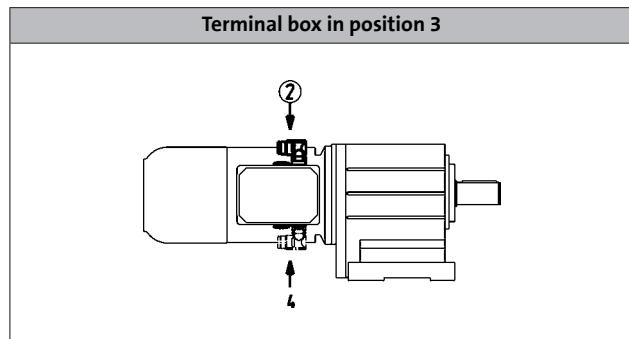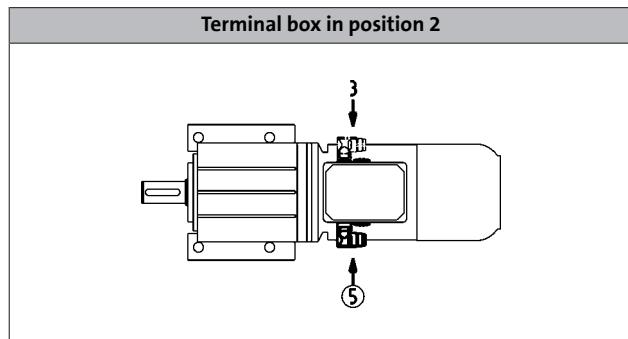

MD three-phase AC motors




Accessories

ICN connector


Blower connection

The blower is also optionally available with an ICN connector fixed to the terminal box of the blower for exceptionally fast commissioning. The connectors are fitted with a bayonet fixing, which is also compatible with conventional union nuts. Existing counter plugs can therefore continue to be used without difficulty.

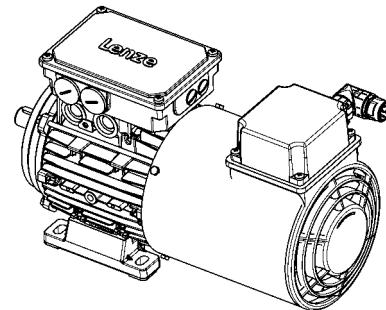


► Blower 1-ph

Pin assignment		
Contact	Designation	Meaning
PE	PE	PE conductor
1	U1	
2	U2	Fan
3		
4		
5		
6		



► Blower 3-ph

Pin assignment		
Contact	Designation	Meaning
PE	PE	PE conductor
1	U	Phase U power
2		Not assigned
3	V	Phase V power
4		Not assigned
5		
6	W	Phase W power




MD three-phase AC motors

Accessories



ICN connector

Dimensions of blower

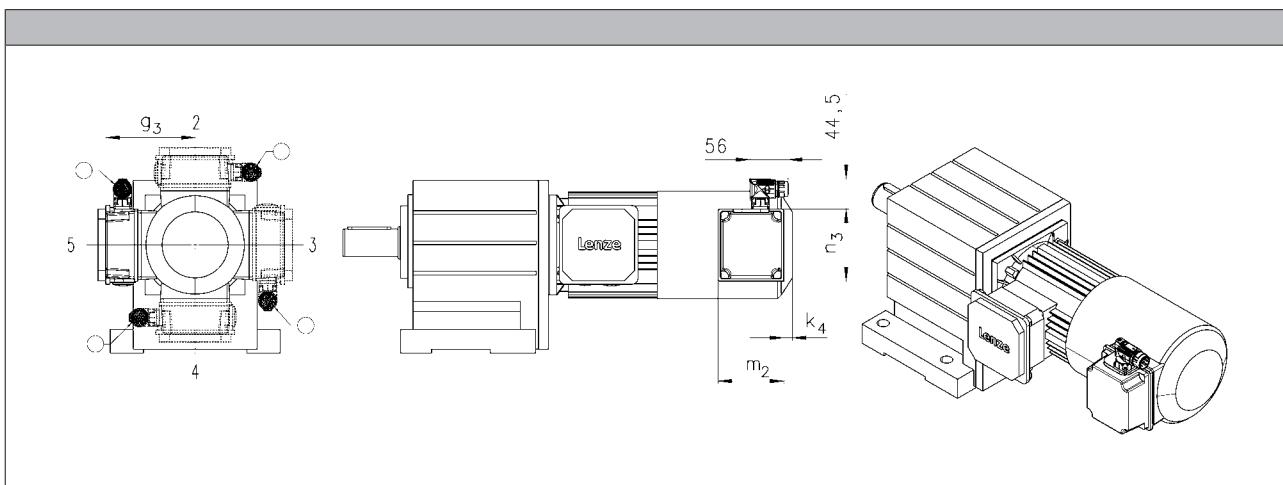

Size	Motor			
	k_4 [mm]	g_3 [mm]	m_2 [mm]	n_3 [mm]
063	12	115	95	105
071		122		
080	13	132	96	106
090	22	141	95	105
100		150		
112		162		
132	32	182		
160	31	209	96	106
180				
225				

- In addition, the cover of the blower terminal box (including connectors) can be rotated progressively through 90° if necessary.

MD three-phase AC motors

Accessories



M12 connector

IG128-24V-H incremental encoder connection

As a standard this incremental encoder is equipped with a connection cable of about 0.5 m length and with a common industry standard M12 connector at its end.

Pin assignment		
Contact	Designation	Meaning
1	+U _B	Supply +
2	B	Track B
3	GND	Mass
4	A	Track A



MD three-phase AC motors




Accessories

HAN connector

10E

In the case of the rectangular HAN-10E connectors, all six ends of the three winding phases are taken out to the power contacts. The motor circuit is therefore determined in the mating connector.

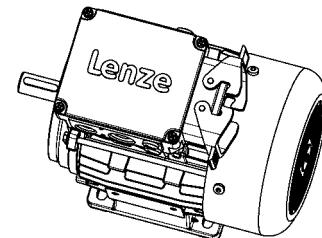

Pin assignment	
Contact	Meaning
1	Terminal board: U1
2	Terminal board: V1
3	Terminal board: W1
4	Brake +/AC
5	Brake -/AC
6	Terminal board: W2
7	Terminal board: U2
8	Terminal board: V2
9	Thermal sensor: +KTY/PTC/TKO
10	Thermal sensor: KTY/PTC/TKO

MD three-phase AC motors


Accessories



HAN connector

Modular

The connector is available with two different power modules (16 A or 40 A), depending on the rated motor current. The motor connection is determined in the terminal box and must be checked before commissioning.

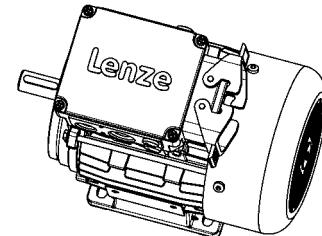

► HAN modular 16 A

Pin assignment		
Module	Contact	Meaning
A	1	Terminal board: U1
	2	Terminal board: V1
	3	Terminal board: W1
B		Dummy module
C	1	Thermal sensor: +KTY/PTC/TKO
	2	Brake +/AC
	3	Brake -/AC
	4	Rectifier: Switching contact
	5	
	6	Thermal sensor: KTY/PTC/TKO

► HAN modular 40 A

Pin assignment		
Module	Contact	Meaning
A	1	Terminal board: U1
	2	Terminal board: V1
	3	Terminal board: W1
B		Dummy module
C	1	Thermal sensor: +KTY/PTC/TKO
	2	Brake +/AC
	3	Brake -/AC
	4	Rectifier: Switching contact
	5	
	6	Thermal sensor: KTY/PTC/TKO

MD three-phase AC motors



Accessories

HAN connector

Motor terminal box with HAN connectors - built-on accessories as-signment: 2-pole motors

Motor type	M□□MAXX M□□MABR	M□□MAZE M□□MABZ	M□□MALL M□□MABL	M□□MALZ
Motor frame size	Terminal box with HAN connector			
063-11 063-31	HAN-10E HAN modular			
071-11 071-31	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular
080-11 080-31	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular
090-31 090-11	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular
100-31 100-41	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular
112-31 112-41	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular
132-21	HAN modular	HAN modular	HAN modular	HAN modular

MD three-phase AC motors

Accessories



HAN connector

Motor terminal box with HAN connectors - built-on accessories assignment: 4-pole / 6-pole motors

Motor type	M□□MAXX M□□MABR	M□□MAZE M□□MAHA M□□MABZ M□□MABH	M□□MALL M□□MABL	M□□MALZ M□□MALH
Motor frame size	Terminal box with HAN connector			
063-02 063-22	HAN-10E HAN modular			
063-12 063-32 063-42	HAN-10E HAN modular			
071-32 071-42 071-13 071-33	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular
080-13 080-32 080-33 080-42	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular
090-12 090-32	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular
100-12 100-32	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular
112-22 112-32	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular	HAN-10E HAN modular
132-12 132-22 132-32	HAN modular	HAN modular	HAN modular	HAN modular
160-22 160-32	HAN modular			

MD three-phase AC motors




Accessories

HAN connector

Dimensions

- ▶ For motors with connectors, the connector position can be selected in accordance with the terminal box position.
- ▶ Unless the connector position is specified, it will be supplied in position 1.

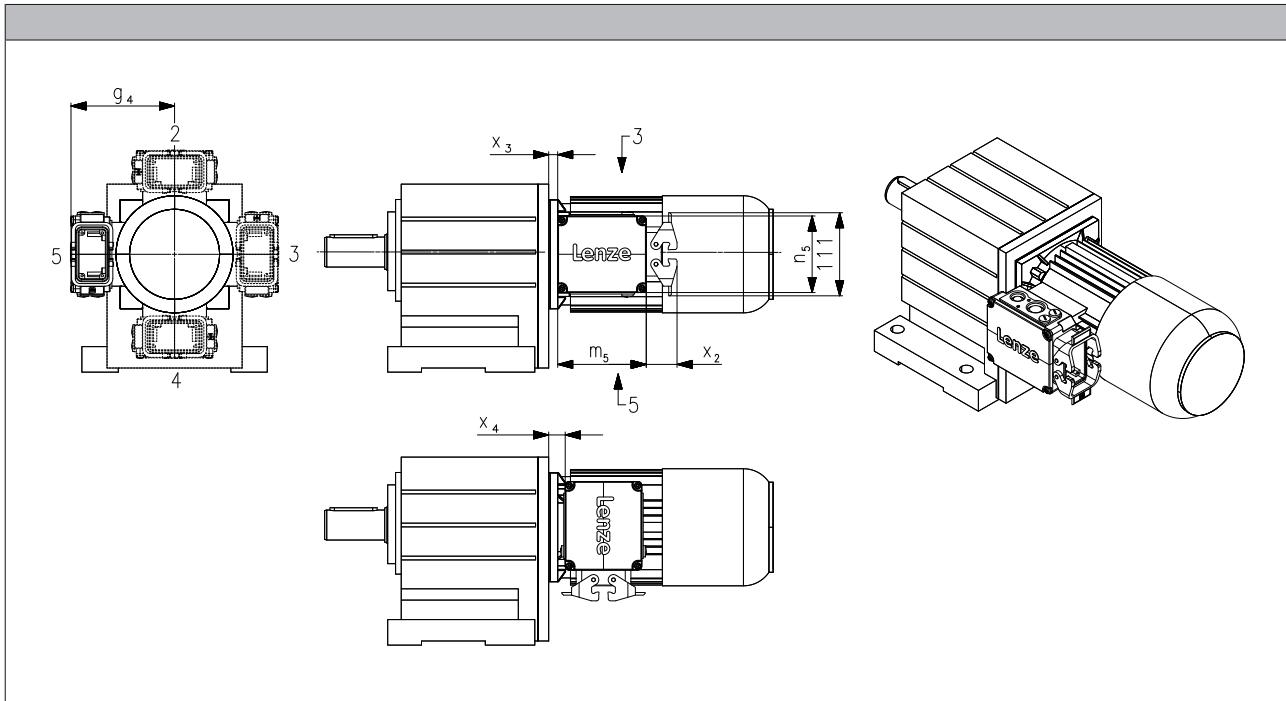

Size Motor			
	g_4 [mm]	x_3 [mm]	x_4 [mm]
063	120	5.00	6.00
071	129	7.00	8.00
080	138	11.0	19.0
090	143	15.0	23.0
100	154	16.0	24.0
112	164	13.5	21.5
132	233	34.5	4.50
160	248	39.0	9.00


MD three-phase AC motors

Accessories



HAN connector

Position of connector

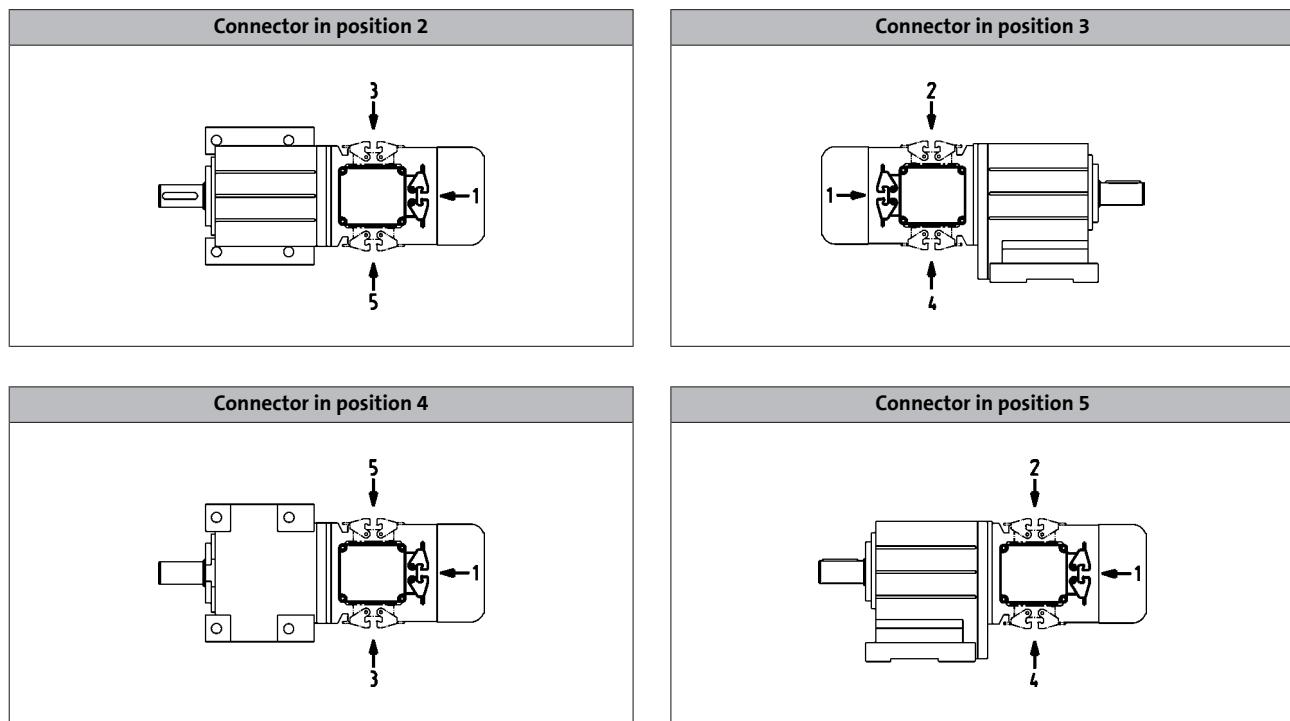

MD three-phase AC motors

Accessories



Handwheel

Design	Handwheel made from alloy, smooth wheel surface
Function	Manual operation: <ul style="list-style-type: none">• Emergency operation• Setting-up operation for machines/systems
Note	The increased moment of inertia must be taken into account during project planning! For frequent switching operations, in particular if the direction of rotation changes: Please contact Lenze.

Size Motor	Moment of inertia		Mass Additional m [kg]	
	Additional			
	J [kgcm ²]			
071	16.0		0.60	
080	16.0		0.60	
090	16.0		0.60	
100	16.0		0.60	
112	16.0		0.60	
132	139		1.80	


MD three-phase AC motors

Accessories



Handwheel

Dimensions, self-ventilated (4/6-pole)

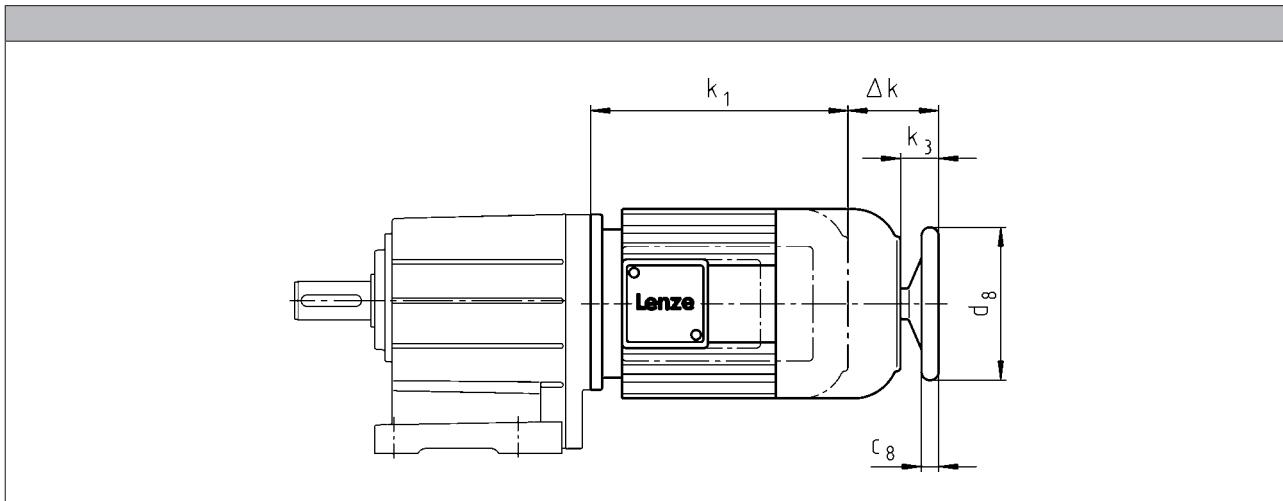

Motor type	M□□MAHA M□□MABH M□□MALH
Built-on accessories	

Motor frame size	Δ k [mm]	k ₃ [mm]	c ₈ [mm]	d ₈ [mm]
071-32				
071-42	70	34.0	18.0	160
071-13				
071-33				
080-32				
080-42	91	34.0	18.0	160
080-13				
080-33				
090-12				
090-32	80	32.0	18.0	160
100-12				
100-32	94	42.0	18.0	160
112-22				
112-32	107	39.0	18.0	160
132-12				
132-22	126	50.0	26.0	250
132-32				

MD three-phase AC motors

Accessories



Centrifugal mass

Note	The increased moment of inertia must be taken into account during project planning! For frequent switching operations, in particular if the direction of rotation changes: Please contact Lenze.	
Function	Increased motor centrifugal mass for smooth starting/braking	
Design	Integral fan made from cast iron	

Motor frame size	Moment of inertia		Mass
	Additional		Additional
	J [kgcm ²]	m [kg]	
071	18.0	1.20	
080	29.0	1.40	
090-□1	83.0	2.80	
090-□2	55.0	2.00	
100	77.0	2.50	
112	153	3.80	
132	356	6.00	


MD three-phase AC motors

Accessories



2nd shaft end

Dimensions, self-ventilated (2-pole)

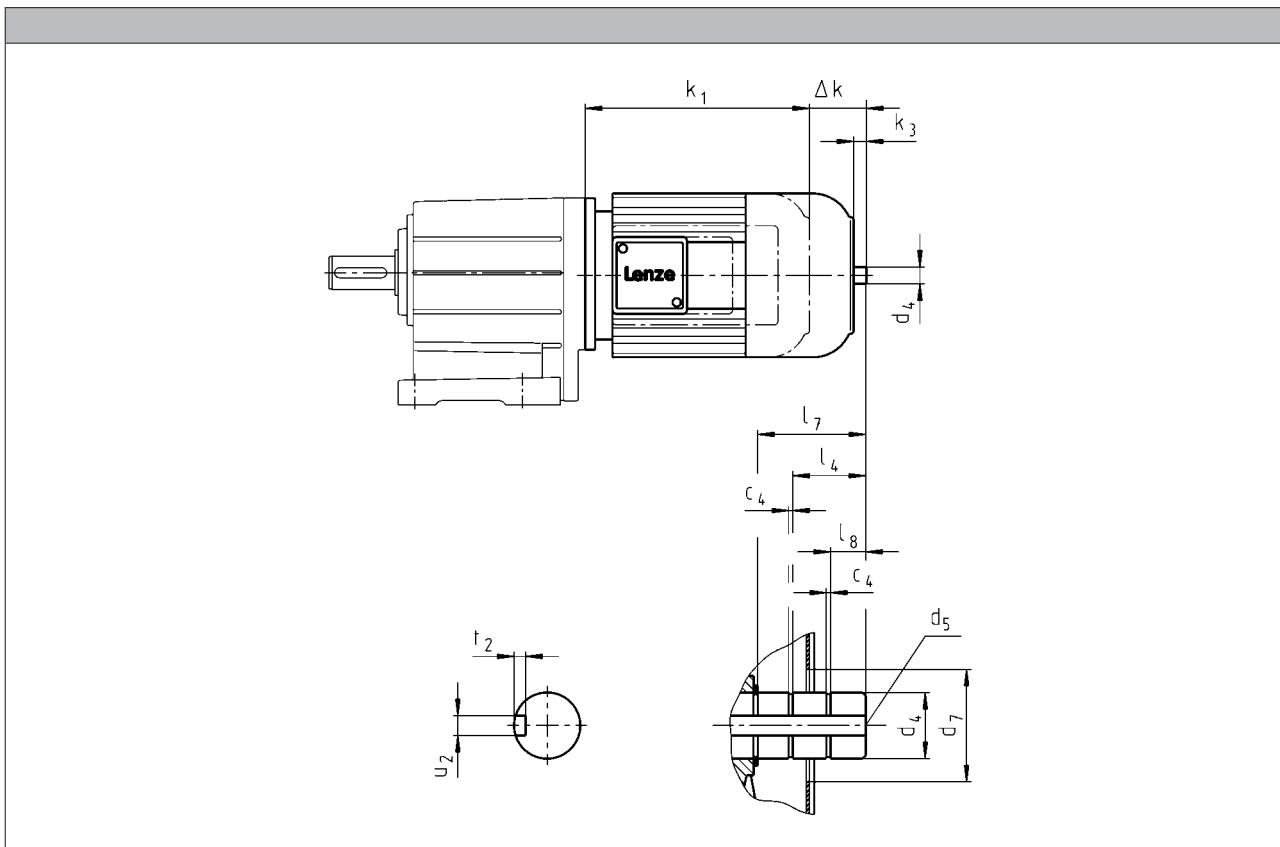

Motor type	M□□MAZE M□□MABZ M□□MALZ											
Built-on accessories	Δ k	k ₃	c ₄	d ₄	d ₄	d ₅	d ₇ ¹⁾	l ₄	l ₇	l ₈	u ₂	t ₂
Motor frame size	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
071-11 071-31	47	11.0	1.10	14.0		M5	34.0		19.0	3.00	5.00	3.00
080-11 080-31	68	9.00	1.30	19.0		M6	34.0		19.0	4.50	6.00	3.20
090-11 090-31	57	9.00	1.30		20.0	M6	34.0		19.5	5.50	6.00	3.50
100-31 100-41	71	18.5	1.30		25.0	M10	34.0	17.0	32.5	10.5	8.00	4.00
112-31 112-41	84	16.0	1.30		25.0	M10	34.0	17.0	28.5	7.00	8.00	4.00
132-21	101	24.5	1.60		30.0	M10	48.0	24.5	42.0	8.50	8.00	4.00

¹⁾ During operation, appropriate measures must be taken to make fan cover opening safe.


MD three-phase AC motors



Accessories

2nd shaft end

Dimensions, self-ventilated (4/6-pole)

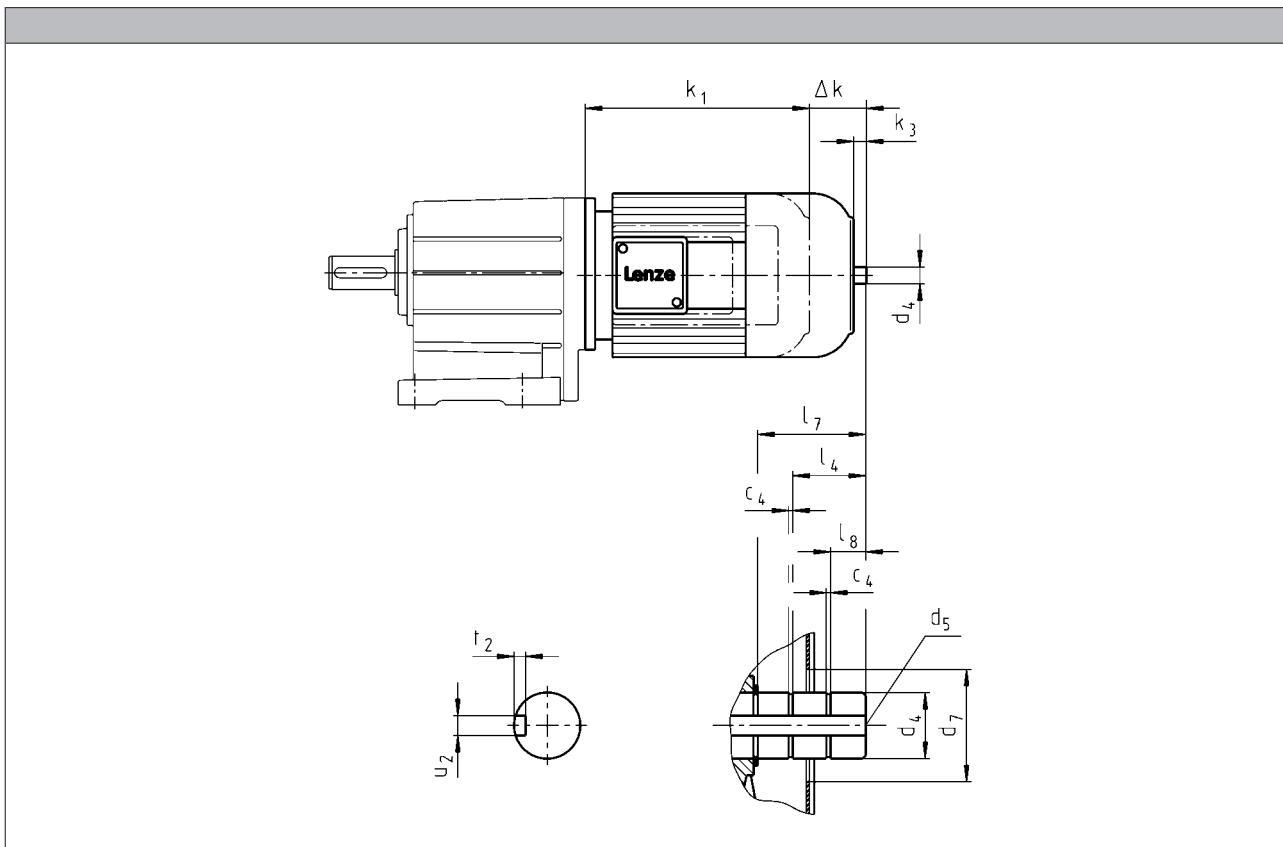

Motor type	M□□MAZE M□□MABZ M□□MALZ											
Built-on accessories	Δ k	k ₃	c ₄	d ₄	d ₄	d ₅	d ₇ ¹⁾	l ₄	l ₇	l ₈	u ₂	t ₂
Motor frame size	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
071-32												
071-42	47	11.0	1.10	14.0		M5	34.0		19.0	3.00	5.00	3.00
071-13												
071-33												
080-32												
080-42	68	9.00	1.10	14.0		M5	34.0		19.0	4.50	5.00	3.00
080-13												
080-33												
090-12												
090-32	57	9.00	1.10	14.0		M5	34.0		19.0	5.00	5.00	3.00
100-12												
100-32	71	18.5	1.30		20.0	M6	34.0	17.0	32.5	10.5	6.00	3.50
112-22												
112-32	84	16.0	1.30		20.0	M6	34.0	17.0	28.5	7.00	6.00	3.50
132-12												
132-22	101	24.5	1.60		30.0	M10	46.0	24.5	42.0	8.50	8.00	4.00
132-32												

¹⁾ During operation, appropriate measures must be taken to make fan cover opening safe.


MD three-phase AC motors

Accessories



Protection cover

Dimensions, self-ventilated (2-pole)

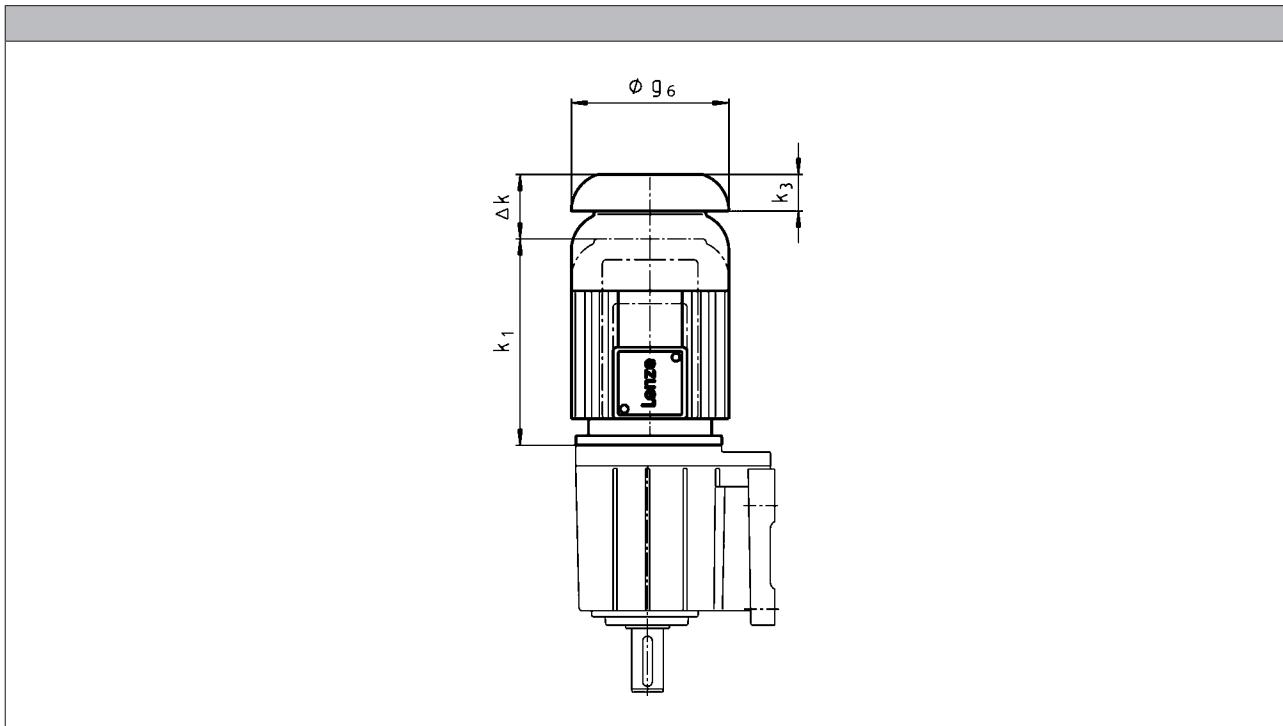

Motor type						
	M□□MAXX	M□□MABR	M□□MABL	M□□MALL		
Motor frame size						
	Δ k	Δ k	Δ k	Δ k	k ₃	g ₆
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
063-11 063-31	26	66			11.0	123
071-11 071-31	26	78	78	26	12.0	138
080-11 080-31	26	99	99	30	16.0	156
090-11 090-31	26	94	94	26	15.0	176
100-31 100-41	31	107	107	107	17.0	194
112-31 112-41	31	121	121	31	18.0	218
132-21	31	141	141	31	20.0	257


MD three-phase AC motors

Accessories



Protection cover

Dimensions, self-ventilated (4/6-pole)

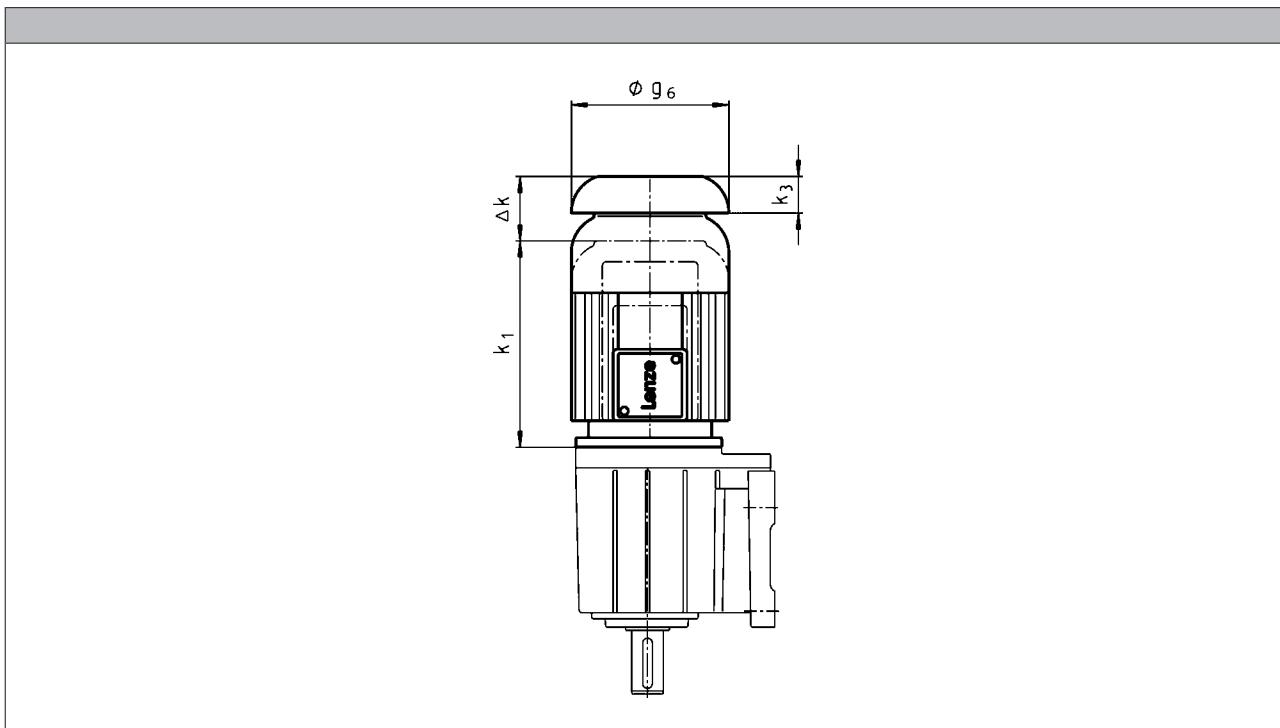

	Motor type							
	M□□MAXX	M□□MABR	M□□MABS M□□MABI M□□MABA	M□□MABL	M□□MARS M□□MAIG M□□MAAG	M□□MALL		

Motor frame size	Δ k	Δ k	Δ k	Δ k	Δ k	Δ k	k ₃	g ₆
	[mm]	[mm]						
063-02 063-22		97	160		97		11.0	123
063-12 063-32 063-42	26	66	129		82		11.0	123
071-32 071-42 071-13 071-33	26	78	122	78	78	26	12.0	138
080-32 080-42 080-13 080-33	26	99	137	99	127	30	16.0	156
090-12 090-32	26	94	131	94	113	26	15.0	176
100-12 100-32	31	107	132	107	112	107	17.0	194
112-22 112-32	31	121	151	121	111	31	18.0	218
132-12 132-22 132-32	31	141	156	141	134	31	20.0	257
160-22 160-32	37	142	228		120		25.0	310


MD three-phase AC motors

Accessories



Protection cover

Dimensions, forced ventilated (2-pole)

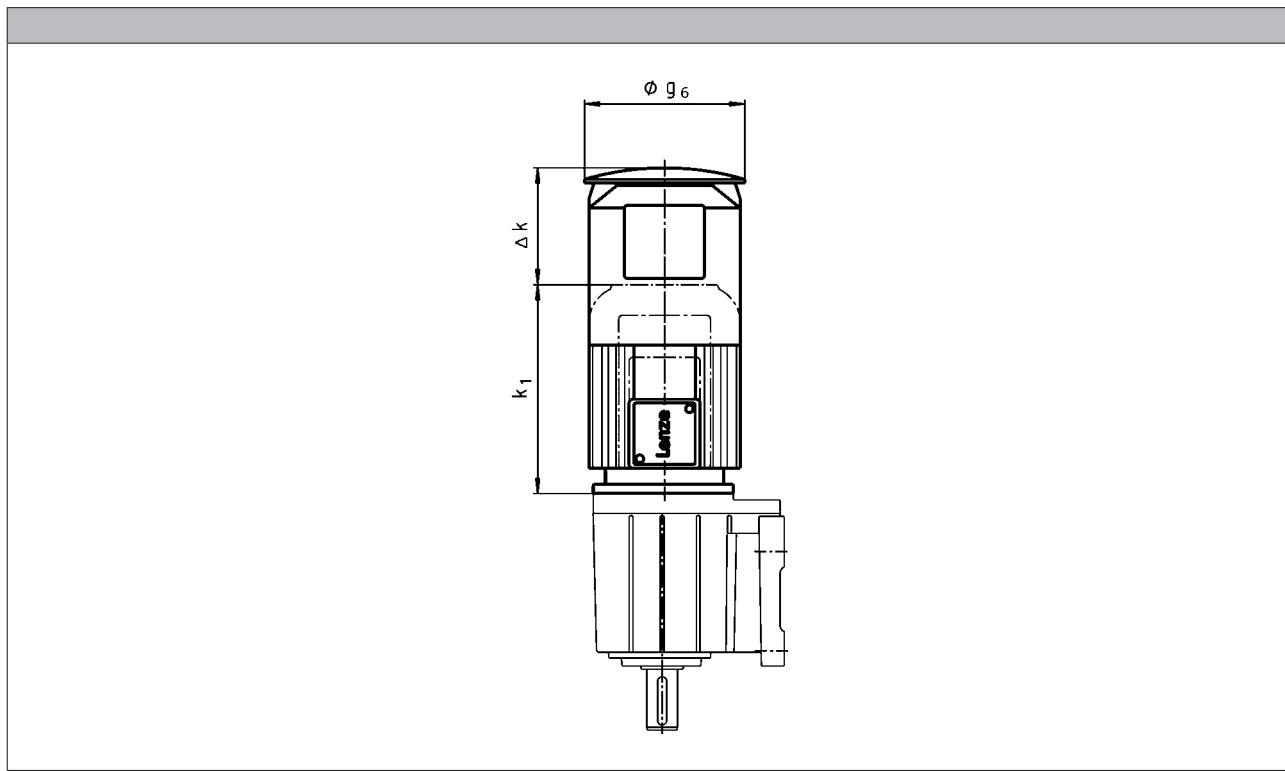

Motor type			
	M□□MAXX	M□□MABR	
Motor frame size	Δ k [mm]	Δ k [mm]	g6 [mm]
063-11 063-31	169	209	133
071-11 071-31	165	202	150
080-11 080-31	168	224	170
090-11 090-31	157		
100-31 100-41	137	198	210
112-31 112-41	135	216	249
132-21	140	226	300


MD three-phase AC motors

Accessories



Protection cover

Dimensions, forced ventilated (4/6-pole)

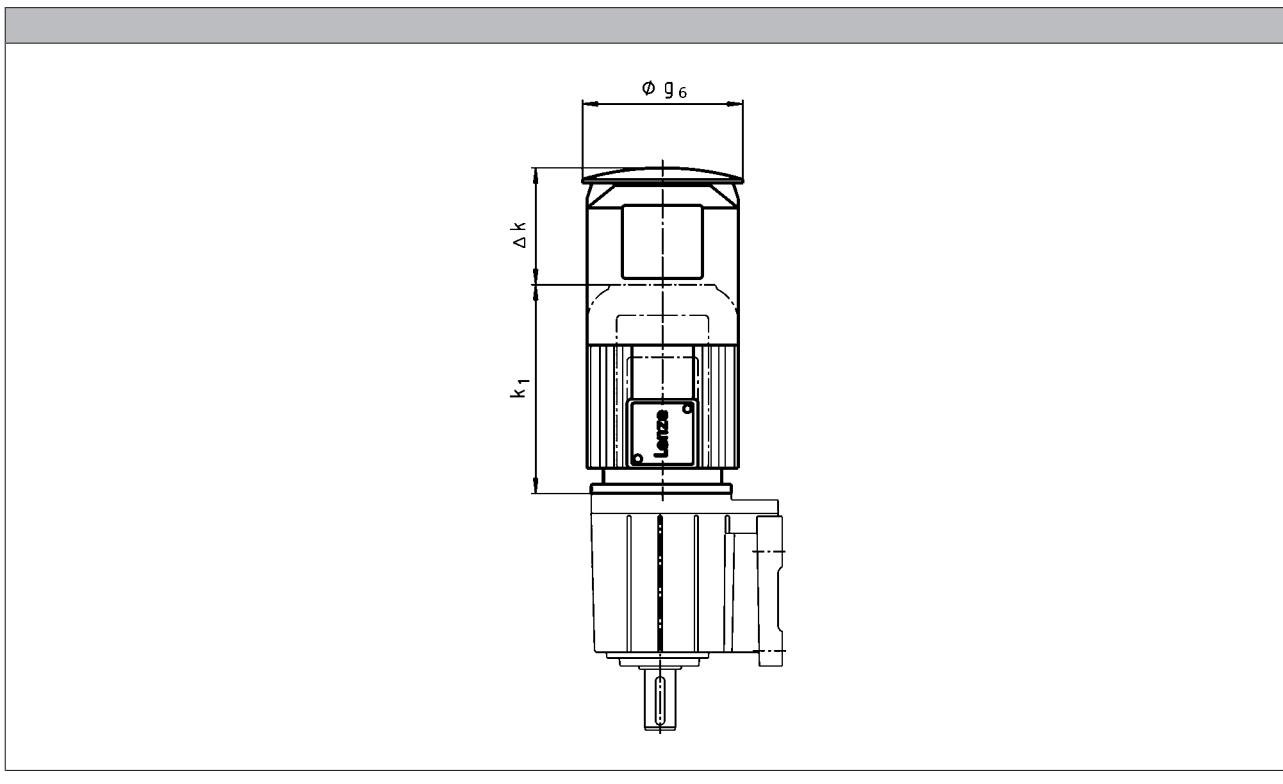

Motor type				
	M□□MAXX	M□□MABR M□□MABS M□□MABI M□□MABA	M□□MARS M□□MAIG M□□MAAG	

Motor frame size	Δ k [mm]	Δ k [mm]	Δ k [mm]	g6 [mm]
063-12 063-32 063-42	169	209	209	133
071-32 071-42 071-13 071-33	165	202	202	150
080-32 080-42 080-13 080-33	168	224	224	170
090-12 090-32	157	210	210	188
100-12 100-32	137	198	198	210
112-22 112-32	135	216	216	249
132-12 132-22 132-32	140	226	226	300
160-22 160-32	155	267	267	338

MD three-phase AC motors

Accessories



6.11

MD three-phase AC motors

Accessories



6.11

MD three-phase AC motors

Accessories



6.11

Lenze SE
Hans-Lenze-Straße 1
D-31855 Aerzen
Phone: +49 (0)5154 82-0
Telefax: +49 (0)5154 82 28 00

www.Lenze.com