

Automation systems Drive solutions

Controls
Inverters

Motors

Gearboxes

Engineering Tools

Motors: MCS synchronous servo motors

Gearboxes: g500-H helical gearbox

Contents of the L-force catalogue

About Lenze		Lenze makes many things easy for you.		
		A matter of principle: the right products for every application.		
		L-force product portfolio		
Automation systems		Controller-based Automation	1.1	
		Drive-based automation	1.2	
Drive solutions		HighLine tasks	2.1	
		StateLine tasks	2.2	
		BaseLine tasks	2.3	
Controls	Cabinet Controller	Controller 3200 C	3.1	
		Controller c300	3.2	
	Panel Controller	Controller p500	3.3	
		Controller p300	3.4	
		I/O system 1000	3.5	
		Monitor Panel	3.6	
Inverters	Decentralised	Inverter Drives 8400 protec	4.1	
		Inverter Drives 8400 motec	4.2	
	Cabinet	Servo Drives 9400 HighLine	4.4	
		Inverter Drives 8400 TopLine	4.5	
		Servo Inverters i700	4.6	
		Inverter Drives 8400 HighLine	4.7	
		Inverter Drives 8400 StateLine	4.8	
		Inverter Drives 8400 BaseLine	4.10	
Motors	Servo motors	MCS synchronous servo motors	5.1	
		MD□KS synchronous servo motors	5.2	
		MQA asynchronous servo motors	5.3	
		MCA asynchronous servo motors	5.4	
	Three-phase AC motors	MF three-phase AC motors	5.5	
		MH three-phase AC motors	5.6	
		MD three-phase AC motors	5.7	
		m300 Lenze Smart Motor	5.8	
		MD/MH basic three-phase AC motors	5.9	
Gearboxes	Axial gearbox	g700-P planetary gearbox	6.1	
		MPR/MPG planetary gearboxes	6.2	
		g500-H helical gearbox	6.3	
		GST helical gearboxes	6.4	
		g500-S shaft-mounted helical gearbox	6.5	
		GFL shaft-mounted helical gearboxes	6.6	
	Right-angle gearbox	g500-B bevel gearbox	6.7	
		GKR bevel gearboxes	6.8	
		GKS helical-bevel gearboxes	6.9	
		GSS helical-worm gearboxes	6.10	
		Motor data	Assignment see above	6.11
	Engineering Tools		Navigator	7.1
			Drive Solution Designer	7.2
		Drive Solution Catalogue	7.3	
		Engineer	7.4	
		PLC Designer	7.5	
		VisiWinNET®	7.6	
		EASY Starter	7.7	

Lenze makes many things easy for you.

With our motivated and committed approach, we work together with you to create the best possible solution and set your ideas in motion - whether you are looking to optimise an existing machine or develop a new one. We always strive to make things easy and seek perfection therein. This is anchored in our thinking, in our services and in every detail of our products. It's as easy as that!

1

Developing ideas

Are you looking to build the best machine possible and already have some initial ideas? Then get these down on paper together with us, starting with small innovative details and stretching all the way to completely new machines. Working together, we will develop an intelligent and sustainable concept that is perfectly aligned with your specific requirements.

2

Drafting concepts

We see welcome challenges in your machine tasks, supporting you with our comprehensive expertise and providing valuable impetus for your innovations. We take a holistic view of the individual motion and control functions here and draw up consistent, end-to-end drive and automation solutions for you - keeping everything as easy as possible and as extensive as necessary.

3

Implementing solutions

Our easy formula for satisfied customers is to establish an active partnership with fast decision-making processes and an individually tailored offer. We have been using this simple principle to meet the ever more specialised customer requirements in the field of mechanical engineering for many years.

4

Manufacturing machines

Functional diversity in perfect harmony: as one of the few full-range providers in the market, we can provide you with precisely those products that you actually need for any machine task – no more and no less. Our L-force product portfolio, a consistent platform for implementing drive and automation tasks, is invaluable in this regard.

5

Ensuring productivity

Productivity, reliability and new performance peaks on a daily basis – these are our key success factors for your machine. After delivery, we offer you cleverly devised service concepts to ensure continued safe operation. The primary focus here is on technical support, based on the excellent application expertise of our highly-skilled and knowledgeable after-sales team.

A matter of principle: the right products for every application.


Lenze's extensive L-force product portfolio follows a very simple principle. The functions of our finely scaled products are assigned to the three lines Base-Line, State-Line or High-Line.

But what does this mean for you? It allows you to quickly recognise which products represent the best solution for your own specific requirements.

Powerful products with a major impact:


- Easy handling
- High quality and durability
- Reliable technologies in tune with the latest developments

Lenze products undergo the most stringent testing in our own laboratory. This allows us to ensure that you will receive consistently high quality and a long service life. In addition to this, five logistics centres ensure that the Lenze products you select are available for quick delivery anywhere across the globe. It's as easy as that!

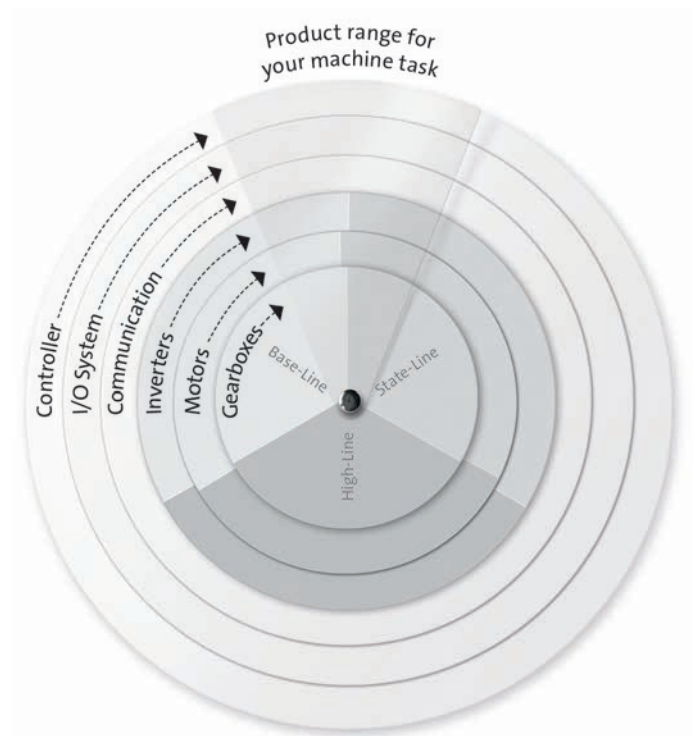


L-force product portfolio

Controls

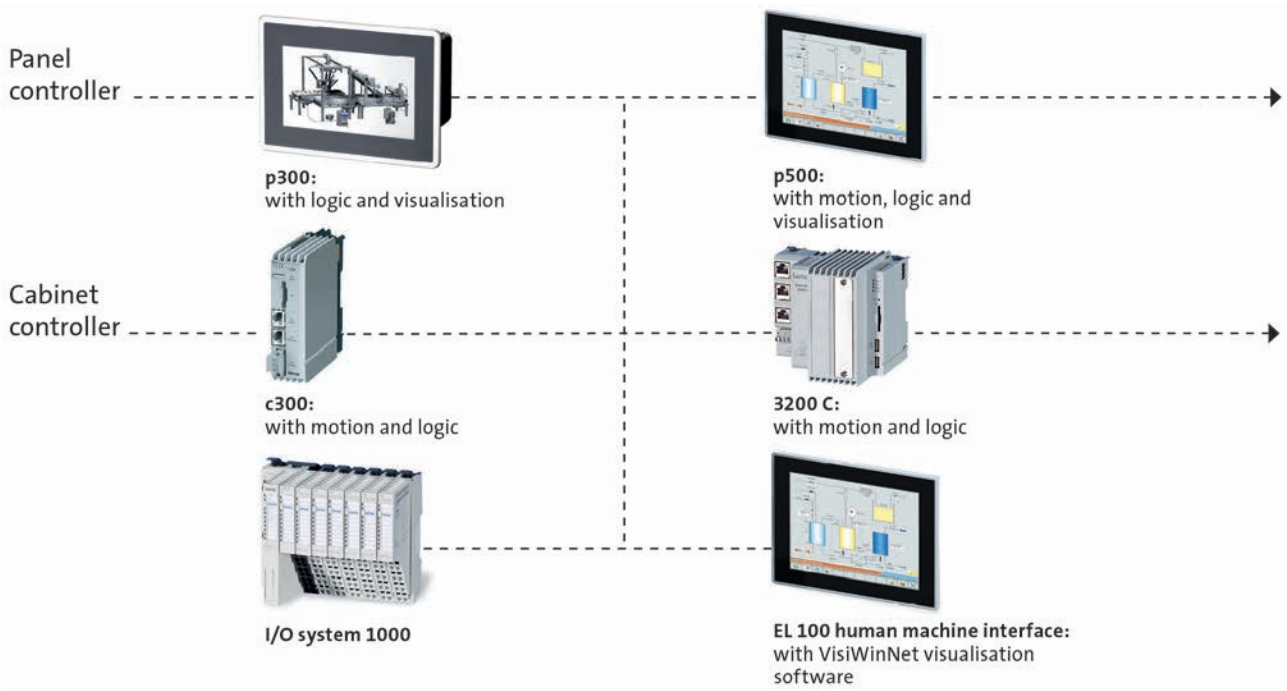


Engineering Tools

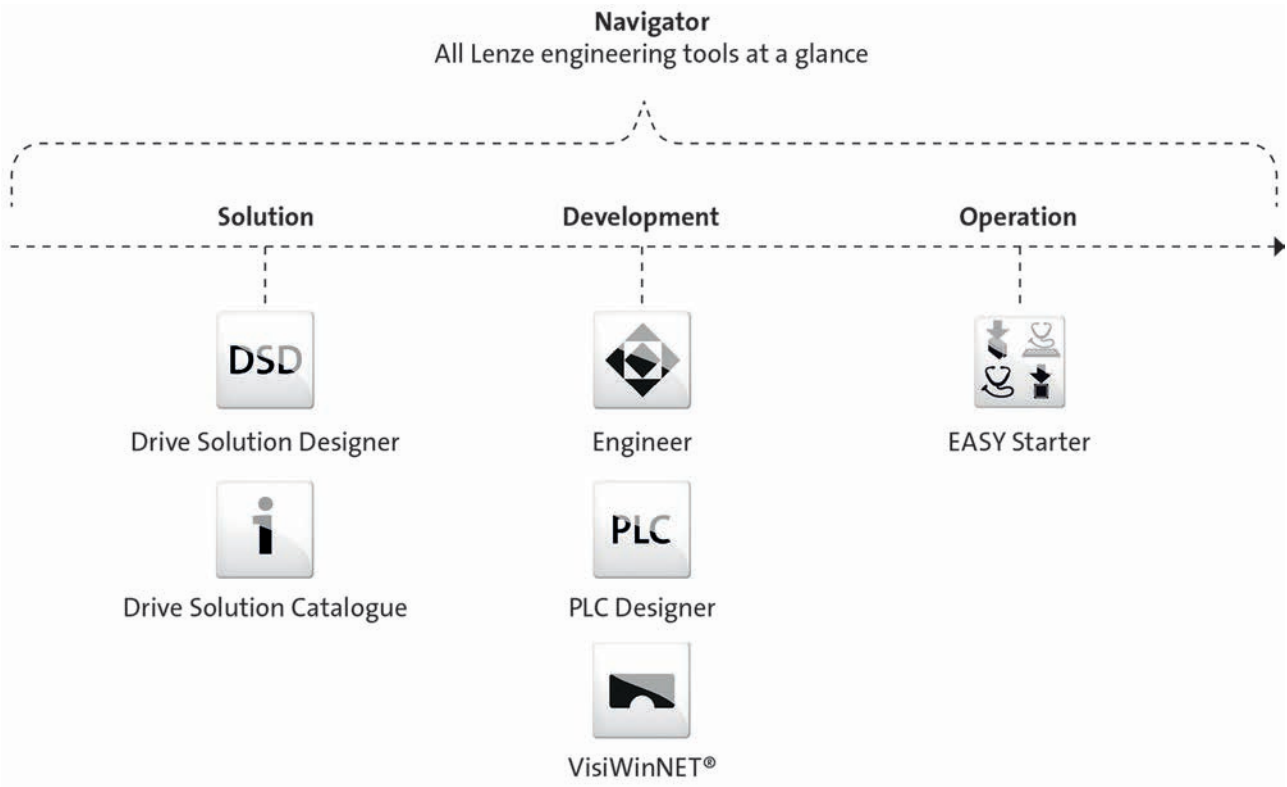


L-force product portfolio

Inverters

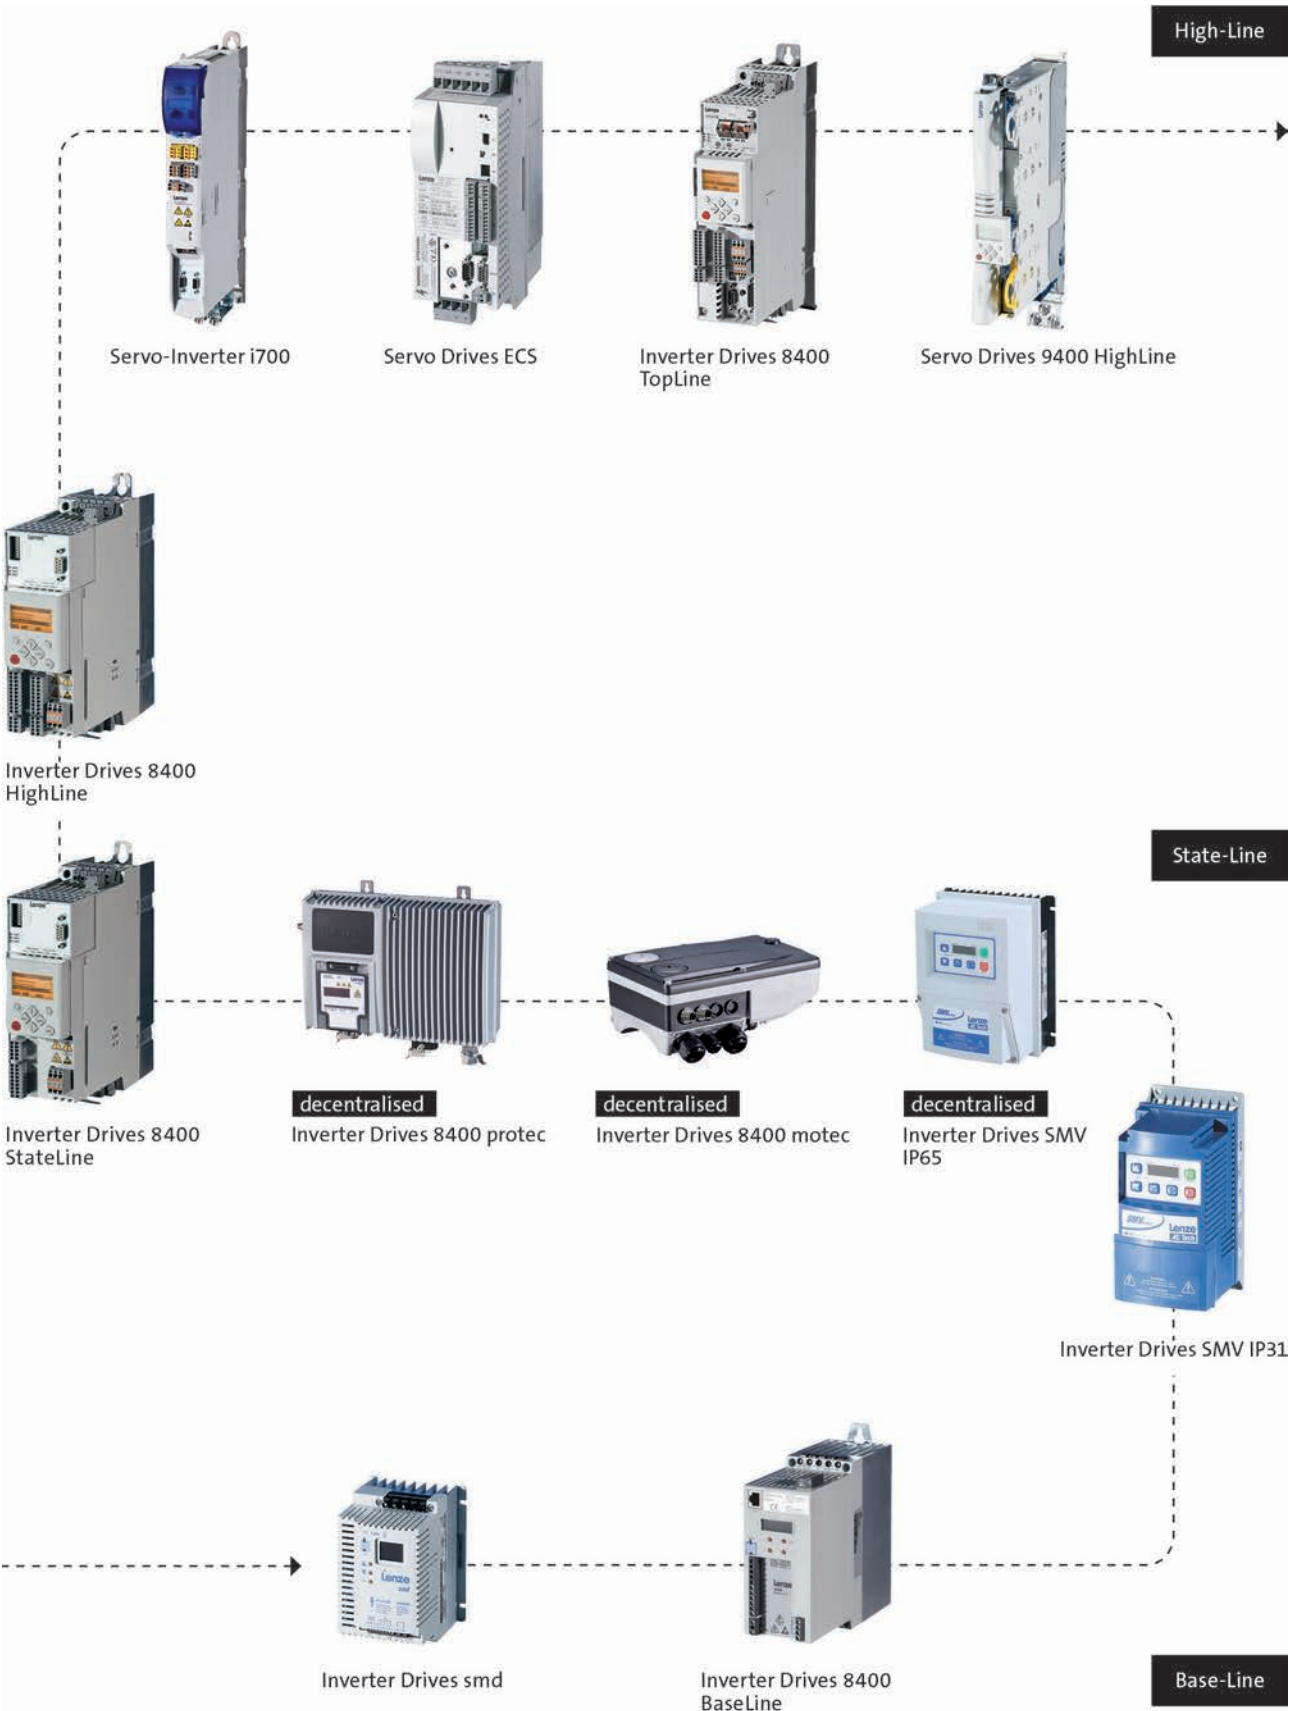


L-force product portfolio

Motors

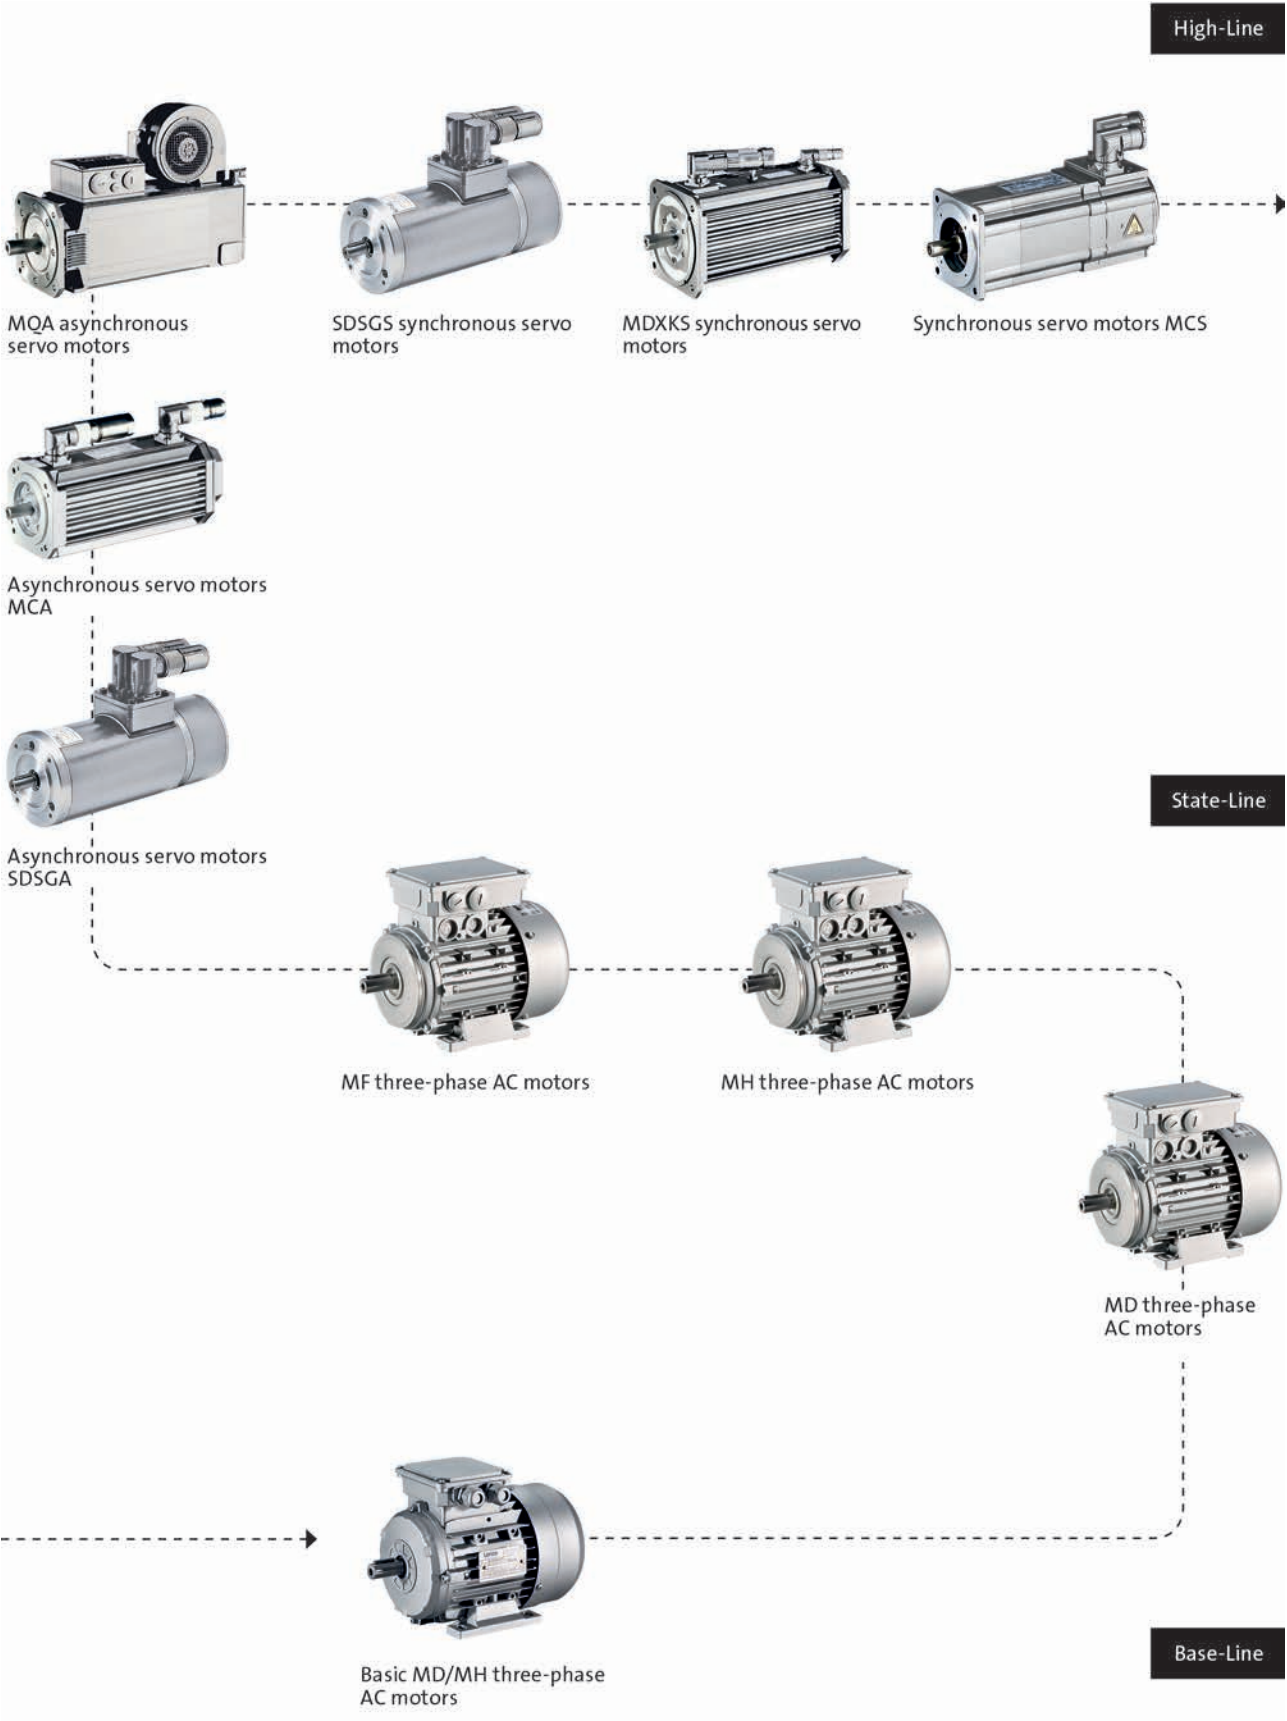

L-force product portfolio


Gearboxes

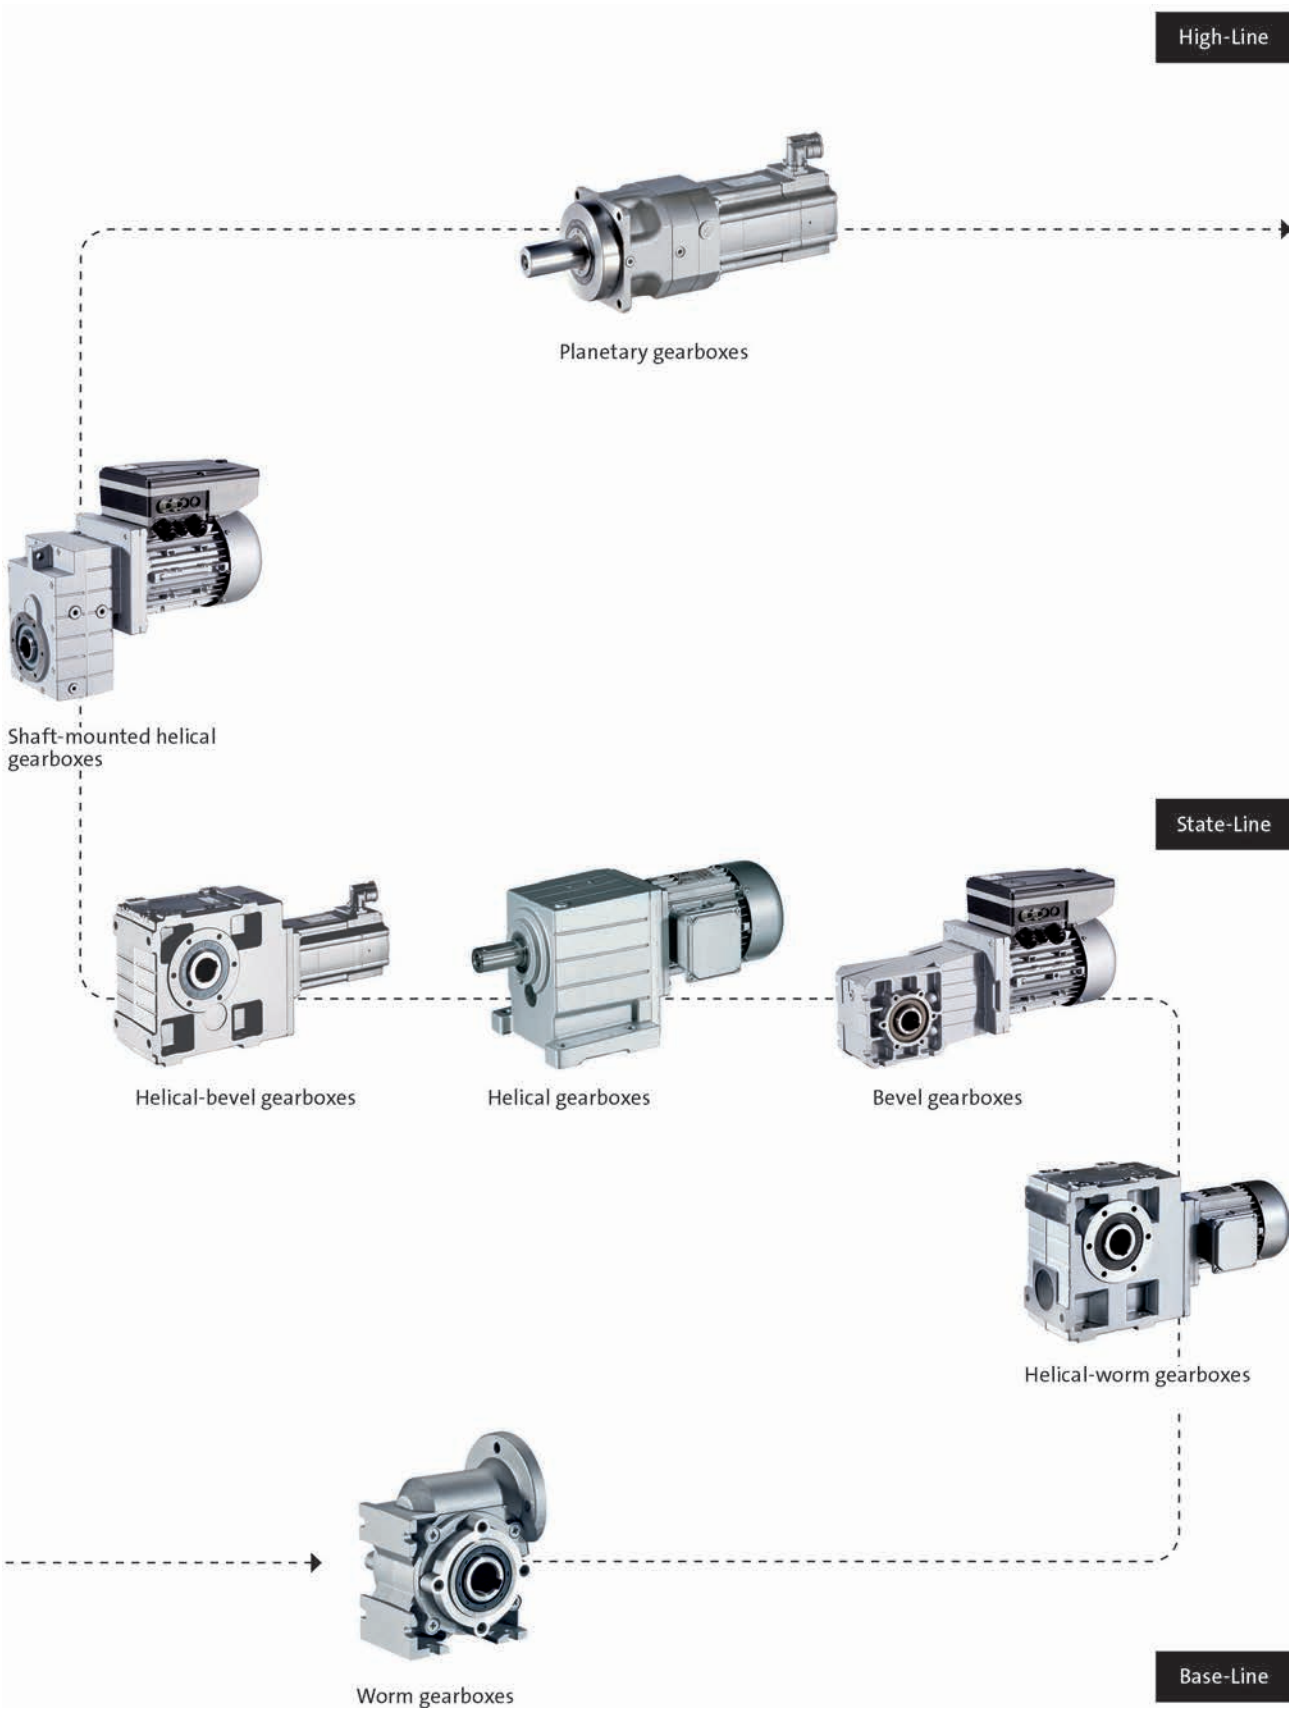

Gearboxes

g500-H helical geared motors

3 ... 440 Nm (synchronous servo motors)

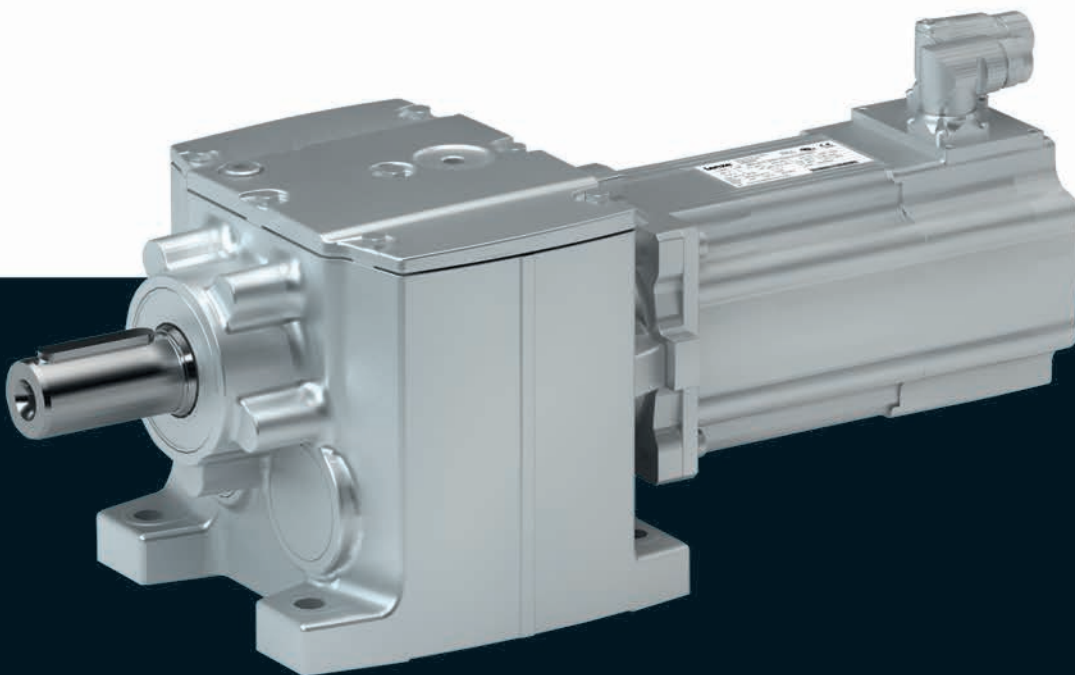

g500-H helical geared motors

Contents



General information	List of abbreviations	6.3 - 5
	Product information	6.3 - 6
	Equipment	6.3 - 7
	The gearbox kit	6.3 - 8
	Dimensioning	6.3 - 14
Technical data	Selection tables, notes	6.3 - 19
	Selection tables	6.3 - 20
	Dimensions, notes	6.3 - 37
	Dimensions, self-ventilated motors	6.3 - 38
	Weights, self-ventilated motors	6.3 - 65
	Surface and corrosion protection	6.3 - 66

g500-H helical geared motors

Contents



g500-H helical geared motors

General information



List of abbreviations

c		Load capacity
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass
M ₂	[Nm]	Output torque
M _{2, max}	[Nm]	Max. output torque
n _{2, eto}	[r/min]	Transition speed
n _{2, th}	[r/min]	Thermal limit speed

CCC	China Compulsory Certificate
CE	Communauté Européenne
CSA	Canadian Standards Association
cURus	Combined certification marks of UL for the USA and Canada
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

g500-H helical geared motors

General information



Product information

In combination with servo motors, our helical gearboxes form a compact and powerful drive unit. Numerous options at the input and output end provide for the drive to be exactly adapted to your application.

The robust helical gearboxes feature high permissible radial forces, closely stepped ratios and a low backlash. They are available in 2-pole and 3-pole design with a torque up to 450 Nm and a ratio of up to $i = 370$.

Versions

- Fine-scaling of size / torque provides for an optimum machine adaptation
- Standardised shaft and flange dimensions for an easy machine integration
- High efficiency
- With MCS synchronous servo motors, rated torque: 0.5 Nm ... 72 Nm

The product name

Gearbox type	Product range		Design	Rated torque [Nm]	Product
Helical gearbox	g500	-	H	45	g500-H45
				100	g500-H100
				140	g500-H140
				210	g500-H210
				320	g500-H320
				450	g500-H450

g500-H helical geared motors


General information



Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

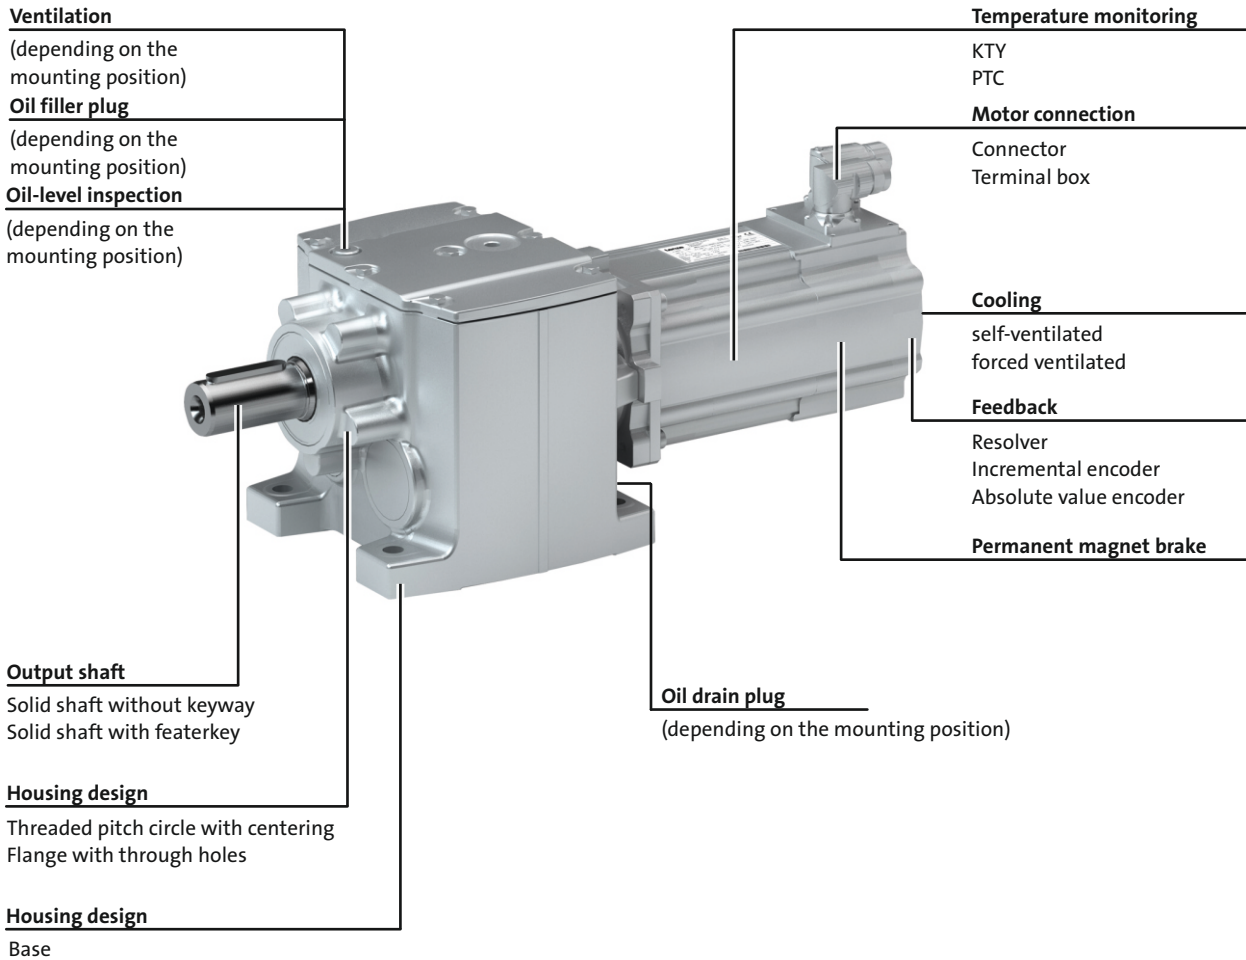

g500-H helical geared motors

General information




The gearbox kit

Geared motor

Product												
	g500-H45	g500-H100	g500-H140	g500-H210	g500-H320	g500-H450						
Motor type	Synchronous servo motor											
Servo motor	MCS06											
0.6 - 1.5 Nm												
2.3 - 4.5 Nm								MCS09				
5.5 - 17 Nm										MCS12		
9.2 - 42 Nm											MCS14	
Technical data	See selection table											
Output torque												
Output speed												
Ratio												
Load capacity												
Moment of inertia												
Mounting position	A/B/C/D/E/F											
Standard												
Combined	ABCDEF	AEF										
Colour	Not coated Primed Paint in various corrosion-protection designs in accordance with RAL colours											
Surface and corrosion protection	Without OKS(uncoated) OKS-G (primed) OKS-S (small) OKS-M (medium) OKS-L (large)											

g500-H helical geared motors


General information



The gearbox kit

Mounting positions

- Mounting position (A to F) and position of system blocks (1 to 6)

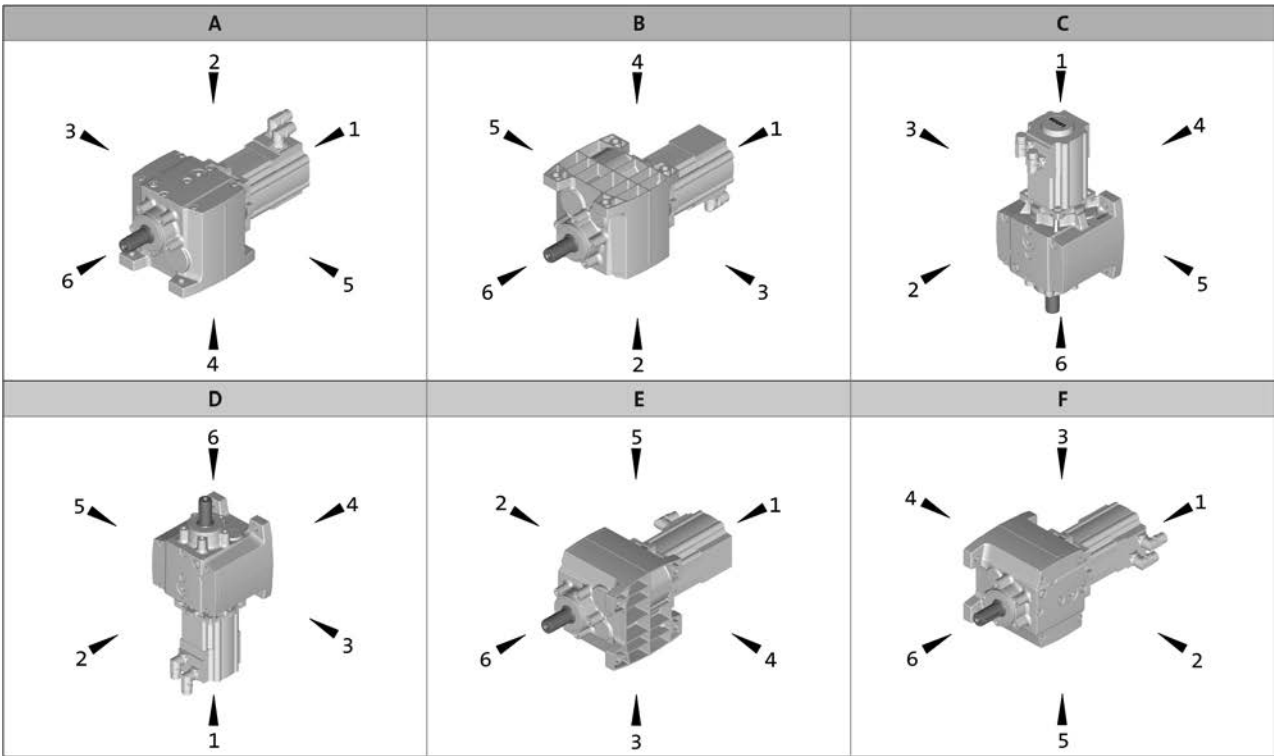

Connector / terminal box: 2, 3, 4, 5

g500-H helical geared motors

General information



The gearbox kit

Motor details

Product				
	MCS			
	06C41 06F41 06L41	09D41 09L41 09F38 09H41	12D20 12D41 12H15 12H30 12H35 12L20 12L41	14D15 14D36 14H15 14H32 14L15 14L32 14P14 14P32
Connection type				
	Plug connectors	Plug connectors Terminal box		
Permanent magnet holding brake				
Rated torque [Nm]	2.2	8.0	12	22
Brake voltage [V]	DC 24			
Feedback				
	With absolute value encoder With incremental encoder With resolver			
Cooling				
	Self-ventilated			
Temperature monitoring				
	KTY83-110 thermal de- tector	KTY83-110 thermal detector PTC thermistor		
Approval				
	cURus GOST_R UkrSepro			
Degree of protection				
	IP54 IP65			

- Further information and installation feasibilities can be found in the Motors chapter.

g500-H helical geared motors

General information



The gearbox kit

Motor details

Connection type		
		
Plug connectors	Terminal box	

Cooling: self-ventilated		
		
With resolver	With permanent magnet brake	With feedback With feedback and permanent magnet brake

g500-H helical geared motors

General information



The gearbox kit

Gearbox details

Product						
	g500-H45	g500-H100	g500-H140	g500-H210	g500-H320	g500-H450
Driven shaft						
Solid shaft without keyway [mm]		20x40	25x50		30x60	35x70
Solid shaft with featherkey [mm]	14x28 20x40	20x40	25x50		30x60	30x60 35x70
Design	Standard stainless steel					
Gasket	Standard FPM (Viton)					
Bearing	Standard	Standard Reinforced				
Fitting grease	Not enclosed Enclosed					
Housing						
Housing version	With foot Without foot with centering	With foot With foot and centering Without foot with centering				
Output flange						
flange diameter [mm]	120/140/160			120/140/160/200	160/200	160/200/250
Lubricant						
Type	CLP 460 ¹⁾ CLP HC 320 CLP HC 220 CLP HC 220 USDA H1					
Oil-level inspection	Without inspection With inspection					
Breather element	Without				Standard mounting position: Mounted Combined mounting position: loosely enclosed	
Backlash						
Backlash	Standard					

¹⁾ Not suitable for geared servo motors.

- Further information and installation feasibilities can be found in the Gearboxes chapter.


g500-H helical geared motors


General information



The gearbox kit

Gearbox details

Solid shaft		
		
Foot mounting	Foot mounting With centering	Foot mounting Flange with through holes

Solid shaft	
	
With centering	Flange with through holes

g500-H helical geared motors

General information



Dimensioning

General information about the data provided in this catalogue

The powers, torques and speeds specified in this catalogue are rounded values and are valid under the following conditions:


- Operating time/day = 8 h (100% OT)
- Duty class I for up to 10 switching operations/h
- Mounting positions and designs in this catalogue
- Standard lubricant
- $T_{amb} = 20\text{ °C}$ for gearboxes,
 $T_{amb} = 40\text{ °C}$ for motors (in accordance with EN 60034)
- Site altitude $< = 1000\text{ m amsl}$
- The selection tables provide the permissible mechanical powers and torques. For notes on the thermal power limit, see chapter drive dimensioning.
- The rated power specified for motors and geared motors applies to operating mode S1 (in accordance with EN 60034).

Under different operating conditions, the values obtained may vary from those listed here.

In the case of extreme operating conditions, please consult your Lenze sales office.

g500-H helical geared motors

General information



Dimensioning

Thermal power limit

The thermal power limit, defined by the heat balance, limits the permissible gearbox continuous power. It may be less than the mechanical power ratings listed in the selection tables.

The thermal power limit is affected by:

- the churning losses in the lubricant. These are determined by the mounting position and the circumferential speed of the gears;
- the load and the speed
- the ambient conditions: temperature, air circulation, input or dissipation via shafts and the foundation

If the following input speeds n_1 are exceeded, please contact Lenze:

Motor frame size	Mounting position A, B, E, F	Mounting position C, D
MCS06 ... 12	4000 r/min	3000 r/min
MCS14	3000 r/min	1500 r/min


- For a short period of time up to 5 min, 30 % higher speeds are permissible

Possible ways of extending the application area

- shaft sealing rings made from FP material/Viton (option)
- reduction in lubricant quantity
- cooling of the geared motor by means of air convection on the machine/system

g500-H helical geared motors

General information



Dimensioning

Load capacity and application factor

Load capacity c of gearbox

Rated value for the load capacity of Lenze geared motors.

- c is the ratio of the permissible rated torque of the gearbox to the rated torque supplied by the drive component (e.g. the built-in Lenze motor).
- The value of c must always be greater than the value of the application factor k calculated for the application.


Application factor k (according to DIN 3990)

Takes into account the influence of temporally variable loads which are actually present during the anticipated operating time of gearboxes and geared motors.

k is determined by:

- the type of load
- the load intensity
- temporal influences


Duty class	Load type
I	Smooth operation, small or light jolts
II	Uneven operation, average jolts
III	Uneven operation, severe jolts and/or alternating load

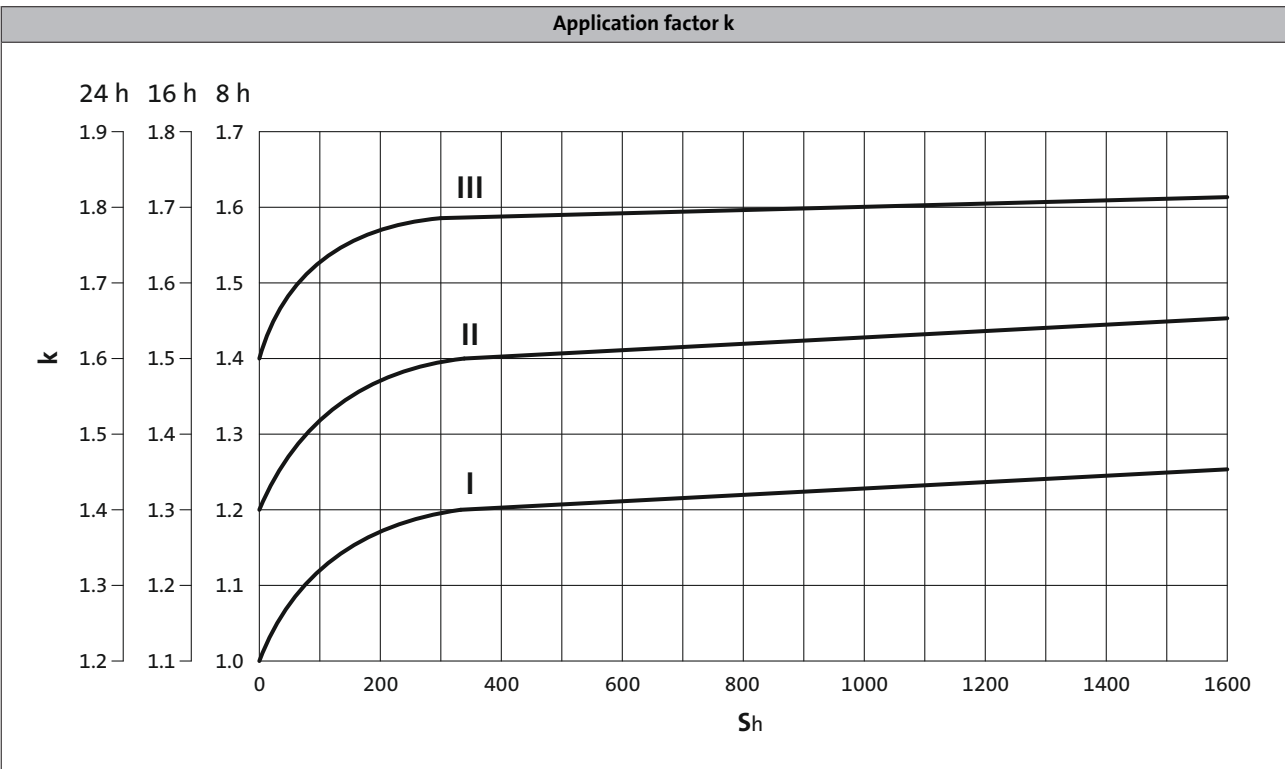

► S_h = switchings/h

g500-H helical geared motors

General information



Dimensioning

Weights

The values given in the tables consider the following gearbox/motor combination:

- Gearbox with solid shaft including lubricant amount
- Motor with feedback

For versions deviating from this, additional weights have to be considered.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data
- Motor options: Brake
 - > Chapter: Motors/Accessories

Moments of inertia

The given moments of inertia of the gearbox refer to the drive shaft. The influence of the ratio (i^2) has been considered in the data.

When the total moment of inertia of the geared motor is calculated, the values of the geared motors and the brake have to be added.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data/Selection tables
- Motor options: Brake
 - > Chapter: Motors/Accessories

g500-H helical geared motors

General information





Selection tables, notes

Notes on the selection tables

The selection tables show the available combinations of gearbox type, number of stages, ratio and motor. They are used only to provide basic orientation.

The following legend indicates the structure of the selection tables.

Number of the gear stage of the gearbox



2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
23	1559	3	1559	4.3	0.500	2.597	-H45	06F41	Selbst	34
23	1559	4	1559	3.4	0.600	2.597	-H45	06I41	Selbst	34
24	1187	4	1187	3.4	0.400	3.413	-H45	06F41	Selbst	34
24	1187	5	1187	2.8	0.500	3.413	-H45	06I41	Selbst	34

For operating mode S1
Torque M₂ and
thermal output speed n_{2, th}

For operating mode S2, S3 und S6
Max. permissible acceleration torque of geared
motor M_{2, max} and
output speed n_{2, eto}

Load capacity of the gearbox
c is the ratio between the permissible rated torque of the
gearbox and the rated torque of the three-phase AC
motor (converted to the driven shaft).
c must be always higher than the service factor k
determined for the application k.

Ratio i

Moment of inertia of
geared motor

Product
Gearbox

Product
Motor

Type of
motor cooling

Page number
for dimensions

$$c = \frac{M_{2, zul}}{M_{1N} \cdot i \cdot \eta_{Getr}} > k$$

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
10	927	3	927	5.9	0.300	4.368	-H45	06C41	natural	38
11	1559	3	1559	4.3	0.500	2.597	-H45	06F41	natural	38
14	679	3	679	6.0	0.300	5.965	-H45	06C41	natural	38
15	1187	4	1187	3.4	0.400	3.413	-H45	06F41	natural	38
16	1559	4	1559	3.4	0.600	2.597	-H45	06I41	natural	38
16	580	4	580	5.3	0.300	6.982	-H45	06C41	natural	38
18	517	5	517	5.0	0.300	7.840	-H45	06C41	natural	38
19	1187	5	1187	2.8	0.500	3.413	-H45	06I41	natural	38
19	927	5	927	3.0	0.300	4.368	-H45	06F41	natural	38
21	927	6	927	2.4	0.400	4.368	-H45	06I41	natural	38
21	453	5	453	4.6	0.200	8.935	-H45	06C41	natural	38
23	762	6	762	3.1	0.400	5.312	-H45	06F41	natural	38
23	404	6	404	4.3	0.200	10.033	-H45	06C41	natural	38
25	679	7	679	3.0	0.400	5.965	-H45	06F41	natural	38
27	354	7	354	3.8	0.200	11.429	-H45	06C41	natural	38
30	580	8	580	2.6	0.300	6.982	-H45	06F41	natural	38
30	580	10	580	2.1	0.400	6.982	-H45	06I41	natural	38
30	316	7	316	3.6	0.200	12.833	-H45	06C41	natural	38
32	517	9	517	2.5	0.300	7.840	-H45	06F41	natural	38
32	517	11	517	2.0	0.400	7.840	-H45	06I41	natural	38
33	453	10	453	2.3	0.300	8.935	-H45	06F41	natural	38
33	453	13	453	1.8	0.400	8.935	-H45	06I41	natural	38
35	404	12	404	2.1	0.300	10.033	-H45	06F41	natural	38
35	404	15	404	1.7	0.400	10.033	-H45	06I41	natural	38
35	354	13	354	1.9	0.300	11.429	-H45	06F41	natural	38
35	354	17	354	1.5	0.400	11.429	-H45	06I41	natural	38
35	273	9	273	3.2	0.200	14.836	-H45	06C41	natural	38
38	316	15	316	1.8	0.300	12.833	-H45	06F41	natural	38
38	316	19	316	1.5	0.400	12.833	-H45	06I41	natural	38
39	273	17	273	1.6	0.300	14.836	-H45	06F41	natural	38
39	273	22	273	1.3	0.300	14.836	-H45	06I41	natural	38
39	243	10	243	3.5	0.200	16.660	-H45	06C41	natural	38
41	243	19	243	1.7	0.300	16.660	-H45	06F41	natural	38
41	243	24	243	1.4	0.300	16.660	-H45	06I41	natural	38
42	213	11	213	3.1	0.200	19.013	-H45	06C41	natural	38
42	213	22	213	1.6	0.200	19.013	-H45	06F41	natural	38
42	213	28	213	1.2	0.300	19.013	-H45	06I41	natural	38
43	572	10	572	6.0	0.600	7.086	-H100	06I41	natural	41
43	403	12	403	5.6	0.300	10.063	-H100	06F41	natural	41
44	190	12	190	2.9	0.200	21.350	-H45	06C41	natural	38

6.3

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
44	190	25	190	1.4	0.200	21.350	-H45	06F41	natural	38
44	190	31	190	1.2	0.300	21.350	-H45	06I41	natural	38
45	165	14	165	2.6	0.200	24.595	-H45	06C41	natural	38
45	165	29	165	1.3	0.200	24.595	-H45	06F41	natural	38
45	165	36	165	1.0	0.300	24.595	-H45	06I41	natural	38
45	147	16	147	2.3	0.200	27.618	-H45	06C41	natural	38
45	147	32	147	1.1	0.200	27.618	-H45	06F41	natural	38
45	127	19	127	2.0	0.200	32.000	-H45	06C41	natural	38
45	113	21	113	1.8	0.200	35.933	-H45	06C41	natural	38
48	357	13	357	5.4	0.400	11.360	-H100	06F41	natural	41
49	493	12	493	5.2	0.400	8.214	-H100	06I41	natural	41
52	182	13	182	5.5	0.200	22.314	-H100	06C41	natural	41
54	688	13	688	4.4	1.300	5.887	-H100	09D41	natural	41
54	320	15	320	4.9	0.400	12.653	-H100	06F41	natural	41
55	447	13	447	5.2	0.500	9.068	-H100	06I41	natural	41
58	161	15	161	4.9	0.200	25.095	-H100	06C41	natural	41
59	629	14	629	4.2	1.300	6.440	-H100	09D41	natural	41
59	413	14	413	4.5	0.500	9.800	-H140	06I41	natural	44
61	403	15	403	4.5	0.400	10.063	-H100	06I41	natural	41
62	280	17	280	4.3	0.300	14.490	-H100	06F41	natural	41
66	261	18	261	4.0	0.300	15.500	-H100	06F41	natural	41
67	815	14	815	3.8	1.800	4.600	-H100	09F38	natural	41
67	141	17	141	4.9	0.200	28.738	-H100	06C41	natural	41
68	357	17	357	4.3	0.500	11.360	-H100	06I41	natural	41
76	493	18	493	3.6	1.200	8.214	-H100	09D41	natural	41
76	320	18	320	3.9	0.400	12.653	-H100	06I41	natural	41
76	228	21	228	3.5	0.300	17.750	-H100	06F41	natural	41
81	688	22	688	2.7	2.100	5.887	-H100	09H41	natural	41
81	688	26	688	2.3	3.000	5.887	-H100	09L41	natural	41
81	637	18	637	3.4	1.700	5.887	-H100	09F38	natural	41
81	420	25	420	5.3	5.000	4.648	-H210	12D20	natural	47
82	115	21	115	5.6	0.200	35.308	-H140	06C41	natural	44
83	654	17	654	4.4	1.900	5.733	-H140	09F38	natural	44
83	629	24	629	2.5	2.100	6.440	-H100	09H41	natural	41
83	629	28	629	2.1	3.000	6.440	-H100	09L41	natural	41
83	582	19	582	3.2	1.700	6.440	-H100	09F38	natural	41
83	208	23	208	3.2	0.300	19.486	-H100	06F41	natural	41
84	447	20	447	3.4	1.300	9.068	-H100	09D41	natural	41
84	205	23	205	4.4	0.300	19.750	-H140	06F41	natural	44
87	280	21	280	3.4	0.400	14.490	-H100	06I41	natural	41

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
90	413	22	413	4.1	1.300	9.800	-H140	09D41	natural	44
91	598	19	598	4.1	1.800	6.272	-H140	09F38	natural	44
92	493	30	493	2.2	2.000	8.214	-H100	09H41	natural	41
92	493	36	493	1.8	2.900	8.214	-H100	09L41	natural	41
92	457	25	457	2.7	1.600	8.214	-H100	09F38	natural	41
93	403	22	403	3.2	1.200	10.063	-H100	09D41	natural	41
93	261	23	261	3.2	0.400	15.500	-H100	06I41	natural	41
93	186	25	186	4.0	0.300	21.808	-H140	06F41	natural	44
95	443	30	443	5.5	9.300	3.389	-H320	14D15	natural	53
95	443	33	443	3.8	8.800	3.389	-H210	12H15	natural	47
95	182	26	182	2.8	0.300	22.314	-H100	06F41	natural	41
96	414	27	414	2.6	1.700	9.068	-H100	09F38	natural	41
97	251	23	251	4.3	0.500	16.122	-H140	06I41	natural	44
98	349	30	349	4.9	5.200	5.583	-H210	12D20	natural	47
99	403	37	403	1.9	2.000	10.063	-H100	09H41	natural	41
99	403	44	403	1.6	2.900	10.063	-H100	09L41	natural	41
99	373	30	373	2.4	1.600	10.063	-H100	09F38	natural	41
100	357	25	357	2.8	1.300	11.360	-H100	09D41	natural	41
100	330	34	330	2.2	1.700	11.360	-H100	09F38	natural	41
100	320	28	320	2.5	1.200	12.653	-H100	09D41	natural	41
100	320	47	320	1.5	2.000	12.653	-H100	09H41	natural	41
100	296	38	296	1.9	1.600	12.653	-H100	09F38	natural	41
100	280	32	280	2.2	1.200	14.490	-H100	09D41	natural	41
100	261	35	261	2.1	1.200	15.500	-H100	09D41	natural	41
100	261	57	261	1.3	2.000	15.500	-H100	09H41	natural	41
100	261	68	261	1.1	2.900	15.500	-H100	09L41	natural	41
100	259	44	259	1.7	1.600	14.490	-H100	09F38	natural	41
100	242	47	242	1.6	1.600	15.500	-H100	09F38	natural	41
100	228	26	228	2.8	0.400	17.750	-H100	06I41	natural	41
100	228	40	228	1.8	1.200	17.750	-H100	09D41	natural	41
100	228	65	228	1.1	2.000	17.750	-H100	09H41	natural	41
100	211	53	211	1.4	1.600	17.750	-H100	09F38	natural	41
100	208	28	208	2.5	0.400	19.486	-H100	06I41	natural	41
100	182	32	182	2.2	0.400	22.314	-H100	06I41	natural	41
100	161	29	161	2.5	0.300	25.095	-H100	06F41	natural	41
100	161	37	161	2.0	0.300	25.095	-H100	06I41	natural	41
100	141	33	141	2.4	0.300	28.738	-H100	06F41	natural	41
100	141	42	141	1.9	0.300	28.738	-H100	06I41	natural	41
103	706	21	706	3.5	2.300	5.733	-H140	09H41	natural	44
103	706	25	706	3.0	3.200	5.733	-H140	09L41	natural	44

6.3

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
105	646	23	646	3.3	2.200	6.272	-H140	09H41	natural	44
105	646	27	646	2.8	3.100	6.272	-H140	09L41	natural	44
106	351	26	351	3.6	1.300	11.554	-H140	09D41	natural	44
106	163	29	163	3.5	0.300	24.829	-H140	06F41	natural	44
107	228	26	228	3.9	0.400	17.802	-H140	06I41	natural	44
109	312	33	312	4.3	5.200	6.250	-H210	12D20	natural	47
116	469	24	469	3.6	1.700	8.000	-H140	09F38	natural	44
117	506	29	506	2.9	2.100	8.000	-H140	09H41	natural	44
117	506	35	506	2.4	3.000	8.000	-H140	09L41	natural	44
117	320	28	320	3.4	1.300	12.640	-H140	09D41	natural	44
117	148	32	148	3.6	0.300	27.415	-H140	06F41	natural	44
119	205	29	205	3.5	0.400	19.750	-H140	06I41	natural	44
121	282	37	282	5.4	5.500	6.910	-H320	12D20	natural	53
125	413	36	413	2.5	2.100	9.800	-H140	09H41	natural	44
125	413	43	413	2.1	3.000	9.800	-H140	09L41	natural	44
125	383	29	383	3.1	1.700	9.800	-H140	09F38	natural	44
126	575	44	575	2.6	12.000	3.389	-H210	12L20	natural	47
128	351	43	351	2.2	2.100	11.554	-H140	09H41	natural	44
128	325	35	325	2.7	1.700	11.554	-H140	09F38	natural	44
129	290	31	290	3.1	1.300	13.957	-H140	09D41	natural	44
131	646	36	646	3.1	8.300	4.648	-H210	12H30	natural	47
131	646	36	646	3.9	8.100	4.648	-H320	12H30	natural	53
131	323	41	323	4.6	8.900	4.648	-H320	14D15	natural	53
131	323	45	323	3.2	8.300	4.648	-H210	12H15	natural	47
131	323	45	323	3.9	8.100	4.648	-H320	12H15	natural	53
131	186	32	186	3.2	0.400	21.808	-H140	06I41	natural	44
132	320	47	320	2.0	2.100	12.640	-H140	09H41	natural	44
132	297	38	297	2.6	1.700	12.640	-H140	09F38	natural	44
134	255	41	255	3.9	4.800	7.657	-H210	12D20	natural	47
136	290	51	290	1.9	2.100	13.957	-H140	09H41	natural	44
136	269	42	269	2.4	1.700	13.957	-H140	09F38	natural	44
137	127	37	127	3.1	0.300	31.976	-H140	06F41	natural	44
140	251	36	251	2.8	1.300	16.122	-H140	09D41	natural	44
140	251	59	251	1.7	2.000	16.122	-H140	09H41	natural	44
140	251	70	251	1.4	3.000	16.122	-H140	09L41	natural	44
140	233	48	233	2.1	1.600	16.122	-H140	09F38	natural	44
140	228	40	228	2.5	1.200	17.802	-H140	09D41	natural	44
140	228	66	228	1.5	2.000	17.802	-H140	09H41	natural	44
140	211	54	211	1.9	1.600	17.802	-H140	09F38	natural	44
140	205	44	205	2.3	1.200	19.750	-H140	09D41	natural	44

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
140	205	73	205	1.4	2.000	19.750	-H140	09H41	natural	44
140	205	86	205	1.2	2.900	19.750	-H140	09L41	natural	44
140	190	59	190	1.7	1.600	19.750	-H140	09F38	natural	44
140	186	49	186	2.1	1.200	21.808	-H140	09D41	natural	44
140	186	80	186	1.3	2.000	21.808	-H140	09H41	natural	44
140	186	95	186	1.1	2.900	21.808	-H140	09L41	natural	44
140	172	66	172	1.6	1.600	21.808	-H140	09F38	natural	44
140	163	36	163	2.8	0.400	24.829	-H140	06I41	natural	44
140	148	40	148	2.9	0.400	27.415	-H140	06I41	natural	44
140	127	47	127	2.5	0.400	31.976	-H140	06I41	natural	44
140	115	41	115	2.8	0.300	35.308	-H140	06F41	natural	44
140	115	51	115	2.2	0.400	35.308	-H140	06I41	natural	44
141	265	34	265	4.2	1.500	15.306	-H210	09D41	natural	47
143	420	61	420	2.1	12.000	4.648	-H210	12L20	natural	47
147	166	36	166	4.3	0.500	24.405	-H210	06I41	natural	47
150	228	46	228	3.4	4.800	8.571	-H210	12D20	natural	47
150	115	41	115	4.2	0.300	35.095	-H210	06F41	natural	47
153	575	44	575	3.1	12.000	3.389	-H320	12L20	natural	53
154	242	37	242	4.0	1.400	16.750	-H210	09D41	natural	47
156	350	32	350	4.3	2.000	10.720	-H210	09F38	natural	47
157	269	54	269	2.9	8.500	5.583	-H210	12H15	natural	47
158	312	82	312	1.8	12.000	6.250	-H210	12L20	natural	47
158	240	61	240	2.6	8.500	6.250	-H210	12H15	natural	47
159	349	73	349	2.0	12.000	5.583	-H210	12L20	natural	47
163	149	39	149	4.3	0.400	27.119	-H210	06I41	natural	47
163	106	45	106	4.3	0.300	38.238	-H320	06F41	natural	53
165	443	53	443	3.1	15.000	3.389	-H320	14H15	natural	53
165	443	76	443	2.2	25.000	3.389	-H320	14L15	natural	53
165	398	99	398	1.7	36.000	3.389	-H320	14P14	natural	53
166	206	51	206	4.3	5.000	9.477	-H320	12D20	natural	53
168	103	46	103	3.8	0.300	39.286	-H210	06F41	natural	47
170	496	47	496	4.0	9.500	6.045	-H450	12H30	natural	59
170	248	59	248	4.0	9.500	6.045	-H450	12H15	natural	59
171	247	54	247	4.2	9.800	6.083	-H320	14D15	natural	53
171	247	59	247	3.9	9.000	6.083	-H320	12H15	natural	53
171	228	112	228	1.4	11.000	8.571	-H210	12L20	natural	47
171	199	52	199	3.2	4.600	9.799	-H210	12D20	natural	47
171	175	83	175	2.1	8.100	8.571	-H210	12H15	natural	47
172	392	59	392	2.3	8.100	7.657	-H210	12H30	natural	47
172	255	100	255	1.6	11.000	7.657	-H210	12L20	natural	47

6.3

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
172	196	74	196	2.3	8.100	7.657	-H210	12H15	natural	47
173	216	42	216	3.6	1.400	18.750	-H210	09D41	natural	47
175	420	61	420	2.6	11.000	4.648	-H320	12L20	natural	53
175	313	36	313	3.8	2.000	12.000	-H210	09F38	natural	47
178	137	43	137	4.3	0.500	29.548	-H320	06I41	natural	53
182	306	76	306	1.9	7.900	9.799	-H210	12H30	natural	47
182	199	128	199	1.3	11.000	9.799	-H210	12L20	natural	47
182	153	95	153	1.9	7.900	9.799	-H210	12H15	natural	47
182	95	50	95	3.3	0.300	42.593	-H210	06F41	natural	47
183	133	44	133	3.9	0.400	30.357	-H210	06I41	natural	47
183	95	62	95	2.7	0.400	42.593	-H210	06I41	natural	47
186	454	51	454	3.8	9.300	6.613	-H450	12H30	natural	59
186	250	93	250	1.6	7.800	12.000	-H210	12H30	natural	47
186	227	64	227	3.9	9.300	6.613	-H450	12H15	natural	59
186	183	57	183	4.3	4.700	10.677	-H320	12D20	natural	53
186	163	64	163	2.7	4.500	12.000	-H210	12D20	natural	47
186	163	157	163	1.1	11.000	12.000	-H210	12L20	natural	47
186	125	116	125	1.6	7.800	12.000	-H210	12H15	natural	47
187	566	45	566	3.9	16.000	3.444	-H450	12L20	natural	59
187	182	57	182	3.0	4.500	10.720	-H210	12D20	natural	47
189	323	72	323	2.6	15.000	4.648	-H320	14H15	natural	53
189	323	104	323	1.8	24.000	4.648	-H320	14L15	natural	53
189	291	135	291	1.4	36.000	4.648	-H320	14P14	natural	53
189	280	83	280	1.8	7.800	10.720	-H210	12H30	natural	47
189	182	140	182	1.2	11.000	10.720	-H210	12L20	natural	47
189	140	104	140	1.8	7.800	10.720	-H210	12H15	natural	47
194	217	62	217	3.5	9.600	6.910	-H320	14D15	natural	53
194	217	67	217	3.3	8.800	6.910	-H320	12H15	natural	53
198	87	54	87	3.6	0.300	46.407	-H320	06F41	natural	53
199	274	41	274	3.6	1.900	13.673	-H210	09F38	natural	47
200	265	56	265	2.5	2.300	15.306	-H210	09H41	natural	47
200	265	64	265	2.3	4.400	15.306	-H210	12D41	natural	47
200	265	67	265	2.1	3.200	15.306	-H210	09L41	natural	47
200	245	46	245	3.2	1.900	15.306	-H210	09F38	natural	47
200	196	119	196	1.3	7.700	15.306	-H210	12H30	natural	47
200	127	82	127	2.2	4.400	15.306	-H210	12D20	natural	47
200	98	149	98	1.4	7.700	15.306	-H210	12H15	natural	47
201	296	50	296	2.9	2.300	13.673	-H210	09H41	natural	47
201	296	57	296	2.5	4.400	13.673	-H210	12D41	natural	47
201	296	60	296	2.4	3.200	13.673	-H210	09L41	natural	47

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
201	258	99	258	1.5	7.700	13.673	-H210	12H35	natural	47
201	219	106	219	1.5	7.700	13.673	-H210	12H30	natural	47
201	186	49	186	3.1	1.300	21.802	-H210	09D41	natural	47
201	143	73	143	2.5	4.400	13.673	-H210	12D20	natural	47
201	143	179	143	1.0	11.000	13.673	-H210	12L20	natural	47
201	110	133	110	1.5	7.700	13.673	-H210	12H15	natural	47
202	121	49	121	4.3	0.400	33.564	-H320	06I41	natural	53
204	167	62	167	4.0	4.600	11.680	-H320	12D20	natural	53
204	85	56	85	3.4	0.300	47.679	-H210	06F41	natural	47
206	85	69	85	2.7	0.400	47.679	-H210	06I41	natural	47
210	242	62	242	2.4	2.200	16.750	-H210	09H41	natural	47
210	242	70	242	2.2	4.300	16.750	-H210	12D41	natural	47
210	242	73	242	2.1	3.100	16.750	-H210	09L41	natural	47
210	224	50	224	3.1	1.800	16.750	-H210	09F38	natural	47
210	216	69	216	2.2	2.200	18.750	-H210	09H41	natural	47
210	216	78	216	1.9	4.300	18.750	-H210	12D41	natural	47
210	216	82	216	1.8	3.100	18.750	-H210	09L41	natural	47
210	210	122	210	1.3	7.600	16.750	-H210	12H35	natural	47
210	200	56	200	2.7	1.800	18.750	-H210	09F38	natural	47
210	188	136	188	1.2	7.600	18.750	-H210	12H35	natural	47
210	186	80	186	1.9	2.100	21.802	-H210	09H41	natural	47
210	186	95	186	1.6	3.000	21.802	-H210	09L41	natural	47
210	179	130	179	1.3	7.600	16.750	-H210	12H30	natural	47
210	172	66	172	2.4	1.700	21.802	-H210	09F38	natural	47
210	166	54	166	2.8	1.300	24.405	-H210	09D41	natural	47
210	166	90	166	1.7	2.100	24.405	-H210	09H41	natural	47
210	166	107	166	1.4	3.000	24.405	-H210	09L41	natural	47
210	160	146	160	1.1	7.600	18.750	-H210	12H30	natural	47
210	154	73	154	2.1	1.700	24.405	-H210	09F38	natural	47
210	149	61	149	2.8	1.200	27.119	-H210	09D41	natural	47
210	149	100	149	1.7	2.000	27.119	-H210	09H41	natural	47
210	149	118	149	1.4	2.900	27.119	-H210	09L41	natural	47
210	138	82	138	2.2	1.600	27.119	-H210	09F38	natural	47
210	133	68	133	2.5	1.200	30.357	-H210	09D41	natural	47
210	133	112	133	1.5	2.000	30.357	-H210	09H41	natural	47
210	133	133	133	1.3	2.900	30.357	-H210	09L41	natural	47
210	124	91	124	1.9	1.600	30.357	-H210	09F38	natural	47
210	116	89	116	2.1	4.300	16.750	-H210	12D20	natural	47
210	115	51	115	3.4	0.400	35.095	-H210	06I41	natural	47
210	104	100	104	1.9	4.300	18.750	-H210	12D20	natural	47

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
210	103	57	103	3.0	0.400	39.286	-H210	06I41	natural	47
210	90	163	90	1.3	7.600	16.750	-H210	12H15	natural	47
210	80	182	80	1.1	7.600	18.750	-H210	12H15	natural	47
212	161	65	161	3.6	4.700	12.128	-H320	12D20	natural	53
215	114	52	114	4.3	0.500	35.689	-H450	06I41	natural	59
218	282	91	282	2.2	12.000	6.910	-H320	12L20	natural	53
218	217	107	217	2.0	16.000	6.910	-H320	14H15	natural	53
218	217	154	217	1.4	25.000	6.910	-H320	14L15	natural	53
218	195	201	195	1.1	36.000	6.910	-H320	14P14	natural	53
218	87	68	87	2.9	0.400	46.407	-H320	06I41	natural	53
219	171	53	171	4.3	1.300	23.754	-H320	09D41	natural	53
220	413	62	413	3.3	14.000	4.724	-H450	12L20	natural	59
225	77	61	77	3.6	0.300	52.715	-H320	06F41	natural	53
227	321	80	321	2.6	12.000	6.083	-H320	12L20	natural	53
227	247	94	247	2.4	16.000	6.083	-H320	14H15	natural	53
227	247	136	247	1.7	25.000	6.083	-H320	14L15	natural	53
227	222	177	222	1.3	36.000	6.083	-H320	14P14	natural	53
230	106	56	106	3.4	0.400	38.238	-H320	06I41	natural	53
232	147	71	147	3.4	4.600	13.268	-H320	12D20	natural	53
234	74	64	74	3.8	0.300	54.750	-H450	06F41	natural	59
235	360	65	360	3.0	8.300	8.343	-H320	12H30	natural	53
235	180	74	180	3.4	9.100	8.343	-H320	14D15	natural	53
235	180	81	180	3.1	8.300	8.343	-H320	12H15	natural	53
237	323	79	323	2.7	13.000	6.045	-H450	12L20	natural	59
238	317	74	317	2.6	8.300	9.477	-H320	12H30	natural	53
238	206	124	206	1.8	12.000	9.477	-H320	12L20	natural	53
238	158	85	158	2.8	9.100	9.477	-H320	14D15	natural	53
238	158	92	158	2.6	8.300	9.477	-H320	12H15	natural	53
238	158	147	158	1.6	15.000	9.477	-H320	14H15	natural	53
238	158	211	158	1.1	24.000	9.477	-H320	14L15	natural	53
246	222	51	222	4.1	1.900	16.923	-H320	09F38	natural	53
247	295	87	295	2.6	13.000	6.613	-H450	12L20	natural	59
248	171	85	171	4.3	9.700	8.800	-H450	12H15	natural	59
248	77	77	77	2.9	0.400	52.715	-H320	06I41	natural	53
249	234	109	234	2.1	12.000	8.343	-H320	12L20	natural	53
249	180	130	180	1.9	15.000	8.343	-H320	14H15	natural	53
249	180	186	180	1.3	24.000	8.343	-H320	14L15	natural	53
249	162	243	162	1.0	36.000	8.343	-H320	14P14	natural	53
249	150	60	150	4.3	1.300	26.983	-H320	09D41	natural	53
252	318	73	318	4.0	17.000	4.724	-H450	14H15	natural	59

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
254	247	94	247	2.1	8.000	12.128	-H320	12H30	natural	53
254	161	159	161	1.5	11.000	12.128	-H320	12L20	natural	53
254	124	108	124	2.3	8.800	12.128	-H320	14D15	natural	53
254	124	118	124	2.1	8.000	12.128	-H320	12H15	natural	53
254	124	188	124	1.4	15.000	12.128	-H320	14H15	natural	53
256	436	77	436	3.3	28.000	3.444	-H450	14L15	natural	59
256	392	100	392	2.5	40.000	3.444	-H450	14P14	natural	59
260	272	62	272	3.4	4.400	14.898	-H320	12D41	natural	53
260	131	79	131	3.4	4.400	14.898	-H320	12D20	natural	53
261	94	63	94	3.9	0.500	43.313	-H450	06I41	natural	59
261	93	63	93	3.8	0.400	43.436	-H320	06I41	natural	53
262	226	103	226	2.0	7.900	13.268	-H320	12H30	natural	53
262	147	174	147	1.4	11.000	13.268	-H320	12L20	natural	53
262	113	118	113	2.2	8.700	13.268	-H320	14D15	natural	53
262	113	129	113	2.0	7.900	13.268	-H320	12H15	natural	53
262	113	206	113	1.3	15.000	13.268	-H320	14H15	natural	53
264	66	72	66	3.8	0.300	61.875	-H450	06F41	natural	59
265	281	83	281	2.5	8.000	10.677	-H320	12H30	natural	53
265	183	140	183	1.7	11.000	10.677	-H320	12L20	natural	53
265	141	95	141	2.8	8.800	10.677	-H320	14D15	natural	53
265	141	104	141	2.6	8.000	10.677	-H320	12H15	natural	53
265	141	166	141	1.6	15.000	10.677	-H320	14H15	natural	53
265	141	238	141	1.1	24.000	10.677	-H320	14L15	natural	53
266	206	55	206	4.1	1.800	18.250	-H320	09F38	natural	53
270	74	80	74	3.1	0.400	54.750	-H450	06I41	natural	59
271	257	91	257	2.4	7.900	11.680	-H320	12H30	natural	53
271	167	153	167	1.6	11.000	11.680	-H320	12L20	natural	53
271	128	104	128	2.6	8.700	11.680	-H320	14D15	natural	53
271	128	113	128	2.4	7.900	11.680	-H320	12H15	natural	53
271	128	181	128	1.5	15.000	11.680	-H320	14H15	natural	53
271	128	261	128	1.0	24.000	11.680	-H320	14L15	natural	53
272	137	66	137	4.0	1.300	29.548	-H320	09D41	natural	53
280	301	77	301	4.0	9.100	9.965	-H450	12H30	natural	59
280	151	89	151	4.3	9.900	9.965	-H450	14D15	natural	59
280	151	97	151	4.0	9.100	9.965	-H450	12H15	natural	59
281	239	62	239	3.2	2.300	16.923	-H320	09H41	natural	53
281	239	71	239	2.9	4.400	16.923	-H320	12D41	natural	53
281	239	74	239	2.7	3.200	16.923	-H320	09L41	natural	53
281	208	123	208	1.7	7.700	16.923	-H320	12H35	natural	53
281	177	131	177	1.7	7.700	16.923	-H320	12H30	natural	53

6.3

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
$M_{2, \max}$ [Nm]	$n_{2, th}$ [r/min]	M_2 [Nm]	$n_{2, eto}$ [r/min]	c	J [kgcm ²]		g500	MCS		
281	115	90	115	2.9	4.400	16.923	-H320	12D20	natural	53
281	115	222	115	1.2	11.000	16.923	-H320	12L20	natural	53
281	89	151	89	1.9	8.500	16.923	-H320	14D15	natural	53
281	89	164	89	1.7	7.700	16.923	-H320	12H15	natural	53
281	89	263	89	1.1	15.000	16.923	-H320	14H15	natural	53
289	272	55	272	3.8	2.300	14.898	-H320	09H41	natural	53
292	272	65	272	3.2	3.200	14.898	-H320	09L41	natural	53
293	318	105	318	2.8	27.000	4.724	-H450	14L15	natural	59
293	286	137	286	2.1	38.000	4.724	-H450	14P14	natural	59
294	237	108	237	2.0	7.700	14.898	-H320	12H35	natural	53
294	201	116	201	2.0	7.700	14.898	-H320	12H30	natural	53
294	131	195	131	1.4	11.000	14.898	-H320	12L20	natural	53
294	101	133	101	2.2	8.500	14.898	-H320	14D15	natural	53
294	101	145	101	2.0	7.700	14.898	-H320	12H15	natural	53
294	101	231	101	1.3	15.000	14.898	-H320	14H15	natural	53
294	83	71	83	3.9	0.500	48.950	-H450	06I41	natural	59
299	195	76	195	2.8	2.200	20.731	-H320	09H41	natural	53
299	195	86	195	2.5	4.300	20.731	-H320	12D41	natural	53
299	195	91	195	2.4	3.100	20.731	-H320	09L41	natural	53
299	181	62	181	3.5	1.800	20.731	-H320	09F38	natural	53
299	170	151	170	1.5	7.600	20.731	-H320	12H35	natural	53
299	145	161	145	1.5	7.600	20.731	-H320	12H30	natural	53
299	94	111	94	2.5	4.300	20.731	-H320	12D20	natural	53
299	94	272	94	1.0	11.000	20.731	-H320	12L20	natural	53
299	72	201	72	1.5	7.600	20.731	-H320	12H15	natural	53
303	264	88	264	3.6	18.000	5.678	-H450	14H15	natural	59
305	66	90	66	3.1	0.400	61.875	-H450	06I41	natural	59
307	222	67	222	3.3	2.200	18.250	-H320	09H41	natural	53
307	222	80	222	2.8	3.100	18.250	-H320	09L41	natural	53
308	343	74	343	3.9	14.000	5.678	-H450	12L20	natural	59
309	121	75	121	3.5	1.200	33.564	-H320	09D41	natural	53
313	222	76	222	3.0	4.300	18.250	-H320	12D41	natural	53
313	193	133	193	1.8	7.600	18.250	-H320	12H35	natural	53
313	164	142	164	1.8	7.600	18.250	-H320	12H30	natural	53
313	107	97	107	2.9	4.300	18.250	-H320	12D20	natural	53
313	107	239	107	1.2	11.000	18.250	-H320	12L20	natural	53
313	82	177	82	1.8	7.600	18.250	-H320	12H15	natural	53
315	264	127	264	2.5	27.000	5.678	-H450	14L15	natural	59
315	238	165	238	1.9	38.000	5.678	-H450	14P14	natural	59
317	266	87	266	3.6	9.000	11.262	-H450	12H30	natural	59

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
317	133	101	133	4.0	9.800	11.262	-H450	14D15	natural	59
317	133	109	133	3.7	9.000	11.262	-H450	12H15	natural	59
320	171	88	171	2.6	2.100	23.754	-H320	09H41	natural	53
320	171	104	171	2.2	3.000	23.754	-H320	09L41	natural	53
320	158	71	158	3.3	1.700	23.754	-H320	09F38	natural	53
320	150	99	150	2.6	2.100	26.983	-H320	09H41	natural	53
320	150	118	150	2.2	3.000	26.983	-H320	09L41	natural	53
320	139	81	139	3.3	1.700	26.983	-H320	09F38	natural	53
320	137	109	137	2.4	2.100	29.548	-H320	09H41	natural	53
320	137	129	137	2.0	3.000	29.548	-H320	09L41	natural	53
320	127	89	127	3.0	1.700	29.548	-H320	09F38	natural	53
320	121	124	121	2.1	2.000	33.564	-H320	09H41	natural	53
320	121	147	121	1.8	2.900	33.564	-H320	09L41	natural	53
320	112	101	112	2.6	1.600	33.564	-H320	09F38	natural	53
322	94	97	94	3.0	1.300	43.313	-H450	09D41	natural	59
322	94	160	94	1.8	2.100	43.313	-H450	09H41	natural	59
322	94	189	94	1.5	3.000	43.313	-H450	09L41	natural	59
322	87	130	87	2.3	1.700	43.313	-H450	09F38	natural	59
323	248	94	248	3.4	16.000	6.045	-H450	14H15	natural	59
323	248	135	248	2.4	26.000	6.045	-H450	14L15	natural	59
323	223	176	223	1.8	37.000	6.045	-H450	14P14	natural	59
323	169	67	169	4.1	2.000	22.170	-H450	09F38	natural	59
329	114	80	114	4.1	1.300	35.689	-H450	09D41	natural	59
331	238	63	238	4.1	2.800	17.033	-H450	09H41	natural	59
334	227	103	227	3.3	16.000	6.613	-H450	14H15	natural	59
334	227	148	227	2.3	25.000	6.613	-H450	14L15	natural	59
334	204	192	204	1.7	37.000	6.613	-H450	14P14	natural	59
336	210	80	210	4.0	4.900	19.250	-H450	12D41	natural	59
336	101	103	101	4.0	4.900	19.250	-H450	12D20	natural	59
347	244	96	244	3.4	8.900	12.320	-H450	12H30	natural	59
347	122	110	122	3.7	9.700	12.320	-H450	14D15	natural	59
347	122	120	122	3.4	8.900	12.320	-H450	12H15	natural	59
354	250	102	250	3.2	13.000	7.787	-H450	12L20	natural	59
354	193	121	193	2.9	17.000	7.787	-H450	14H15	natural	59
354	193	174	193	2.0	26.000	7.787	-H450	14L15	natural	59
354	173	227	173	1.6	37.000	7.787	-H450	14P14	natural	59
356	238	74	238	3.4	3.700	17.033	-H450	09L41	natural	59
365	150	75	150	4.1	2.000	25.056	-H450	09F38	natural	59
366	83	109	83	3.0	1.300	48.950	-H450	09D41	natural	59
366	83	180	83	1.8	2.100	48.950	-H450	09H41	natural	59

6.3

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
366	83	214	83	1.6	3.000	48.950	-H450	09L41	natural	59
366	77	147	77	2.3	1.700	48.950	-H450	09F38	natural	59
370	222	115	222	2.9	13.000	8.800	-H450	12L20	natural	59
370	171	137	171	2.7	17.000	8.800	-H450	14H15	natural	59
370	171	196	171	1.9	26.000	8.800	-H450	14L15	natural	59
370	153	256	153	1.4	37.000	8.800	-H450	14P14	natural	59
372	183	82	183	3.3	2.400	22.170	-H450	09H41	natural	59
372	183	97	183	2.8	3.300	22.170	-H450	09L41	natural	59
372	100	90	100	4.5	1.300	40.333	-H450	09D41	natural	59
374	210	71	210	4.1	2.800	19.250	-H450	09H41	natural	59
384	196	131	196	2.7	12.000	9.965	-H450	12L20	natural	59
384	151	155	151	2.5	16.000	9.965	-H450	14H15	natural	59
384	151	222	151	1.7	25.000	9.965	-H450	14L15	natural	59
384	136	290	136	1.3	37.000	9.965	-H450	14P14	natural	59
386	147	102	147	3.1	2.300	27.578	-H450	09H41	natural	59
386	147	120	147	2.6	3.200	27.578	-H450	09L41	natural	59
386	136	83	136	3.9	1.900	27.578	-H450	09F38	natural	59
387	183	92	183	3.5	4.500	22.170	-H450	12D41	natural	59
387	88	118	88	3.5	4.500	22.170	-H450	12D20	natural	59
391	254	101	254	3.2	8.500	13.905	-H450	12H35	natural	59
391	216	108	216	3.1	8.500	13.905	-H450	12H30	natural	59
391	108	124	108	3.4	9.300	13.905	-H450	14D15	natural	59
391	108	135	108	3.2	8.500	13.905	-H450	12H15	natural	59
400	173	148	173	2.5	12.000	11.262	-H450	12L20	natural	59
400	133	175	133	2.3	16.000	11.262	-H450	14H15	natural	59
400	133	251	133	1.6	25.000	11.262	-H450	14L15	natural	59
400	120	328	120	1.2	36.000	11.262	-H450	14P14	natural	59
400	114	132	114	2.5	2.100	35.689	-H450	09H41	natural	59
400	114	156	114	2.1	3.000	35.689	-H450	09L41	natural	59
400	105	107	105	3.1	1.700	35.689	-H450	09F38	natural	59
403	210	84	210	3.4	3.700	19.250	-H450	09L41	natural	59
411	158	161	158	2.3	12.000	12.320	-H450	12L20	natural	59
411	122	191	122	2.1	16.000	12.320	-H450	14H15	natural	59
411	122	275	122	1.5	25.000	12.320	-H450	14L15	natural	59
411	110	359	110	1.1	36.000	12.320	-H450	14P14	natural	59
420	162	92	162	3.3	2.400	25.056	-H450	09H41	natural	59
420	162	109	162	2.8	3.300	25.056	-H450	09L41	natural	59
426	140	182	140	2.1	12.000	13.905	-H450	12L20	natural	59
426	108	216	108	2.0	15.000	13.905	-H450	14H15	natural	59
426	108	310	108	1.4	25.000	13.905	-H450	14L15	natural	59

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
426	97	405	97	1.1	36.000	13.905	-H450	14P14	natural	59
436	130	115	130	3.1	2.300	31.167	-H450	09H41	natural	59
436	130	136	130	2.6	3.200	31.167	-H450	09L41	natural	59
436	120	94	120	3.9	1.900	31.167	-H450	09F38	natural	59
438	162	105	162	3.1	4.500	25.056	-H450	12D41	natural	59
438	78	134	78	3.1	4.500	25.056	-H450	12D20	natural	59
441	224	114	224	2.9	8.500	15.714	-H450	12H35	natural	59
441	191	122	191	2.9	8.500	15.714	-H450	12H30	natural	59
441	124	206	124	2.0	12.000	15.714	-H450	12L20	natural	59
441	96	140	96	3.1	9.300	15.714	-H450	14D15	natural	59
441	96	152	96	2.9	8.500	15.714	-H450	12H15	natural	59
441	96	244	96	1.8	15.000	15.714	-H450	14H15	natural	59
441	96	351	96	1.3	25.000	15.714	-H450	14L15	natural	59
448	183	140	183	2.4	8.200	19.250	-H450	12H35	natural	59
448	156	149	156	2.4	8.200	19.250	-H450	12H30	natural	59
448	101	252	101	1.6	12.000	19.250	-H450	12L20	natural	59
448	78	172	78	2.6	9.000	19.250	-H450	14D15	natural	59
448	78	187	78	2.4	8.200	19.250	-H450	12H15	natural	59
448	78	299	78	1.5	15.000	19.250	-H450	14H15	natural	59
448	78	430	78	1.0	24.000	19.250	-H450	14L15	natural	59
450	207	124	207	2.7	8.200	17.033	-H450	12H35	natural	59
450	189	231	189	1.5	15.000	17.033	-H450	14H32	natural	59
450	176	132	176	2.7	8.200	17.033	-H450	12H30	natural	59
450	159	161	159	2.1	7.800	22.170	-H450	12H35	natural	59
450	147	115	147	3.2	4.400	27.578	-H450	12D41	natural	59
450	147	294	147	1.3	11.000	27.578	-H450	12L41	natural	59
450	146	301	146	1.2	15.000	22.170	-H450	14H32	natural	59
450	141	182	141	1.9	7.800	25.056	-H450	12H35	natural	59
450	135	172	135	2.1	7.800	22.170	-H450	12H30	natural	59
450	130	130	130	2.8	4.400	31.167	-H450	12D41	natural	59
450	130	333	130	1.1	11.000	31.167	-H450	12L41	natural	59
450	129	340	129	1.0	15.000	25.056	-H450	14H32	natural	59
450	128	201	128	1.9	7.700	27.578	-H450	12H35	natural	59
450	120	194	120	1.8	7.800	25.056	-H450	12H30	natural	59
450	115	223	115	1.9	12.000	17.033	-H450	12L20	natural	59
450	113	227	113	1.7	7.700	31.167	-H450	12H35	natural	59
450	109	214	109	1.9	7.700	27.578	-H450	12H30	natural	59
450	100	149	100	2.7	2.100	40.333	-H450	09H41	natural	59
450	100	176	100	2.3	3.000	40.333	-H450	09L41	natural	59
450	96	242	96	1.7	7.700	31.167	-H450	12H30	natural	59

6.3

g500-H helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
$M_{2, \max}$ [Nm]	$n_{2, th}$ [r/min]	M_2 [Nm]	$n_{2, eto}$ [r/min]	c	J [kgcm ²]		g500	MCS		
450	93	121	93	3.4	1.700	40.333	-H450	09F38	natural	59
450	88	152	88	3.0	9.000	17.033	-H450	14D15	natural	59
450	88	165	88	2.7	8.200	17.033	-H450	12H15	natural	59
450	88	264	88	1.7	15.000	17.033	-H450	14H15	natural	59
450	88	290	88	1.4	11.000	22.170	-H450	12L20	natural	59
450	88	380	88	1.2	24.000	17.033	-H450	14L15	natural	59
450	78	328	78	1.3	11.000	25.056	-H450	12L20	natural	59
450	71	147	71	3.1	4.400	27.578	-H450	12D20	natural	59
450	71	361	71	1.3	11.000	27.578	-H450	12L20	natural	59
450	68	198	68	2.3	8.600	22.170	-H450	14D15	natural	59
450	68	215	68	2.1	7.800	22.170	-H450	12H15	natural	59
450	68	344	68	1.3	15.000	22.170	-H450	14H15	natural	59
450	63	166	63	2.7	4.400	31.167	-H450	12D20	natural	59
450	63	408	63	1.1	11.000	31.167	-H450	12L20	natural	59
450	60	224	60	2.0	8.600	25.056	-H450	14D15	natural	59
450	60	243	60	1.9	7.800	25.056	-H450	12H15	natural	59
450	60	389	60	1.2	15.000	25.056	-H450	14H15	natural	59
450	54	268	54	1.7	7.700	27.578	-H450	12H15	natural	59
450	48	302	48	1.5	7.700	31.167	-H450	12H15	natural	59

g500-H helical geared motors

Technical data



Selection tables


3-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
127	73	32	73	5.4	0.200	55.529	-H210	06C41	natural	47
143	65	36	65	4.8	0.200	62.160	-H210	06C41	natural	47
163	57	41	57	4.2	0.200	71.026	-H210	06C41	natural	47
182	93	50	93	3.0	0.300	43.390	-H210	06F41	natural	47
182	51	46	51	3.8	0.200	79.507	-H210	06C41	natural	47
204	83	56	83	3.1	0.300	48.571	-H210	06F41	natural	47
210	93	62	93	2.4	0.400	43.390	-H210	06I41	natural	47
210	93	95	93	1.6	1.200	43.390	-H210	09D41	natural	47
210	86	129	86	1.2	1.600	43.390	-H210	09F38	natural	47
210	83	70	83	2.5	0.400	48.571	-H210	06I41	natural	47
210	83	107	83	1.6	1.200	48.571	-H210	09D41	natural	47
210	77	144	77	1.2	1.600	48.571	-H210	09F38	natural	47
210	73	64	73	2.7	0.300	55.529	-H210	06F41	natural	47
210	73	80	73	2.1	0.400	55.529	-H210	06I41	natural	47
210	73	122	73	1.4	1.200	55.529	-H210	09D41	natural	47
210	68	165	68	1.1	1.600	55.529	-H210	09F38	natural	47
210	65	71	65	2.4	0.300	62.160	-H210	06F41	natural	47
210	65	89	65	1.9	0.400	62.160	-H210	06I41	natural	47
210	65	137	65	1.3	1.200	62.160	-H210	09D41	natural	47
210	57	81	57	2.1	0.300	71.026	-H210	06F41	natural	47
210	57	102	57	1.7	0.400	71.026	-H210	06I41	natural	47
210	51	91	51	1.9	0.300	79.507	-H210	06F41	natural	47
210	51	114	51	1.5	0.400	79.507	-H210	06I41	natural	47
210	44	53	44	3.6	0.200	92.205	-H210	06C41	natural	47
210	44	106	44	1.8	0.300	92.205	-H210	06F41	natural	47
210	44	132	44	1.4	0.300	92.205	-H210	06I41	natural	47
210	39	59	39	3.2	0.200	103.214	-H210	06C41	natural	47
210	39	118	39	1.6	0.300	103.214	-H210	06F41	natural	47
210	39	148	39	1.3	0.300	103.214	-H210	06I41	natural	47
226	75	62	75	4.2	0.400	53.703	-H320	06F41	natural	53
254	67	69	67	3.8	0.300	60.502	-H320	06F41	natural	53
262	36	65	36	4.4	0.200	114.118	-H320	06C41	natural	53
278	33	70	33	5.8	0.200	121.342	-H450	06C41	natural	59
280	86	68	86	3.9	0.400	47.276	-H320	06I41	natural	53
289	59	79	59	3.3	0.300	68.726	-H320	06F41	natural	53
315	30	79	30	5.2	0.200	137.133	-H450	06C41	natural	59
318	75	77	75	3.4	0.400	53.703	-H320	06I41	natural	53
320	86	104	86	2.5	1.200	47.276	-H320	09D41	natural	53
320	86	172	86	1.5	2.000	47.276	-H320	09H41	natural	53
320	86	203	86	1.3	2.900	47.276	-H320	09L41	natural	53

6.3

g500-H helical geared motors

Technical data



Selection tables

3-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
320	79	140	79	1.9	1.600	47.276	-H320	09F38	natural	53
320	75	118	75	2.2	1.200	53.703	-H320	09D41	natural	53
320	75	195	75	1.3	2.000	53.703	-H320	09H41	natural	53
320	75	231	75	1.1	2.900	53.703	-H320	09L41	natural	53
320	70	159	70	1.7	1.600	53.703	-H320	09F38	natural	53
320	67	87	67	3.0	0.400	60.502	-H320	06I41	natural	53
320	67	133	67	2.0	1.200	60.502	-H320	09D41	natural	53
320	67	220	67	1.2	2.000	60.502	-H320	09H41	natural	53
320	67	260	67	1.0	2.900	60.502	-H320	09L41	natural	53
320	62	179	62	1.5	1.600	60.502	-H320	09F38	natural	53
320	59	99	59	2.6	0.400	68.726	-H320	06I41	natural	53
320	59	151	59	1.7	1.200	68.726	-H320	09D41	natural	53
320	59	250	59	1.1	2.000	68.726	-H320	09H41	natural	53
320	55	204	55	1.3	1.600	68.726	-H320	09F38	natural	53
320	52	89	52	2.9	0.300	77.387	-H320	06F41	natural	53
320	52	111	52	2.4	0.400	77.387	-H320	06I41	natural	53
320	46	101	46	2.9	0.300	87.906	-H320	06F41	natural	53
320	46	126	46	2.3	0.400	87.906	-H320	06I41	natural	53
320	40	115	40	2.5	0.300	100.462	-H320	06F41	natural	53
320	40	144	40	2.0	0.300	100.462	-H320	06I41	natural	53
320	36	131	36	2.2	0.300	114.118	-H320	06F41	natural	53
320	36	164	36	1.8	0.300	114.118	-H320	06I41	natural	53
331	51	90	51	4.1	0.400	78.794	-H450	06F41	natural	59
358	26	90	26	4.5	0.200	156.274	-H450	06C41	natural	59
366	66	89	66	4.2	0.500	61.774	-H450	06I41	natural	59
374	46	102	46	4.0	0.400	89.048	-H450	06F41	natural	59
401	92	97	92	3.3	1.500	44.124	-H450	09D41	natural	59
405	23	101	23	4.0	0.200	176.611	-H450	06C41	natural	59
406	42	111	42	3.7	0.300	96.522	-H450	06F41	natural	59
414	58	100	58	3.7	0.500	69.813	-H450	06I41	natural	59
450	92	160	92	2.0	2.300	44.124	-H450	09H41	natural	59
450	92	190	92	1.7	3.200	44.124	-H450	09L41	natural	59
450	85	131	85	2.5	1.900	44.124	-H450	09F38	natural	59
450	81	110	81	3.4	1.500	49.867	-H450	09D41	natural	59
450	81	181	81	2.0	2.300	49.867	-H450	09H41	natural	59
450	81	214	81	1.7	3.200	49.867	-H450	09L41	natural	59
450	75	148	75	2.5	1.900	49.867	-H450	09F38	natural	59
450	72	124	72	3.0	1.400	56.469	-H450	09D41	natural	59
450	72	205	72	1.8	2.200	56.469	-H450	09H41	natural	59
450	72	243	72	1.5	3.100	56.469	-H450	09L41	natural	59

g500-H helical geared motors

Technical data



Selection tables


3-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
450	66	136	66	2.7	1.300	61.774	-H450	09D41	natural	59
450	66	167	66	2.3	1.800	56.469	-H450	09F38	natural	59
450	66	224	66	1.6	2.100	61.774	-H450	09H41	natural	59
450	66	266	66	1.4	3.000	61.774	-H450	09L41	natural	59
450	61	183	61	2.1	1.700	61.774	-H450	09F38	natural	59
450	58	153	58	2.4	1.300	69.813	-H450	09D41	natural	59
450	58	254	58	1.4	2.100	69.813	-H450	09H41	natural	59
450	58	300	58	1.2	3.000	69.813	-H450	09L41	natural	59
450	54	207	54	1.8	1.700	69.813	-H450	09F38	natural	59
450	51	113	51	3.3	0.500	78.794	-H450	06I41	natural	59
450	51	173	51	2.1	1.300	78.794	-H450	09D41	natural	59
450	51	286	51	1.3	2.100	78.794	-H450	09H41	natural	59
450	51	339	51	1.1	3.000	78.794	-H450	09L41	natural	59
450	48	233	48	1.6	1.700	78.794	-H450	09F38	natural	59
450	46	128	46	3.2	0.500	89.048	-H450	06I41	natural	59
450	46	196	46	2.1	1.300	89.048	-H450	09D41	natural	59
450	46	323	46	1.3	2.100	89.048	-H450	09H41	natural	59
450	46	383	46	1.1	3.000	89.048	-H450	09L41	natural	59
450	42	138	42	2.9	0.400	96.522	-H450	06I41	natural	59
450	42	212	42	1.9	1.200	96.522	-H450	09D41	natural	59
450	42	264	42	1.6	1.700	89.048	-H450	09F38	natural	59
450	42	351	42	1.2	2.000	96.522	-H450	09H41	natural	59
450	39	286	39	1.5	1.600	96.522	-H450	09F38	natural	59
450	37	125	37	3.3	0.300	109.083	-H450	06F41	natural	59
450	37	156	37	2.6	0.400	109.083	-H450	06I41	natural	59
450	37	240	37	1.7	1.200	109.083	-H450	09D41	natural	59
450	37	396	37	1.0	2.000	109.083	-H450	09H41	natural	59
450	34	323	34	1.3	1.600	109.083	-H450	09F38	natural	59
450	33	139	33	2.9	0.300	121.342	-H450	06F41	natural	59
450	33	174	33	2.3	0.400	121.342	-H450	06I41	natural	59
450	30	157	30	2.6	0.300	137.133	-H450	06F41	natural	59
450	30	197	30	2.1	0.400	137.133	-H450	06I41	natural	59
450	26	179	26	2.3	0.300	156.274	-H450	06F41	natural	59
450	26	224	26	1.8	0.400	156.274	-H450	06I41	natural	59
450	23	203	23	2.0	0.300	176.611	-H450	06F41	natural	59
450	23	253	23	1.6	0.400	176.611	-H450	06I41	natural	59

6.3

g500-H helical geared motors


Technical data



Dimensions, notes


Notes on the dimensions

The following legend shows the layout of the dimension sheets.

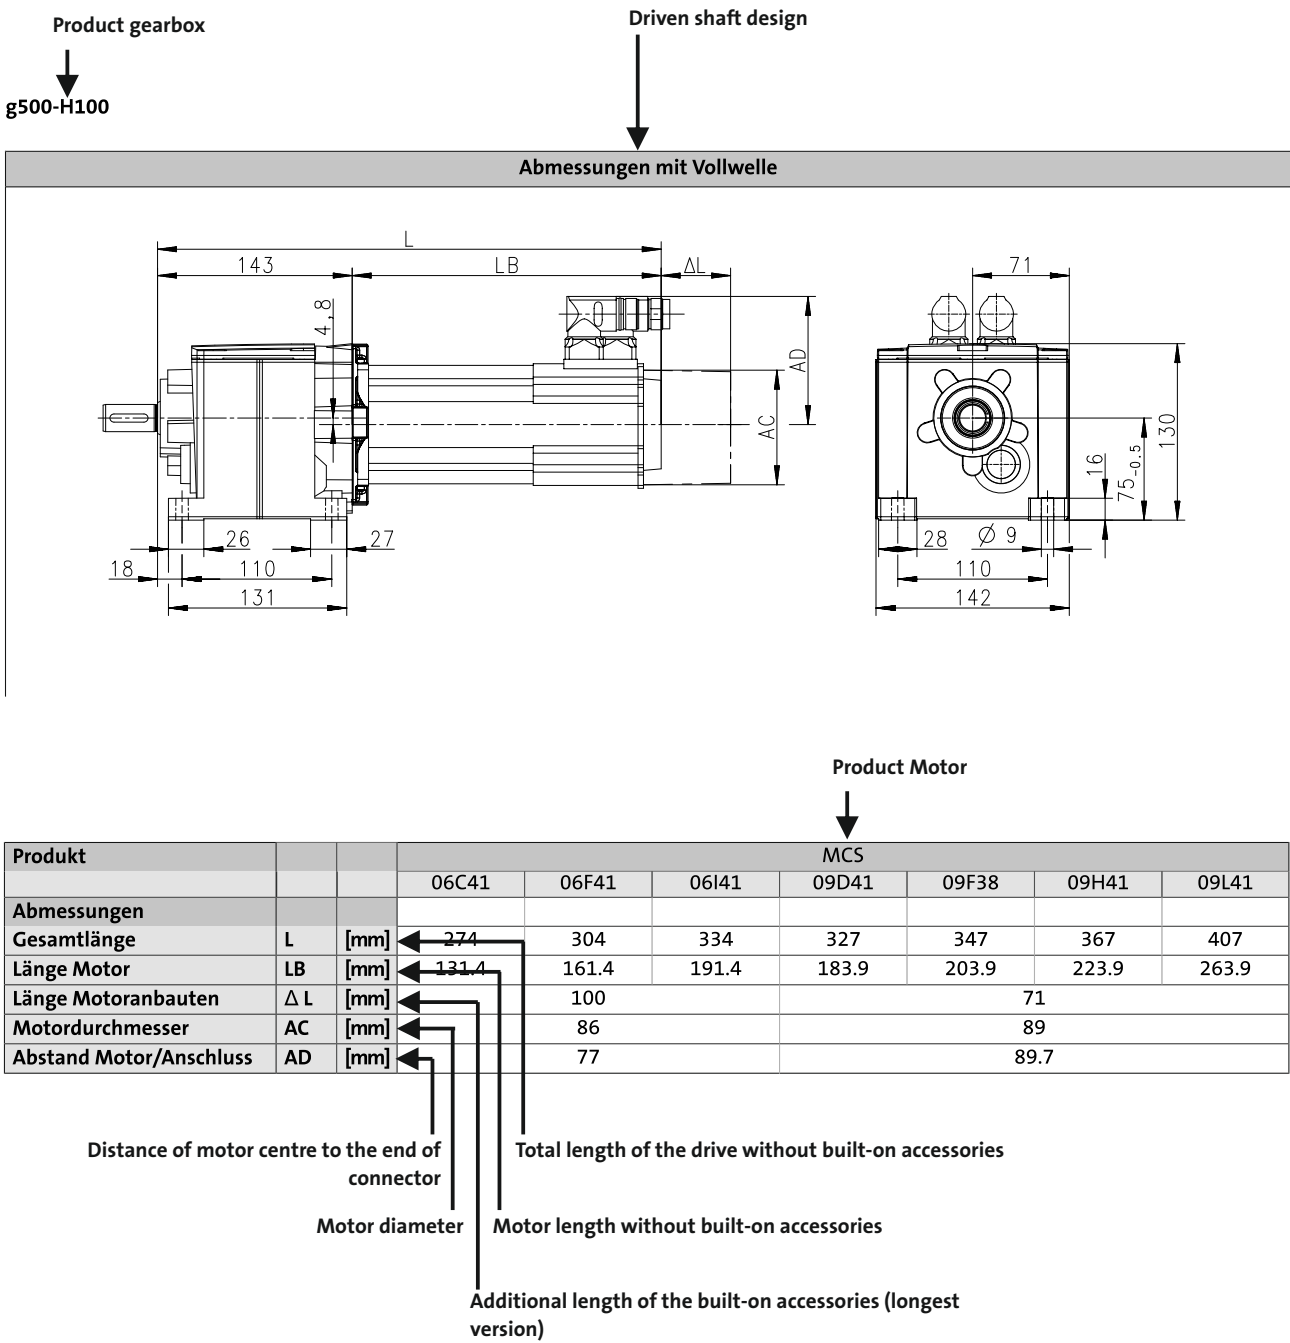


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-H45

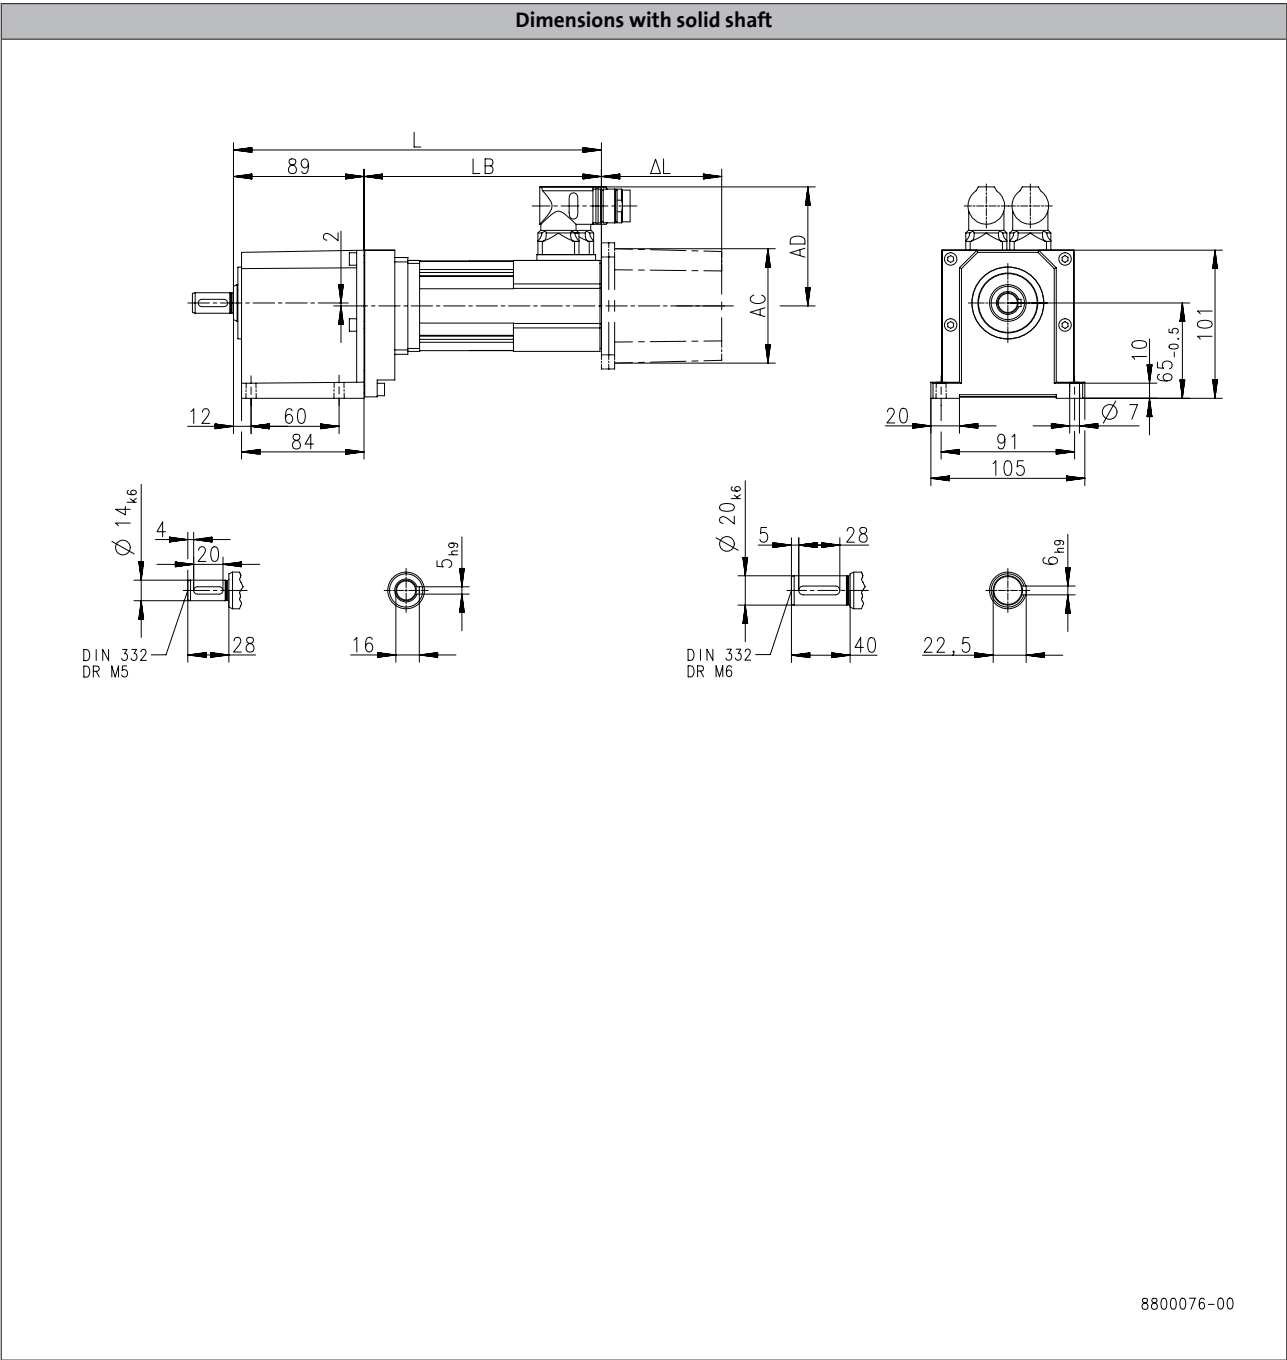


8800076-00

Product			MCS		
			06C41	06F41	06I41
Dimensions					
Total length	L	[mm]	220	250	280
Motor length	LB	[mm]	131.4	161.4	191.4
Length of motor options	Δ L	[mm]	100		
Motor diameter	AC	[mm]	86		
Distance motor/connection	AD	[mm]	77		


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors


g500-H45

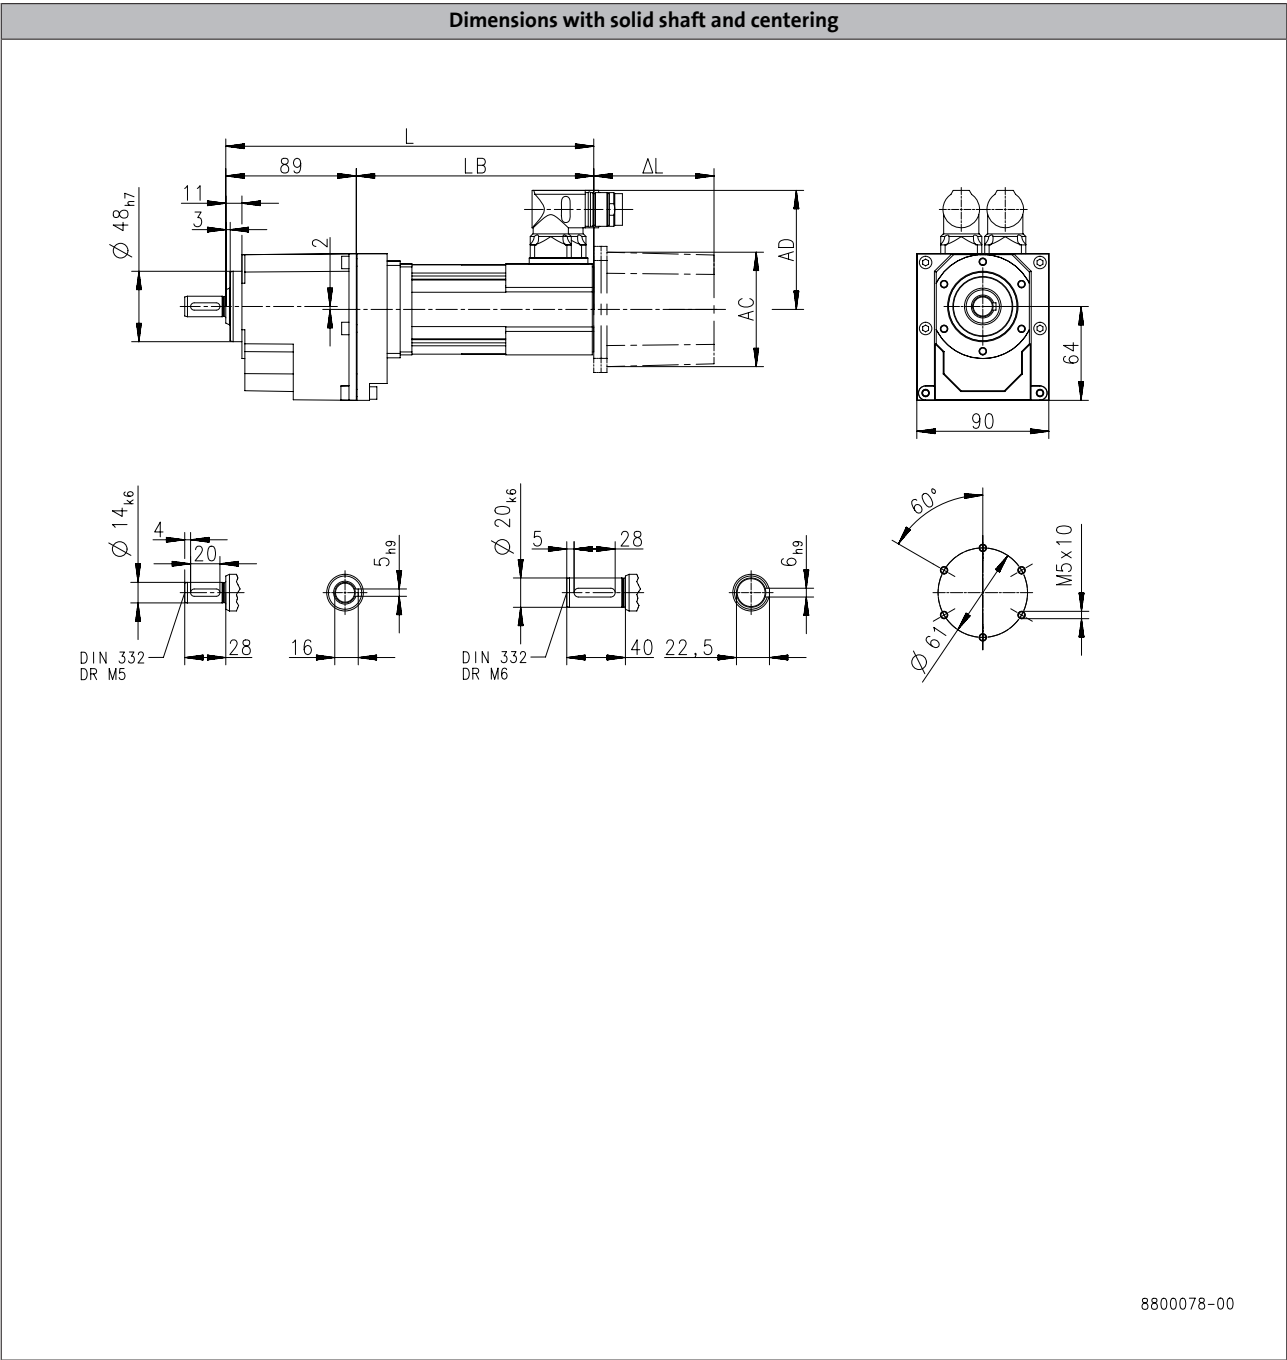

Product			MCS		
			06C41	06F41	06I41
Dimensions					
Total length	L	[mm]	220	250	280
Motor length	LB	[mm]	131.4	161.4	191.4
Length of motor options	ΔL	[mm]		100	
Motor diameter	AC	[mm]		86	
Distance motor/connection	AD	[mm]		77	


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-H45

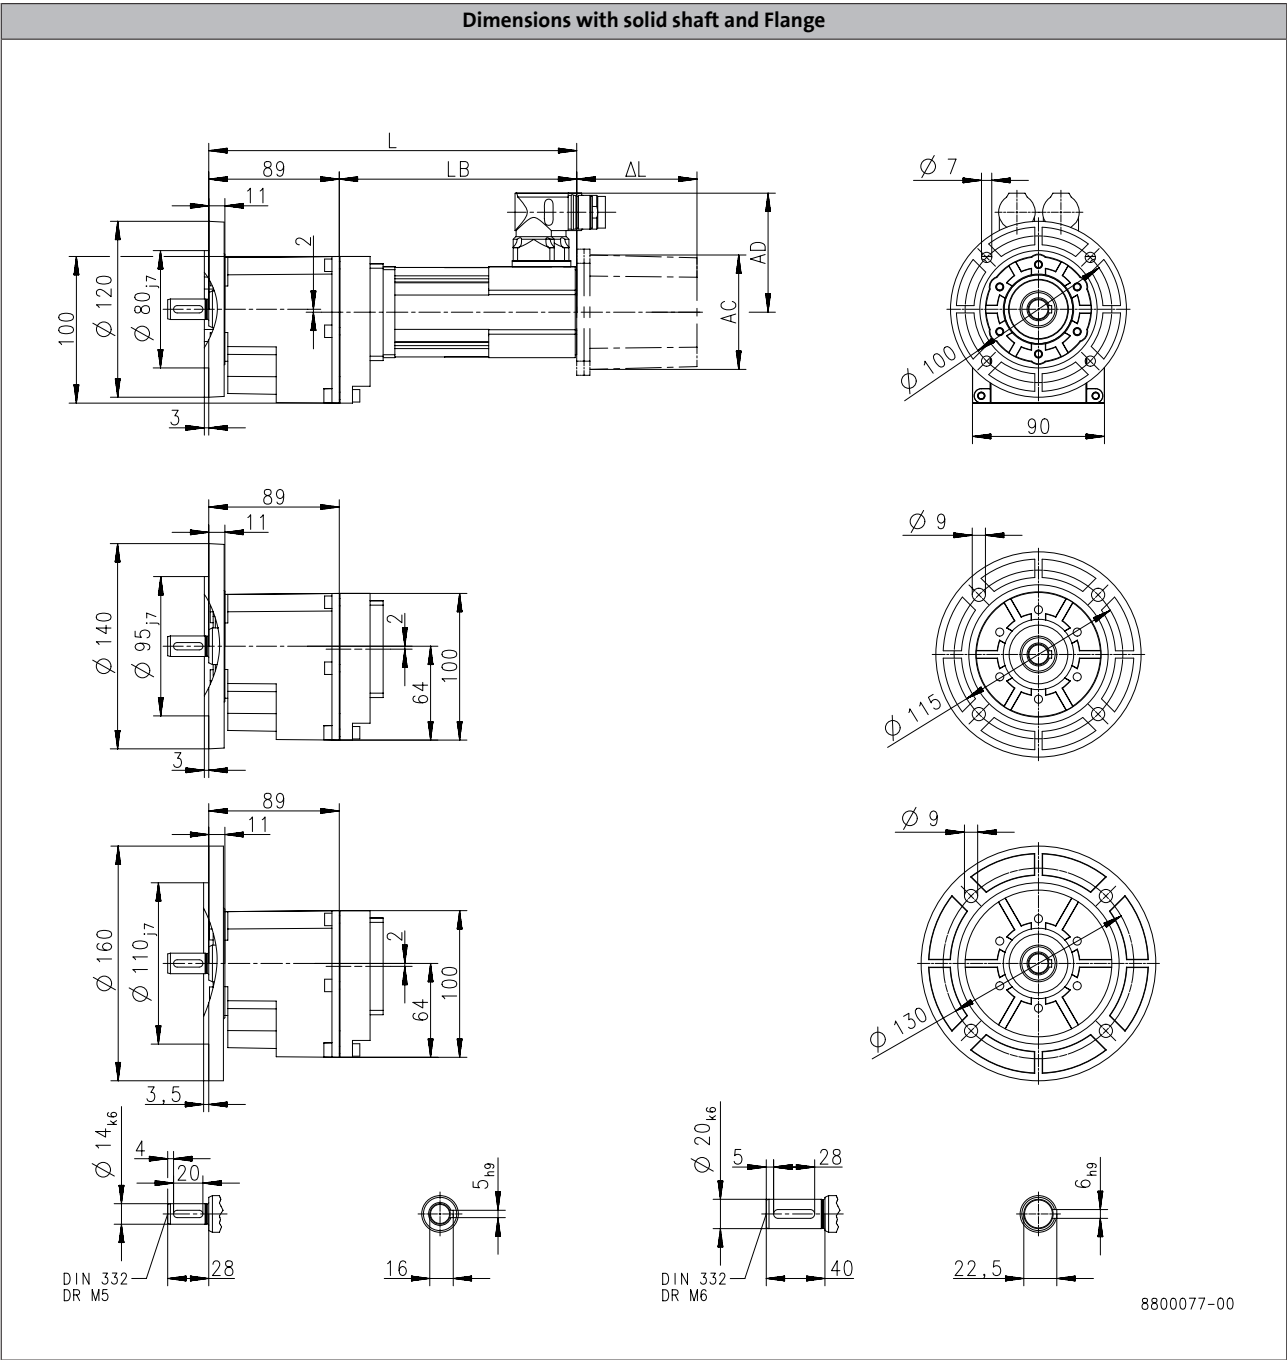


Product			MCS		
			06C41	06F41	06I41
Dimensions					
Total length	L	[mm]	220	250	280
Motor length	LB	[mm]	131.4	161.4	191.4
Length of motor options	Δ L	[mm]		100	
Motor diameter	AC	[mm]		86	
Distance motor/connection	AD	[mm]		77	

Dimensions, self-ventilated motors

g500-H100

Dimensions with solid shaft

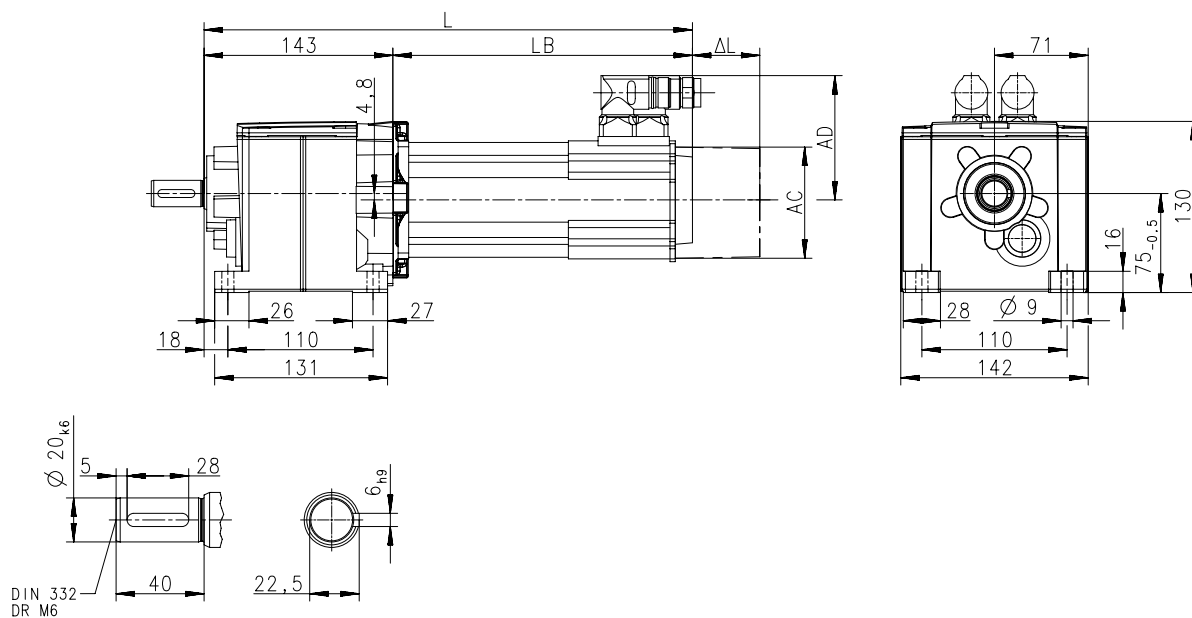


8800088-00

Product			MCS						
			06C41	06F41	06I41	09D41	09F38	09H41	09L41
Dimensions									
Total length	L	[mm]	274	304	334	327	347	367	407
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9
Length of motor options	Δ L	[mm]	100				71		
Motor diameter	AC	[mm]	86				89		
Distance motor/connection	AD	[mm]	77				89.7		


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors


g500-H100

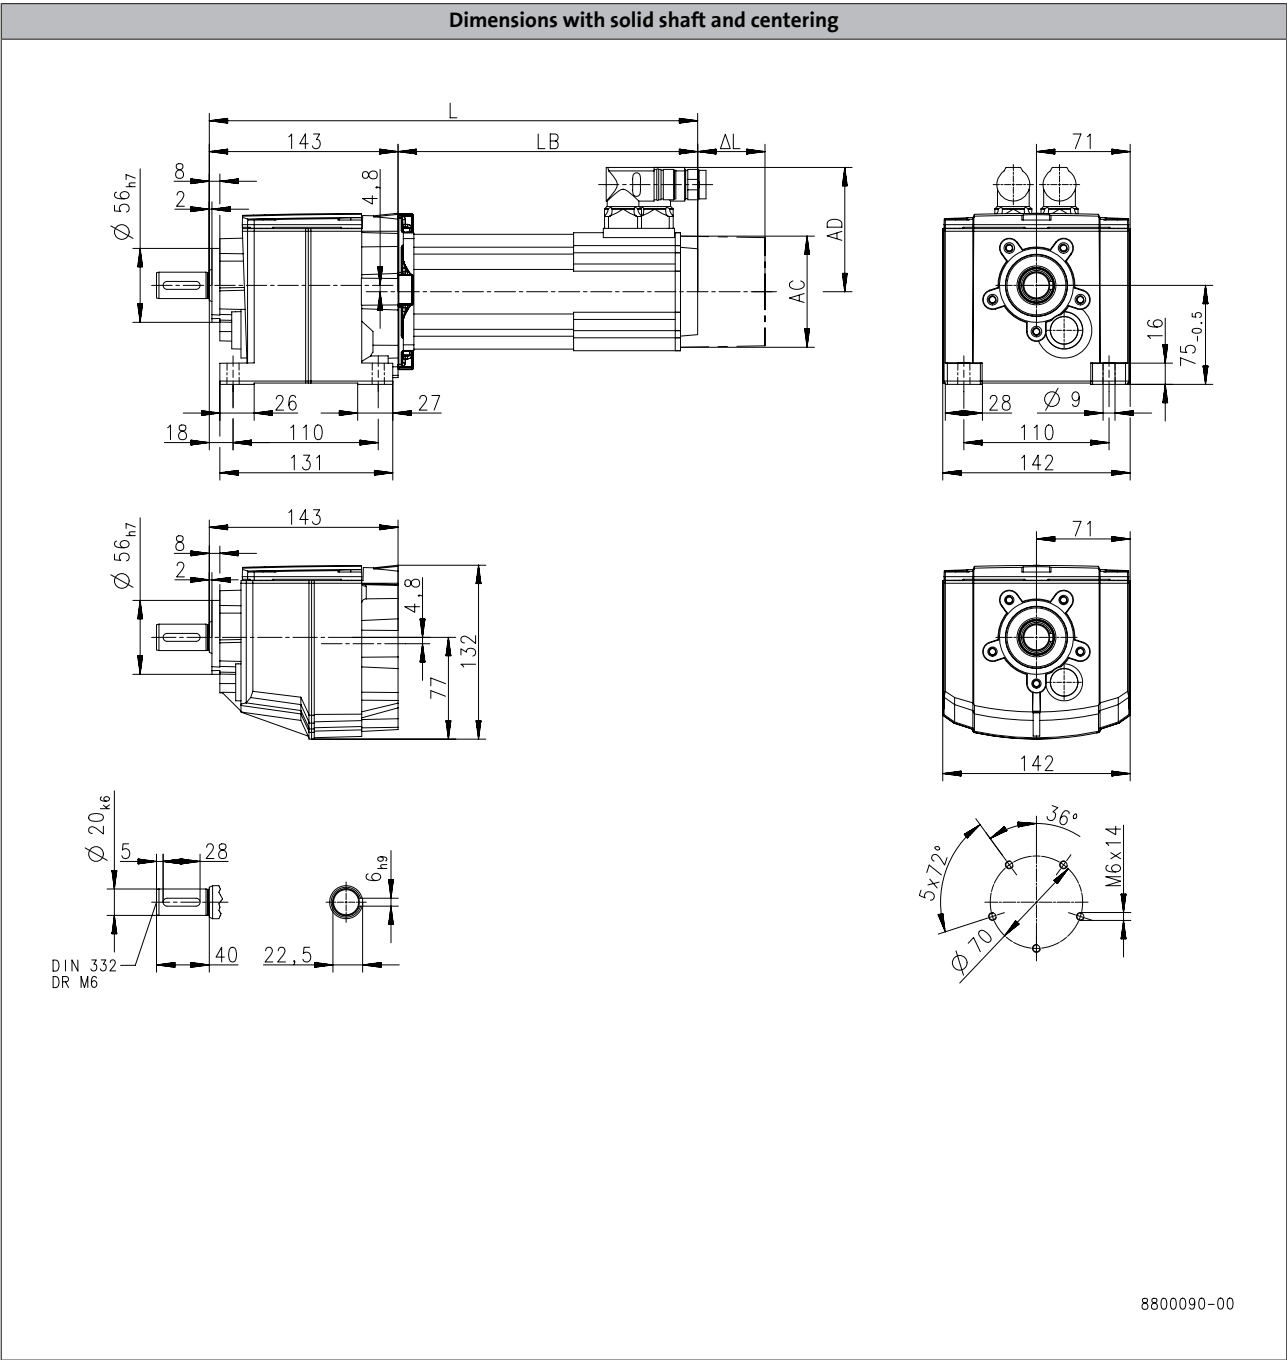

Product			MCS						
			06C41	06F41	06I41	09D41	09F38	09H41	09L41
Dimensions									
Total length	L	[mm]	274	304	334	327	347	367	407
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9
Length of motor options	Δ L	[mm]	100				71		
Motor diameter	AC	[mm]	86				89		
Distance motor/connection	AD	[mm]	77				89.7		


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-H100

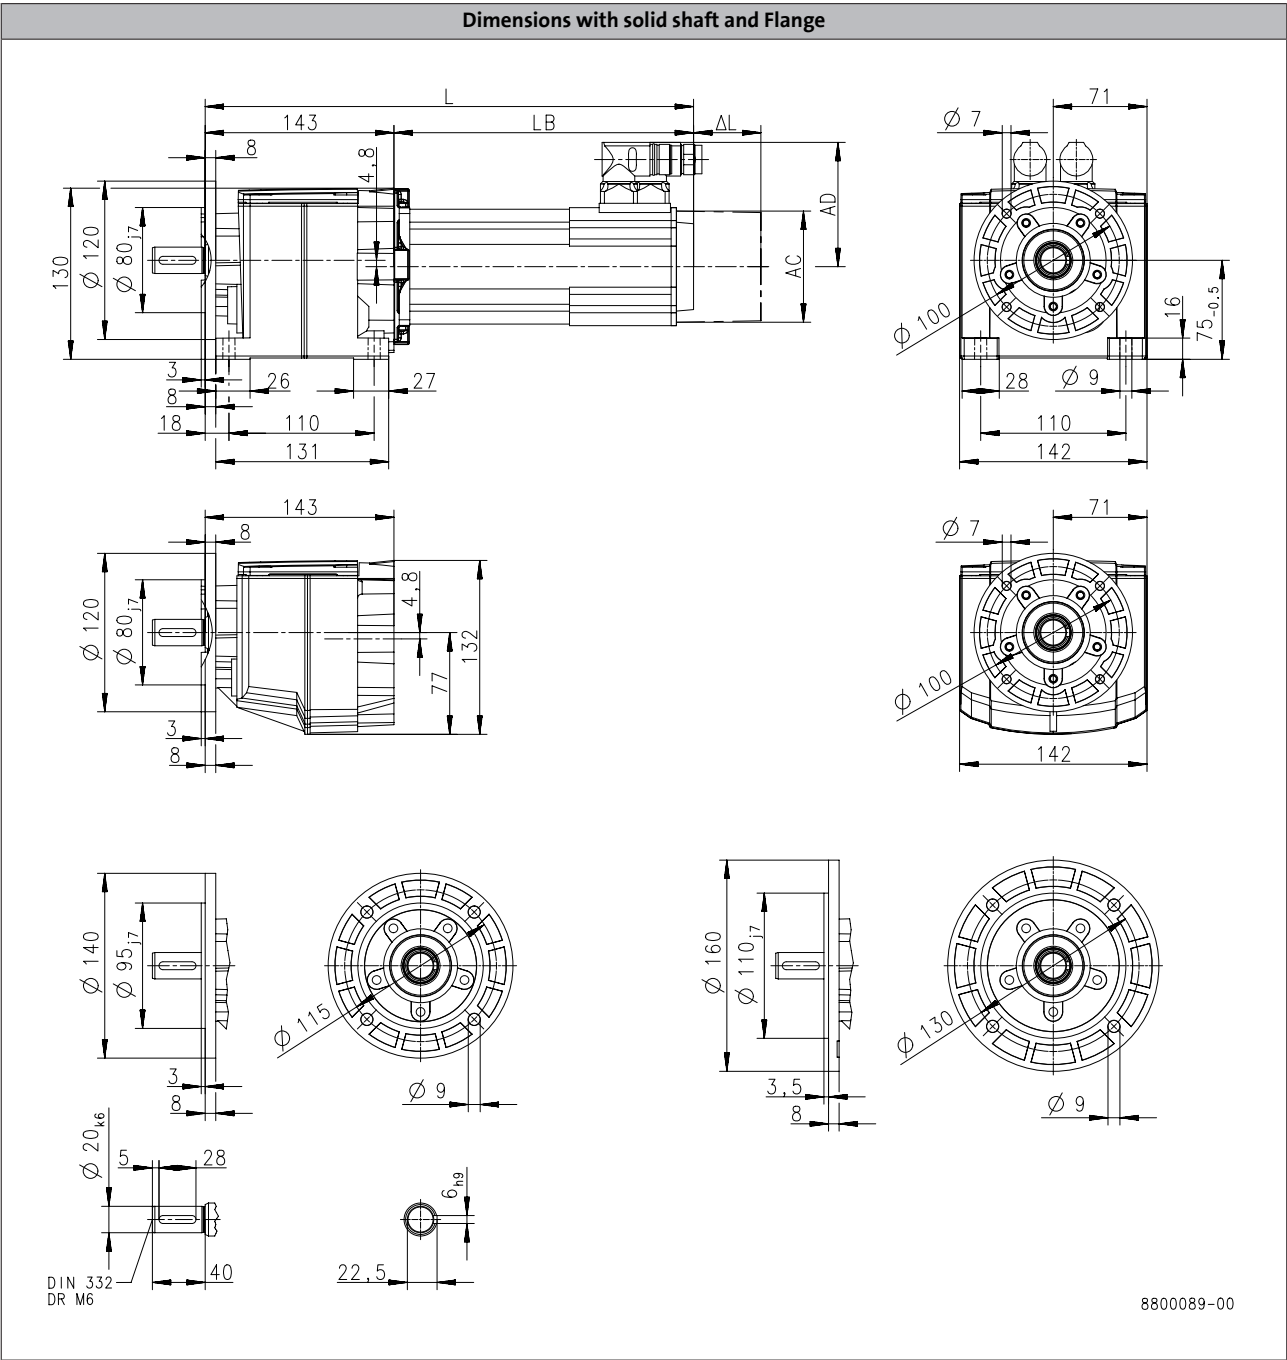

Product			MCS					
			06C41	06F41	06I41	09D41	09F38	09H41
Dimensions								09L41
Total length	L	[mm]	274	304	334	327	347	367
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9
Length of motor options	Δ L	[mm]	100			71		
Motor diameter	AC	[mm]	86			89		
Distance motor/connection	AD	[mm]	77			89.7		


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors


g500-H140

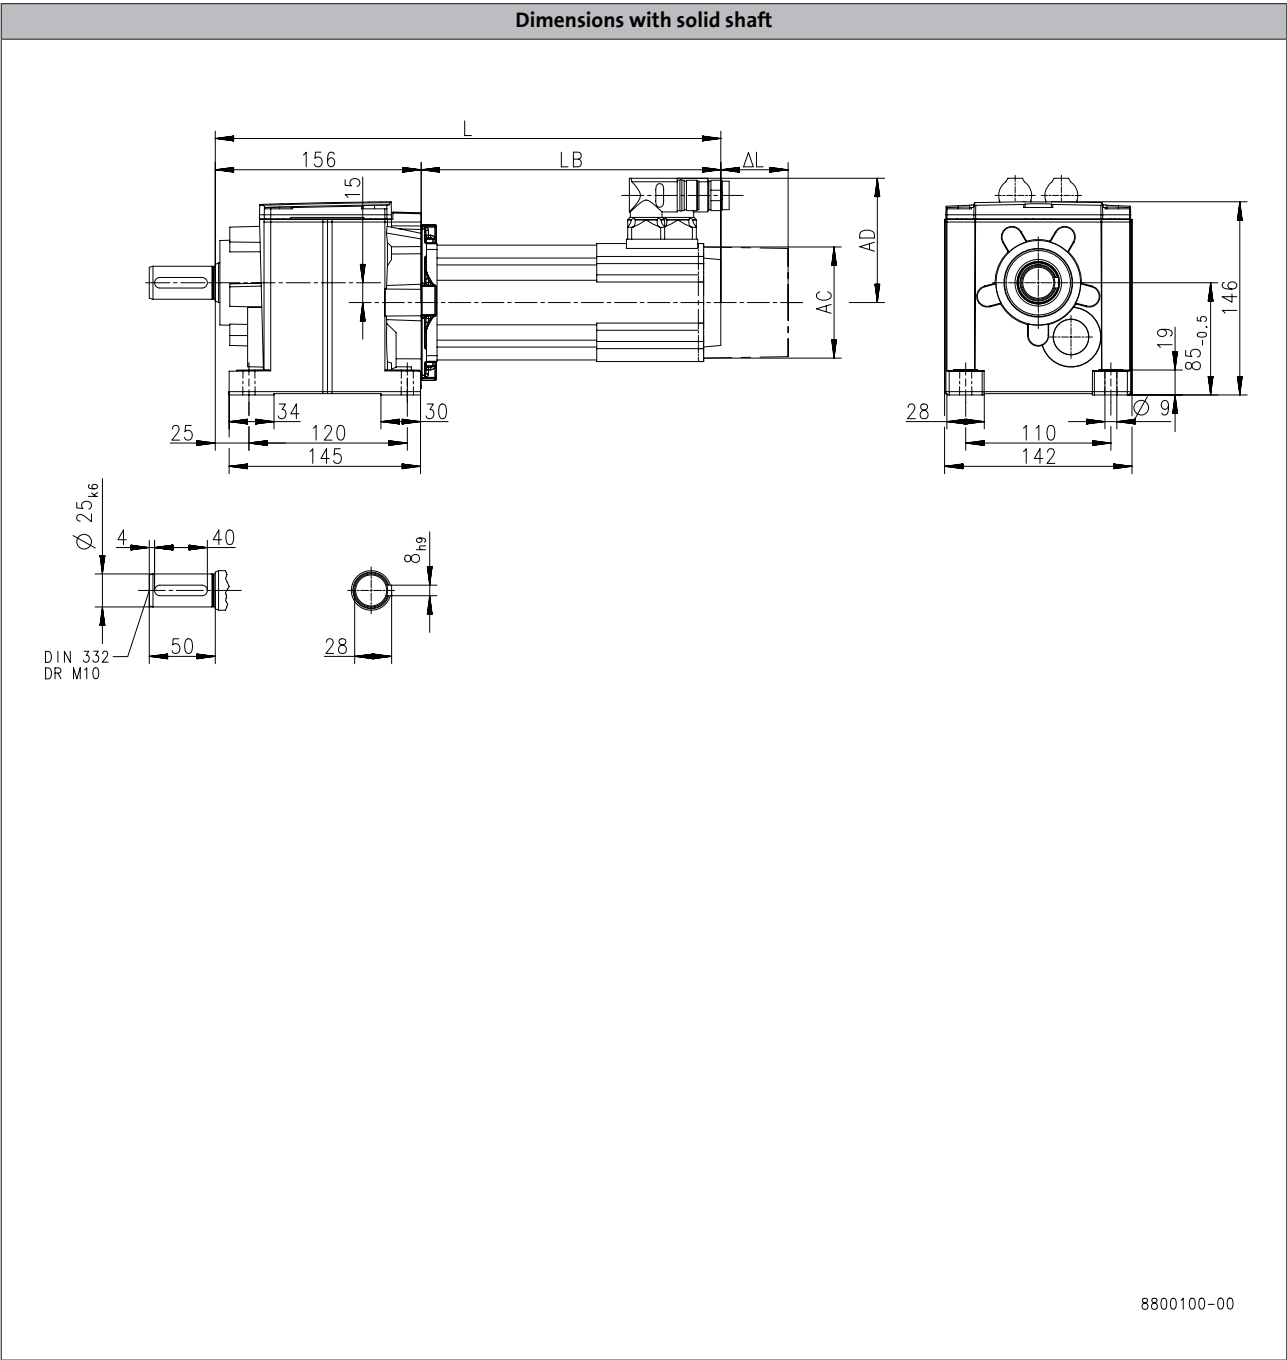

Product			MCS						
			06C41	06F41	06I41	09D41	09F38	09H41	09L41
Dimensions									
Total length	L	[mm]	287	317	347	340	360	380	420
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9
Length of motor options	Δ L	[mm]	100				71		
Motor diameter	AC	[mm]	86				89		
Distance motor/connection	AD	[mm]	77				89.7		


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors


g500-H140

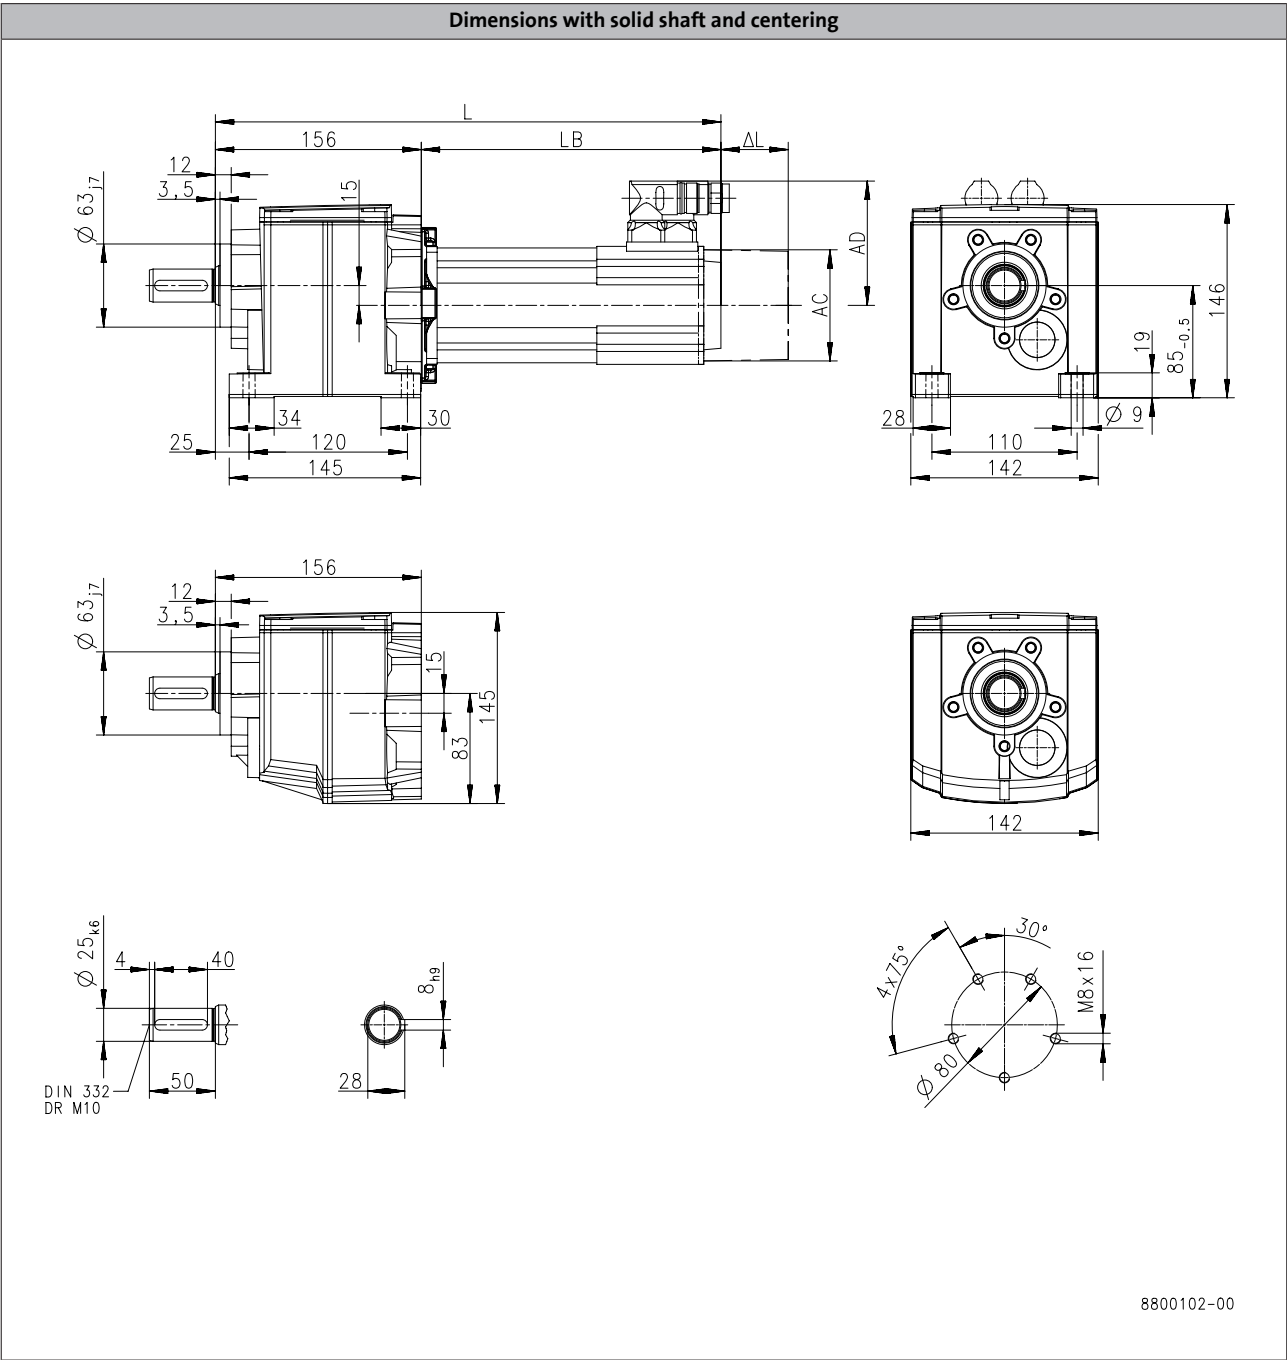

Product			MCS						
			06C41	06F41	06I41	09D41	09F38	09H41	09L41
Dimensions									
Total length	L	[mm]	287	317	347	340	360	380	420
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9
Length of motor options	Δ L	[mm]	100				71		
Motor diameter	AC	[mm]	86				89		
Distance motor/connection	AD	[mm]	77				89.7		


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors


g500-H140

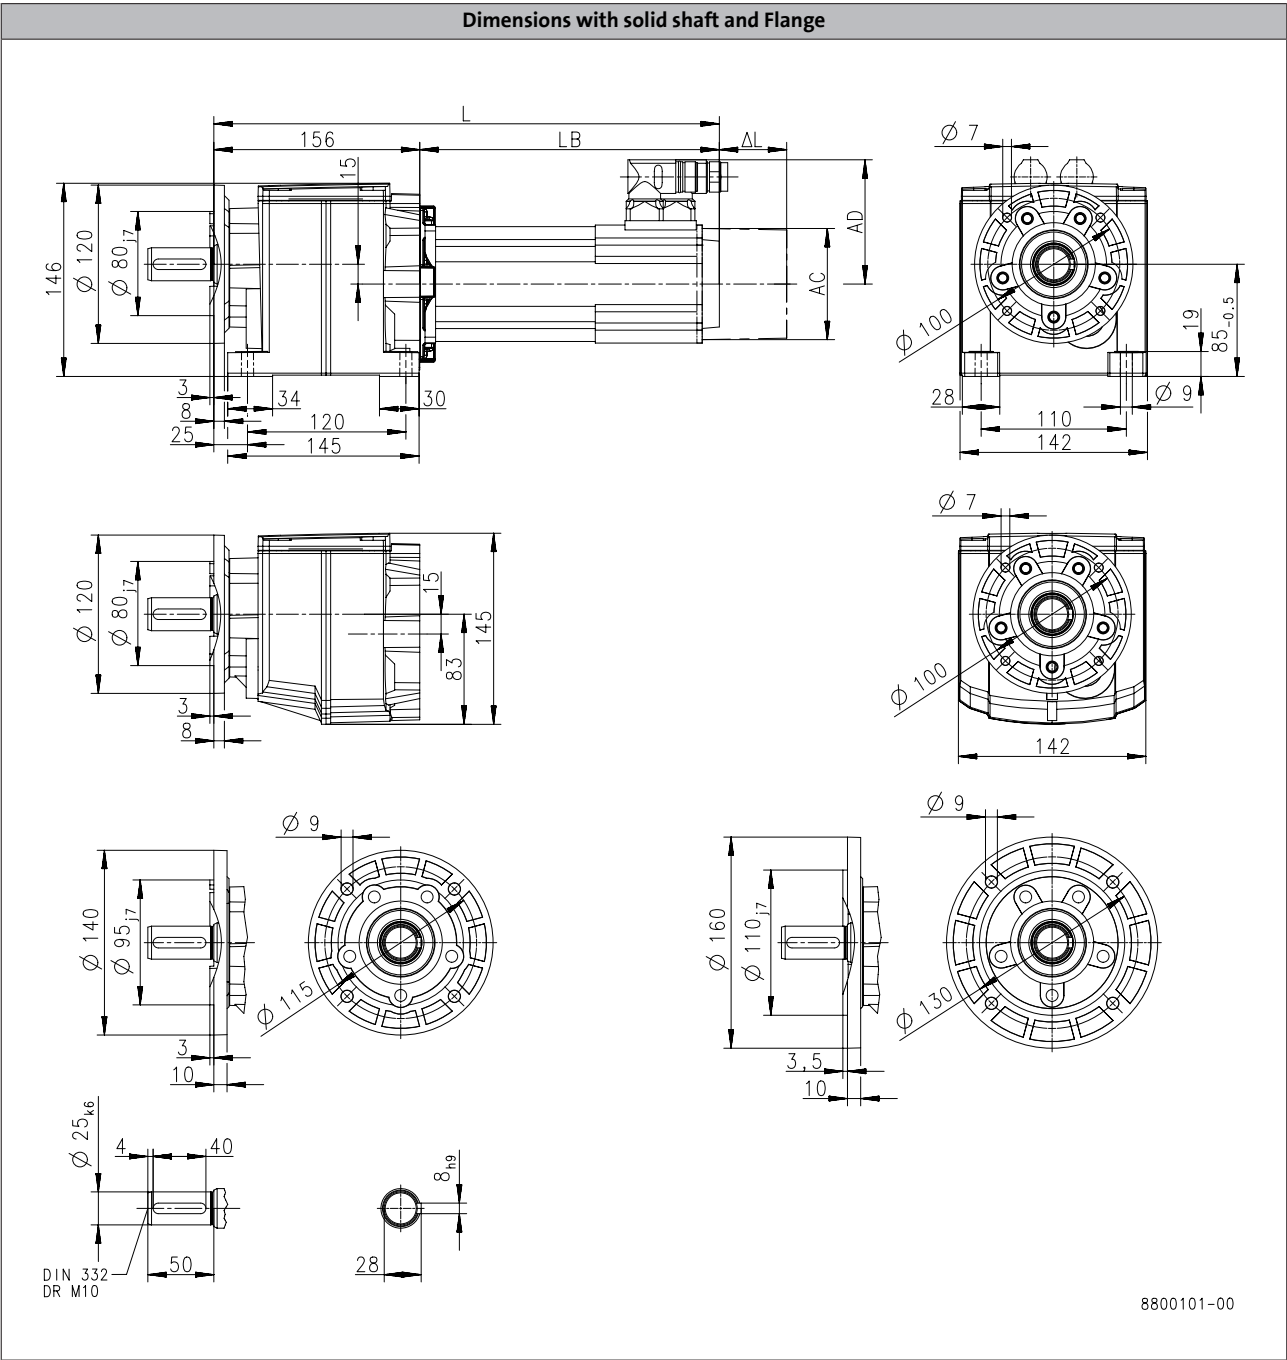

Product			MCS						
			06C41	06F41	06I41	09D41	09F38	09H41	09L41
Dimensions									
Total length	L	[mm]	287	317	347	340	360	380	420
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9
Length of motor options	Δ L	[mm]	100				71		
Motor diameter	AC	[mm]	86				89		
Distance motor/connection	AD	[mm]	77				89.7		


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-H210

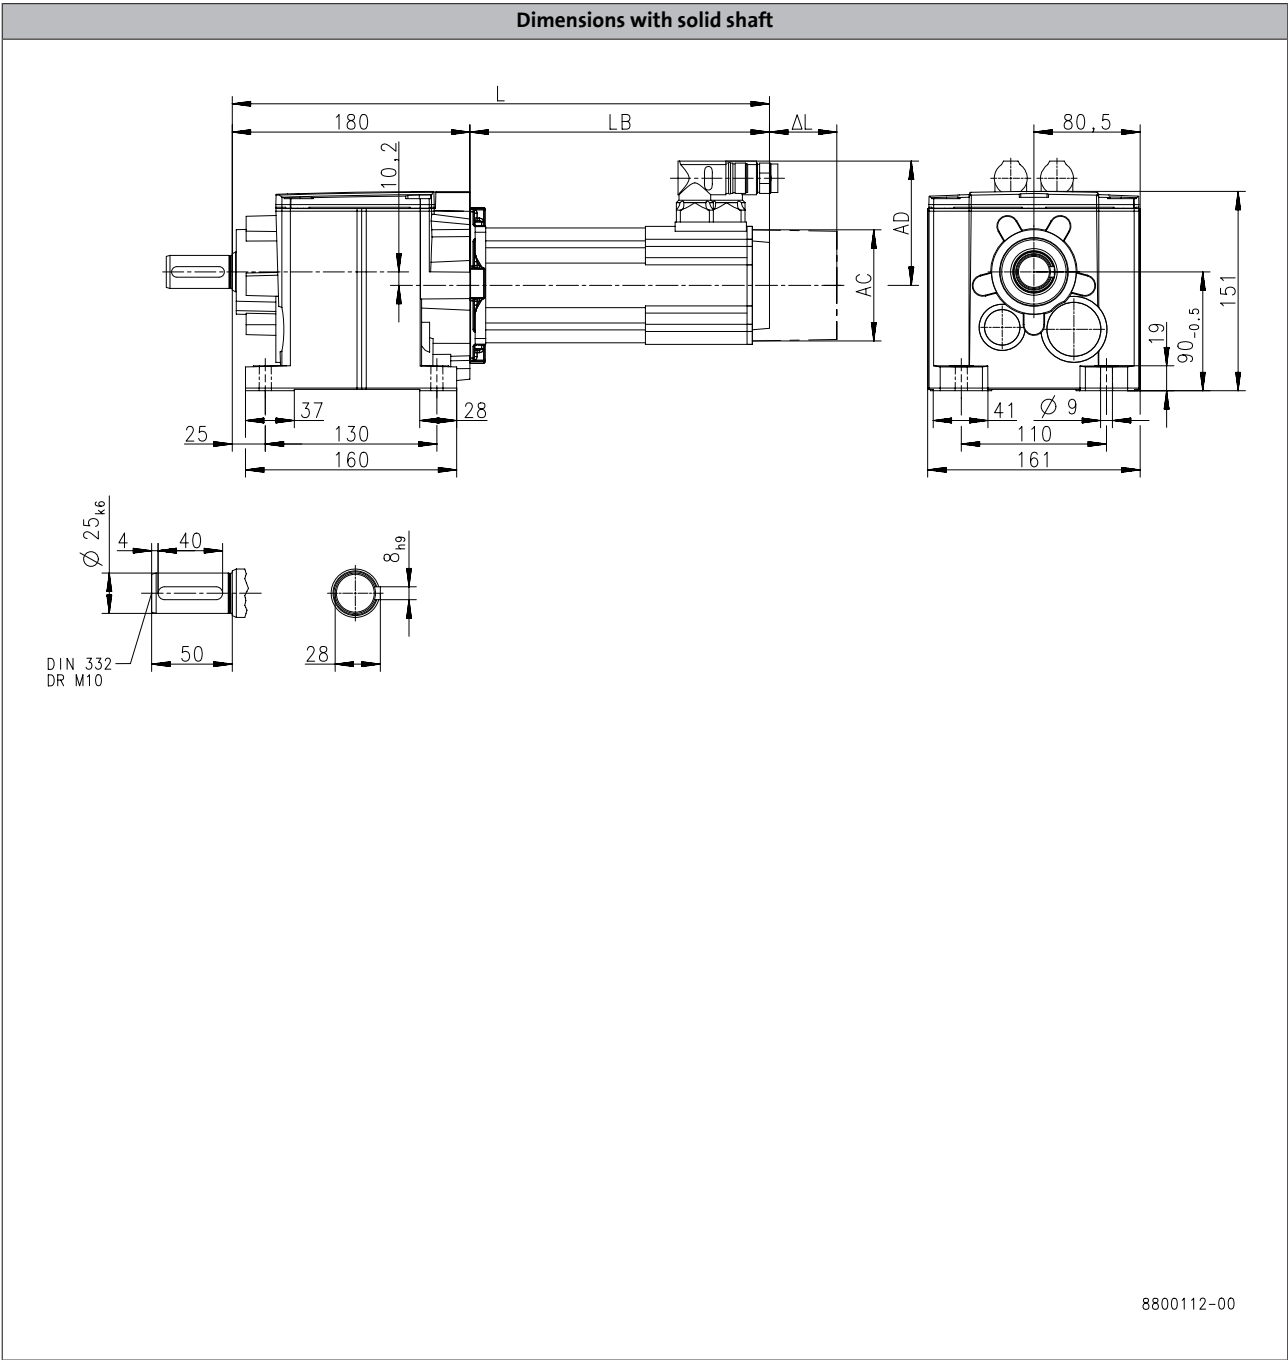

6.3

Product			MCS					
			06C41	06F41	06I41	09D41	09F38	09H41
Dimensions								
Total length	L	[mm]	311	341	371	364	384	404
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9
Length of motor options	Δ L	[mm]		100			71	
Motor diameter	AC	[mm]		86			89	
Distance motor/connection	AD	[mm]		77			89.7	


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-H210

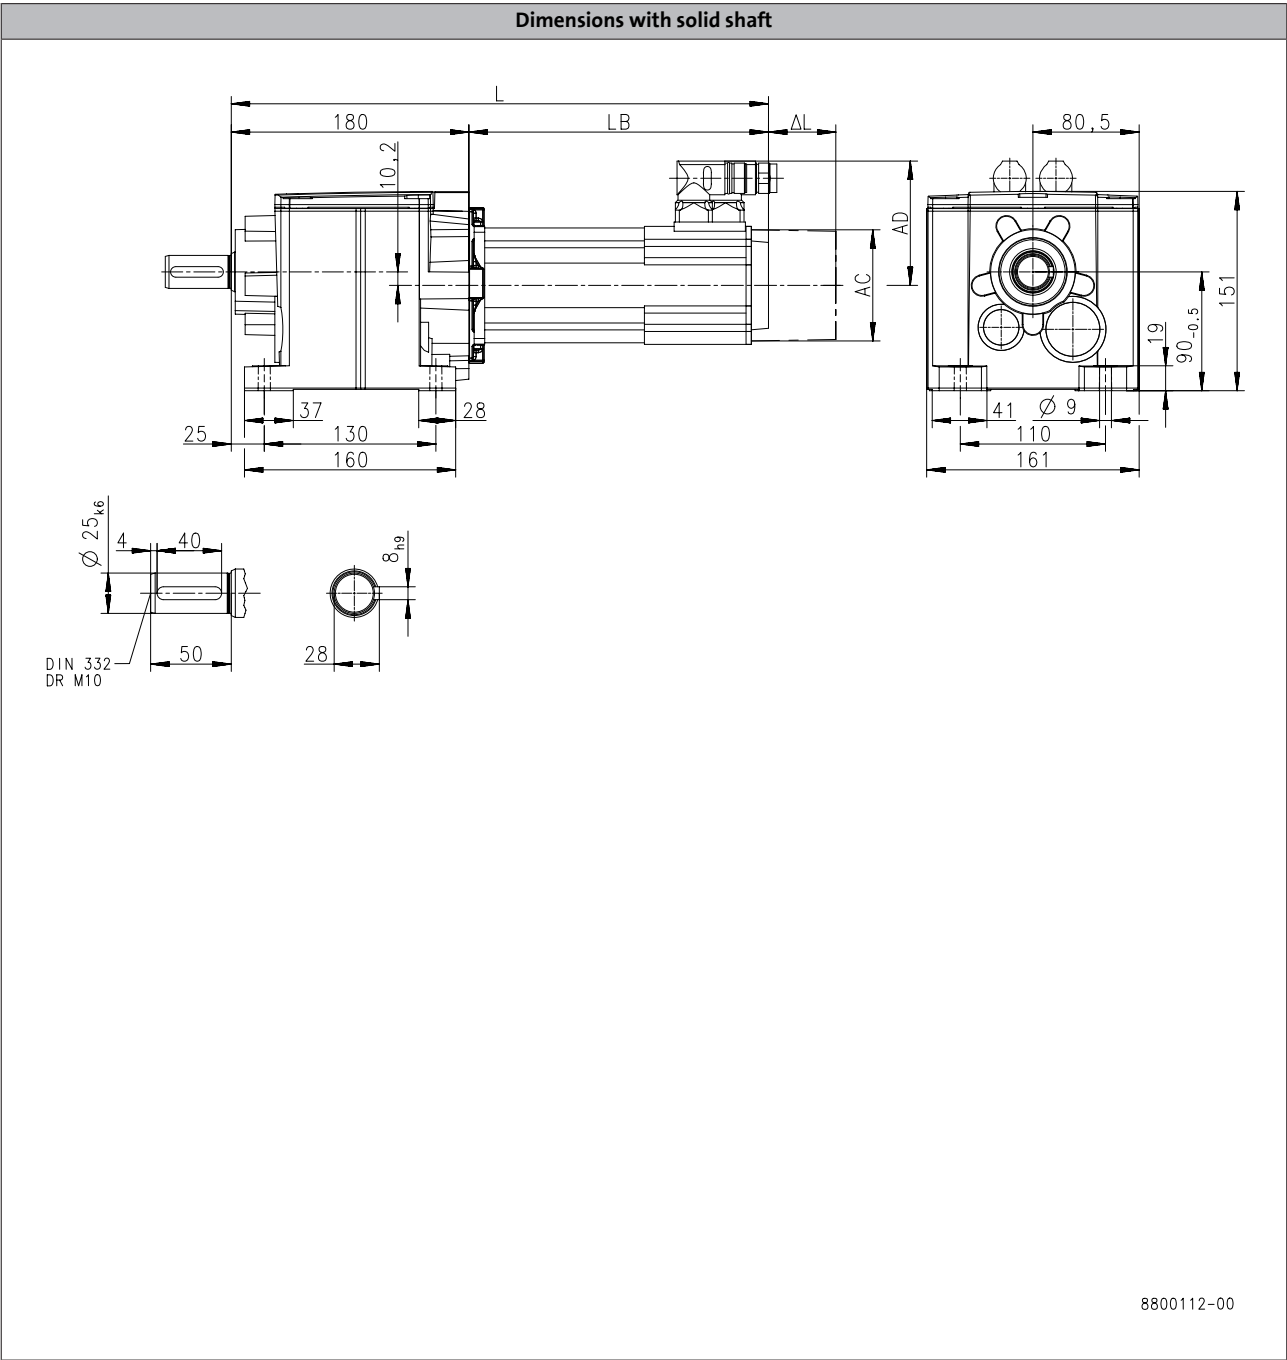


8800112-00

Product			MCS						
			09L41	12D20	12D41	12H15	12H30	12H35	12L20
Dimensions									
Total length	L	[mm]	444	381		421			461
Motor length	LB	[mm]	263.9	200.5		240.5			280.5
Length of motor options	Δ L	[mm]	71	69					
Motor diameter	AC	[mm]	89	116					
Distance motor/connection	AD	[mm]	89.7	105					

Dimensions, self-ventilated motors

g500-H210

Dimensions with solid shaft and centering

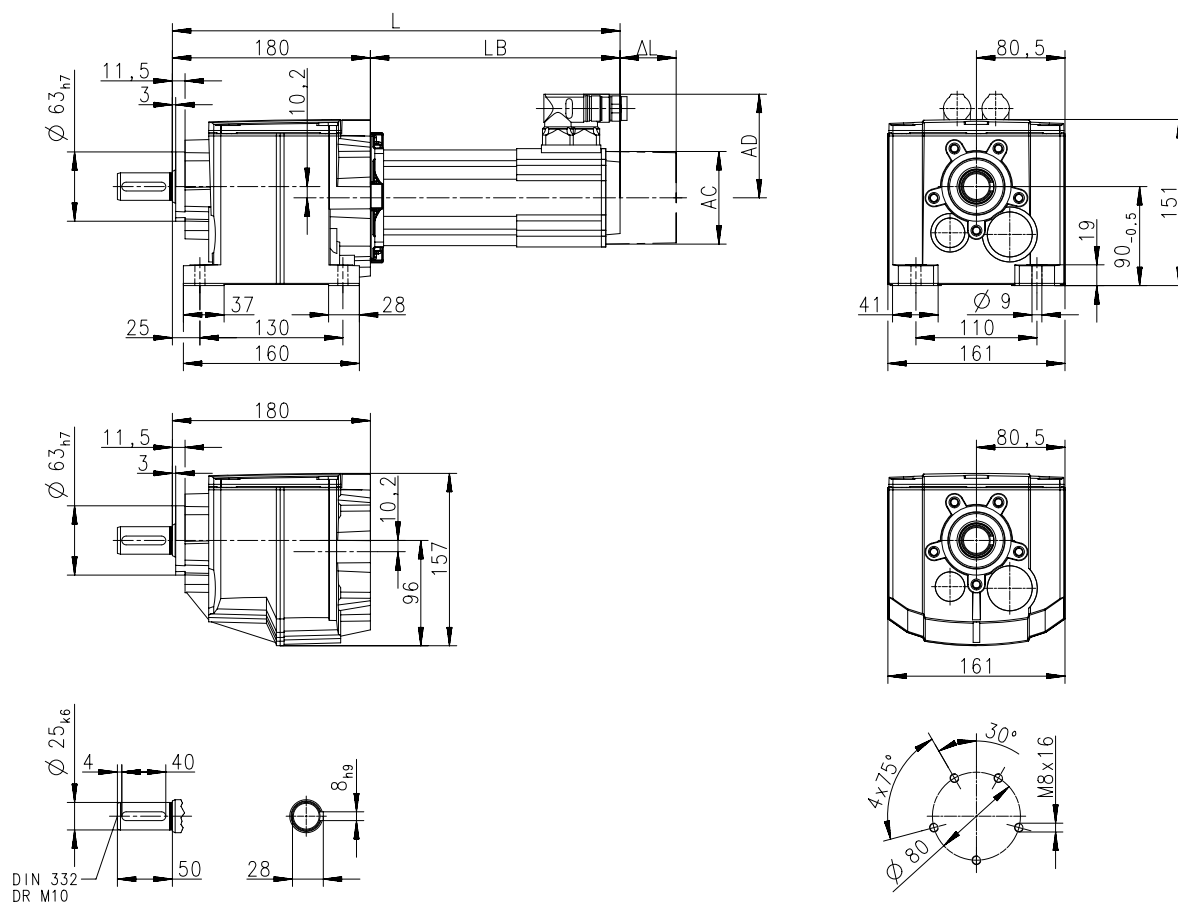

8800114-00


6.3

Product			MCS					
			06C41	06F41	06I41	09D41	09F38	09H41
Dimensions								
Total length	L	[mm]	311	341	371	364	384	404
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9
Length of motor options	Δ L	[mm]	100			71		
Motor diameter	AC	[mm]	86			89		
Distance motor/connection	AD	[mm]	77			89.7		

Dimensions, self-ventilated motors

g500-H210

Dimensions with solid shaft and centering

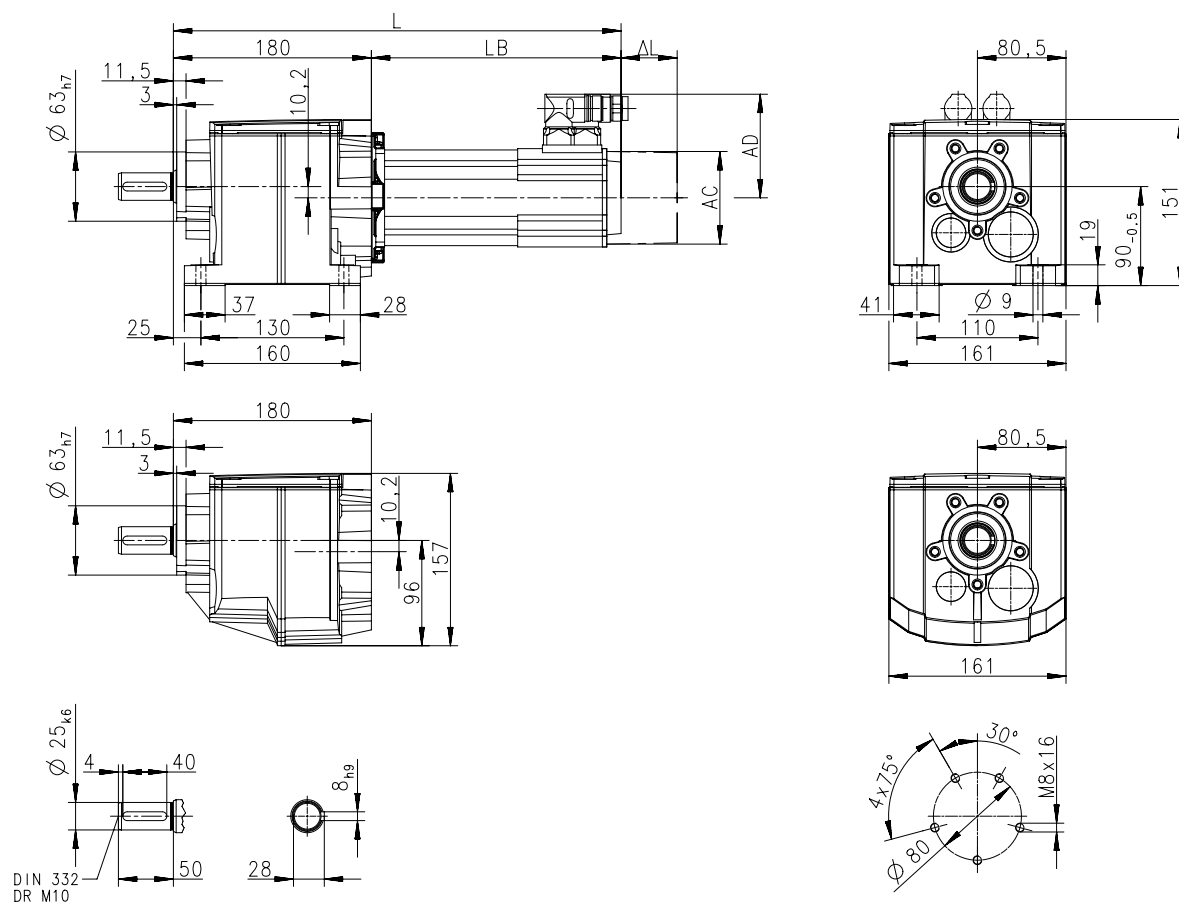

8800114-00

Product			MCS						
			09L41	12D20	12D41	12H15	12H30	12H35	12L20
Dimensions									
Total length	L	[mm]	444	381		421			461
Motor length	LB	[mm]	263.9	200.5		240.5			280.5
Length of motor options	Δ L	[mm]	71			69			
Motor diameter	AC	[mm]	89			116			
Distance motor/connection	AD	[mm]	89.7			105			

g500-H helical geared motors


Technical data



Dimensions, self-ventilated motors

g500-H210

Dimensions with solid shaft and Flange

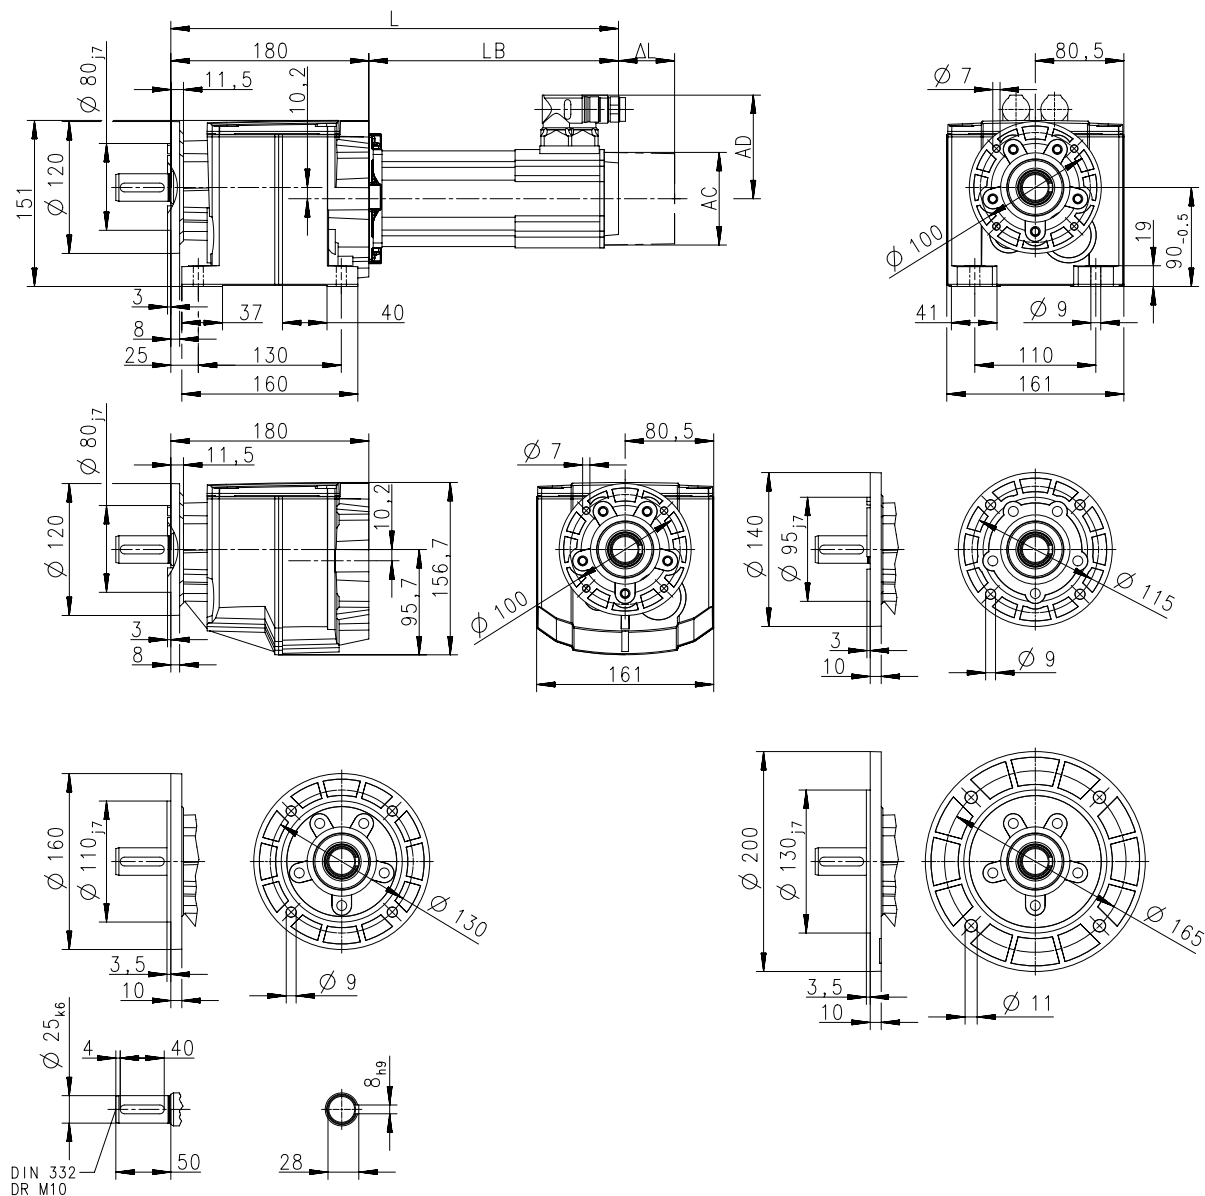


8800113-00

6.3

Product			MCS					
			06C41	06F41	06I41	09D41	09F38	09H41
Dimensions								
Total length	L	[mm]	311	341	371	364	384	404
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9
Length of motor options	ΔL	[mm]		100			71	
Motor diameter	AC	[mm]		86			89	
Distance motor/connection	AD	[mm]		77			89.7	


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-H210

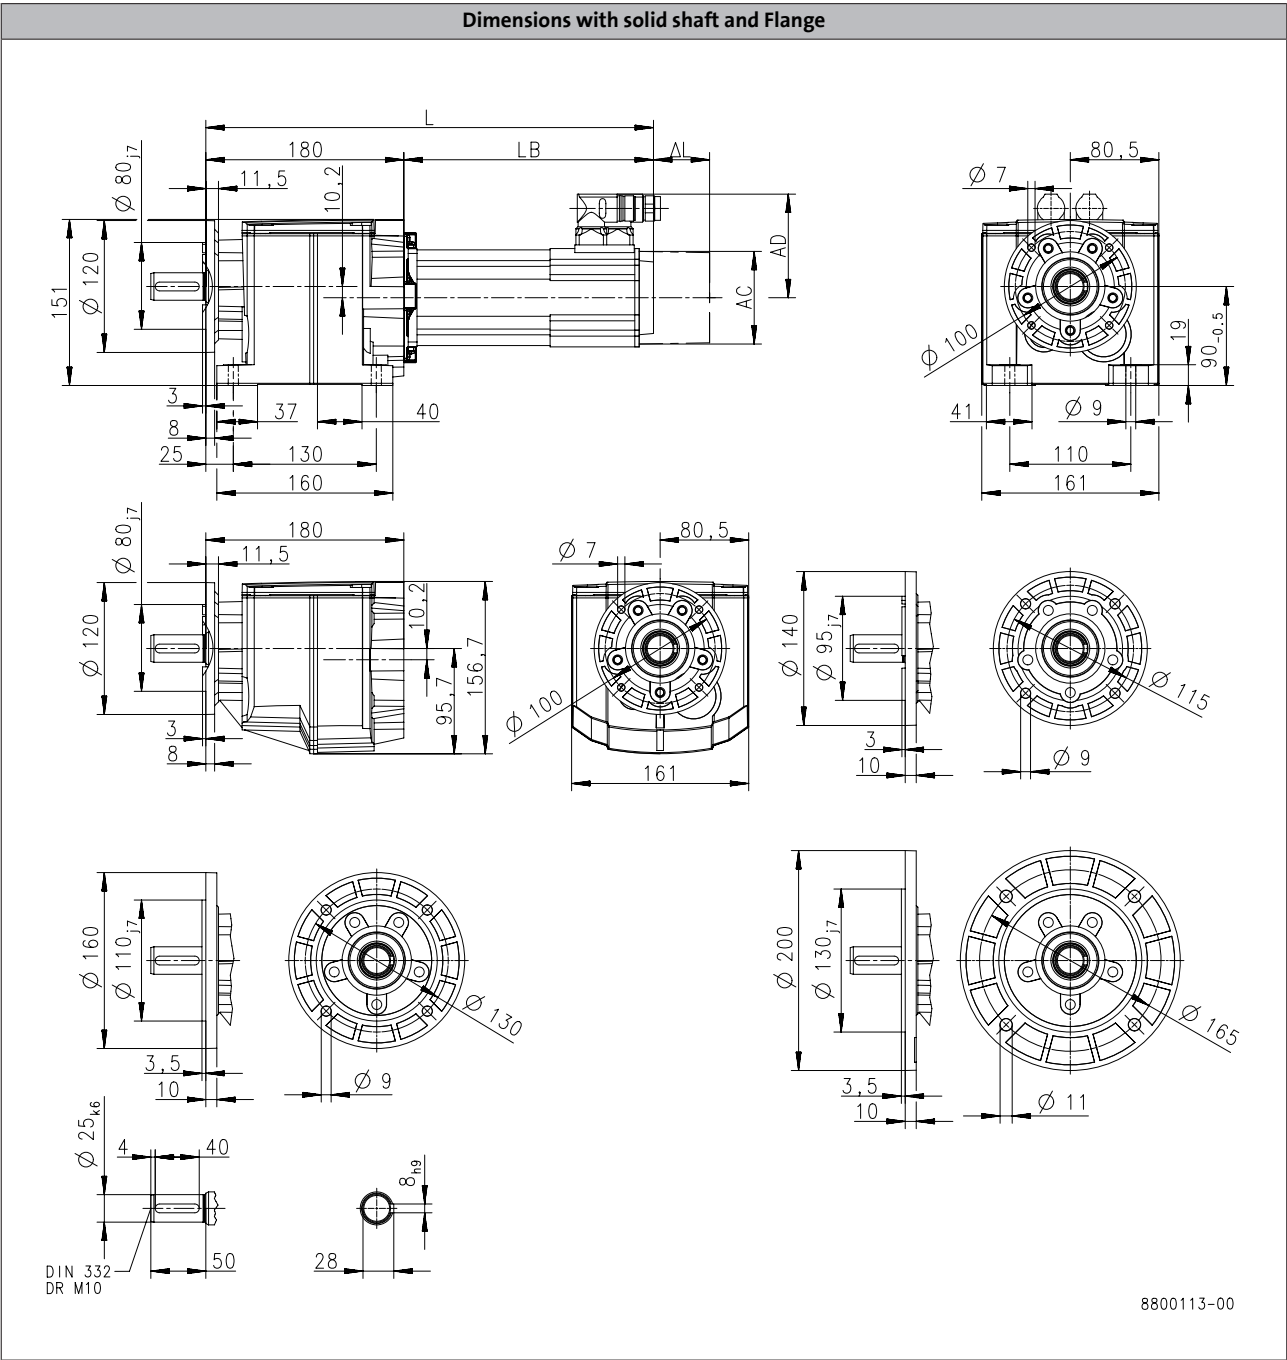

Product			MCS						
			09L41	12D20	12D41	12H15	12H30	12H35	12L20
Dimensions									
Total length	L	[mm]	444	381		421			461
Motor length	LB	[mm]	263.9	200.5		240.5			280.5
Length of motor options	Δ L	[mm]	71	69					
Motor diameter	AC	[mm]	89	116					
Distance motor/connection	AD	[mm]	89.7	105					


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-H320

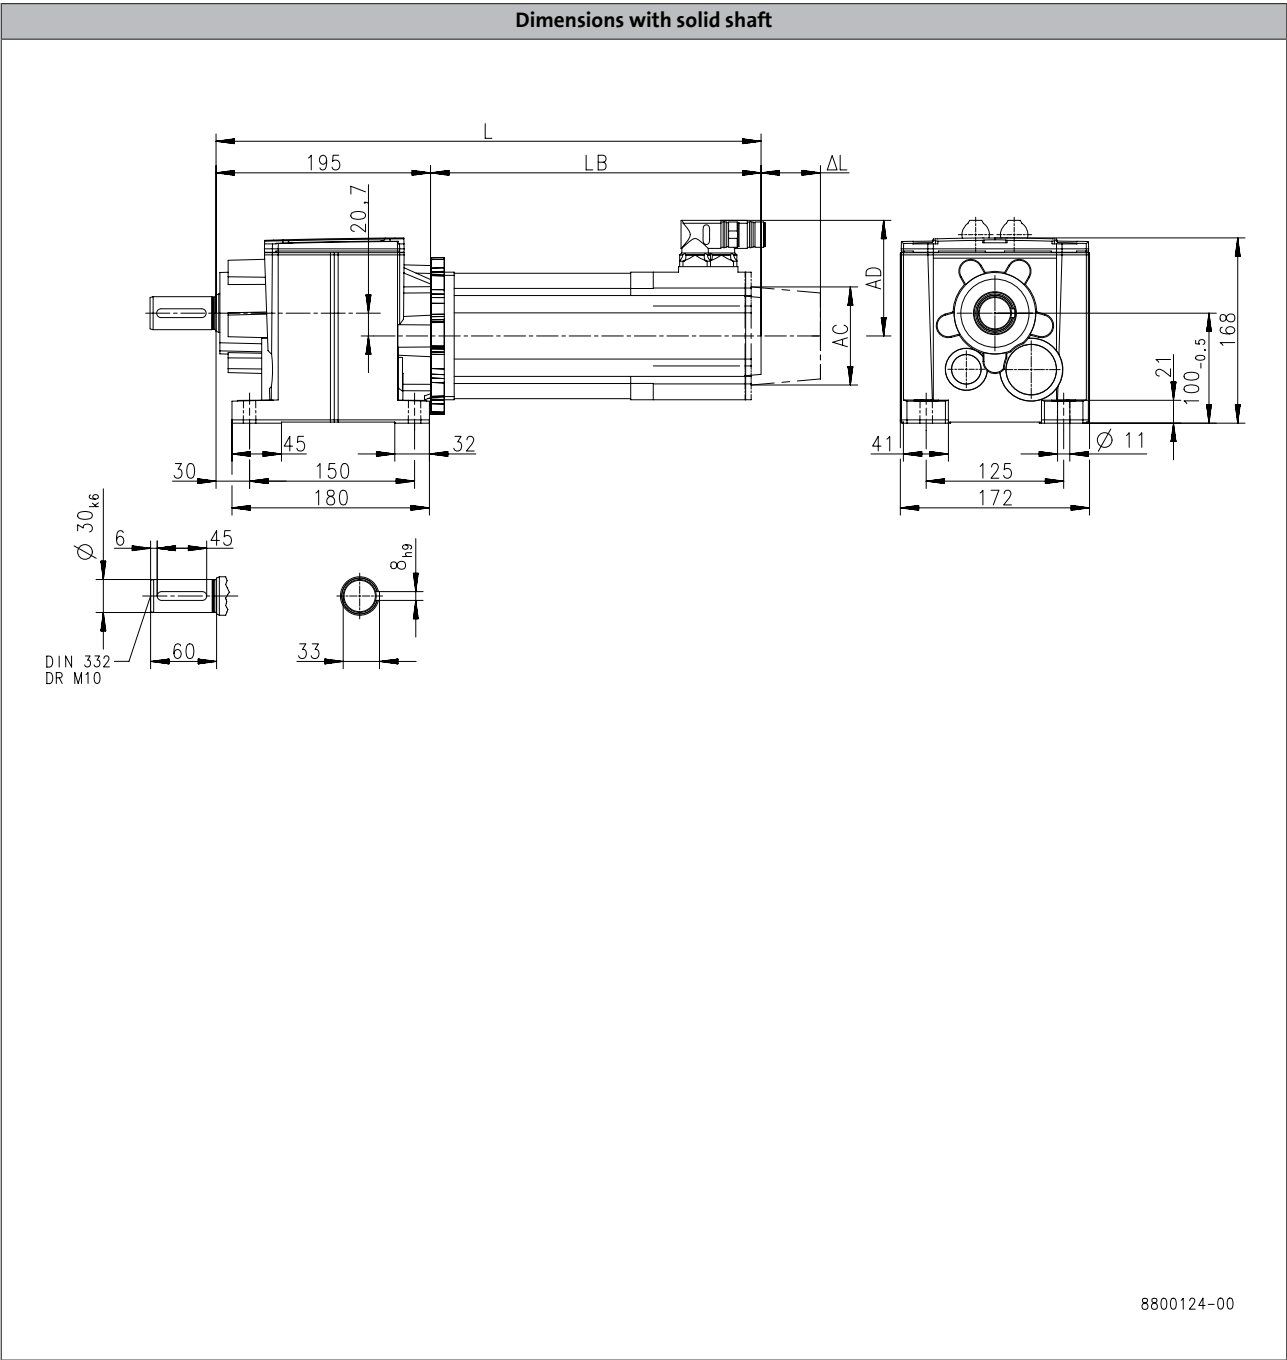


6.3

Product			MCS							
			06C41	06F41	06I41	09D41	09F38	09H41	09L41	12D20
Dimensions										
Total length	L	[mm]	331	361	391	384	404	424	464	401
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9	200.5
Length of motor options	Δ L		100			71			69	
Motor diameter	AC	[mm]	86			89			116	
Distance motor/connection	AD	[mm]	77			89.7			105	


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors


g500-H320

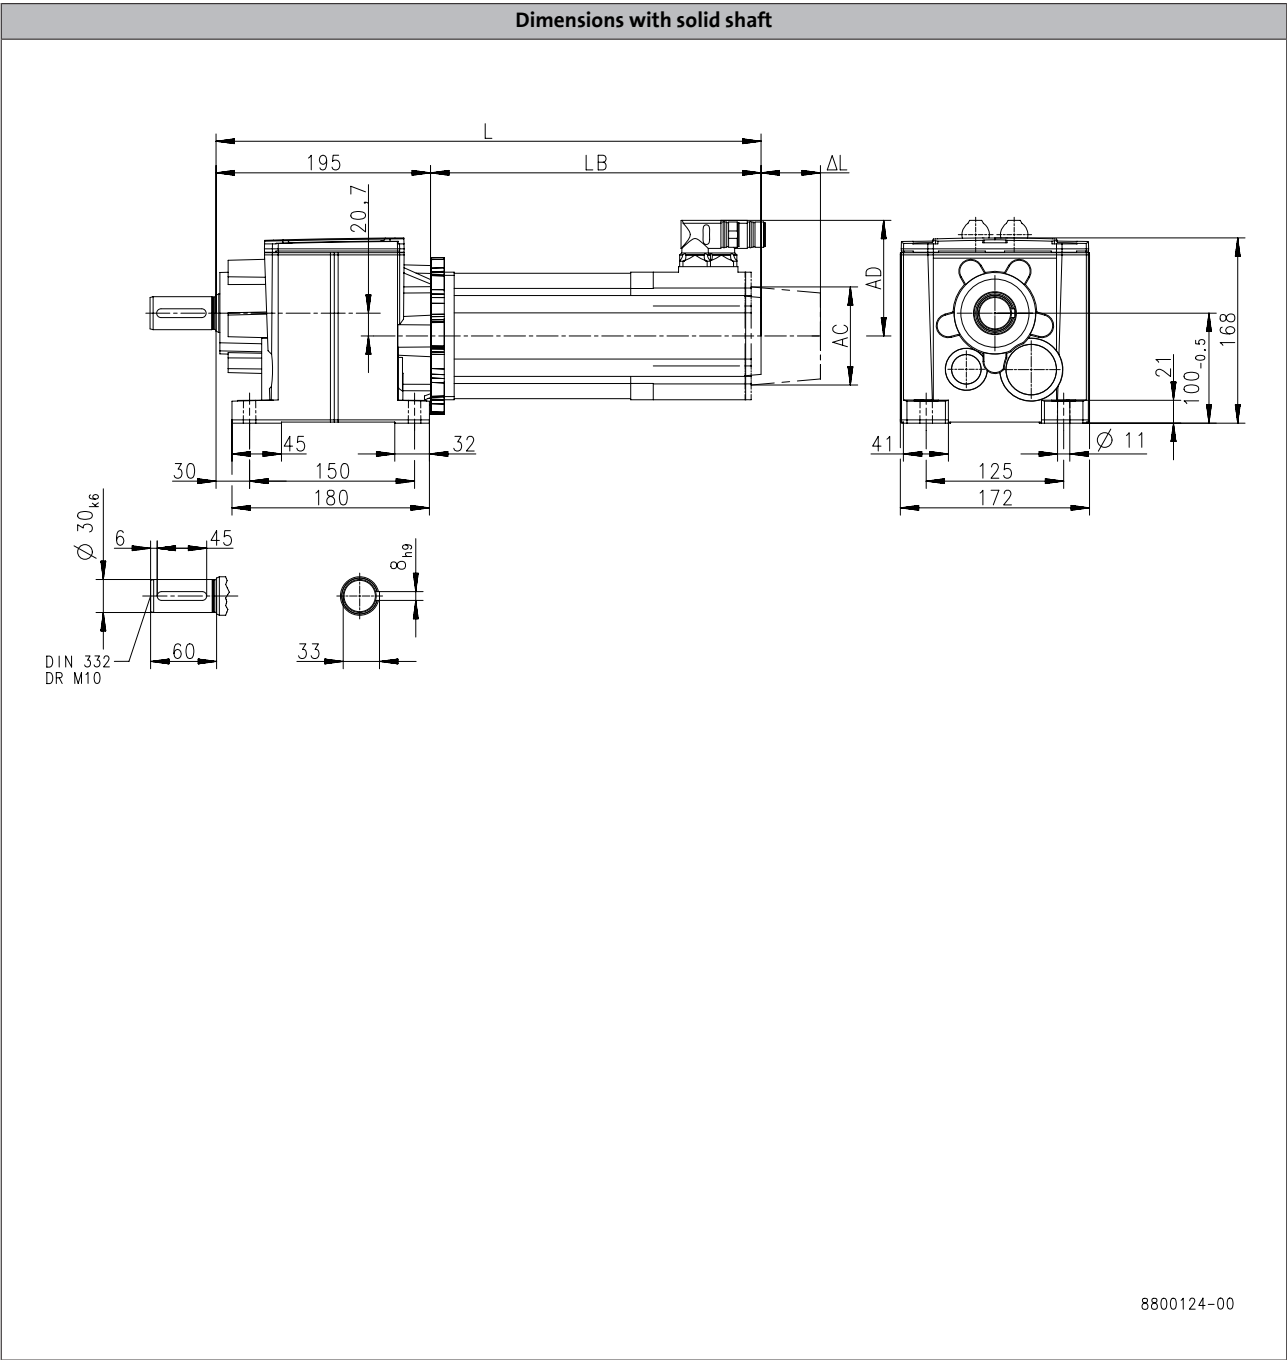

Product			MCS								
			12D41	12H15	12H30	12H35	12L20	14D15	14H15	14L15	14P14
Dimensions											
Total length	L	[mm]	401		441		481	416	456	496	536
Motor length	LB	[mm]	200.5		240.5		280.5	216	256	296	336
Length of motor options	Δ L	[mm]			69				78		
Motor diameter	AC	[mm]			116				143		
Distance motor/connection	AD	[mm]			105				116.5		


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-H320

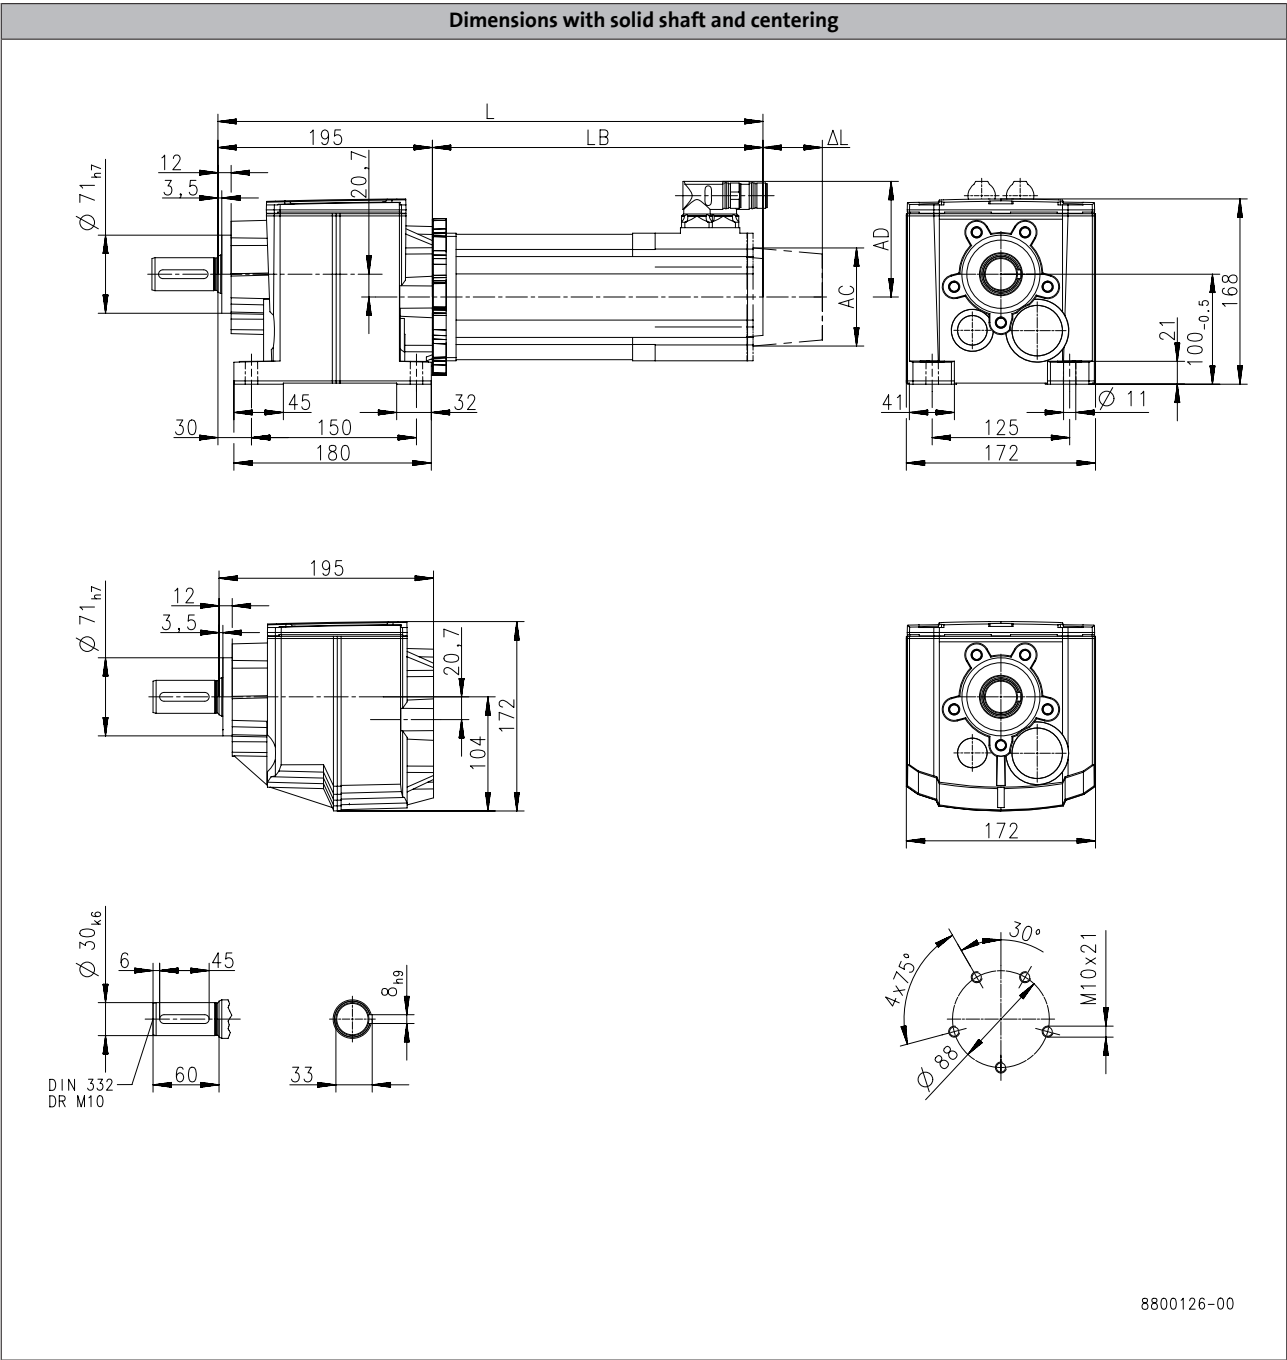


Product			MCS							
			06C41	06F41	06I41	09D41	09F38	09H41	09L41	12D20
Dimensions										
Total length	L	[mm]	331	361	391	384	404	424	464	401
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9	200.5
Length of motor options	Δ L		100				71			69
Motor diameter	AC	[mm]	86			89				116
Distance motor/connection	AD	[mm]	77			89.7				105

Dimensions, self-ventilated motors

g500-H320

Dimensions with solid shaft and centering

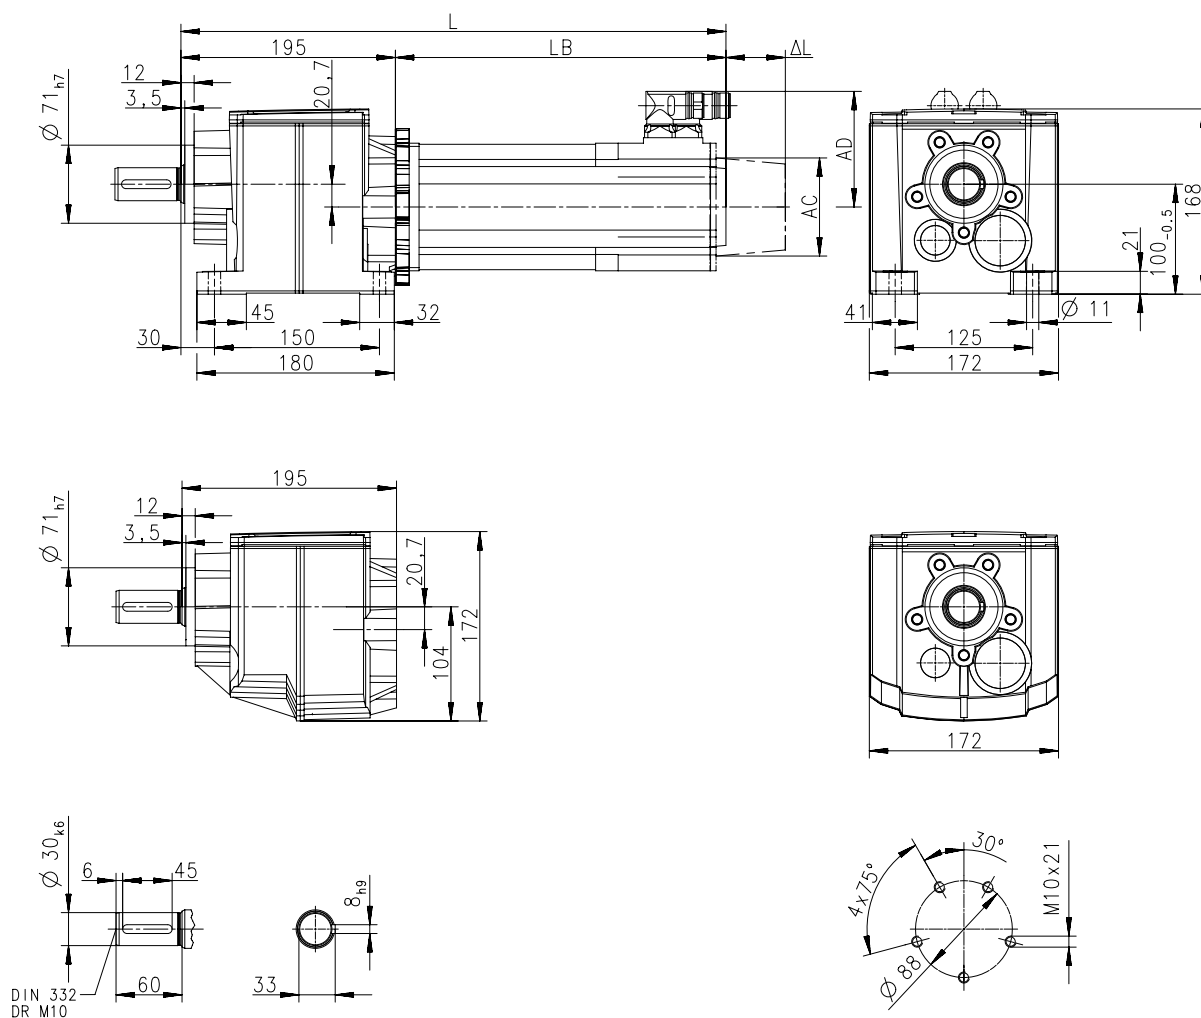

8800126-00

Product			MCS								
			12D41	12H15	12H30	12H35	12L20	14D15	14H15	14L15	14P14
Dimensions											
Total length	L	[mm]	401	441			481	416	456	496	536
Motor length	LB	[mm]	200.5	240.5			280.5	216	256	296	336
Length of motor options	Δ L	[mm]	69					78			
Motor diameter	AC	[mm]	116					143			
Distance motor/connection	AD	[mm]	105					116.5			

Dimensions, self-ventilated motors

g500-H320


[illegible]

6.3

Lenze | V00-en_GB-04/2014


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors


g500-H320

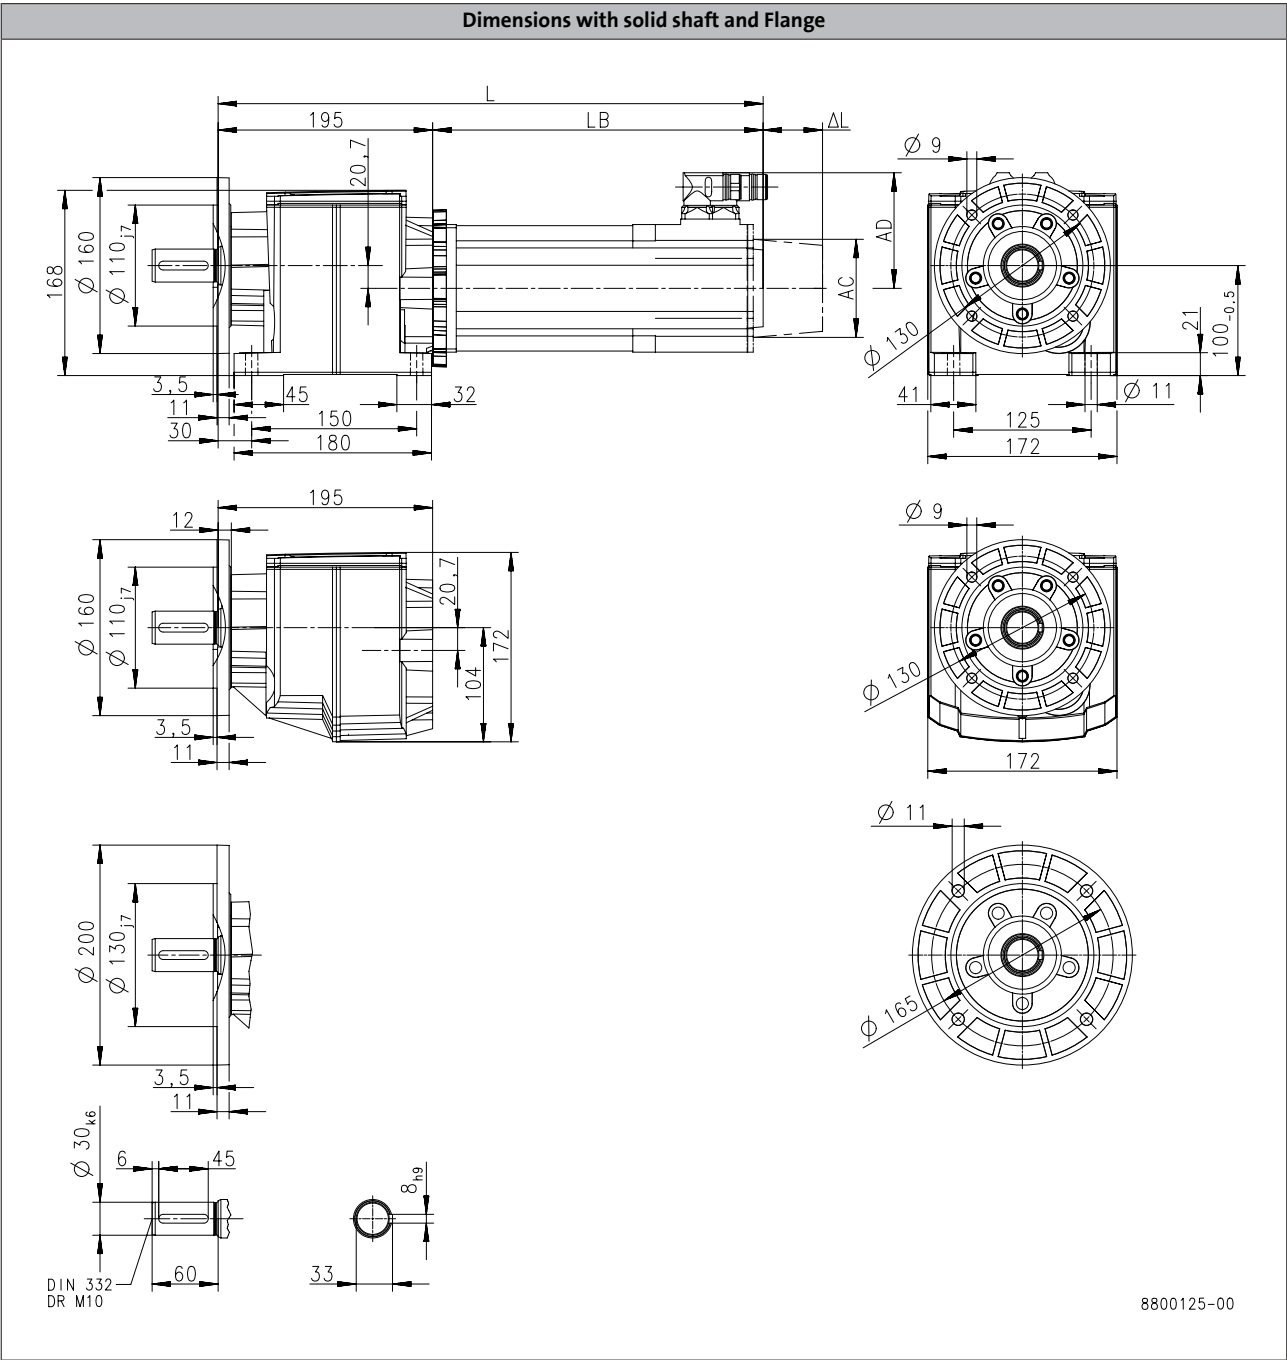

Product			MCS								
			12D41	12H15	12H30	12H35	12L20	14D15	14H15	14L15	14P14
Dimensions											
Total length	L	[mm]	401		441		481	416	456	496	536
Motor length	LB	[mm]	200.5		240.5		280.5	216	256	296	336
Length of motor options	Δ L	[mm]			69				78		
Motor diameter	AC	[mm]			116				143		
Distance motor/connection	AD	[mm]			105				116.5		


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors


g500-H450

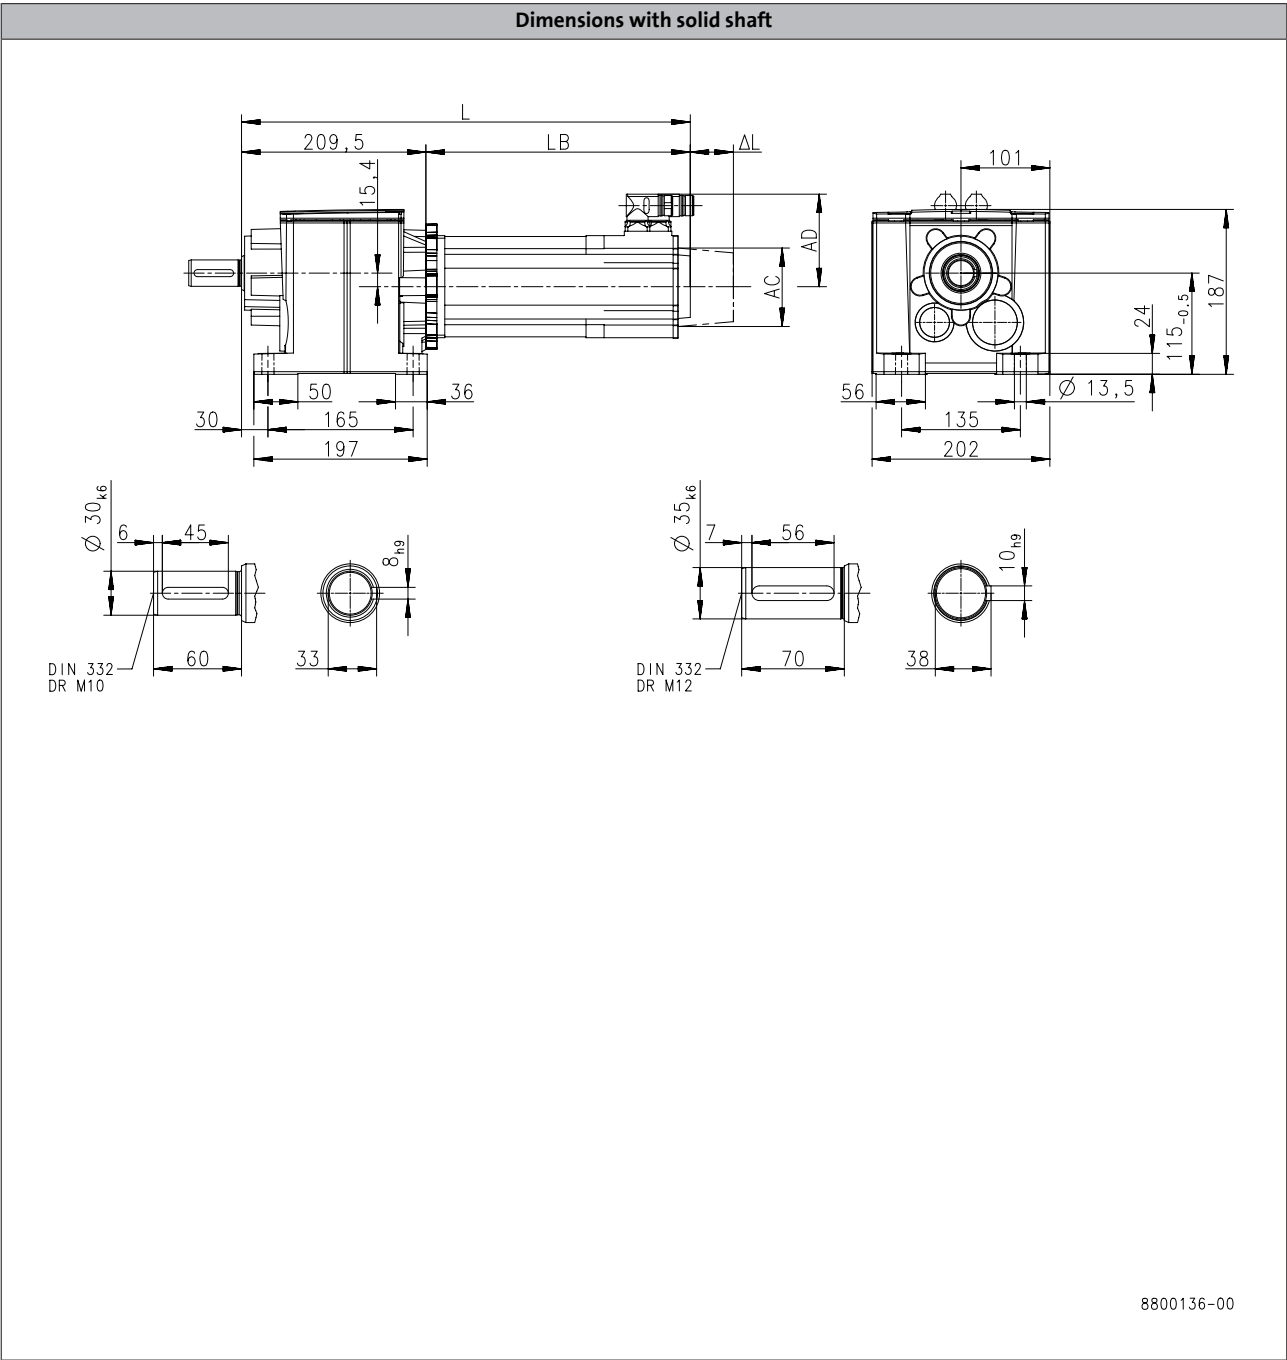

Product			MCS								
			06C41	06F41	06I41	09D41	09F38	09H41	09L41	12D20	12D41
Dimensions											
Total length	L	[mm]	341	371	401	393	413	433	473	410	
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9	200.5	
Length of motor options	Δ L		100			71				69	
Motor diameter	AC	[mm]	86			89				116	
Distance motor/connection	AD	[mm]	77			89.7				105	


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors


g500-H450

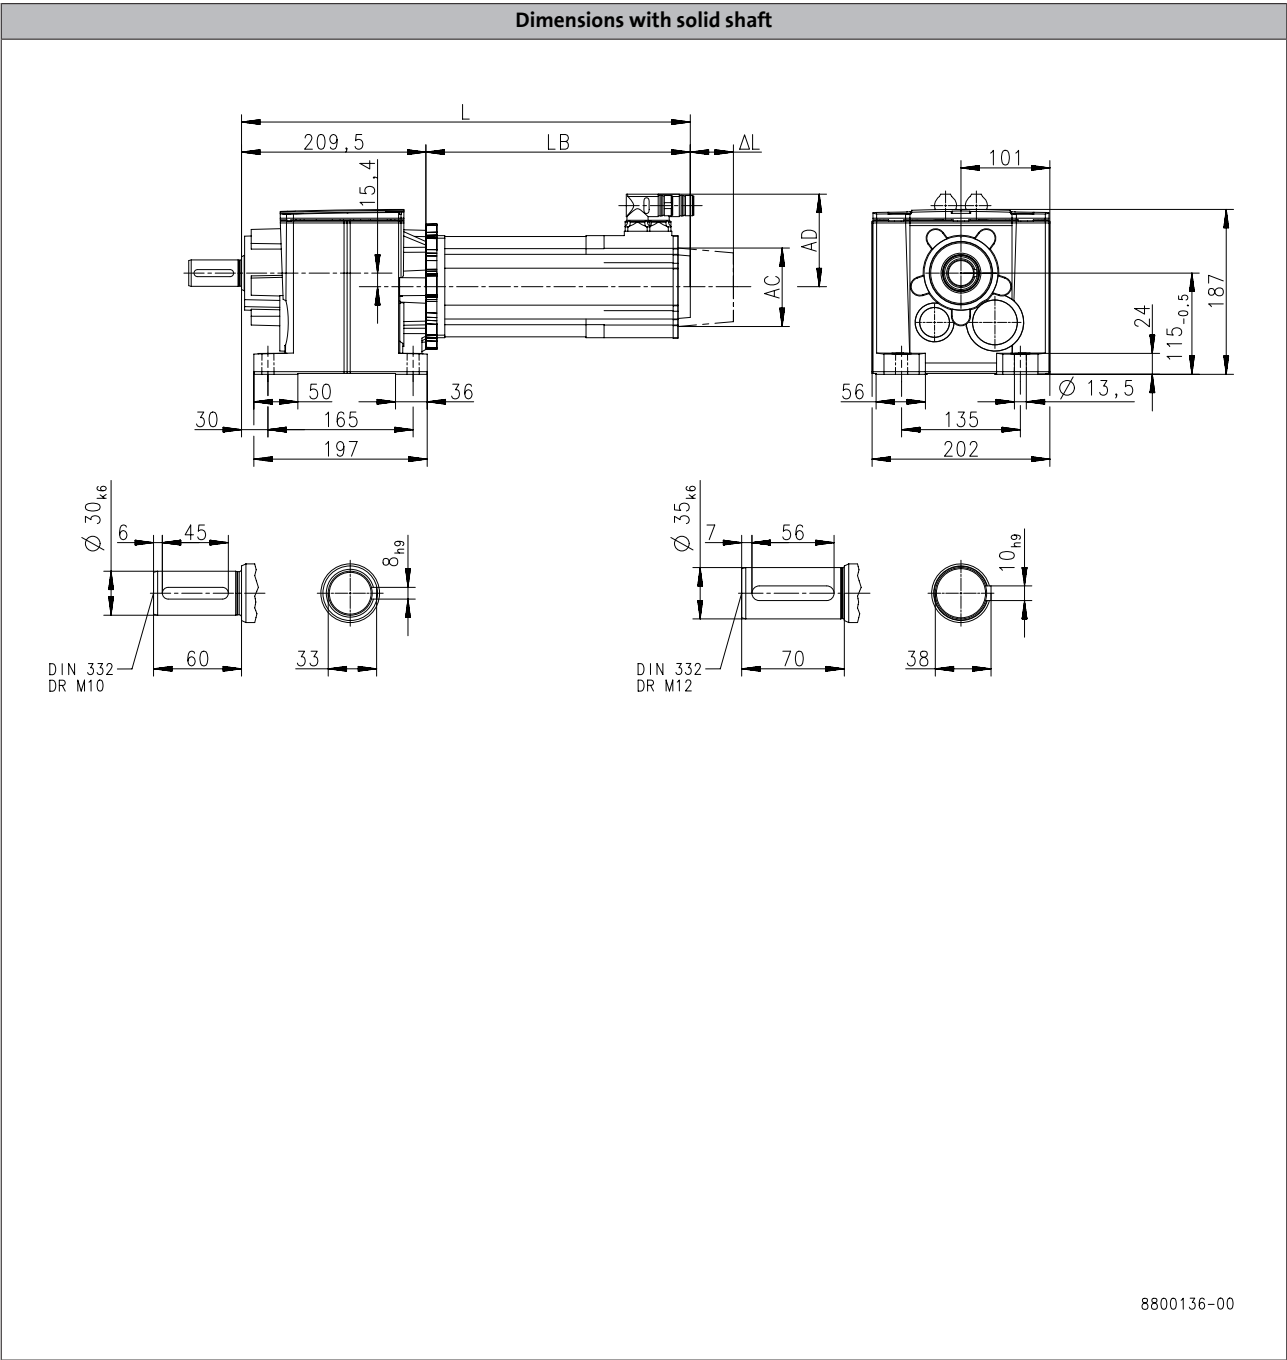

Product			MCS									
			12H15	12H30	12H35	12L20	12L41	14D15	14H15	14H32	14L15	14P14
Dimensions												
Total length	L	[mm]	450			490		426	466		506	546
Motor length	LB	[mm]	240.5			280.5		216	256		296	336
Length of motor options	Δ L	[mm]	69					78				
Motor diameter	AC	[mm]	116					143				
Distance motor/connection	AD	[mm]	105					116.5				


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors


g500-H450

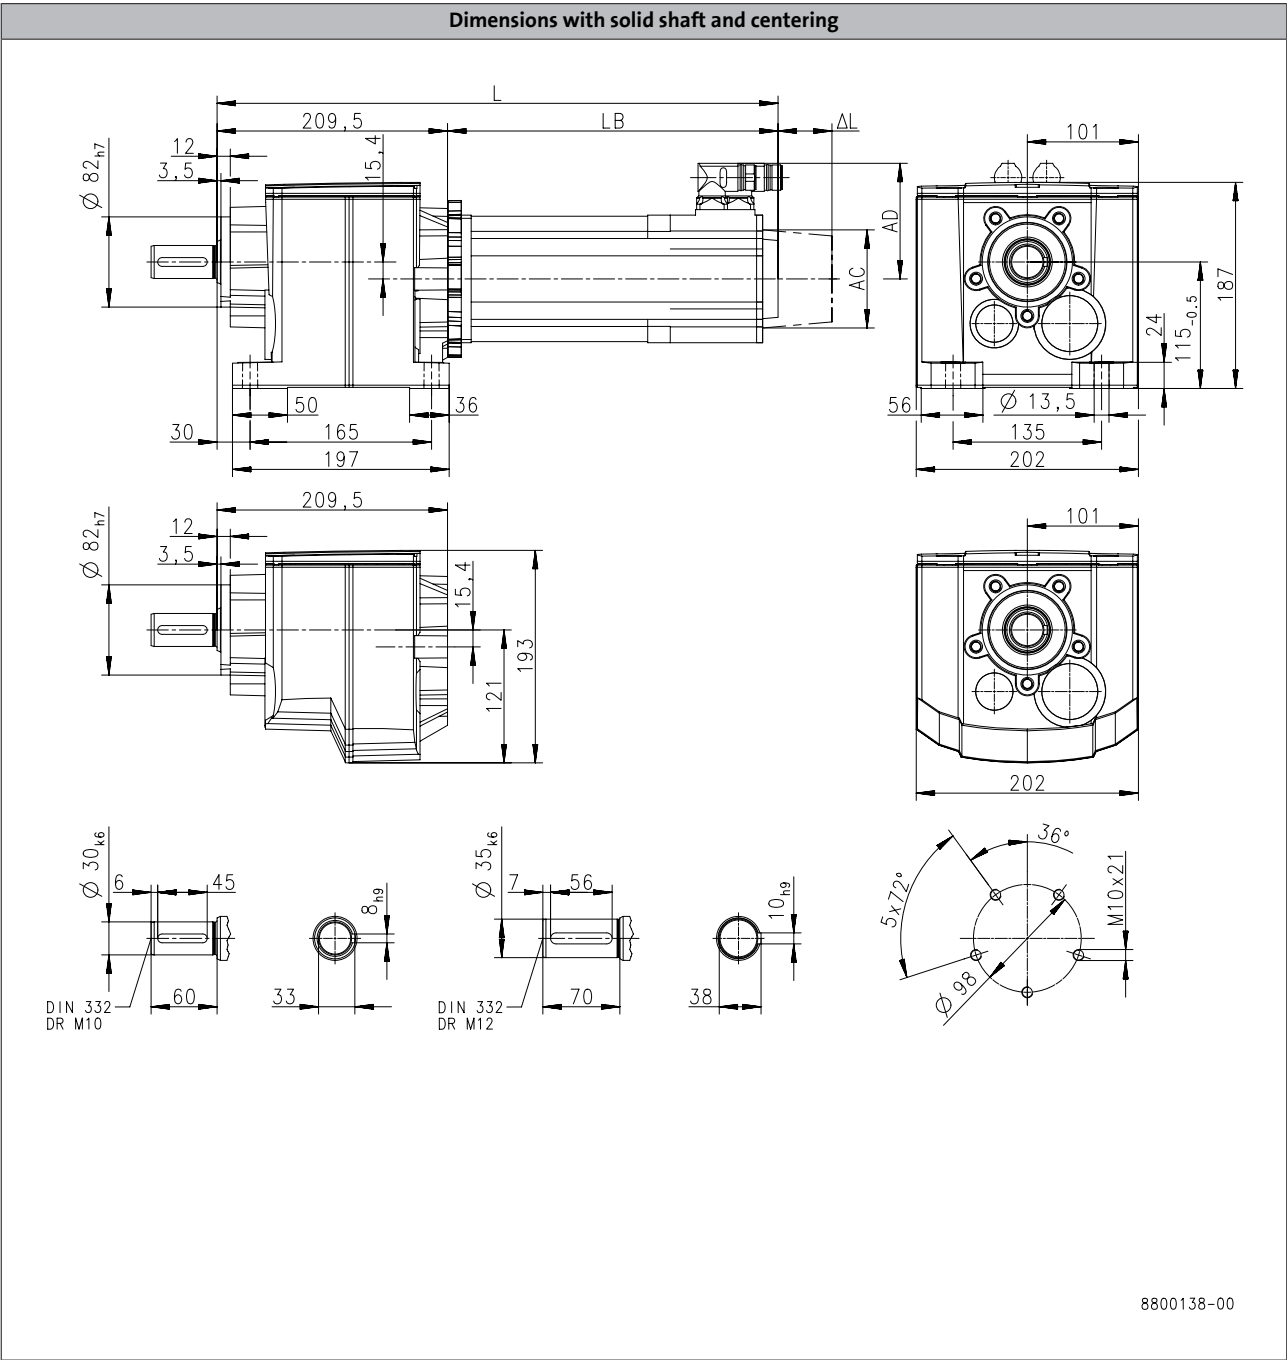

Product			MCS							
			06C41	06F41	06I41	09D41	09F38	09H41	09L41	12D20 12D41
Dimensions										
Total length	L	[mm]	341	371	401	393	413	433	473	410
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9	200.5
Length of motor options	Δ L	[mm]		100			71			69
Motor diameter	AC	[mm]		86			89			116
Distance motor/connection	AD	[mm]		77			89.7			105


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-H450

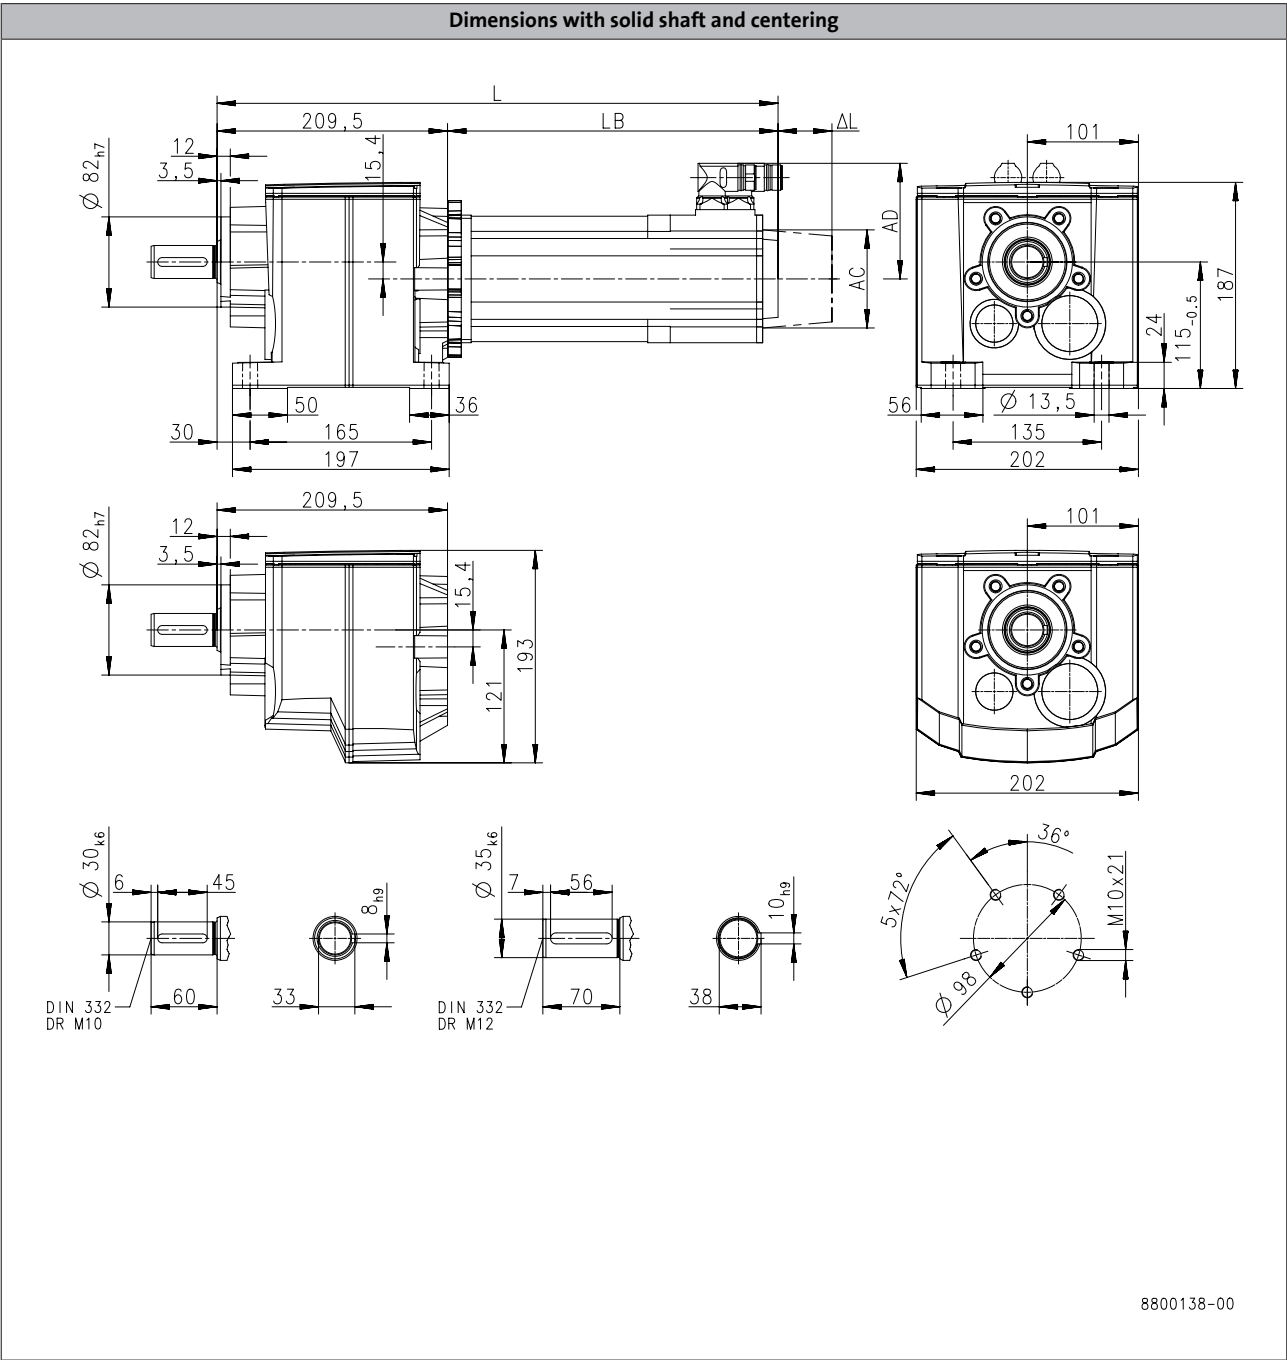

8800138-00

Product			MCS									
			12H15	12H30	12H35	12L20	12L41	14D15	14H15	14H32	14L15	14P14
Dimensions												
Total length	L	[mm]	450			490		426	466		506	546
Motor length	LB	[mm]	240.5			280.5		216	256		296	336
Length of motor options	Δ L	[mm]	69						78			
Motor diameter	AC	[mm]	116						143			
Distance motor/connection	AD	[mm]	105						116.5			

Dimensions, self-ventilated motors

g500-H450

6.3

8800137-00


g500-H helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-H450

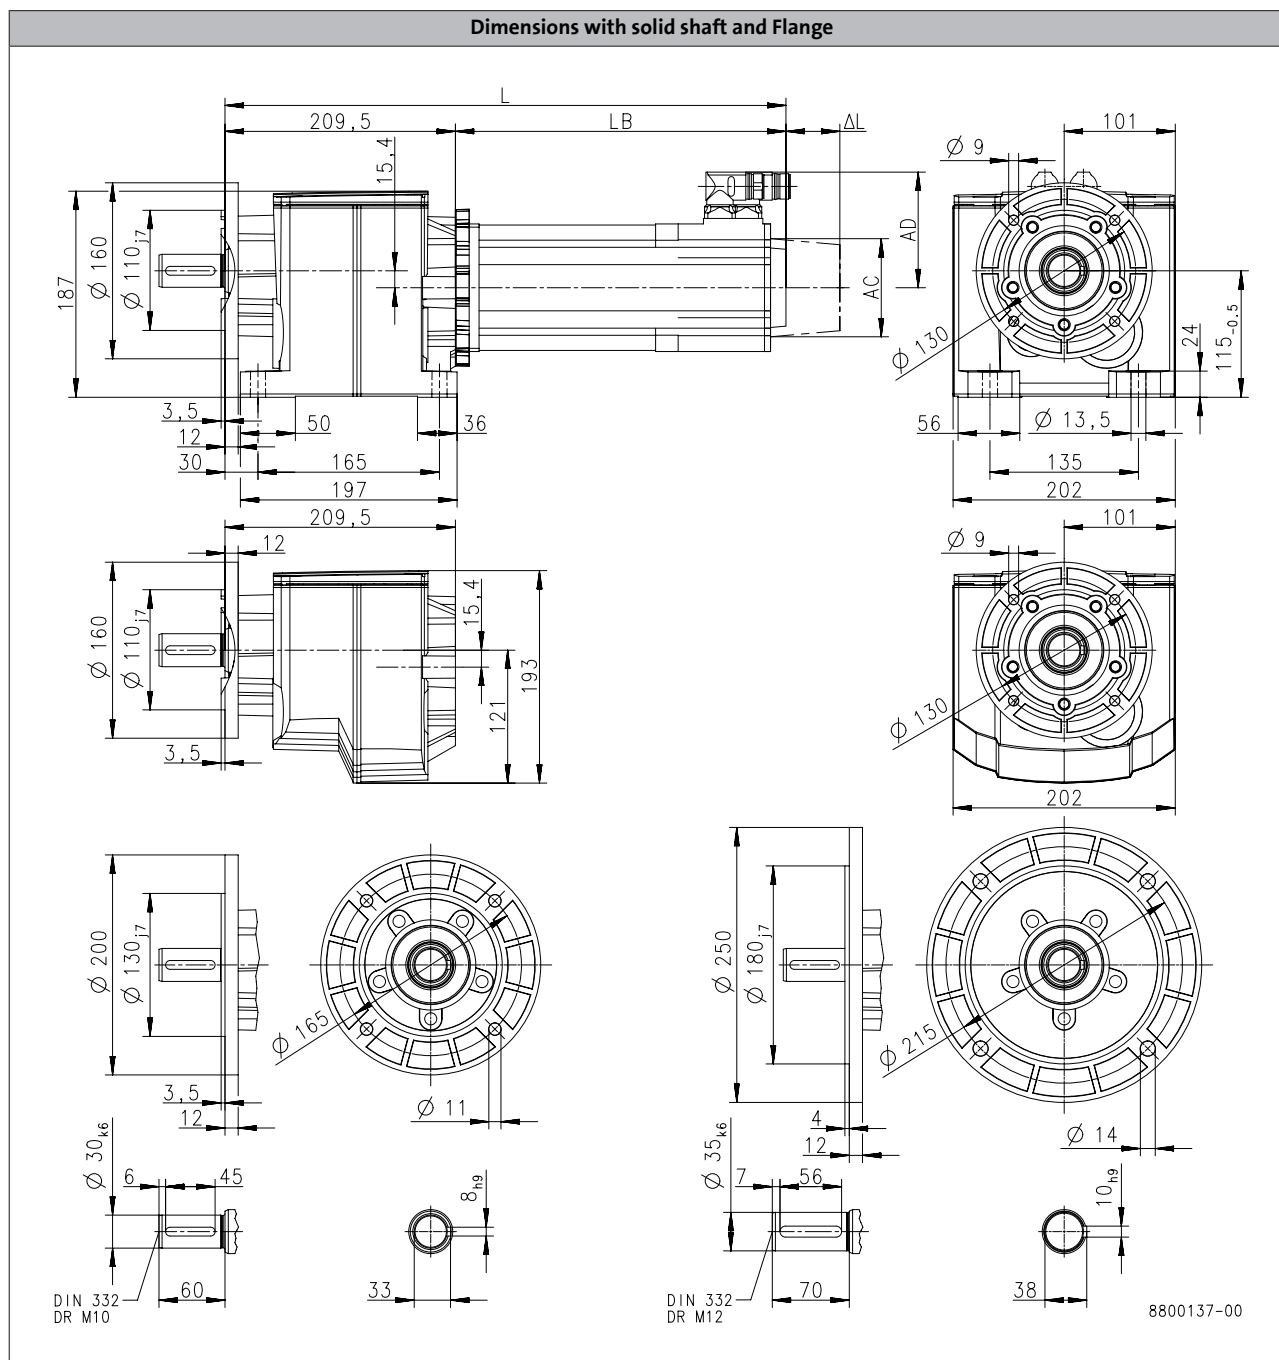

Product			MCS									
			12H15	12H30	12H35	12L20	12L41	14D15	14H15	14H32	14L15	14P14
Dimensions												
Total length	L	[mm]	450			490		426	466		506	546
Motor length	LB	[mm]	240.5			280.5		216	256		296	336
Length of motor options	Δ L	[mm]	69					78				
Motor diameter	AC	[mm]	116					143				
Distance motor/connection	AD	[mm]	105					116.5				

g500-H helical geared motors

Technical data



Weights, self-ventilated motors

2-stage gearboxes

				MCS							
				06C41	06F41	06I41	09D41	09F38	09H41	09L41	12D20 12D41
g500	-H45	m	[kg]	3.5	3.9	4.6					
	-H100	m	[kg]	5.3	5.7	6.4	7.7	8.6	9.5	11	
	-H140	m	[kg]	6.4	6.8	7.5	8.8	9.7	11	12	
	-H210	m	[kg]		8.1	8.8	10	11	12	14	12
	-H320	m	[kg]		10	11	12	13	14	16	14
	-H450	m	[kg]		13	14	15	16	17	19	17

				MCS							
				12H15 12H30 12H35	12L20	12L41	14D15	14H15	14H32	14L15	14P14
g500	-H210	m	[kg]	16	19						
	-H320	m	[kg]	17	20		19	24		28	33
	-H450	m	[kg]	20	24		22	27		31	36

3-stage gearboxes

				MCS						
				06C41	06F41	06I41	09D41	09F38	09H41	09L41
g500	-H210	m	[kg]	7.9	8.3	9.0	10	11		
	-H320	m	[kg]	9.8	10	11	12	13	14	16
	-H450	m	[kg]	13	14		16		17	19

g500-H helical geared motors

Technical data



Surface and corrosion protection

For optimum protection of geared motors against ambient conditions, the surface and corrosion protection system (OKS) offers tailor-made solutions.

Various surface coatings combined with other protective measures ensure that the geared motors operate reliably even at high air humidity, in outdoor installations or in the presence of atmospheric impurities. Any colour from the RAL Classic collection can be chosen for the top coat. The geared motors are also available unpainted (no surface and corrosion protection).

Surface and corrosion protection	Applications	Measures
OKS-G (primed)	Dependent on subsequent top coat applied	2K PUR priming coat (grey) - Zinc-coated screws - Rust-free breather elements Optional measures - Stainless steel nameplate
OKS-S (small)	- Standard applications - Internal installation in heated buildings - Air humidity up to 90%	- Surface coating as per corrosivity category C1 (in line with EN 12944-2) - Zinc-coated screws - Rust-free breather elements Optional measures - Stainless steel nameplate
OKS-M (medium)	- Internal installation in non-heated buildings - Covered, protected external installation - Air humidity up to 95%	- Surface coating as per corrosivity category C2 (in line with EN 12944-2) - Zinc-coated screws - Rust-free breather elements Optional measures - Stainless steel shaft - Stainless steel nameplate - Rust-free shrink disc (on request)
OKS-L (large)	- External installation - Air humidity above 95% - Chemical industry plants - Food industry	- Surface coating as per corrosivity category C3 (in line with EN 12944-2) - Blower cover and B end shield additionally primed - Cable glands with gaskets - Corrosion-resistant brake with cover ring, stainless friction plate, and chrome-plated armature plate (on request) - All screws/screw plugs zinc-coated - Stainless breather elements - Threaded holes that are not used are closed by means of plastic plugs Optional measures - Sealed recesses on motor (on request) - Stainless steel shaft - Stainless steel nameplate - Rust-free shrink disc (on request) - Additional priming coat on cast iron fan - Oil expansion tank and torque plates painted separately and supplied loose

g500-H helical geared motors

Technical data



Surface and corrosion protection

Structure of surface coating

Surface and corrosion protection	Corrosivity category	Surface coating	Colour
	DIN EN ISO 12944-2	Structure	
Without OKS(uncoated)		Dipping primed gearbox	
OKS-G (primed)		Dipping primed gearbox 2K PUR priming coat	
OKS-S (small)	C1	Dipping primed gearbox 2K-PUR top coat	Standard: RAL 7012 Optional: RAL Classic
OKS-M (medium)	C2	Dipping primed gearbox 2K PUR priming coat	
OKS-L (large)	C3	2K-PUR top coat	

g500-H helical geared motors


Technical data



Gearboxes

g500-H helical gearbox

45 to 450 Nm

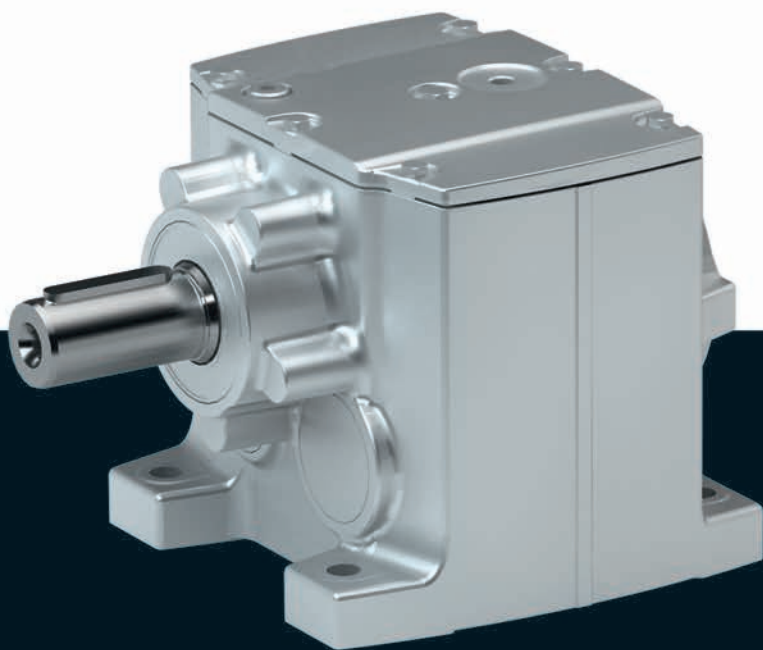

g500-H helical gearbox


Contents



General information	List of abbreviations	6.3 - 5
	Product information	6.3 - 6
	Equipment	6.3 - 7
	The gearbox kit	6.3 - 8
	Functions and features	6.3 - 10
	Lubricants	6.3 - 11
Technical data	Ventilation	6.3 - 12
	Permissible radial and axial forces at output	6.3 - 15
	Moments of inertia	6.3 - 17
	Additional weights for gearboxes	6.3 - 20


g500-H helical gearbox

Contents



g500-H helical gearbox

General information



List of abbreviations

$F_{ax,max}$	[N]	Max. axial force
$F_{rad,max}$	[N]	Max. radial force
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass

g500-H helical gearbox

General information



Product information

The robust helical gearboxes feature high permissible radial forces, closely stepped ratios and a low backlash. They are available in 2-pole and 3-pole design with a torque up to 450 Nm and a ratio of up to $i = 370$.

Versions

- Fine-scaling of size / torque provides for an optimum machine adaptation
- Standardised shaft and flange dimensions for an easy machine integration
- High efficiency

The product name

Gearbox type	Product range		Design	Rated torque [Nm]	Product
Helical gearbox	g500	-	H	45	g500-H45
				100	g500-H100
				140	g500-H140
				210	g500-H210
				320	g500-H320
				450	g500-H450

g500-H helical gearbox


General information



Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

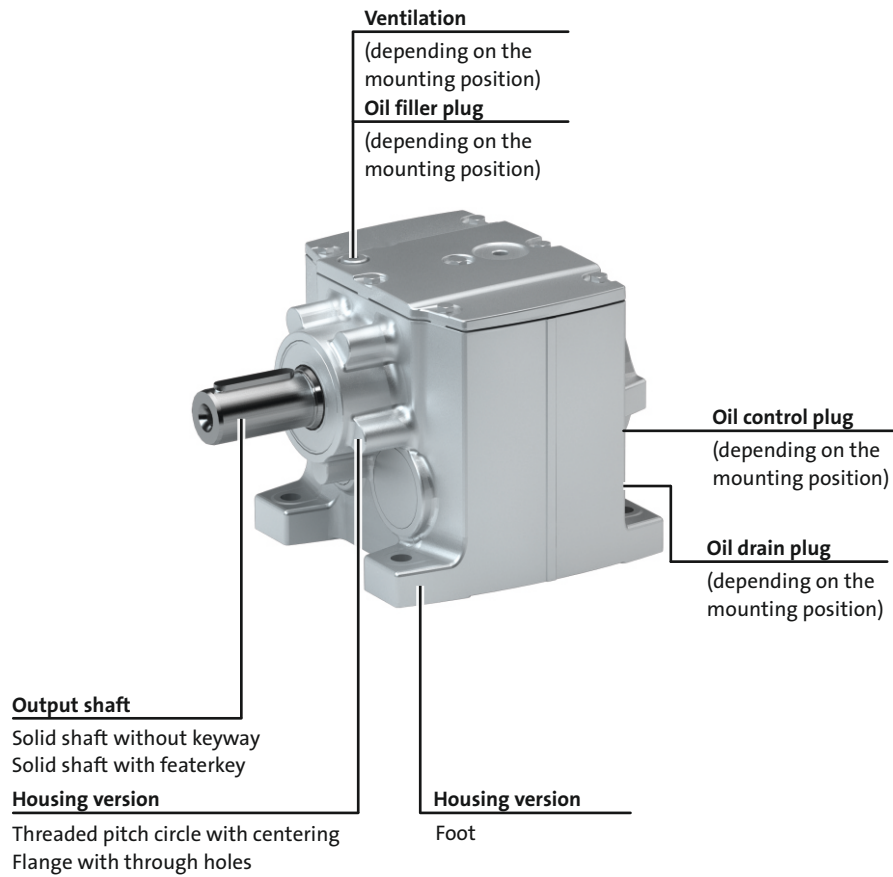

g500-H helical gearbox

General information



The gearbox kit

Gearbox details

Product						
	g500-H45	g500-H100	g500-H140	g500-H210	g500-H320	g500-H450
Driven shaft						
Solid shaft without keyway [mm]		20x40	25x50		30x60	35x70
Solid shaft with featherkey [mm]	14x28 20x40	20x40	25x50		30x60	30x60 35x70
Design	Standard stainless steel					
Gasket	Standard FPM (Viton)					
Bearing	Standard	Standard Reinforced				
Fitting grease	Not enclosed Enclosed					
Housing						
Housing version	With foot Without foot with centering	With foot With foot and centering Without foot with centering				
Output flange						
flange diameter [mm]	120/140/160			120/140/160/200	160/200	160/200/250
Lubricant						
Type	CLP 460 ¹⁾ CLP HC 320 CLP HC 220 CLP HC 220 USDA H1					
Oil-level inspection	Without inspection With inspection					
Breather element	Without				Standard mounting position: Mounted Combined mounting position: loosely enclosed	
Backlash						
Backlash	Standard					

¹⁾ Not suitable for geared servo motors.

- Further information and installation feasibilities can be found in the Gearboxes chapter.


g500-H helical gearbox



General information



The gearbox kit


Gearbox details

Solid shaft		
		
Foot mounting	Foot mounting With centering	Foot mounting Flange with through holes

Solid shaft	
	
With centering	Flange with through holes

g500-H helical gearbox

General information





Functions and features

Product	g500-H45		g500-H100	g500-H140	g500-H210	g500-H320	g500-H450
Housing							
Design	Cuboid						
Material	Aluminium						
Solid shaft							
Design	with keyway to DIN 6885	with keyway to DIN 6885 Without keyway					
Tolerance	Shaft diameter ≤ 50 mm: k6 Shaft diameter > 50 mm: m6						
Material	Tempered steel C45 Nirosta X46Cr13						
Toothed parts							
Design	Ground tooth flanks Optimised tooth flank geometry						
Material	Case-hardened steel						
Shaft-hub joint							
	Force-fit						
Shaft sealing rings							
Design	With dust lip						
Material	NB / FP						
Bearing							
Design	Ball bearing / tapered-roller bearing depending on size and design						
Lubricants							
	Standard: mineral oil Optional: synthetic oil ¹⁾						
Quantities	Corresponding to mounting position (see nameplate)						
Mechanical efficiency							
2-stage gearboxes [η _{c=1}]	0.96				0.95		
3-stage gearboxes [η _{c=1}]							

¹⁾ Standard for geared servo motors.

Direction of rotation

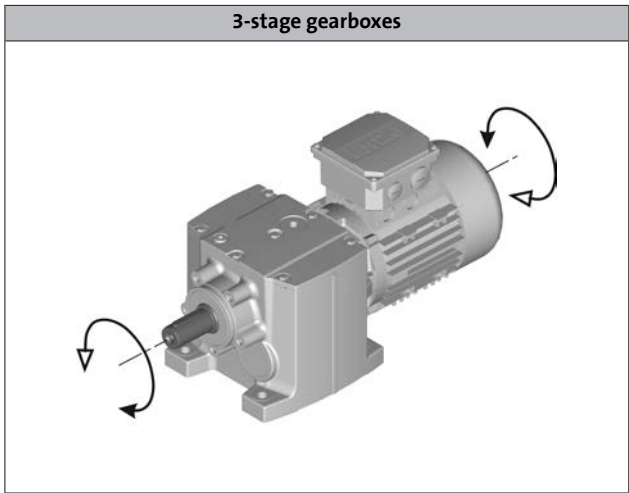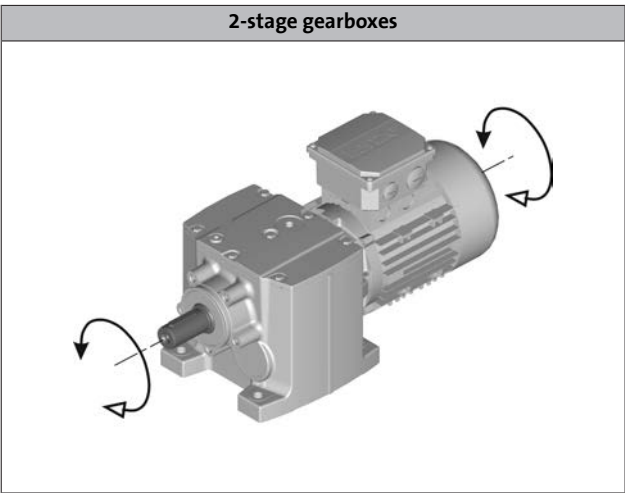

g500-H helical gearbox

General information



Lubricants

Lenze gearboxes and geared motors are ready for operation on delivery and are filled with lubricants specific to both the drive and the design. The mounting position and design specified in the order are key factors in choosing the volume of lubricant.

The lubricants listed in the lubricant table are approved for use in Lenze drives.

Lubricant table

Mode	CLP 460	CLP HC 320	CLP HC 220 USDA H1
Ambient temperature [°C]	0 ... +40	-25 ... +50	-20 ... +40
Specification	Mineral based oil with additives	Synthetic-based oil (synthetic hydrocarbon / poly-alpha-olefin oil)	
Changing interval	16000 operating hours not later than after three years (oil temperature 70 to 80 °C)	25000 operating hours not later than after three years (oil temperature 70 to 80 °C)	16000 operating hours not later than after three years (oil temperature 70 to 80 °C)
Fuchs	Fuchs Renolin CLP 460	Fuchs Renolin Unisyn CLP 320	bremer & leguil Cassida Fluid GL 220
Klüber	Klüberoil GEM1-460 N	Klübersynth GEM4-320 N	Klüberoil 4 UH1-220 N
Shell	Shell Omala S2 G 460	Shell Omala S4 GX HD 320	

- Please contact your Lenze sales office if you are operating at ambient temperatures in areas up to < -20 °C bzw. > or up to +40°C.

Shaft sealing rings

By default, the gearboxes come with NBR shaft sealing rings at the output end. At high speed and unfavourable ambient conditions as high temperature, reduced circulation of air etc., Lenze recommends the use of Viton shaft sealing rings.

Please consider this in your order.

g500-H helical gearbox

General information



Ventilation

Non-ventilated gearboxes

No ventilation is required for gearboxes g500-H45 to H210.

Ventilated gearboxes

The g500-H320 H450 gearbox is supplied with a breather element as standard.

Gearboxes in combined mounting position

To reduce the number of different versions, the gearboxes can also be ordered with combined mounting positions. Depending on the gearbox in question, the following combinations are available:

- g500-H45 in combined mounting position ABCDEF
- g500-H100 ... H450 in combined mounting position AEF

The breather elements are supplied loose.

g500-H helical gearbox

General information



Ventilation

Position of ventilation, sealing elements and oil level check

► A ... F mounting position

A		B	
C		D	
E		F	
	Filling		Drain
	Ventilation		Check

g500-H helical gearbox

General information



g500-H helical gearbox

Technical data



Permissible radial and axial forces at output

Permissible radial force


$$F_{\text{rad,perm}} = f_w \times F_{\text{rad,max}}$$

Permissible axial force


If there is no radial force, the maximum permissible axial force is 50 % of the table value $F_{\text{rad,max}}$

► If F_{rad} and $F_{\text{ax}} \neq 0$, please contact Lenze.

Application of forces

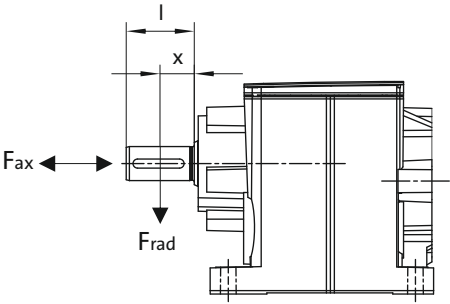

Additional load factor f_w at output shaft

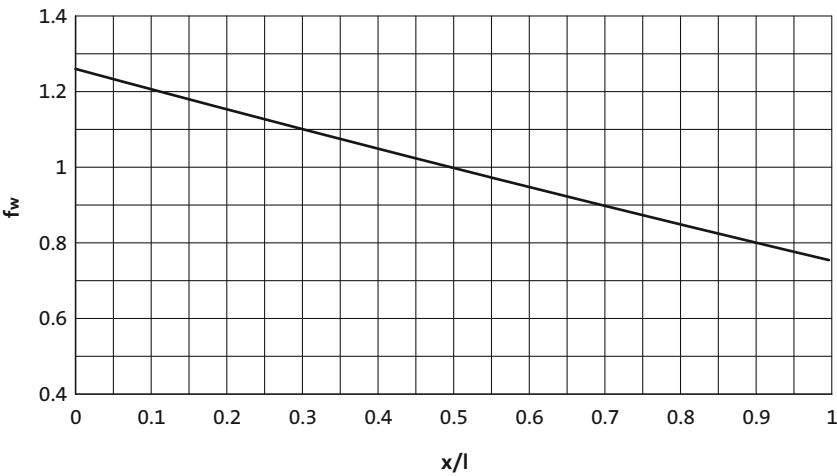

g500-H helical gearbox

Technical data



Permissible radial and axial forces at output

The values given in the table refer to the center shaft end force application point and are minimum values calculated according to the most unfavourable conditions (force application angle, mounting position, direction of rotation). The values were calculated for the motor/gearbox combination with a load capacity of $c = 1.3$ and an input speed of 1400 rpm.

In case of different operating conditions, considerably higher forces can be transmitted. Please contact Lenze.

- If the torque is transmitted via the flange face, max 50 % of the radial force $F_{rad,max}$ are permissible.

Product	n_2 [r/min]									
	1000	630	400	250	160	100	63	40	25	≤16

Max. radial force, Solid shaft										
	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$
	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]
g500-H45	300	370	630	710	800	920	1100	1400	1500	1500
g500-H100	820	1000	1200	1450	1750	2120	2560	2650	2650	2650
g500-H140	1210	1750	2000	2300	2700	3300	3800	3800	3800	3800
g500-H210	1150	1600	2020	2390	2780	3360	3900	3900	4360	4800
g500-H320	1500	1900	2200	2600	3000	3500	4100	4800	5600	5700
g500-H450	1900	2200	2560	3000	3470	4050	4720	5480	6610	7100

Max. radial force, Solid shaft (reinforced bearings)										
	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$
	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]
g500-H100	1020	1250	1500	1810	2190	2650	3200	3300	3300	3300
g500-H140	1510	2180	2500	2870	3370	4120	4750	4750	4750	4750
g500-H210	1430	2000	2520	2980	3470	4200	4870	4870	5450	6000
g500-H320	1870	2370	2750	3250	3750	4370	5120	6000	7000	7100
g500-H450	2370	2750	3200	3750	4330	5060	5900	6850	8260	8870

g500-H helical gearbox

Technical data



Moments of inertia

- The moments of inertia relate to the drive shaft of the gearbox.
- The total moment of inertia is calculated by adding the values of the gearbox, motor and accessories.


2-stage gearboxes

Product	Ratio	Moment of inertia
	i	J
		[kgcm ²]
g500-H45	2.597	0.26
	3.413	0.17
	4.368	0.12
	5.312	0.18
	5.965	0.17
	6.982	0.12
	7.840	0.12
	8.935	0.089
	10.033	0.086
	11.429	0.059
	12.833	0.057
	14.836	0.041
	16.660	0.040
	19.013	0.028
	21.350	0.027
	24.595	0.019
	27.618	0.019
	32.000	0.012
	35.933	0.012
	41.455	0.008
g500-H100	46.550	0.008
	52.909	0.005
	59.413	0.005
	3.354	0.53
	4.600	0.34
	5.167	0.43
	5.887	0.24
	6.440	0.21
	7.086	0.28
	8.214	0.15
	9.068	0.20
	10.063	0.11
	11.360	0.17
	12.653	0.13
	14.490	0.13
	15.500	0.10
	17.750	0.10
	19.486	0.069
	22.314	0.067
	25.095	0.048
	28.738	0.047
	31.805	0.032
	36.422	0.031
	39.857	0.022
	45.643	0.022
	52.510	0.014
	60.133	0.013

Product	Ratio	Moment of inertia
	i	J
		[kgcm ²]
g500-H140	3.267	0.90
	4.480	0.54
	5.733	0.36
	6.272	0.31
	7.269	0.51
	8.000	0.21
	9.029	0.34
	9.800	0.15
	11.554	0.24
	12.640	0.21
	13.957	0.20
	16.122	0.15
	17.802	0.14
	19.750	0.11
	21.808	0.11
	24.829	0.077
	27.415	0.074
	31.976	0.053
	35.308	0.051
	40.526	0.035
g500-H210	44.748	0.034
	50.786	0.024
	56.077	0.024
	66.908	0.015
	73.879	0.014
	3.389	1.53
	4.648	0.98
	5.583	1.24
	6.250	1.18
	7.657	0.82
	8.571	0.79
	9.799	0.59
	10.720	0.51
	12.000	0.50
	13.673	0.38
	15.306	0.36
	16.750	0.29
	18.750	0.28
	21.802	0.18
	24.405	0.18
	27.119	0.13
	30.357	0.13
	35.095	0.085
	39.286	0.083
	42.593	0.062
	47.679	0.061
	54.438	0.040
	60.938	0.039

g500-H helical gearbox

Technical data



Moments of inertia

2-stage gearboxes

Product	Ratio	Moment of inertia
	i	J
		[kgcm²]
g500-H320	3.389	1.23
	4.648	0.81
	6.083	1.66
	6.910	1.51
	8.343	1.04
	9.477	0.97
	10.677	0.72
	11.680	0.63
	12.128	0.68
	13.268	0.59
	14.898	0.44
	16.923	0.42
	18.250	0.34
	20.731	0.32
	23.754	0.21
	26.983	0.20
	29.548	0.15
	33.564	0.15
	38.238	0.095
	43.436	0.092
	46.407	0.070
	52.715	0.067

Product	Ratio	Moment of inertia
	i	J
		[kgcm²]
g500-H450	3.444	4.94
	4.724	3.21
	5.678	3.64
	6.045	2.23
	6.613	1.98
	7.787	2.52
	8.800	2.40
	9.965	1.81
	11.262	1.74
	12.320	1.56
	13.905	1.21
	15.714	1.17
	17.033	0.95
	19.250	0.93
	22.170	0.53
	25.056	0.51
	27.578	0.39
	31.167	0.38
	35.689	0.24
	40.333	0.24
	43.313	0.18
	48.950	0.17
	54.750	0.12
	61.875	0.11

g500-H helical gearbox

Technical data



Moments of inertia

3-stage gearboxes

Product	Ratio	Moment of inertia
	i	J
		[kgcm ²]
g500-H210	43.390	0.13
	48.571	0.13
	55.529	0.088
	62.160	0.088
	71.026	0.060
	79.507	0.059
	92.205	0.042
	103.214	0.042
	118.162	0.029
	132.270	0.029
	152.853	0.020
	198.873	0.014
	222.619	0.013
	257.631	0.003
	288.393	0.003
	368.080	0.006
g500-H320	47.276	0.13
	53.703	0.13
	60.502	0.093
	68.726	0.091
	77.387	0.062
	87.906	0.061
	100.462	0.044
	114.118	0.043
	128.743	0.030
	146.244	0.030
	166.541	0.021
	216.683	0.014
	246.137	0.014
	280.702	0.003
	318.859	0.003

Product	Ratio	Moment of inertia
	i	J
		[kgcm ²]
g500-H450	44.124	0.36
	49.867	0.36
	56.469	0.25
	61.774	0.22
	69.813	0.22
	78.794	0.16
	89.048	0.15
	96.522	0.12
	109.083	0.12
	121.342	0.079
	137.133	0.078
	156.274	0.054
	176.611	0.054
	198.059	0.036
	223.833	0.035
	248.200	0.025
	280.500	0.025
	326.994	0.015
	369.548	0.015

g500-H helical gearbox

Technical data



Additional weights for gearboxes

Product			g500-H45	g500-H100	g500-H140	g500-H210	g500-H320	g500-H450
Mass								
Foot	m	[kg]	0.1	0.1	0.2	0.1	0.1	0.2
Flange	m	[kg]	0.3	0.4	0.6	0.6	0.8	0.9

Motors

MCS synchronous servo motors

0.25 to 190 Nm



MCS synchronous servo motors

Contents



General information	List of abbreviations	6.11 - 4
	Product key	6.11 - 6
	Product information	6.11 - 8
	Functions and features	6.11 - 9
	Dimensioning	6.11 - 10
Technical data	Standards and operating conditions	6.11 - 17
	Permissible radial and axial forces	6.11 - 18
	Rated data, non-ventilated	6.11 - 19
	Rated data, forced ventilated	6.11 - 24
	Selection tables, Servo Drives 9400 HighLine	6.11 - 26
	Selection tables, Inverter Drives 8400 TopLine	6.11 - 36
	Selection tables, Servo Drives ECS	6.11 - 47
	Selection tables, Servo Inverter 9300	6.11 - 56
	Torque characteristics	6.11 - 63
	Dimensions, self-ventilated	6.11 - 100
	Dimensions, forced ventilated	6.11 - 104
Accessories	Permanent magnet holding brake	6.11 - 107
	Resolver	6.11 - 109
	Incremental encoder and SinCos absolute value encoder	6.11 - 110
	Blowers	6.11 - 112
	Temperature monitoring	6.11 - 113
	Terminal box	6.11 - 114
	ICN connector	6.11 - 116

MCS synchronous servo motors

General information



List of abbreviations

$\eta_{100\%}$	[%]	Efficiency
$\cos \phi$		Power factor
du/dt	[kV/ μ s]	Insulation resistance
$F_{ax,-}$	[N]	Min. axial force
$F_{ax,+}$	[N]	Max. axial force
$f_{in,max}$	[Hz]	Max. input frequency
f_{max}	[kHz]	Limit frequency
f_{max}	[kHz]	Max. switching frequency
f_N	[Hz]	Rated frequency
F_{rad}	[N]	Max. radial force
H_{max}	[m]	Site altitude
I_0	[A]	Standstill current
I_{max}	[A]	Max. short-time DC-bus current
I_{max}	[A]	Max. current
I_{max}	[A]	Max. current consumption
I_{max}	[A]	Max. current
I_{max}	[A]	Max. DC-bus current
I_N	[A]	Rated current
J	[kgcm ²]	Moment of inertia
J_{MB}	[kgcm ²]	Moment of inertia
$KE_{LL\ 150\ ^\circ C}$	[V /1000 rp]	Voltage constant
$Kt_{0\ 150\ ^\circ C}$	[Nm/A]	Torque constant
L	[mH]	Mutual inductance
$L_{1\sigma}$	[mH]	Stator leakage inductance
$L_{2\sigma}$	[mH]	Rotor leakage inductance
L_N	[mH]	Rated inductance
m	[kg]	Mass
M_0	[Nm]	Stall torque
$M_{0,max}$	[Nm]	Max. standstill torque
M_{av}	[Nm]	Average dynamic torque
M_{max}	[Nm]	Max. torque
M_N	[Nm]	Rated torque
n_{eto}	[r/min]	Transition speed
n_k	[r/min]	Speed
n_{max}	[r/min]	Max. speed

n_N	[r/min]	Rated speed
P_N	[kW]	Rated power
Q_E	[J]	Maximum switching energy
R	[Ω]	Insulation resistance
R	[Ω]	Min. insulation resistance
R_1	[Ω]	Stator impedance
R_2	[Ω]	Charging resistor
R_2	[Ω]	Rotor impedance
$R_{UV\ 150\ ^\circ C}$	[Ω]	Stator impedance
$R_{UV\ 20\ ^\circ C}$	[Ω]	Stator impedance
$S_{h\ddot{u}}$	[1/h]	Transition operating frequency
T	[$^\circ C$]	Operating temperature
T	[$^\circ C$]	Rated temperature
T	[$^\circ C$]	Max. ambient temperature of bearing
T	[$^\circ C$]	Max. surface temperature
T	[$^\circ C$]	Max. ambient temperature for transport
T	[$^\circ C$]	Min. ambient storage temperature
T	[$^\circ C$]	Min. ambient temperature for transport
T	[$^\circ C$]	Ambient temperature
t_1	[ms]	Engagement time
t_2	[ms]	Disengagement time
$T_{opr,max}$	[$^\circ C$]	Max. ambient operating temperature
$T_{opr,min}$	[$^\circ C$]	Min. ambient operating temperature
$U_{in,max}$	[V]	Max. input voltage
$U_{in,min}$	[V]	Min. input voltage
U_{max}	[V]	Max. mains voltage
U_{max}	[V]	Min. input voltage
U_{min}	[V]	Min. mains voltage
$U_{N, AC}$	[V]	Rated voltage
$U_{N, DC}$	[V]	Rated voltage
Z_{ro}	[Ω]	Rotor impedance
Z_{rs}	[Ω]	Impedance
Z_{so}	[Ω]	Stator impedance

MCS synchronous servo motors

General information



List of abbreviations


CE	Communauté Européenne
CSA	Canadian Standards Association
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UkrSEPRO	Certificate for Ukraine
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

MCS synchronous servo motors

General information



Product key

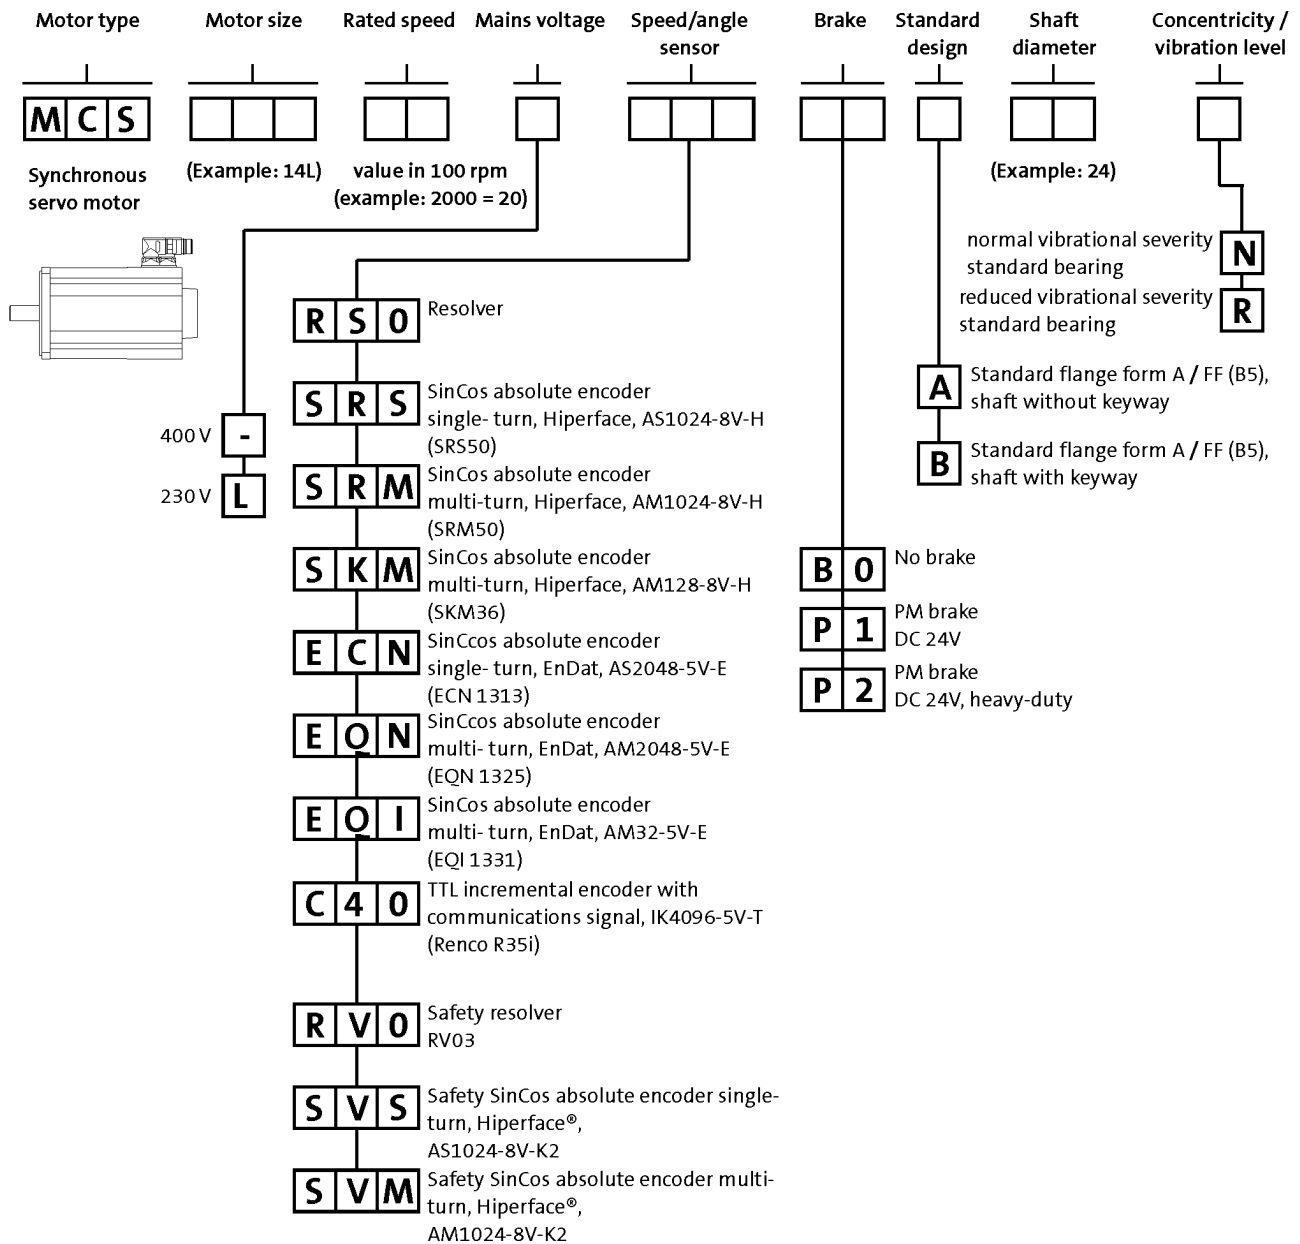


MCS synchronous servo motors

General information



Product key

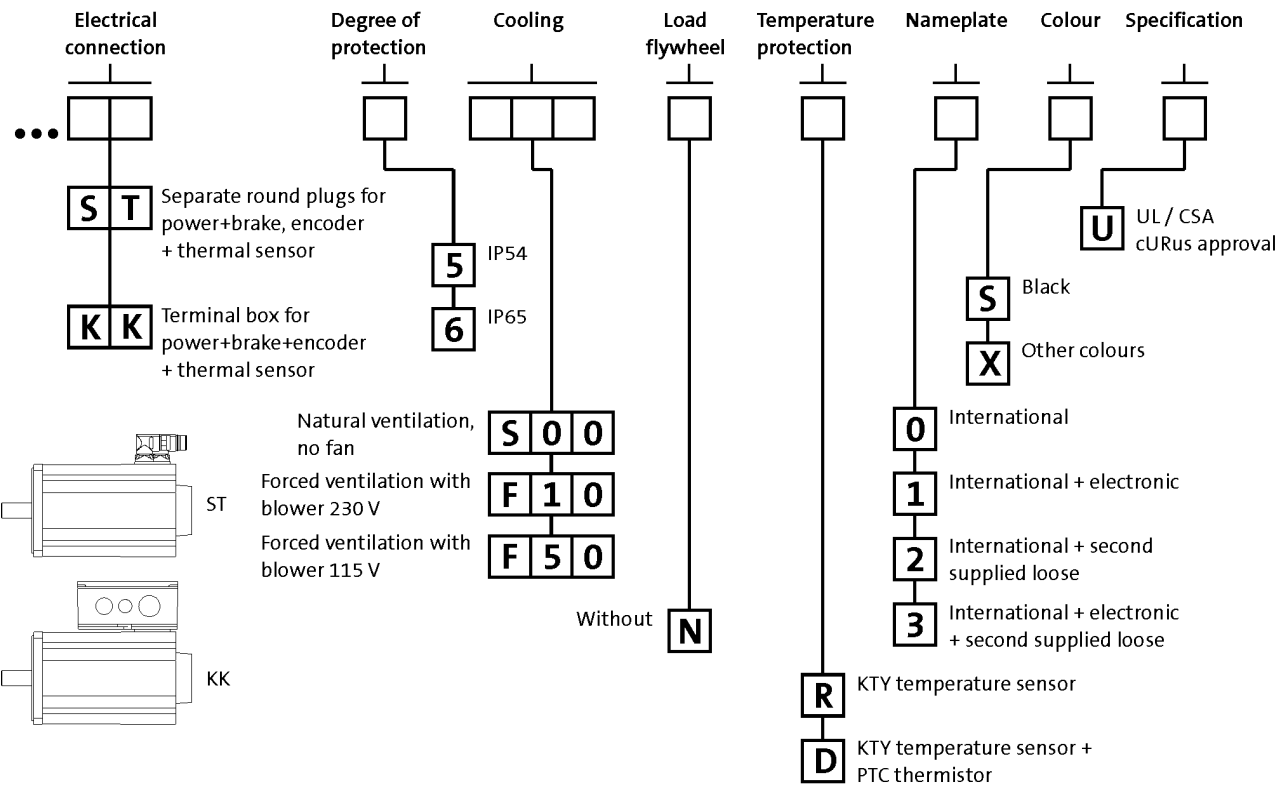

MCS synchronous servo motors

General information



Product information


When space is limited, but strict requirements in terms of dynamics and precision still have to be met, the MCS synchronous servo motors are the right choice.

With a power range from 0.25 kW to 15.8 kW and a rated torque range from 0.5 Nm to 72 Nm and peak torques of up to 190 Nm, these motors leave nothing to be desired in installations requiring compact and dynamic drive technology. The stator winding of the MCS motors employs innovative Single Element Pole Technology – SEPT – and is made up of individual coils. High-quality magnetic materials and specially developed pole shapes set the conditions for their excellent drive characteristics. This results in a significant increase in power density, while at the same time reducing moments of inertia. The minimum detent torques offer exceptional smooth running characteristics and thereby secure excellent control behaviour.

The robust mechanical structure with reinforced bearings, the high degree of protection and the full stator encapsulation increase operational reliability, even in harsh ambient conditions.

Advantages

- High dynamic performance thanks to low moments of inertia
- Compact size with high power density
- Cooling with or without axial external fan
- Robust regenerative resolver system as standard
- Alternatively sin/cos encoder for the highest precision
- Easy to install and service friendly thanks to use of SpeedTec connectors
- Optional terminal box
- Protection: IP54, IP65 optional
- cURus-approved, GOST-certified, CE, RoHS compliant
- Smooth surface
- Single Element Pole Technology
- Optimum rotation characteristics
- Virtually free of detent torque
- Electronic nameplate

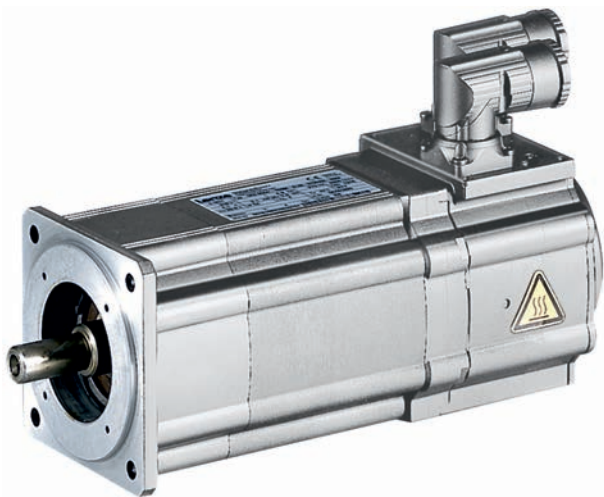

MCS09 synchronous servo motor

MCS synchronous servo motors

General information



Functions and features

	MCS06	MCS09	MCS12	MCS14	MCS19
Design					
	B5-FF75	B5-FF100	B5-FF130	B5-FF165	B5-FF215
Shaft end (with and without keyway)					
	11 x 23	14 x 30	19 x 40	24 x 50	28 x 60
A end shield					
	Not oil-tight				
Brake					
Permanent magnetic brake	DC 24 V	DC 24 V 24 V DC, reinforced			
Speed and angle encoder					
	Resolver SinCos single-turn/multi-turn				
Cooling					
Without blower	Naturally ventilated				
Axial blower, 1 phase			230 V; 50 Hz 115 V; 60 Hz		
Temperature sensor					
Thermal detector	KTY				
PTC thermistor		2x PTC additional (3-phase monitoring)			
Motor connection: plug connector					
	Power + brake Encoder + thermal sensor		Power + brake Encoder + thermal sensor Blower		
Motor connection: terminal box					
		Power + brake + encoder + thermal sensor			
Shaft bearings					
Bearing type	Deep-groove ball bearing with high-temperature resistant grease, sealing disc or cover plate				
Position of the locating bearing	Non-drive end				
Colour					
	RAL9005M				

► Terminal boxes not possible if blower is fitted.

MCS synchronous servo motors

General information



Dimensioning

Speed-dependent safety functions

Single encoder concepts with resolvers

Servo motors can perform speed-dependent safety functions for safe speed and / or safe relative position monitoring in a drive system with the Servo Drives 9400. The SM301 safety module, which can be integrated in the Servo Drives 9400, is used to implement these functions. When planning systems/installations of this kind, the following must always be observed:

When using just one single feedback system in the environment of these safety applications, the applicable safety engineering standard IEC 61800-5-2 [Adjustable speed electrical power drive systems - Part: 5-2: Safety requirements - Functional] stipulates special requirements for the connection between feedback system and motor shaft. This is due to the fact that two-channel safety systems at this point in the mechanical system are actually designed as single-channel systems. If this mechanical connection is designed with considerable overdimensioning, the standard permits exclusion of the fault "encoder-shaft breakage" or "encoder-shaft slip". As such, acceleration limit values must not be exceeded for the individual drive solutions. You can find the limit values in the corresponding feedback data of the individual motor ranges.

Speed-dependent safety functions in connection with the SM301 safety module

For the following speed-dependent safety functions, the motor-feedback system combinations listed in the following table are available:

- Safe stop 1 (SS1)
- Safe operational stop (SOS)
- Safely Limited Speed (SLS)
- Safe Maximum Speed (SMS)

- Safe direction (SDI)
- Operation mode selector (OMS) with confirmation (ES)
- Safe speed monitor (SSM)
- Safely limited increment (SLI).

Encoder type	Encoder type	Product key	Feedback	Safe speed monitoring
			Design	
SinCos absolute value	Single-turn	AS1024-8V-K2		PL d/SIL 2
	Multi-turn	AM1024-8V-K2		
Resolver		RV03		PL e/SIL 3
			2-encoder concept	up to PL e / SIL 3

MCS synchronous servo motors

General information



Dimensioning

Cooling effect of mounting flange

Mounting on a thermally conducting / insulating plate or machine chassis has an influence on heating up the motor, particularly when using naturally ventilated motors.

The motor rating data specified in the catalogue applies when mounting on a steel plate with free convection with the following dimensions:

- MCS06: 270 x 270 mm
- MCS09: 330 x 330 mm
- MCS12 / 14 / 19: 450 x 450 mm

Vibrational severity

		MCS06	MCS09	MCS12	MCS14	MCS19
Vibrational severity						
IEC/EN 60034-14		A				
Maximum r.m.s. value of the vibration velocity ¹⁾	[mm/s]	1.60				


¹⁾ Free suspension

- at n = 600 to 3,600 rpm



Dimensioning

Concentricity and axial run-out of the mounting flanges and smooth running of the shaft ends

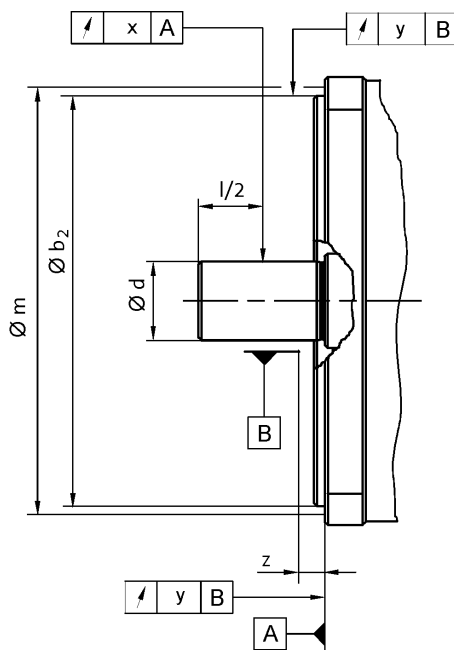

				MCS06	MCS09	MCS12	MCS14	MCS19
Flange size				FF75	FF100	FF130	FF165	FF215
Dimensions								
	b_2	j6	[mm]	60	80	110	130	180
	d	k6	[mm]	11	14	19	24	28
Distance								
Measuring diameter	m		[mm]	65.0	85.0	115	135	185
Dial gauge holder for flange check	z	+/- 1	[mm]	10.0				
Concentricity								
IEC 60072				Normal class				
Value	y		[mm]	0.080		0.10		
Linear movement								
IEC 60072				Normal class				
Value	y		[mm]	0.080		0.10		
Smooth running								
IEC 60072				Normal class				
Value	x		[mm]	0.035		0.040		

- Limit values for checking the smooth running of the shaft ends as well as the concentricity and axial run-out of the mounting flange to IEC 60072


MCS synchronous servo motors

General information



Dimensioning

Notes on the selection tables

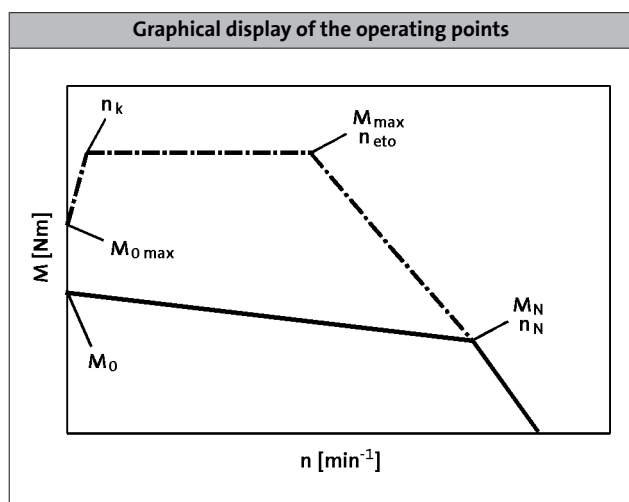

Please note:

- In case of an active load (e.g. vertical drive axes, hoists, test benches, unwinders), $M_{0 \max}$ has to be considered
- In case of a passive load (e.g. horizontal drive axes), $M_{\max}$ can be usually used
- In case of a speed $< n_k$ and inverter-specifically, the achievable torque $M_{0 \max}$ is smaller than $M_{\max}$
- In case of a speed $n = 0$, the standstill torque M_0 and the standstill current I_0 have to be reduced by 30% after 2 seconds. In case of applications which require a longer holding of M_0 , we recommend the drive to be held via the holding brake and reduce the current, e.g. by controller inhibit.
- In case of servo inverters, the switching frequency dependent overload capacity is considered in the default setting. For more information, see the servo inverter catalogue.

	n_k [r/min]
MCS	75.0
MDSKS	100
MDFKS	

Further selection tables with different switching frequencies are available with the following codes:

- DS_ZT_MCS_0001
- DS_ZT_MCA_0001
- DS_ZT_MDSKS_0001
- DS_ZT_MDFKS_0001

Simply enter this code (e.g. DS_ZT_MCS_0001) as a search string at www.lenze.de/dsc and you will be given the information immediately in the form of a PDF format.


MCS synchronous servo motors

General information



Dimensioning

Notes on the torque characteristics

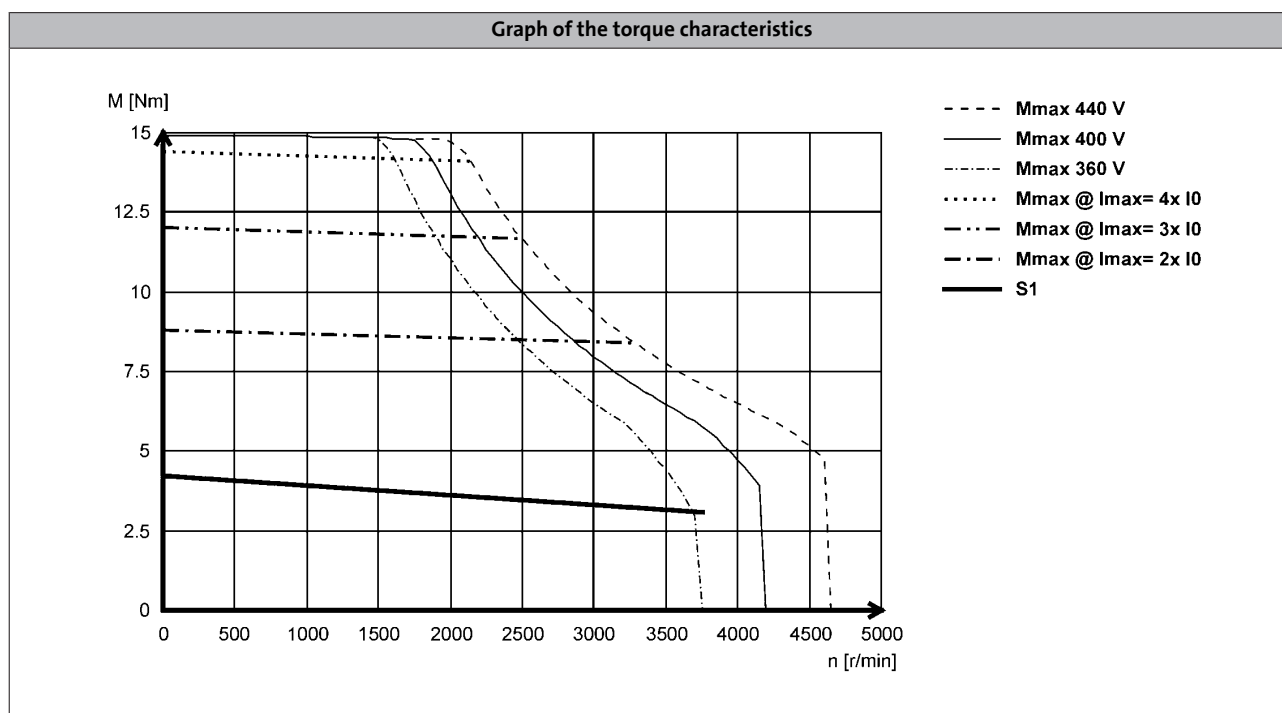

With synchronous servo motors, the limit torque characteristics that result from the selection of servo inverters with maximum currents are also shown alongside the characteristics for continuous operation (S1). These correspond to a multiple of the motor standstill current (2x I₀ to 4x I₀).

Characteristics in the Internet

You can find the torque characteristic for inverter-motor combinations on the Internet at www.lenze.de/dsc. This lists all useful combinations with the servo inverters 9400, 9300, ECS and Inverter Drives 8400 TopLine. These characteristics are each determined using the factory default settings of the inverters:

- 9400 with variable switching frequency.
This means that up to 6-fold overcurrent can be applied in borderline cases.
- 9300 and ECS with fixed switching frequency.
- 8400 TopLine with variable switching frequency.

The continuous operation characteristics (S1) show the inverter-independent motor rating values

Further information on the terms switching frequency and factory default settings can be found in the operating manual of the respective servo inverter.




Dimensioning

Influence of ambient temperature and site altitude

The information relating to the servo motors in the tables and graphs is valid for a maximum ambient temperature (T_{opr}) of 40 °C and a site altitude (H) up to 1000 m above sea level. The torque correction factor (k_{M1}) shall be applied to the S1 torque characteristic ($M_0...M_N$) in the event of differing installation conditions.

- The maximum permissible ambient temperature (T_{opr}) for servo motors with blowers is 40 °C

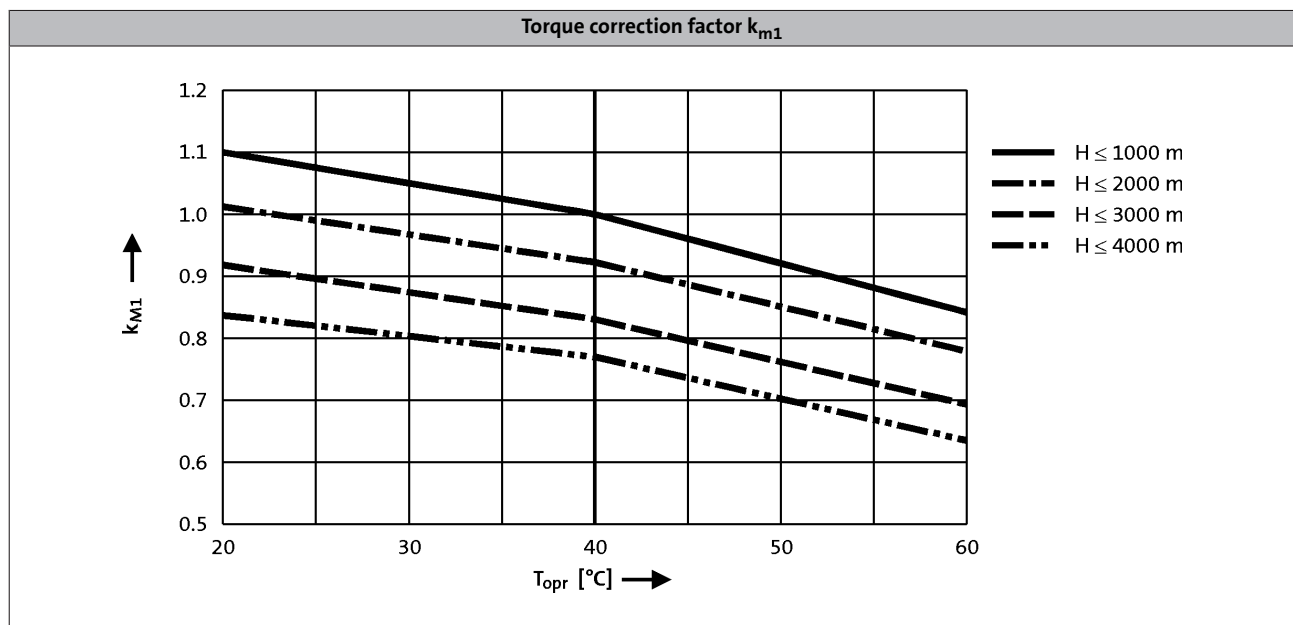

MCS synchronous servo motors

General information



MCS synchronous servo motors

Technical data



Standards and operating conditions

MCS			
Cooling type			Naturally ventilated Blower
Degree of protection			IP54 IP54
EN 60529			IP65
Temperature class			F
IEC/EN 60034-1; utilisation			H
IEC/EN 60034-1; insulation system (enamel-insulated wire)			
Approval			cURus ¹⁾ GOST-R UkrSepro
Class			
Max. voltage load			Pulse voltage limiting curve A
IEC/TS 60034-25			
Smooth running			Normal class
IEC 60072			
Linear movement			Normal class
IEC 60072			
Concentricity			Normal class
IEC 60072			
Mechanical ambient conditions (vibration)			3M6
IEC/EN 60721-3-3			
Min. ambient operating temperature			-20 -15
Without brake	T _{opr,min}	[°C]	
With brake	T _{opr,min}	[°C]	-10
Max. ambient temperature for operation			40
	T _{opr,max}	[°C]	
Max. surface temperature			140 110
	T	[°C]	
Mechanical tolerance			b ₂ ≤ 230 mm = j6 b ₂ > 230 mm = h6
Flange centring diameter			
Shaft diameter			d ≤ 50 mm = k6 d > 50 mm = m6
Site altitude			4000
Amsl	H _{max}	[m]	


¹⁾ Recognized component File No. E 210321.

MCS synchronous servo motors

Technical data



Permissible radial and axial forces

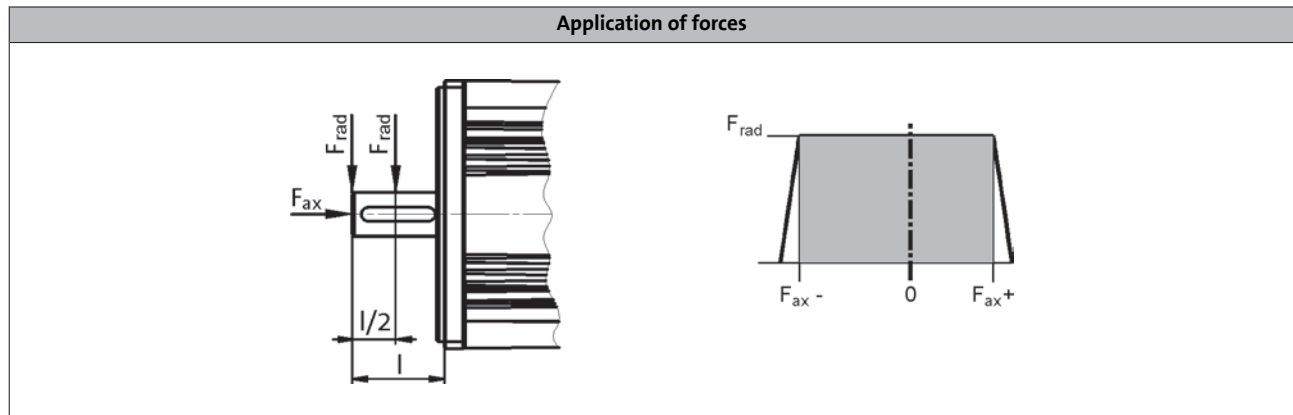

Application of force at $l/2$

Bearing service life L_{10}															
	5000 h			10000 h			20000 h			30000 h			50000 h		
	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]
MCS06	740	-260	140	590	-210	80	470	-170	40	410	-150	30	340	-140	10
MCS09	1040	-700	470	830	-550	310	660	-440	200	580	-380	150	490	-330	90
MCS12	1030	-880	560	820	-690	370	650	-550	230	570	-490	160	480	-420	100
MCS14	1830	-1150	720	1450	-900	470	1150	-720	290	1010	-640	200	850	-550	120
MCS19	3840	-1550	950	3050	-1210	620	2430	-960	360	2120	-840	250	1790	-730	130

Application of force at l

Bearing service life L_{10}															
	5000 h			10000 h			20000 h			30000 h			50000 h		
	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]
MCS06	630	-210	90	500	-170	50	400	-140	20	350	-130	0	290	-120	-10
MCS09	900	-630	400	710	-500	260	570	-400	160	500	-350	120	420	-300	70
MCS12	890	-820	490		-640	320	560	-520	190	490	-460	130		-400	
MCS14	1590	-1040	610		-820	390	1000	-660	230	880	-580	150		-510	
MCS19	3330	-1320	730	2650	-1040	450	2100	-830	240	1840	-740	140	1550	-640	40

- The values for the bearing service life L_{10} refer to an average speed of 4000 r/min. Depending on the ambient temperatures, the service life of the bearings is also reduced by the grease life-time.

MCS synchronous servo motors

Technical data



Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS06C41-	4050	0.80	0.60	2.40	0.25	1.30	1.30	5.40	225	270
MCS06C60-	6000	0.80	0.50	2.40	0.31	2.50	2.40	10.8	135	400
MCS06F41-	4050	1.50	1.20	4.40	0.51	1.50	1.50	5.30	320	270
MCS06F60-	6000	1.50	0.90	4.40	0.57	2.90	2.50	10.5	180	400
MCS06I41-	4050	2.00	1.50	6.20	0.64	1.70	1.60	5.90	325	270
MCS06I60-	6000	2.00	1.20	6.20	0.75	3.40	2.90	11.8	190	400
MCS09D41-	4050	3.30	2.30	9.50	1.00	2.60	2.30	10.0	320	270
MCS09D60-	6000	3.30	1.80	9.50	1.10	5.30	3.80	20.0	210	400
MCS09F38-	3750	4.20	3.10	15.0	1.20	3.00	2.50	15.0	330	250
MCS09F60-	6000	4.20	2.40	15.0	1.50	6.00	4.50	30.0	230	400
MCS09H41-	4050	5.50	3.80	20.0	1.60	4.30	3.40	20.0	300	270
MCS09H60-	6000	5.50	3.00	20.0	1.90	8.50	6.00	40.0	190	400
MCS09L41-	4050	7.50	4.50	32.0	1.90	6.20	4.20	32.0	295	270
MCS09L51-	5100	7.50	3.60	32.0	1.90	12.4	6.90	64.0	180	340

	$\eta_{100\%}$	$J^{1)}$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max\ 2)}$	$m^{1)}$
	[%]	[kgcm ²]	[V /1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS06C41-	65.0	0.14	36.6	27.1	36.5	51.0	0.66	8000	1.80
MCS06C60-	70.0	0.14	18.3	6.80	9.10	12.8	0.33	8000	1.80
MCS06F41-	77.0	0.22	60.1	21.9	29.5	63.5	1.05	8000	2.20
MCS06F60-	81.0	0.22	30.0	5.50	7.40	15.9	0.53	8000	2.20
MCS06I41-	81.0	0.30	73.4	18.8	25.4	60.2	1.21	8000	2.90
MCS06I60-	84.0	0.30	36.7	4.70	6.30	15.1	0.60	8000	2.90
MCS09D41-	87.0	1.10	71.2	7.00	9.40	25.1	1.25	7000	4.30
MCS09D60-	87.0	1.10	35.6	1.80	2.40	6.30	0.62	7000	4.30
MCS09F38-	91.0	1.50	79.8	5.20	7.00	24.6	1.40	7000	5.20
MCS09F60-	91.0	1.50	39.9	1.30	1.80	6.20	0.70	7000	5.20
MCS09H41-	91.0	1.90	75.7	3.20	4.30	16.1	1.29	7000	6.10
MCS09H60-	91.0	1.90	37.8	0.80	1.10	4.00	0.65	7000	6.10
MCS09L41-	91.0	2.80	71.7	1.80	2.40	9.90	1.21	7000	7.90
MCS09L51-	91.0	2.80	35.9	0.44	0.59	2.50	0.60	7000	7.90

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS12D20-	1950	6.40	5.50	18.0	1.10	2.70	2.60	10.0	345	130
MCS12D41-	4050	6.40	4.30	18.0	1.80	5.50	4.50	20.0	310	270
MCS12H15-	1500	11.4	10.0	29.0	1.60	4.10	3.80	12.0	300	100
MCS12H35-	3525	11.4	7.50	29.0	2.80	8.20	5.70	24.0	325	235
MCS12L20-	1950	15.0	13.5	56.0	2.80	6.20	5.90	28.0	330	130
MCS12L41-	4050	15.0	11.0	56.0	4.70	12.4	10.2	57.0	300	270
MCS14D15-	1500	11.0	9.20	29.0	1.45	5.00	4.50	17.0	305	100
MCS14D36-	3600	11.0	7.50	29.0	2.80	10.0	7.50	33.0	295	240
MCS14H15-	1500	21.0	16.0	55.0	2.50	8.50	6.60	26.0	325	100
MCS14H32-	3225	21.0	14.0	55.0	4.70	16.9	11.9	52.0	295	215
MCS14L15-	1500	28.0	23.0	77.0	3.60	12.0	9.70	37.0	315	100
MCS14L32-	3225	28.0	17.2	77.0	5.80	24.0	15.0	75.0	275	215
MCS14P14-	1350	37.0	30.0	105	4.20	12.2	10.8	46.0	340	90
MCS14P32-	3225	37.0	21.0	105	7.10	24.3	15.6	92.0	315	215

	$\eta_{100\%}$	$J^{1)}$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max\ 2)}$	$m^{1)}$
	[%]	[kgcm ²]	[V /1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS12D20-	79.0	4.00	137	8.70	11.8	52.2	2.34	6000	6.40
MCS12D41-	84.0	4.00	68.6	2.20	2.90	13.0	1.17	6000	6.40
MCS12H15-	88.0	7.30	173	5.70	7.70	42.1	2.79	6000	9.50
MCS12H35-	91.0	7.30	86.5	1.40	1.90	10.5	1.40	6000	9.50
MCS12L20-	90.0	10.6	149	2.20	3.00	21.8	2.42	6000	12.6
MCS12L41-	91.0	10.6	74.6	0.55	0.75	5.50	1.21	6000	12.6
MCS14D15-	88.0	8.10	129	4.00	5.40	49.8	2.19	6000	10.7
MCS14D36-	92.0	8.10	64.2	1.00	1.35	12.5	1.09	6000	10.7
MCS14H15-	92.0	14.2	153	2.08	2.81	34.1	2.48	6000	15.5
MCS14H32-	93.0	14.2	76.3	0.52	0.70	8.50	1.24	6000	15.5
MCS14L15-	90.0	23.4	152	1.21	1.64	22.0	2.33	6000	20.1
MCS14L32-	93.0	23.4	76.2	0.30	0.41	5.50	1.16	6000	20.1
MCS14P14-	90.0	34.7	179	1.10	1.49	23.9	3.04	6000	24.9
MCS14P32-	93.0	34.7	89.4	0.28	0.37	6.00	1.52	6000	24.9

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS19F14-	1425	32.0	27.0	86.0	4.00	9.90	8.60	31.0	335	95
MCS19F30-	3000	32.0	21.0	86.0	6.60	19.8	14.0	63.0	300	200
MCS19J14-	1425	51.0	40.0	129	6.00	15.2	12.3	45.0	330	95
MCS19J30-	3000	51.0	29.0	129	9.10	30.5	18.5	90.0	300	200
MCS19P14-	1350	64.0	51.0	190	7.20	17.5	14.3	60.0	330	90
MCS19P30-	3000	64.0	32.0	190	10.0	34.9	19.0	120	320	200

	$\eta_{100\%}$	$J^1)$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max}^{2)}$	$m^1)$
	[%]	[kgcm ²]	[V / 1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS19F14-	92.0	65.0	195	1.30	1.75	20.8	3.23	4000	23.0
MCS19F30-	93.0	65.0	97.2	0.32	0.44	5.20	1.62	4000	23.0
MCS19J14-	92.0	105	199	0.65	0.88	12.8	3.31	4000	30.0
MCS19J30-	93.0	105	99.5	0.16	0.22	3.20	1.65	4000	30.0
MCS19P14-	92.0	160	216	0.54	0.73	9.60	3.66	4000	40.0
MCS19P30-	93.0	160	108	0.14	0.18	2.40	1.83	4000	40.0

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 230 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS06C41L	4050	0.80	0.60	2.40	0.25	2.50	2.50	10.8	125	270
MCS06C60L	6000	0.80	0.50	2.40	0.31	4.30	4.00	18.5	85	400
MCS06F41L	4050	1.50	1.20	4.40	0.51	2.90	2.90	10.5	165	270
MCS06F60L	6000	1.50	0.90	4.40	0.57	3.80	3.40	16.5	125	400
MCS06I41L	4050	2.00	1.50	6.20	0.64	3.10	2.90	11.8	175	270
MCS06I60L	6000	2.00	1.20	6.20	0.75	4.20	3.60	16.0	150	400
MCS09D41L	4050	3.30	2.30	9.50	1.00	5.30	4.60	20.0	165	270
MCS09D60L	6000	3.30	1.80	9.50	1.10	10.3	7.00	39.0	110	400
MCS09F38L	3750	4.20	3.10	15.0	1.20	6.00	5.00	30.0	160	250
MCS09F60L	6000	4.20	2.40	15.0	1.50	10.5	7.90	53.0	125	400
MCS09H41L	4050	5.50	3.80	20.0	1.60	8.50	6.80	40.0	160	270
MCS09H60L	6000	5.50	3.00	20.0	1.90	12.0	8.00	57.0	145	400
MCS09L41L	4050	7.50	4.50	32.0	1.90	12.4	8.40	64.0	145	270

	$\eta_{100\%}$	$J^{1)}$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max}^{2)}$	$m^{1)}$
	[%]	[kgcm ²]	[V / 1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS06C41L	65.0	0.14	21.5	6.00	8.00	12.8	0.33	8000	1.80
MCS06C60L	70.0	0.14	12.5	2.20	2.90	4.30	0.19	8000	1.80
MCS06F41L	81.0	0.22	34.5	5.50	7.40	15.9	0.62	8000	2.20
MCS06F60L	82.0	0.22	22.2	2.30	3.00	6.90	0.40	8000	2.20
MCS06I41L	81.0	0.30	38.0	4.70	6.20	15.1	0.64	8000	2.90
MCS06I60L	84.0	0.30	28.5	2.50	3.40	9.30	0.48	8000	2.90
MCS09D41L	87.0	1.10	35.6	1.80	2.40	6.30	0.62	7000	4.30
MCS09D60L	87.0	1.10	18.3	0.45	0.61	1.70	0.32	7000	4.30
MCS09F38L	90.0	1.50	39.9	1.30	1.80	6.20	0.70	7000	5.20
MCS09F60L	91.0	1.50	22.8	0.42	0.56	2.00	0.40	7000	5.20
MCS09H41L	91.0	1.90	37.8	0.80	1.10	4.00	0.65	7000	6.10
MCS09H60L	91.0	1.90	26.6	0.36	0.48	2.00	0.46	7000	6.10
MCS09L41L	91.0	2.80	35.9	0.44	0.59	2.50	0.60	7000	7.90

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 230 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS12D20L	1950	6.40	5.50	18.0	1.10	5.50	5.20	20.0	175	130
MCS12D41L	4050	6.40	4.30	18.0	1.80	10.7	8.80	40.0	155	270
MCS12H15L	1500	11.4	10.0	29.0	1.60	8.20	7.80	24.0	158	100
MCS12H30L	3000	11.4	8.00	29.0	2.50	13.5	10.5	39.0	165	200
MCS12L20L	1950	15.0	13.5	56.0	2.80	12.4	11.8	57.0	165	130

	$\eta_{100\%}$	$J^{1)}$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max\ 2)}$	$m^{1)}$
	[%]	[kgcm ²]	[V / 1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS12D20L	79.0	4.00	68.6	2.20	2.90	13.0	1.17	6000	6.40
MCS12D41L	84.0	4.00	35.0	0.55	0.75	3.40	0.60	6000	6.40
MCS12H15L	82.0	7.30	86.5	1.41	1.90	10.5	1.40	6000	9.50
MCS12H30L	87.0	7.30	53.0	0.50	0.67	4.00	0.86	6000	9.50
MCS12L20L	90.0	10.6	76.9	0.55	0.75	5.50	1.21	6000	12.6

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Rated data, forced ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS12D17-	1650	7.50	7.00	17.7	1.20	3.20	3.00	10.0	330	110
MCS12D35-	3525	7.50	6.00	17.7	2.20	6.40	5.60	20.0	300	235
MCS12H14-	1350	12.8	12.0	29.0	1.70	4.30	4.10	12.0	310	90
MCS12H34-	3375	12.8	10.5	29.0	3.70	8.50	7.50	24.0	320	225
MCS12L17-	1650	19.0	17.0	56.4	2.90	7.20	6.70	28.0	300	110
MCS12L39-	3900	19.0	14.0	56.4	5.70	14.4	11.7	57.0	295	260
MCS14D14-	1350	12.5	12.0	29.0	1.70	5.70	5.40	17.0	345	90
MCS14D30-	3000	12.5	10.5	29.0	3.30	11.4	9.70	33.0	325	200
MCS14H12-	1200	25.5	23.5	54.8	3.00	9.30	8.30	26.0	335	80
MCS14H28-	2775	25.5	20.5	54.8	6.00	18.4	15.0	52.0	325	185
MCS14L14-	1350	34.5	30.5	77.1	4.30	13.4	11.8	37.0	335	90
MCS14L30-	3000	34.5	25.5	77.1	8.00	26.7	20.8	75.0	310	200
MCS14P11-	1050	43.5	42.0	105	4.60	14.1	13.4	46.0	330	70
MCS14P26-	2625	43.5	33.0	105	9.10	28.3	21.9	92.0	325	175

	$\eta_{100\%}$	$J^{1)}$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max\ 2)}$	$m^{1)}$
	[%]	[kgcm ²]	[V /1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS12D17-	75.0	4.00	137	8.72	11.8	52.2	2.34	6000	8.50
MCS12D35-	82.0	4.00	68.6	2.18	2.94	13.0	1.17	6000	8.50
MCS12H14-	80.0	7.30	173	5.72	7.72	42.1	2.98	6000	11.6
MCS12H34-	86.0	7.30	86.5	1.39	1.88	10.5	1.51	6000	11.6
MCS12L17-	90.0	10.6	149	2.22	2.99	21.8	2.64	6000	14.7
MCS12L39-	94.0	10.6	74.6	0.55	0.75	5.50	1.32	6000	14.7
MCS14D14-	84.0	8.10	129	4.00	5.40	49.8	2.19	6000	14.5
MCS14D30-	92.0	8.10	64.2	1.00	1.35	12.5	1.09	6000	14.5
MCS14H12-	87.0	14.2	153	2.08	2.81	34.1	2.75	6000	19.5
MCS14H28-	93.0	14.2	76.3	0.52	0.70	8.50	1.39	6000	19.5
MCS14L14-	88.0	23.4	152	1.21	1.64	22.0	2.57	6000	24.0
MCS14L30-	92.0	23.4	76.2	0.30	0.41	5.50	1.29	6000	24.0
MCS14P11-	86.0	34.7	179	1.10	1.49	23.9	3.08	6000	29.0
MCS14P26-	92.0	34.7	89.4	0.28	0.37	6.00	1.54	6000	29.0

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Rated data, forced ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS19F12-	1200	41.5	38.0	86.0	4.80	12.2	11.3	31.0	320	80
MCS19F29-	2850	41.5	32.5	86.0	9.70	24.5	20.1	63.0	320	190
MCS19J12-	1200	70.5	62.5	129	7.90	20.3	18.3	45.0	320	80
MCS19J29-	2850	70.5	50.5	129	15.1	40.6	31.0	90.0	315	190
MCS19P12-	1200	86.0	72.0	190	9.00	22.4	21.3	60.0	310	80
MCS19P29-	2850	86.0	53.0	190	15.8	44.7	29.5	120	315	190

	$\eta_{100\%}$	$J^1)$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max}^2)$	$m^1)$
	[%]	[kgcm ²]	[V / 1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS19F12-	90.4	65.0	195	1.30	1.75	20.8	3.40	4000	29.0
MCS19F29-	94.7	65.0	97.2	0.32	0.44	5.20	1.69	4000	29.0
MCS19J12-	89.3	105	199	0.65	0.88	12.8	3.47	4000	36.0
MCS19J29-	92.8	105	99.5	0.16	0.22	3.20	1.74	4000	36.0
MCS19P12-	90.3	160	216	0.54	0.73	9.60	3.84	4000	46.0
MCS19P29-	93.4	160	108	0.14	0.18	2.40	1.92	4000	46.0

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
06C41-	0.6	4050	1.3	0.25	M ₀	0.8										
					M _N	0.6										
					M _{0,max}	2.4										
					M _{max}	2.4										
					η _{eto}	-										
06C60-	0.5	6000	2.4	0.31	M ₀	0.6	0.8									
					M _N	0.4	0.5									
					M _{0,max}	1.5	2.3									
					M _{max}	1.5	2.3									
					η _{eto}	-	-									
06F41-	1.2	4050	1.5	0.51	M ₀	1.5										
					M _N	1.2										
					M _{0,max}	4.4										
					M _{max}	4.4										
					η _{eto}	-										
06F60-	0.9	6000	2.5	0.57	M ₀	1.0	1.5									
					M _N	0.7	0.9									
					M _{0,max}	3.0	4.3									
					M _{max}	3.0	4.3									
					η _{eto}	-	-									
06I41-	1.5	4050	1.6	0.64	M ₀	2.0										
					M _N	1.5										
					M _{0,max}	6.2										
					M _{max}	6.2										
					η _{eto}	-										
06I60-	1.2	6000	2.9	0.75	M ₀	1.1	1.8	2.0								
					M _N	0.8	1.2	1.2								
					M _{0,max}	3.3	5.5	6.2								
					M _{max}	3.3	5.5	6.2								
					η _{eto}	-	-	-								
09D41-	2.3	4050	2.3	1.00	M ₀	2.4	3.3									
					M _N	1.9	2.3									
					M _{0,max}	6.3	9.5									
					M _{max}	6.3	9.5									
					η _{eto}	-	-									
09D60-	1.8	6000	3.8	1.10	M ₀			3.1	3.3							
					M _N			1.8	1.8							
					M _{0,max}			8.0	9.5							
					M _{max}			8.0	9.5							
					η _{eto}			-	-							
09F38-	3.1	3750	2.5	1.20	M ₀		4.2	4.2								
					M _N		3.1	3.1								
					M _{0,max}		11.6	14.9								
					M _{max}		11.6	14.9								
					η _{eto}		-	-								

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
09F60-	2.4	6000	4.5	1.50	M ₀			3.5	4.2	4.2	4.2					
					M _N			2.4	2.4	2.4	2.4					
					M _{0,max}			9.8	12.0	14.4	14.9					
					M _{max}			9.8	12.0	14.4	14.9					
					η _{eto}			-	-	-	-					
09H41-	3.8	4050	3.4	1.60	M ₀		4.0	5.5	5.5							
					M _N		3.5	3.8	3.8							
					M _{0,max}		12.0	17.5	20.4							
					M _{max}		12.0	17.5	20.4							
					η _{eto}		-	-	-							
09H60-	3.0	6000	6.0	1.90	M ₀				5.5	5.5	5.5	5.5				
					M _N				3.0	3.0	3.0	3.0				
					M _{0,max}				12.5	15.8	20.1	20.4				
					M _{max}				12.5	15.8	20.1	20.4				
					η _{eto}				-	-	-	-				
09L41-	4.5	4050	4.2	1.90	M ₀			6.0	7.5	7.5						
					M _N			4.5	4.5	4.5						
					M _{0,max}			17.4	22.2	28.5						
					M _{max}			17.4	22.2	28.5						
					η _{eto}			-	-	-						
09L51-	3.6	5100	6.9	1.90	M ₀				5.3	7.0	7.5	7.5	7.5			
					M _N				3.6	3.6	3.6	3.6	3.6			
					M _{0,max}				11.9	15.5	20.9	25.8	29.7			
					M _{max}				11.9	15.5	20.9	25.8	29.7			
					η _{eto}				-	-	-	-	-			
12D20-	5.5	1950	2.6	1.10	M ₀	4.4	6.4									
					M _N	4.0	5.5									
					M _{0,max}	11.8	17.7									
					M _{max}	11.8	17.7									
					η _{eto}	-	-									
12D41-	4.3	4050	4.5	1.80	M ₀			5.9	6.4							
					M _N			4.3	4.3							
					M _{0,max}			14.7	17.7							
					M _{max}			14.7	17.7							
					η _{eto}			-	-							
12H15-	10.0	1500	3.8	1.60	M ₀		8.7	11.4								
					M _N		8.2	10.0								
					M _{0,max}		24.6	29.0								
					M _{max}		24.6	29.0								
					η _{eto}		-	-								
12H35-	7.5	3525	5.7	2.80	M ₀			7.0	11.4	11.4	11.4					
					M _N			6.6	7.5	7.5	7.5					
					M _{0,max}			20.1	25.8	29.0	29.0					
					M _{max}			20.1	25.8	29.0	29.0					
					η _{eto}			-	-	-	-					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
12L20-	13.5	1950	5.9	2.80	M ₀			12.1	15.0	15.0	15.0					
					M _N			11.4	13.5	13.5	13.5					
					M _{0,max}			35.5	44.6	55.7	56.4					
					M _{max}			35.5	44.6	55.7	56.4					
					η _{eto}			-	-	-	-					
12L41-	11.0	4050	10.2	4.70	M ₀				10.6	14.0	15.0	15.0	15.0			
					M _N				9.5	11.0	11.0	11.0	11.0			
					M _{0,max}				24.4	31.6	41.9	50.8	56.4			
					M _{max}				24.4	31.6	41.9	50.8	56.4			
					η _{eto}				-	-	-	-	-			
14D15-	9.2	1500	4.5	1.45	M ₀			11.0	11.0							
					M _N			9.2	9.2							
					M _{0,max}			28.3	29.0							
					M _{max}			28.3	29.0							
					η _{eto}			-	-							
14D36-	7.5	3600	7.5	2.80	M ₀				9.6	11.0	11.0					
					M _N				7.5	7.5	7.5					
					M _{0,max}				20.2	25.6	29.0					
					M _{max}				20.2	25.6	29.0					
					η _{eto}				-	-	-					
14H15-	16.0	1500	6.6	2.50	M ₀			12.4	21.0	21.0	21.0					
					M _N			12.1	16.0	16.0	16.0					
					M _{0,max}			37.1	46.6	54.8	54.8					
					M _{max}			37.1	46.6	54.8	54.8					
					η _{eto}			-	-	-	-					
14H32-	14.0	3225	11.9	4.70	M ₀					14.4	20.3	21.0	21.0			
					M _N					13.6	14.0	14.0	14.0			
					M _{0,max}					33.0	43.9	53.2	54.8			
					M _{max}					33.0	43.9	53.2	54.8			
					η _{eto}					-	-	-	-			
14L15-	23.0	1500	9.7	3.60	M ₀				20.5	27.1	28.0					
					M _N				20.9	23.0	23.0					
					M _{0,max}				48.0	61.4	77.1					
					M _{max}				48.0	61.4	77.1					
					η _{eto}				-	-	-					
14L32-	17.2	3225	15.0	5.80	M ₀						19.0	24.0	28.0	28.0	28.0	
					M _N						17.2	17.2	17.2	17.2	17.2	
					M _{0,max}						45.0	55.3	63.9	77.1	77.1	
					M _{max}						45.0	55.3	63.9	77.1	77.1	
					η _{eto}						-	-	-	-	-	
14P14-	30.0	1350	10.8	4.20	M ₀				26.7	35.2	37.0	37.0				
					M _N				24.4	30.0	30.0	30.0				
					M _{0,max}				56.1	71.7	93.3	105.1				
					M _{max}				56.1	71.7	93.3	105.1				
					η _{eto}				-	-	-	-				

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
14P32-	21.0	3225	15.6	7.10	M ₀						24.8	31.4	37.0	37.0	37.0	
					M _N						21.0	21.0	21.0	21.0	21.0	
					M _{0,max}						52.5	64.6	74.7	92.2	105.1	
					M _{max}						52.5	64.6	74.7	92.2	105.1	
					n _{eto}						-	-	-	-	-	
19F14-	27.0	1425	8.6	4.00	M ₀				28.4	32.0	32.0					
					M _N				27.0	27.0	27.0					
					M _{0,max}				62.1	78.9	86.0					
					M _{max}				62.1	78.9	86.0					
					n _{eto}				-	-	-					
19F30-	21.0	3000	14.0	6.60	M ₀						26.3	32.0	32.0	32.0		
					M _N						21.0	21.0	21.0	21.0		
					M _{0,max}						56.6	70.2	81.6	86.0		
					M _{max}						56.6	70.2	81.6	86.0		
					n _{eto}						-	-	-	-		
19J14-	40.0	1425	12.3	6.00	M ₀					38.9	51.0	51.0				
					M _N					37.7	40.0	40.0				
					M _{0,max}					85.0	114.4	129.0				
					M _{max}					85.0	114.4	129.0				
					n _{eto}					-	-	-				
19J30-	29.0	3000	18.5	9.10	M ₀						27.3	34.4	49.2	51.0	51.0	
					M _N						25.6	29.0	29.0	29.0	29.0	
					M _{0,max}						60.8	75.9	88.9	112.9	129.0	
					M _{max}						60.8	75.9	88.9	112.9	129.0	
					n _{eto}						-	-	-	-	-	
19P14-	51.0	1350	14.3	7.20	M ₀						59.6	64.0	64.0	64.0		
					M _N						51.0	51.0	51.0	51.0		
					M _{0,max}						128.4	159.9	186.6	190.0		
					M _{max}						128.4	159.9	186.6	190.0		
					n _{eto}						-	-	-	-		
19P30-	32.0	3000	19.0	10.00	M ₀						29.9	37.8	53.9	64.0	64.0	64.0
					M _N						27.5	32.0	32.0	32.0	32.0	32.0
					M _{0,max}						65.7	83.6	98.5	126.6	152.5	187.2
					M _{max}						65.7	83.6	98.5	126.6	152.5	187.2
					n _{eto}						-	-	-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
06C41L	0.6	4050	2.6	0.25	M ₀	0.6	0.8							
					M _N	0.5	0.6							
					M _{0,max}	1.5	2.3							
					M _{max}	1.5	2.3							
					η _{eto}	-	-							
06C60L	0.5	6000	4.0	0.31	M ₀		0.6	0.8	0.8					
					M _N		0.4	0.5	0.5					
					M _{0,max}		1.5	2.2	2.4					
					M _{max}		1.5	2.2	2.4					
					η _{eto}		-	-	-					
06F41L	1.2	4050	2.9	0.51	M ₀	1.0	1.5	1.5						
					M _N	0.8	1.2	1.2						
					M _{0,max}	2.7	4.2	4.4						
					M _{max}	2.7	4.2	4.4						
					η _{eto}	-	-	-						
06F60L	0.9	6000	3.8	0.57	M ₀		1.2	1.5	1.5					
					M _N		0.8	0.9	0.9					
					M _{0,max}		3.1	4.3	4.4					
					M _{max}		3.1	4.3	4.4					
					η _{eto}		-	-	-					
06I41L	1.5	4050	3.2	0.64	M ₀		2.0	2.0						
					M _N		1.5	1.5						
					M _{0,max}		5.4	6.2						
					M _{max}		5.4	6.2						
					η _{eto}		-	-						
06I60L	1.2	6000	3.8	0.75	M ₀		1.5	2.0						
					M _N		1.0	1.2						
					M _{0,max}		4.4	6.2						
					M _{max}		4.4	6.2						
					η _{eto}		-	-						
09D41L	2.3	4050	4.6	1.00	M ₀			3.1	3.3					
					M _N			2.3	2.3					
					M _{0,max}			8.0	9.5					
					M _{max}			8.0	9.5					
					η _{eto}			-	-					
09D60L	1.8	6000	7.0	1.10	M ₀				2.8	3.3	3.3			
					M _N				1.8	1.8	1.8			
					M _{0,max}				5.7	7.3	9.5			
					M _{max}				5.7	7.3	9.5			
					η _{eto}				-	-	-			
09F38L	3.1	3750	5.0	1.20	M ₀			3.5	4.2	4.2	4.2			
					M _N			3.1	3.1	3.1	3.1			
					M _{0,max}			9.8	12.0	13.8	15.0			
					M _{max}			9.8	12.0	13.8	15.0			
					η _{eto}			-	-	-	-			

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
09F60L	2.4	6000	7.9	1.50	M ₀				3.5	4.2	4.2	4.2	4.2	
					M _N				2.4	2.4	2.4	2.4	2.4	
					M _{0,max}				7.8	9.8	12.6	14.5	15.0	
					M _{max}				7.8	9.8	12.6	14.5	15.0	
					η _{eto}				-	-	-	-	-	
09H41L	3.8	4050	6.8	1.60	M ₀				5.5	5.3	5.5	5.5		
					M _N				3.8	3.0	3.8	3.8		
					M _{0,max}				12.4	11.8	19.7	20.0		
					M _{max}				12.4	11.8	19.7	20.0		
					η _{eto}				-	-	-	-		
09H60L	3.0	6000	8.0	1.90	M ₀				4.0	5.5	5.5	5.5	5.5	
					M _N				3.0	3.8	3.0	3.0	3.0	
					M _{0,max}				9.2	15.6	15.4	18.3	20.0	
					M _{max}				9.2	15.6	15.4	18.3	20.0	
					η _{eto}				-	-	-	-	-	
09L41L	4.5	4050	8.4	1.90	M ₀				5.3	7.0	7.5	7.5	7.5	7.5
					M _N				4.5	4.5	4.5	4.5	4.5	4.5
					M _{0,max}				11.9	15.5	20.9	25.8	29.7	31.9
					M _{max}				11.9	15.5	20.9	25.8	29.7	31.9
					η _{eto}				-	-	-	-	-	-
12D20L	5.5	1950	5.2	1.10	M ₀			5.9	6.4					
					M _N			5.3	5.5					
					M _{0,max}			14.9	17.7					
					M _{max}			14.9	17.7					
					η _{eto}			-	-					
12D41L	4.3	4050	8.8	1.80	M ₀				5.3	6.4	6.4	6.4		
					M _N				4.3	4.3	4.3	4.3		
					M _{0,max}				10.6	13.6	17.7	17.9		
					M _{max}				10.6	13.6	17.7	17.9		
					η _{eto}				-	-	-	-		
12H15L	10.0	1500	7.6	1.60	M ₀				11.4	11.4	10.0			
					M _N				10.0	10.0	11.4			
					M _{0,max}				25.8	29.0	29.0			
					M _{max}				25.8	29.0	29.0			
					η _{eto}				-	-	-			
12H30L	8.0	3000	10.5	2.50	M ₀				7.4	9.8	11.4			
					M _N				6.7	8.0	8.0			
					M _{0,max}				16.4	21.5	29.0			
					M _{max}				16.4	21.5	29.0			
					η _{eto}				-	-	-			
12L20L	13.5	1950	11.8	2.80	M ₀				10.6	14.0	15.0	15.0	15.0	
					M _N				10.1	13.3	13.5	13.5	13.5	
					M _{0,max}				24.4	31.5	41.8	50.5	56.0	
					M _{max}				24.4	31.5	41.8	50.5	56.0	
					η _{eto}				-	-	-	-	-	

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
12D17-	7.0	1650	3.0	1.20	M ₀	4.4	7.3									
					M _N	4.0	7.0									
					M _{0,max}	11.8	17.7									
					M _{max}	11.8	17.7									
					n _{eto}	-	-									
12D35-	6.0	3525	5.6	2.20	M ₀			5.9	7.5							
					M _N			5.4	6.0							
					M _{0,max}			14.7	17.7							
					M _{max}			14.7	17.7							
					n _{eto}			-	-							
12H14-	12.0	1350	4.1	1.70	M ₀		8.7	12.8								
					M _N		8.2	12.0								
					M _{0,max}		24.6	29.0								
					M _{max}		24.6	29.0								
					n _{eto}		-	-								
12H34-	10.5	3375	7.5	3.70	M ₀			7.0	12.8	12.8	12.8					
					M _N			6.6	10.5	10.5	10.5					
					M _{0,max}			20.1	25.8	29.0	29.0					
					M _{max}			20.1	25.8	29.0	29.0					
					n _{eto}			-	-	-	-					
12L17-	17.0	1650	6.7	2.90	M ₀			12.1	19.0	19.0	19.0					
					M _N			11.4	17.0	17.0	17.0					
					M _{0,max}			35.5	44.6	55.7	56.4					
					M _{max}			35.5	44.6	55.7	56.4					
					n _{eto}			-	-	-	-					
12L39-	14.0	3900	11.7	5.70	M ₀				10.6	15.3	19.0	19.0	19.0			
					M _N				9.5	13.9	14.0	14.0	14.0			
					M _{0,max}				24.4	31.6	41.9	50.8	56.4			
					M _{max}				24.4	31.6	41.9	50.8	56.4			
					n _{eto}				-	-	-	-	-			
14D14-	12.0	1350	5.4	1.70	M ₀			11.0	12.5							
					M _N			11.0	12.0							
					M _{0,max}			28.3	29.0							
					M _{max}			28.3	29.0							
					n _{eto}			-	-							
14D30-	10.5	3000	9.7	3.30	M ₀				9.6	12.5	12.5					
					M _N				9.5	10.5	10.5					
					M _{0,max}				20.2	25.6	29.0					
					M _{max}				20.2	25.6	29.0					
					n _{eto}				-	-	-					
14H12-	23.5	1200	8.3	3.00	M ₀			12.4	24.1	25.5	25.5					
					M _N			12.1	23.5	23.5	23.5					
					M _{0,max}			37.1	46.6	54.8	54.8					
					M _{max}			37.1	46.6	54.8	54.8					
					n _{eto}			-	-	-	-					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
14H28-	20.5	2775	15.0	6.00	M ₀					16.1	20.5	25.5	25.5			
					M _N					15.9	20.5	20.5	20.5			
					M _{0,max}					33.0	43.9	53.2	54.8			
					M _{max}					33.0	43.9	53.2	54.8			
					η _{eto}					-	-	-	-			
14L14-	30.5	1350	11.8	4.30	M ₀				20.5	30.0	34.5					
					M _N				20.5	30.0	30.5					
					M _{0,max}				48.0	61.4	77.1					
					M _{max}				48.0	61.4	77.1					
					η _{eto}				-	-	-					
14L30-	25.5	3000	20.8	8.00	M ₀						21.0	26.6	34.5	34.5	34.5	
					M _N						20.0	25.3	25.5	25.5	25.5	
					M _{0,max}						45.0	55.3	63.9	77.1	77.1	
					M _{max}						45.0	55.3	63.9	77.1	77.1	
					η _{eto}						-	-	-	-	-	
14P11-	42.0	1050	13.4	4.60	M ₀				26.7	36.4	43.5	43.5				
					M _N				24.4	36.4	42.0	42.0				
					M _{0,max}				56.1	71.7	93.3	105.1				
					M _{max}				56.1	71.7	93.3	105.1				
					η _{eto}				-	-	-	-				
14P26-	33.0	2625	21.9	9.10	M ₀						24.8	31.4	43.5	43.5	43.5	
					M _N						24.6	31.0	33.0	33.0	33.0	
					M _{0,max}						52.5	64.6	74.7	92.2	105.1	
					M _{max}						52.5	64.6	74.7	92.2	105.1	
					η _{eto}						-	-	-	-	-	
19F12-	38.0	1200	11.3	4.80	M ₀				29.9	39.5	41.5					
					M _N				29.3	38.0	38.0					
					M _{0,max}				62.1	78.9	86.0					
					M _{max}				62.1	78.9	86.0					
					η _{eto}				-	-	-					
19F29-	32.5	2850	20.1	9.70	M ₀						26.3	34.9	41.5	41.5		
					M _N						26.0	32.5	32.5	32.5		
					M _{0,max}						56.6	70.2	81.6	86.0		
					M _{max}						56.6	70.2	81.6	86.0		
					η _{eto}						-	-	-	-		
19J12-	62.5	1200	18.3	7.90	M ₀						56.6	70.5				
					M _N						55.7	62.5				
					M _{0,max}						114.4	129.0				
					M _{max}						114.4	129.0				
					η _{eto}						-	-				
19J29-	50.5	2850	31.0	15.10	M ₀								49.2	66.7	70.5	
					M _N								47.9	50.5	50.5	
					M _{0,max}								88.9	112.9	129.0	
					M _{max}								88.9	112.9	129.0	
					η _{eto}								-	-	-	

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
19P12-	72.0	1200	21.3	9.00	M ₀							79.1	86.0	86.0		
					M _N							69.6	72.0	72.0		
					M _{0,max}							159.9	186.6	190.0		
					M _{max}							159.9	186.6	190.0		
					n _{eto}							-	-	-		
19P29-	53.0	2850	29.5	15.80	M ₀								56.5	73.9	86.0	86.0
					M _N								52.8	53.0	53.0	53.0
					M _{0,max}								98.5	126.6	152.5	187.2
					M _{max}								98.5	126.6	152.5	187.2
					n _{eto}								-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
					I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
06C41-	0.6	4050	1.3	0.25	M ₀	0.8	0.8	0.8	0.8	0.8		
					M _N	0.6	0.6	0.6	0.6	0.6		
					M _{0,max}	1.4	1.7	2.3	2.4	2.4		
					M _{max}	1.4	1.7	2.3	2.4	2.4		
					η _{eto}	-	-	-	-	-		
06C60-	0.5	6000	2.4	0.31	M ₀			0.8	0.8	0.8	0.8	0.8
					M _N			0.5	0.5	0.5	0.5	0.5
					M _{0,max}			1.3	1.6	2.0	2.4	2.4
					M _{max}			1.3	1.6	2.0	2.4	2.4
					η _{eto}			-	-	-	-	-
06F41-	1.2	4050	1.5	0.51	M ₀	1.3	1.5	1.5	1.5	1.5		
					M _N	1.0	1.2	1.2	1.2	1.2		
					M _{0,max}	2.3	3.2	4.3	4.4	4.4		
					M _{max}	2.3	3.2	4.3	4.4	4.4		
					η _{eto}	-	-	-	-	-		
06F60-	0.9	6000	2.5	0.57	M ₀			1.2	1.5	1.5	1.5	1.5
					M _N			0.9	0.9	0.9	0.9	0.9
					M _{0,max}			2.1	3.3	4.0	4.4	4.4
					M _{max}			2.1	3.3	4.0	4.4	4.4
					η _{eto}			-	-	-	-	-
06I41-	1.5	4050	1.6	0.64	M ₀	1.6	2.0	2.0	2.0	2.0		
					M _N	1.2	1.5	1.5	1.5	1.5		
					M _{0,max}	2.9	4.0	5.3	6.2	6.2		
					M _{max}	2.9	4.0	5.3	6.2	6.2		
					η _{eto}	-	-	-	-	-		
06I60-	1.2	6000	2.9	0.75	M ₀				2.0	2.0	2.0	2.0
					M _N				1.2	1.2	1.2	1.2
					M _{0,max}				3.6	4.4	5.7	5.7
					M _{max}				3.6	4.4	5.7	5.7
					η _{eto}				-	-	-	-
09D41-	2.3	4050	2.3	1.00	M ₀		2.2	3.1	3.3	3.3	3.3	3.3
					M _N		1.7	2.3	2.3	2.3	2.3	2.3
					M _{0,max}		4.0	5.3	6.7	8.2	9.4	9.4
					M _{max}		4.0	5.3	6.7	8.2	9.4	9.4
					η _{eto}		-	-	-	-	-	-
09D60-	1.8	6000	3.8	1.10	M ₀				2.0	2.4	3.3	3.3
					M _N				1.5	1.8	1.8	1.8
					M _{0,max}				3.5	4.2	6.3	7.8
					M _{max}				3.5	4.2	6.3	7.8
					η _{eto}				-	-	-	-
09F38-	3.1	3750	2.5	1.20	M ₀			3.4	4.2	4.2	4.2	4.2
					M _N			3.0	3.1	3.1	3.1	3.1
					M _{0,max}			6.6	8.4	10.2	12.0	12.0
					M _{max}			6.6	8.4	10.2	12.0	12.0
					η _{eto}			-	-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC					
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I _N					
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I _{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I _{max}	P _N	I _N	n _N	M _N	MCS
								M ₀					
								M _N	0.25	1.3	4050	0.6	06C41-
								M _{0,max}					
								M _{max}					
								n _{eto}					
								M ₀	0.31	2.4	6000	0.5	06C60-
								M _N					
								M _{0,max}					
								M _{max}					
								n _{eto}	0.51	1.5	4050	1.2	06F41-
								M ₀					
								M _N					
								M _{0,max}					
								M _{max}	0.57	2.5	6000	0.9	06F60-
								n _{eto}					
								M ₀					
								M _N					
								M _{0,max}	0.64	1.6	4050	1.5	06I41-
								M _{max}					
								n _{eto}					
								M ₀					
								M _N	0.75	2.9	6000	1.2	06I60-
								M _{0,max}					
								M _{max}					
								n _{eto}					
								M ₀	1.00	2.3	4050	2.3	09D41-
								M _N					
								M _{0,max}					
								M _{max}					
								n _{eto}	1.10	3.8	6000	1.8	09D60-
3.3	3.3							M ₀					
1.8	1.8							M _N					
9.1	9.3							M _{0,max}					
9.1	9.3							M _{max}	1.20	2.5	3750	3.1	09F38-
-	-							n _{eto}					
								M ₀					
								M _N					
								M _{0,max}					
								M _{max}					
								n _{eto}					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
					I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
09F60-	2.4	6000	4.5	1.50	M ₀						4.2	4.2
					M _N						2.4	2.4
					M _{0,max}						7.8	9.6
					M _{max}						7.8	9.6
					η _{eto}						-	-
09H41-	3.8	4050	3.4	1.60	M ₀				4.7	5.0	5.5	5.5
					M _N				3.6	3.8	3.8	3.8
					M _{0,max}				8.1	9.9	14.0	17.4
					M _{max}				8.1	9.9	14.0	17.4
					η _{eto}				-	-	-	-
09H60-	3.0	6000	6.0	1.90	M ₀						4.4	4.5
					M _N						3.0	3.0
					M _{0,max}						7.5	9.3
					M _{max}						7.5	9.3
					η _{eto}						-	-
09L41-	4.5	4050	4.2	1.90	M ₀				3.9	4.7	7.5	7.5
					M _N				3.4	4.2	4.5	4.5
					M _{0,max}				7.3	8.9	13.1	16.3
					M _{max}				7.3	8.9	13.1	16.3
					η _{eto}				-	-	-	-
09L51-	3.6	5100	6.9	1.90	M ₀							4.2
					M _N							3.6
					M _{0,max}							8.3
					M _{max}							8.3
					η _{eto}							-
12D20-	5.5	1950	2.6	1.10	M ₀			5.7	6.4	6.4	6.4	6.4
					M _N			5.1	5.5	5.5	5.5	5.5
					M _{0,max}			9.6	12.6	15.3	17.7	17.7
					M _{max}			9.6	12.6	15.3	17.7	17.7
					η _{eto}			-	-	-	-	-
12D41-	4.3	4050	4.5	1.80	M ₀				3.8	4.6	6.4	6.4
					M _N				3.0	3.7	4.3	4.3
					M _{0,max}				6.4	7.8	11.4	14.0
					M _{max}				6.4	7.8	11.4	14.0
					η _{eto}				-	-	-	-
12H15-	10.0	1500	3.8	1.60	M ₀				9.2	10.9	11.4	11.4
					M _N				8.4	10.0	10.0	10.0
					M _{0,max}				16.4	20.0	29.0	29.0
					M _{max}				16.4	20.0	29.0	29.0
					η _{eto}				-	-	-	-
12H35-	7.5	3525	5.7	2.80	M ₀						9.8	9.8
					M _N						7.5	7.5
					M _{0,max}						15.2	18.8
					M _{max}						15.2	18.8
					η _{eto}						-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC					
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I _N					
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I _{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I _{max}	P _N	I _N	n _N	M _N	MCS
4.2	4.2							M ₀					
2.4	2.4							M _N	1.50	4.5	6000	2.4	09F60-
11.1	11.4							M _{0,max}					
11.1	11.4							M _{max}					
-	-							n _{eto}					
5.5	5.5							M ₀	1.60	3.4	4050	3.8	09H41-
3.8	3.8							M _N					
19.6	20.1							M _{0,max}					
19.6	20.1							M _{max}					
-	-							n _{eto}	1.90	6.0	6000	3.0	09H60-
5.5	5.5							M ₀					
3.0	3.0							M _N					
11.4	11.7							M _{0,max}					
11.4	11.7							M _{max}	1.90	4.2	4050	4.5	09L41-
-	-							n _{eto}					
7.5	7.5							M ₀					
4.5	4.5							M _N					
20.3	20.8							M _{0,max}	1.90	6.9	5100	3.6	09L51-
20.3	20.8							M _{max}					
-	-							n _{eto}					
7.5	7.5	7.5	7.5					M ₀					
3.6	3.6	3.6	3.6					M _N	1.10	2.6	1950	5.5	12D20-
10.8	19.1	19.1	19.1					M _{0,max}					
10.8	19.1	19.1	19.1					M _{max}					
-	-	-	-					n _{eto}					
								M ₀	1.80	4.5	4050	4.3	12D41-
								M _N					
								M _{0,max}					
								M _{max}					
								n _{eto}	1.60	3.8	1500	10.0	12H15-
6.4	6.4							M ₀					
4.3	4.3							M _N					
16.9	17.3							M _{0,max}					
16.9	17.3							M _{max}	2.80	5.7	3525	7.5	12H35-
-	-							n _{eto}					
11.4	11.4							M ₀					
10.0	10.0							M _N					
28.3	29.0							M _{0,max}	2.80	5.7	3525	7.5	12H35-
28.3	29.0							M _{max}					
-	-							n _{eto}					
11.4	11.4							M ₀					
7.5	7.5							M _N	2.80	5.7	3525	7.5	12H35-
23.5	24.1							M _{0,max}					
23.5	24.1							M _{max}					
-	-							n _{eto}					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
					I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
12L20-	13.5	1950	5.9	2.80	M ₀						15.0	15.0
					M _N						13.5	13.5
					M _{0,max}						27.4	33.9
					M _{max}						27.4	33.9
					n _{eto}						-	-
12L41-	11.0	4050	10.2	4.70	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14D15-	9.2	1500	4.5	1.45	M ₀				7.0	8.5	11.0	11.0
					M _N				6.6	8.0	9.2	9.2
					M _{0,max}				13.1	16.0	22.7	28.1
					M _{max}				13.1	16.0	22.7	28.1
					n _{eto}				-	-	-	-
14D36-	7.5	3600	7.5	2.80	M ₀							8.0
					M _N							7.3
					M _{0,max}							15.2
					M _{max}							15.2
					n _{eto}							-
14H15-	16.0	1500	6.6	2.50	M ₀							17.3
					M _N							16.0
					M _{0,max}							35.3
					M _{max}							35.3
					n _{eto}							-
14H32-	14.0	3225	11.9	4.70	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14L15-	23.0	1500	9.7	3.60	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14L32-	17.2	3225	15.0	5.80	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14P14-	30.0	1350	10.8	4.20	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC					
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I _N					
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I _{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I _{max}	P _N	I _N	n _N	M _N	MCS
15.0	15.0							M ₀					
13.5	13.5							M _N	2.80	5.9	1950	13.5	12L20-
40.8	41.9							M _{0,max}					
40.8	41.9							M _{max}					
-	-							n _{eto}					
14.0	15.0	15.0	15.0	15.0				M ₀	4.70	10.2	4050	11.0	12L41-
10.2	11.0	11.0	11.0	11.0				M _N					
22.2	30.4	35.5	35.5	35.5				M _{0,max}					
22.2	30.4	49.6	49.6	49.6				M _{max}					
-	-	-	-	-				n _{eto}	1.45	4.5	1500	9.2	14D15-
11.0	11.0							M ₀					
9.2	9.2							M _N					
28.3	29.0							M _{0,max}					
28.3	29.0							M _{max}	2.80	7.5	3600	7.5	14D36-
-	-							n _{eto}					
11.0	11.0	11.0	11.0					M ₀					
7.5	7.5	7.5	7.5					M _N					
18.5	25.3	29.0	29.0					M _{0,max}	2.50	6.6	1500	16.0	14H15-
18.5	22.2	22.2	22.2					M _{max}					
-	-	-	-					n _{eto}					
21.0	21.0							M ₀					
16.0	16.0							M _N	4.70	11.9	3225	14.0	14H32-
42.8	43.9							M _{0,max}					
42.8	43.9							M _{max}					
-	-							n _{eto}					
12.9	16.2	21.0	21.0	21.0				M ₀	3.60	9.7	1500	23.0	14L15-
11.2	14.0	14.0	14.0	14.0				M _N					
23.2	31.7	37.1	37.1	37.1				M _{0,max}					
23.2	31.7	51.9	51.9	51.9				M _{max}					
-	-	-	-	-				n _{eto}	5.80	15.0	3225	17.2	14L32-
27.4	28.0	28.0	28.0					M ₀					
22.5	23.0	23.0	23.0					M _N					
43.8	52.9	52.9	52.9					M _{0,max}					
43.8	60.0	73.8	73.8					M _{max}	4.20	10.8	1350	30.0	14P14-
-	-	-	-					n _{eto}					
	15.2	27.4	27.4	28.0	28.0	28.0		M ₀					
	14.9	17.2	17.2	17.2	17.2	17.2		M _N					
	31.3	39.7	52.9	52.9	52.9	52.9		M _{0,max}	4.20	10.8	1350	30.0	14P14-
	31.3	57.6	73.9	73.9	73.9	73.9		M _{max}					
-	-	-	-	-	-	-		n _{eto}					
32.5	37.0	37.0	37.0	37.0				M ₀					
26.4	30.0	30.0	30.0	30.0				M _N					
51.2	70.0	80.0	80.0	80.0				M _{0,max}					
51.2	70.0	105.1	105.1	105.1				M _{max}					
-	-	-	-	-				n _{eto}					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
					I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
14P32-	21.0	3225	15.6	7.10	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19F14-	27.0	1425	8.6	4.00	M ₀							23.6
					M _N							22.9
					M _{0,max}							45.9
					M _{max}							45.9
					n _{eto}							-
19F30-	21.0	3000	14.0	6.60	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19J14-	40.0	1425	12.3	6.00	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19J30-	29.0	3000	18.5	9.10	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19P14-	51.0	1350	14.3	7.20	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19P30-	32.0	3000	19.0	10.00	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC					
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I _N					
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I _{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I _{max}					
	19.8	35.8	35.8	37.0	37.0	37.0		M ₀					
	17.5	21.0	21.0	21.0	21.0	21.0		M _N	7.10	15.6	3225	21.0	14P32-
	36.5	46.3	61.8	61.8	61.8	61.8		M _{0,max}					
	36.5	67.3	86.4	86.4	86.4	86.4		M _{max}					
	-	-	-	-	-	-		n _{eto}					
32.0	32.0	32.0	32.0					M ₀	4.00	8.6	1425	27.0	19F14-
27.0	27.0	27.0	27.0					M _N					
56.7	68.3	68.3	68.3					M _{0,max}					
56.7	77.6	86.0	86.0					M _{max}					
-	-	-	-					n _{eto}	6.60	14.0	3000	21.0	19F30-
	21.0	32.0	32.0	32.0				M ₀					
	19.5	21.0	21.0	21.0				M _N					
	47.2	47.2	47.2	47.2				M _{0,max}					
	38.9	68.3	68.3	68.3				M _{max}	6.00	12.3	1425	40.0	19J14-
	-	-	-	-				n _{eto}					
	43.6	51.0	51.0	51.0				M ₀					
	40.0	40.0	40.0	40.0				M _N					
	81.1	96.0	96.0	96.0				M _{0,max}	9.10	18.5	3000	29.0	19J30-
	81.1	129.0	129.0	129.0				M _{max}					
	-	-	-	-				n _{eto}					
			39.3	51.0	51.0	51.0	51.0	M ₀					
			29.0	29.0	29.0	29.0	29.0	M _N	7.20	14.3	1350	51.0	19P14-
			73.6	79.5	79.5	79.5	79.5	M _{0,max}					
			110.4	127.6	127.6	127.6	127.6	M _{max}					
			-	-	-	-	-	n _{eto}					
	47.5	64.0	64.0	64.0				M ₀	10.00	19.0	3000	32.0	19P30-
	46.4	51.0	51.0	51.0				M _N					
	92.7	106.7	106.7	106.7				M _{0,max}					
	92.7	155.5	155.5	155.5				M _{max}					
	-	-	-	-				n _{eto}					
			43.1	58.7	64.0	64.0	64.0	M ₀					
			32.0	32.0	32.0	32.0	32.0	M _N					
			79.2	87.6	87.6	87.6	87.6	M _{0,max}					
			118.6	144.3	144.3	144.3	144.3	M _{max}					
			-	-	-	-	-	n _{eto}					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□1124	□1524	□2224	□3024	□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034
					I _N	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0
					I _{0,max}	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5
MCS	M _N	n _N	I _N	P _N	I _{max}	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0
12D17-	7.0	1650	3.0	1.20	M ₀	7.5	7.5	7.5	7.5								
					M _N	7.0	7.0	7.0	7.0								
					M _{0,max}	12.6	15.3	17.7	17.7								
					M _{max}	12.6	15.3	17.7	17.7								
					η _{eto}	-	-	-	-								
12D35-	6.0	3525	5.6	2.20	M ₀		4.6	7.5	7.5	7.5	7.5						
					M _N		3.7	6.0	6.0	6.0	6.0						
					M _{0,max}		7.8	11.4	14.0	16.9	17.3						
					M _{max}		7.8	11.4	14.0	16.9	17.3						
					η _{eto}		-	-	-	-	-						
12H14-	12.0	1350	4.1	1.70	M ₀	8.9	10.9	12.8	12.8	12.8	12.8						
					M _N	8.5	10.3	12.0	12.0	12.0	12.0						
					M _{0,max}	16.4	20.0	29.0	29.0	28.3	29.0						
					M _{max}	16.4	20.0	29.0	29.0	28.3	29.0						
					η _{eto}	-	-	-	-	-	-						
12H34-	10.5	3375	7.5	3.70	M ₀				10.2	12.8	12.8						
					M _N				10.0	10.5	10.5						
					M _{0,max}				18.8	23.5	24.1						
					M _{max}				18.8	23.5	24.1						
					η _{eto}				-	-	-						
12L17-	17.0	1650	6.7	2.90	M ₀				18.5	19.0	19.0						
					M _N				17.0	17.0	17.0						
					M _{0,max}				33.9	40.8	41.9						
					M _{max}				33.9	40.8	41.9						
					η _{eto}				-	-	-						
12L39-	14.0	3900	11.7	5.70	M ₀					17.2	17.2	19.0	19.0	19.0			
					M _N					14.0	14.0	14.0	14.0	14.0			
					M _{0,max}					22.2	30.4	35.5	35.5	35.5			
					M _{max}					22.2	30.4	49.6	49.6	49.6			
					η _{eto}					-	-	-	-	-			
14D14-	12.0	1350	5.4	1.70	M ₀		8.5	12.5	12.5	12.5	12.5						
					M _N		8.0	12.0	12.0	12.0	12.0						
					M _{0,max}		16.0	22.7	28.1	28.3	29.0						
					M _{max}		16.0	22.7	28.1	28.3	29.0						
					η _{eto}		-	-	-	-	-						
14D30-	10.5	3000	9.7	3.30	M ₀				7.7	12.2	12.5	12.5	12.5				
					M _N				7.0	9.8	10.0	10.0	10.0				
					M _{0,max}				15.2	18.5	25.3	29.0	29.0				
					M _{max}				15.2	18.5	22.2	22.2	22.2				
					η _{eto}				-	-	-	-	-				
14H12-	23.5	1200	8.3	3.00	M ₀				18.0	25.5	25.5						
					M _N				17.9	23.5	23.5						
					M _{0,max}				35.3	42.8	43.9						
					M _{max}				35.3	42.8	43.9						
					η _{eto}				-	-	-						

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□1124	□1524	□2224	□3024	□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034
					I _N	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0
					I _{0,max}	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5
MCS	M _N	n _N	I _N	P _N	I _{max}	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0
14H28-	20.5	2775	15.0	6.00	M ₀						16.2	25.5	25.5	25.5			
					M _N						16.1	20.5	20.5	20.5			
					M _{0,max}						31.7	37.1	37.1	37.1			
					M _{max}						31.7	51.9	51.9	51.9			
					η _{eto}						-	-	-	-			
14L14-	30.5	1350	11.8	4.30	M ₀					26.9	33.4	34.5	34.5				
					M _N					24.6	30.5	30.5	30.5				
					M _{0,max}					43.8	52.9	52.9	52.9				
					M _{max}					43.8	60.0	73.8	73.8				
					η _{eto}					-	-	-	-				
14L30-	25.5	3000	20.8	8.00	M ₀								27.4	34.5	34.5	34.5	
					M _N								25.5	25.5	25.5	25.5	
					M _{0,max}								52.9	52.9	52.9	52.9	
					M _{max}								73.9	73.9	73.9	73.9	
					η _{eto}								-	-	-	-	
14P11-	42.0	1050	13.4	4.60	M ₀						38.9	43.5	43.5	43.5			
					M _N						38.8	42.0	42.0	42.0			
					M _{0,max}						70.0	80.0	80.0	80.0			
					M _{max}						70.0	105.1	105.1	105.1			
					η _{eto}						-	-	-	-			
14P26-	33.0	2625	21.9	9.10	M ₀								35.8	43.5	43.5	43.5	
					M _N								33.0	33.0	33.0	33.0	
					M _{0,max}								66.0	86.4	86.4	86.4	
					M _{max}								86.4	86.4	86.4	86.4	
					η _{eto}								-	-	-	-	
19F12-	38.0	1200	11.3	4.80	M ₀				23.6	34.9	41.5	41.5	41.5				
					M _N				22.9	31.9	38.0	38.0	38.0				
					M _{0,max}				45.9	56.7	68.3	68.3	68.3				
					M _{max}				45.9	56.7	77.6	86.0	86.0				
					η _{eto}				-	-	-	-	-				
19F29-	32.5	2850	20.1	9.70	M ₀								39.9	41.5			
					M _N								32.5	32.5			
					M _{0,max}								47.2	47.2			
					M _{max}								68.3	68.3			
					η _{eto}								-	-			
19J12-	62.5	1200	18.3	7.90	M ₀						43.6		70.5	70.5			
					M _N						43.4		62.5	62.5			
					M _{0,max}						81.1		96.0	96.0			
					M _{max}						81.1		129.0	129.0			
					η _{eto}						-		-	-			
19J29-	50.5	2850	31.0	15.10	M ₀									55.5	70.5	70.5	70.5
					M _N									50.5	50.5	50.5	50.5
					M _{0,max}									87.6	87.6	87.6	87.6
					M _{max}									127.6	127.6	127.6	127.6
					η _{eto}									-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□1124	□1524	□2224	□3024	□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034
					I _N	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0
					I _{0,max}	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5
MCS	M _N	n _N	I _N	P _N	I _{max}	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0
19P12-	72.0	1200	21.3	9.00	M ₀						47.5		86.0	86.0			
					M _N						46.4		72.0	72.0			
					M _{0,max}						92.7		106.7	106.7			
					M _{max}						92.7		155.5	155.5			
					n _{eto}						-		-	-			
19P29-	53.0	2850	29.5	15.80	M ₀									58.7	86.0	86.0	86.0
					M _N									53.0	53.0	53.0	53.0
					M _{0,max}									87.6	87.6	87.6	87.6
					M _{max}									144.3	144.3	144.3	144.3
					n _{eto}									-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
06C41-	0.6	4050	1.3	0.25	M ₀	0.8					
					M _N	0.6					
					M _{0,max}	1.2					
					M _{max}	1.9					
					n _{eto}	2747					
06C60-	0.5	6000	2.4	0.31	M ₀	0.6	0.8				
					M _N	0.4	0.5				
					M _{0,max}	0.6	1.2				
					M _{max}	1.0	1.9				
					n _{eto}	7000	6814				
06F41-	1.2	4050	1.5	0.51	M ₀	1.5					
					M _N	1.2					
					M _{0,max}	2.0					
					M _{max}	3.6					
					n _{eto}	1902					
06F60-	0.9	6000	2.5	0.57	M ₀	1.0	1.5				
					M _N	0.7	0.9				
					M _{0,max}	1.0	2.0				
					M _{max}	1.8	3.7				
					n _{eto}	7000	4602				
06I41-	1.5	4050	1.6	0.64	M ₀	2.0	2.0				
					M _N	1.5	1.5				
					M _{0,max}	2.6	5.0				
					M _{max}	4.4	6.2				
					n _{eto}	1898	1384				
06I60-	1.2	6000	2.9	0.75	M ₀	1.2	2.0	2.0			
					M _N	0.8	1.2	1.2			
					M _{0,max}	1.3	2.6	5.2			
					M _{max}	2.2	4.7	6.2			
					n _{eto}	6407	4200	3157			
09D41-	2.3	4050	2.3	1.00	M ₀		3.3	3.3			
					M _N		2.3	2.3			
					M _{0,max}		5.0	8.8			
					M _{max}		8.0	9.4			
					n _{eto}		2361	2008			
09D60-	1.8	6000	3.8	1.10	M ₀		2.5	3.3			
					M _N		1.8	1.8			
					M _{0,max}		2.5	4.9			
					M _{max}		4.4	8.0			
					n _{eto}		7000	5217			
09F38-	3.1	3750	2.5	1.20	M ₀		4.2	4.2			
					M _N		3.1	3.1			
					M _{0,max}		6.2	10.8			
					M _{max}		9.8	14.9			
					n _{eto}		2589	1737			

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
09F60-	2.4	6000	4.5	1.50	M ₀		2.8	4.2	4.2		
					M _N		2.1	2.4	2.4		
					M _{0,max}		3.2	6.1	10.8		
					M _{max}		5.4	9.8	14.9		
					n _{eto}		7000	5906	3715		
09H41-	3.8	4050	3.4	1.60	M ₀		5.2	5.5			
					M _N		3.8	3.8			
					M _{0,max}		5.9	11.1			
					M _{max}		9.9	17.5			
					n _{eto}		3675	2231			
09H60-	3.0	6000	6.0	1.90	M ₀			5.2	5.5	5.5	
					M _N			3.0	3.0	3.0	
					M _{0,max}			5.9	11.0	15.5	
					M _{max}			9.9	17.5	20.4	
					n _{eto}			7000	5061	4375	
09L41-	4.5	4050	4.2	1.90	M ₀		4.8	7.5	7.5		
					M _N		4.3	4.5	4.5		
					M _{0,max}		5.2	10.3	19.5		
					M _{max}		9.1	17.4	31.9		
					n _{eto}		4450	3188	1878		
09L51-	3.6	5100	6.9	1.90	M ₀			4.8	7.5	7.5	7.5
					M _N			3.6	3.6	3.6	3.6
					M _{0,max}			5.2	10.3	15.1	19.6
					M _{max}			9.1	17.5	25.1	31.9
					n _{eto}			7000	7000	5647	4076
12D20-	5.5	1950	2.6	1.10	M ₀	4.7	6.4	6.4			
					M _N	4.2	5.5	5.5			
					M _{0,max}	4.6	9.1	17.0			
					M _{max}	8.0	15.3	17.7			
					n _{eto}	1730	1089	919			
12D41-	4.3	4050	4.5	1.80	M ₀		4.7	6.4			
					M _N		3.8	4.3			
					M _{0,max}		4.6	8.8			
					M _{max}		7.8	14.7			
					n _{eto}		3902	2433			
12H15-	10.0	1500	3.8	1.60	M ₀		11.2	11.4			
					M _N		10.0	10.0			
					M _{0,max}		11.9	22.6			
					M _{max}		20.1	29.0			
					n _{eto}		1220	918			
12H35-	7.5	3525	5.7	2.80	M ₀		5.6	11.2	11.4		
					M _N		5.3	7.5	7.5		
					M _{0,max}		6.0	11.8	22.5		
					M _{max}		10.4	20.1	29.0		
					n _{eto}		3850	2838	2092		

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
12L20-	13.5	1950	5.9	2.80	M ₀			15.0	15.0		
					M _N			13.5	13.5		
					M _{0,max}			21.4	39.4		
					M _{max}			35.5	56.4		
					n _{eto}			1324	863		
12L41-	11.0	4050	10.2	4.70	M ₀			9.7	15.0	15.0	15.0
					M _N			8.6	11.0	11.0	11.0
					M _{0,max}			10.8	21.3	30.8	39.5
					M _{max}			19.0	35.5	49.6	56.4
					n _{eto}			4450	3013	2236	1907
14D15-	9.2	1500	4.5	1.45	M ₀		8.8	11.0			
					M _N		8.2	9.2			
					M _{0,max}		9.6	17.9			
					M _{max}		15.9	28.3			
					n _{eto}		1141	689			
14D36-	7.5	3600	7.5	2.80	M ₀			8.8	11.0		
					M _N			7.5	7.5		
					M _{0,max}			9.5	17.8		
					M _{max}			15.9	28.3		
					n _{eto}			2496	1614		
14H15-	16.0	1500	6.6	2.50	M ₀			19.8	21.0		
					M _N			16.0	16.0		
					M _{0,max}			22.3	41.2		
					M _{max}			37.1	54.8		
					n _{eto}			920	667		
14H32-	14.0	3225	11.9	4.70	M ₀				15.8	21.0	21.0
					M _N				14.0	14.0	14.0
					M _{0,max}				22.2	32.1	41.3
					M _{max}				37.1	51.9	54.8
					n _{eto}				1953	1471	1409
14L15-	23.0	1500	9.7	3.60	M ₀			18.7	28.0	28.0	
					M _N			19.0	23.0	23.0	
					M _{0,max}			21.9	42.1	59.9	
					M _{max}			37.6	68.5	77.1	
					n _{eto}			1284	828	767	
14L32-	17.2	3225	15.0	5.80	M ₀				14.8	19.8	23.3
					M _N				14.6	17.2	17.2
					M _{0,max}				21.8	32.4	42.2
					M _{max}				37.6	53.9	68.5
					n _{eto}				2801	2096	1757
14P14-	30.0	1350	10.8	4.20	M ₀				37.0	37.0	37.0
					M _N				30.0	30.0	30.0
					M _{0,max}				49.1	70.0	88.4
					M _{max}				80.0	105.1	105.1
					n _{eto}				710	573	573

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
14P32-	21.0	3225	15.6	7.10	M ₀				19.3	25.9	30.5
					M _N				17.1	21.0	21.0
					M _{0,max}				25.4	37.9	49.3
					M _{max}				43.9	63.0	80.0
					n _{eto}				2469	1829	1495
19F14-	27.0	1425	8.6	4.00	M ₀			25.9	32.0		
					M _N			25.1	27.0		
					M _{0,max}			28.6	54.6		
					M _{max}			48.9	86.0		
					n _{eto}			1204	746		
19F30-	21.0	3000	14.0	6.60	M ₀				20.5	27.5	32.0
					M _N				19.0	21.0	21.0
					M _{0,max}				27.2	40.5	53.0
					M _{max}				47.2	68.3	86.0
					n _{eto}				2774	2033	1653
19J14-	40.0	1425	12.3	6.00	M ₀				42.6	51.0	
					M _N				40.0	40.0	
					M _{0,max}				58.9	82.8	
					M _{max}				96.0	129.0	
					n _{eto}				1063	839	
19J30-	29.0	3000	18.5	9.10	M ₀					28.4	33.4
					M _N					26.6	29.0
					M _{0,max}					42.6	56.9
					M _{max}					73.8	96.0
					n _{eto}					2850	2323
19P14-	51.0	1350	14.3	7.20	M ₀				46.4	62.2	64.0
					M _N				45.3	51.0	51.0
					M _{0,max}				64.6	91.5	120.1
					M _{max}				106.7	155.5	190.0
					n _{eto}				1227	996	870
19P30-	32.0	3000	19.0	10.00	M ₀					31.2	36.7
					M _N					28.6	32.0
					M _{0,max}					45.8	61.1
					M _{max}					81.2	106.7
					n _{eto}					2938	2715

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
06C41L	0.6	4050	2.6	0.25	M ₀	0.6	0.8				
					M _N	0.5	0.6				
					M _{0,max}	0.6	1.1				
					M _{max}	1.0	1.9				
					n _{eto}	6298	2835				
06C60L	0.5	6000	4.0	0.31	M ₀		0.7	0.8			
					M _N		0.5	0.5			
					M _{0,max}		0.7	1.3			
					M _{max}		1.2	2.2			
					n _{eto}		7000	1149			
06F41L	1.2	4050	2.9	0.51	M ₀	1.0	1.5	1.5			
					M _N	0.8	1.2	1.2			
					M _{0,max}	1.2	2.1	3.9			
					M _{max}	1.9	3.5	4.4			
					n _{eto}	3838	2118	2831			
06F60L	0.9	6000	3.8	0.57	M ₀		1.5	1.5			
					M _N		0.9	0.9			
					M _{0,max}		1.5	2.9			
					M _{max}		2.6	4.3			
					n _{eto}		6138	3182			
06I41L	1.5	4050	3.2	0.64	M ₀	1.3	2.0	2.0			
					M _N	1.0	1.5	1.5			
					M _{0,max}	1.4	2.8	5.0			
					M _{max}	2.4	4.4	6.2			
					n _{eto}	3549	1947	2831			
06I60L	1.2	6000	3.8	0.75	M ₀		1.9	2.0			
					M _N		1.2	1.2			
					M _{0,max}		2.1	4.1			
					M _{max}		3.6	6.2			
					n _{eto}		3417	1149			
09D41L	2.3	4050	4.6	1.00	M ₀		2.5	3.3	3.3		
					M _N		2.0	2.3	2.3		
					M _{0,max}		2.5	4.9	8.8		
					M _{max}		4.4	8.0	9.5		
					n _{eto}		4091	2547	2170		
09D60L	1.8	6000	7.0	1.10	M ₀			2.6	3.3	3.3	
					M _N			1.8	1.8	1.8	
					M _{0,max}			2.6	5.0	7.1	
					M _{max}			4.5	8.1	9.5	
					n _{eto}			7000	5373	4626	
09F38L	3.1	3750	5.0	1.20	M ₀			4.2	4.2		
					M _N			3.1	3.1		
					M _{0,max}			6.1	10.8		
					M _{max}			9.8	15.0		
					n _{eto}			1149	1951		

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
09F60L	2.4	6000	7.9	1.50	M ₀			3.2	4.2	4.2	4.2
					M _N			2.4	2.4	2.4	2.4
					M _{0,max}			3.6	6.8	9.6	11.9
					M _{max}			6.1	10.9	14.3	15.0
					n _{eto}			6985	3448	2612	2397
09H41L	3.8	4050	6.8	1.60	M ₀			5.2	5.5	5.5	
					M _N			3.8	3.8	3.8	
					M _{0,max}			5.9	11.0	15.3	
					M _{max}			9.9	17.2	20.0	
					n _{eto}			1149	2138	1852	
09H60L	3.0	6000	8.0	1.90	M ₀			3.7	5.5	5.5	5.5
					M _N			3.0	3.0	3.0	3.0
					M _{0,max}			4.1	8.0	11.5	14.5
					M _{max}			7.2	13.2	17.9	20.0
					n _{eto}			1149	4081	2984	2695
09L41L	4.5	4050	8.4	1.90	M ₀			4.8	7.5	7.5	7.5
					M _N			4.3	4.5	4.5	4.5
					M _{0,max}			5.2	10.3	15.1	19.6
					M _{max}			9.1	17.5	25.1	31.9
					n _{eto}			4562	3243	2497	1909
12D20L	5.5	1950	5.2	1.10	M ₀		4.7	6.4			
					M _N		4.2	5.5			
					M _{0,max}		4.6	9.0			
					M _{max}		8.0	14.9			
					n _{eto}		1878	1181			
12D41L	4.3	4050	8.8	1.80	M ₀			4.8	6.4	6.4	
					M _N			3.9	4.3	4.3	
					M _{0,max}			4.6	9.2	13.3	
					M _{max}			8.1	15.2	17.9	
					n _{eto}			4102	2535	2187	
12H15L	10.0	1500	7.6	1.60	M ₀			11.2	11.4		
					M _N			10.0	10.0		
					M _{0,max}			11.8	22.5		
					M _{max}			20.1	29.0		
					n _{eto}			1098	827		
12H30L	8.0	3000	10.5	2.50	M ₀			6.8	10.7	11.4	
					M _N			6.1	8.0	8.0	
					M _{0,max}			7.2	14.3	20.9	
					M _{max}			12.7	24.3	29.0	
					n _{eto}			2831	1849	1591	
12L20L	13.5	1950	11.8	2.80	M ₀				15.0	15.0	15.0
					M _N				13.5	13.5	13.5
					M _{0,max}				21.3	30.7	39.4
					M _{max}				35.4	49.3	56.0
					n _{eto}				1307	1004	866

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
12D17-	7.0	1650	3.0	1.20	M ₀	4.7	7.5	7.5			
					M _N	4.2	7.0	7.0			
					M _{0,max}	4.6	9.1	17.0			
					M _{max}	8.0	15.3	17.7			
					n _{eto}	1730	1089	919			
12D35-	6.0	3525	5.6	2.20	M ₀		4.7	7.5			
					M _N		3.8	6.0			
					M _{0,max}		4.6	8.8			
					M _{max}		7.8	14.7			
					n _{eto}		3902	2433			
12H14-	12.0	1350	4.1	1.70	M ₀		11.2	12.8			
					M _N		10.6	12.0			
					M _{0,max}		11.9	22.6			
					M _{max}		20.1	29.0			
					n _{eto}		1220	918			
12H34-	10.5	3375	7.5	3.70	M ₀		5.6	11.2	12.8		
					M _N		5.3	10.0	7.5		
					M _{0,max}		6.0	11.8	22.5		
					M _{max}		10.4	20.1	29.0		
					n _{eto}		3850	2838	2092		
12L17-	17.0	1650	6.7	2.90	M ₀			19.0	19.0		
					M _N			17.0	17.0		
					M _{0,max}			21.4	39.4		
					M _{max}			35.5	56.4		
					n _{eto}			1324	863		
12L39-	14.0	3900	11.7	5.70	M ₀			9.7	16.7	19.0	19.0
					M _N			8.6	14.0	14.0	14.0
					M _{0,max}			10.8	21.3	30.8	39.5
					M _{max}			19.0	35.5	49.6	56.4
					n _{eto}			4450	3013	2236	1907
14D14-	12.0	1350	5.4	1.70	M ₀		8.8	12.5			
					M _N		8.2	12.0			
					M _{0,max}		9.6	17.9			
					M _{max}		15.9	28.3			
					n _{eto}		1141	689			
14D30-	10.5	3000	9.7	3.30	M ₀			8.8	11.4		
					M _N			8.6	9.7		
					M _{0,max}			9.5	17.8		
					M _{max}			15.9	28.3		
					n _{eto}			2496	1614		
14H12-	23.5	1200	8.3	3.00	M ₀			19.8	25.5		
					M _N			19.6	23.5		
					M _{0,max}			22.3	41.2		
					M _{max}			37.1	54.8		
					n _{eto}			920	667		

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
14H28-	20.5	2775	15.0	6.00	M ₀				15.8	23.5	25.5
					M _N				15.6	20.5	20.5
					M _{0,max}				22.2	32.1	41.3
					M _{max}				37.1	51.9	54.8
					n _{eto}				1953	1471	1409
14L14-	30.5	1350	11.8	4.30	M ₀			18.7	32.7	34.5	
					M _N			19.0	30.5	30.5	
					M _{0,max}			21.9	42.1	59.9	
					M _{max}			37.6	68.5	77.1	
					n _{eto}			1284	828	767	
14L30-	25.5	3000	20.8	8.00	M ₀					19.8	23.3
					M _N					19.7	23.3
					M _{0,max}					32.4	42.2
					M _{max}					53.9	68.5
					n _{eto}					2096	1757
14P11-	42.0	1050	13.4	4.60	M ₀				39.1	43.5	43.5
					M _N				38.9	42.0	42.0
					M _{0,max}				49.1	70.0	88.4
					M _{max}				80.0	105.1	105.1
					n _{eto}				710	573	573
14P26-	33.0	2625	21.9	9.10	M ₀					25.9	30.5
					M _N					25.6	30.1
					M _{0,max}					37.9	49.3
					M _{max}					63.0	80.0
					n _{eto}					1829	1495
19F12-	38.0	1200	11.3	4.80	M ₀			25.9	41.5		
					M _N			25.1	38.0		
					M _{0,max}			28.6	54.6		
					M _{max}			48.9	86.0		
					n _{eto}			1204	746		
19F29-	32.5	2850	20.1	9.70	M ₀					27.5	33.9
					M _N					27.4	32.5
					M _{0,max}					40.5	53.0
					M _{max}					68.3	86.0
					n _{eto}					2033	1653
19J12-	62.5	1200	18.3	7.90	M ₀					59.0	69.4
					M _N					58.1	62.5
					M _{0,max}					82.8	82.8
					M _{max}					129.0	129.0
					n _{eto}					839	839
19J29-	50.5	2850	31.0	15.10	M ₀						34.3
					M _N						32.6
					M _{0,max}						56.9
					M _{max}						96.0
					n _{eto}						2323

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
19P12-	72.0	1200	21.3	9.00	M ₀					62.2	76.8
					M _N					57.5	67.6
					M _{0,max}					91.5	120.1
					M _{max}					155.5	190.0
					n _{eto}					996	870
19P29-	53.0	2850	29.5	15.80	M ₀						36.7
					M _N						35.9
					M _{0,max}						61.1
					M _{max}						106.7
					n _{eto}						2715

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321- E□	9322- E□	9323- E□	9324- E□	9325- E□	9326- E□	9327- E□	9328- E□	9329- E□
					I _N	1.5	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	2.3	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
06C41-	0.6	4050	1.3	0.25	M ₀	0.8	0.8	0.8						
					M _N	0.6	0.6	0.6						
					M _{0,max}	1.2	1.8	2.4						
					M _{max}	1.2	1.8	2.4						
					n _{eto}	4635	2871	2019						
06C60-	0.5	6000	2.4	0.31	M ₀		0.8	0.8	0.8					
					M _N		0.5	0.5	0.5					
					M _{0,max}		1.0	1.5	2.4					
					M _{max}		1.0	1.5	2.4					
					n _{eto}		7000	7000	5368					
06F41-	1.2	4050	1.5	0.51	M ₀	1.5	1.5	1.5						
					M _N	1.2	1.2	1.2						
					M _{0,max}	2.0	3.4	4.4						
					M _{max}	2.0	3.4	4.4						
					n _{eto}	2819	1973	1562						
06F60-	0.9	6000	2.5	0.57	M ₀		1.3	1.5	1.5					
					M _N		0.9	0.9	0.9					
					M _{0,max}		1.7	3.0	4.4					
					M _{max}		1.7	3.0	4.4					
					n _{eto}		7000	5714	3773					
06I41-	1.5	4050	1.6	0.64	M ₀	1.8	2.0	2.0						
					M _N	1.4	1.5	1.5						
					M _{0,max}	2.6	4.2	6.2						
					M _{max}	2.6	4.2	6.2						
					n _{eto}	2994	1980	1384						
06I60-	1.2	6000	2.9	0.75	M ₀		1.5	2.0	2.0					
					M _N		1.0	1.2	1.2					
					M _{0,max}		2.1	3.3	5.7					
					M _{max}		2.1	3.3	5.7					
					n _{eto}		7000	5486	3414					
09D41-	2.3	4050	2.3	1.00	M ₀		3.1	3.3	3.3					
					M _N		2.3	2.3	2.3					
					M _{0,max}		4.2	6.2	9.4					
					M _{max}		4.2	6.2	9.4					
					n _{eto}		4895	2937	2008					
09D60-	1.8	6000	3.8	1.10	M ₀			2.4	3.3	3.3				
					M _N			1.8	1.8	1.8				
					M _{0,max}			3.2	5.6	9.3				
					M _{max}			3.2	5.6	9.3				
					n _{eto}			7000	7000	4492				
09F38-	3.1	3750	2.5	1.20	M ₀		3.5	4.2	4.2					
					M _N		3.1	3.1	3.1					
					M _{0,max}		5.2	7.7	12.0					
					M _{max}		5.2	7.7	12.0					
					n _{eto}		4000	3250	2173					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321- E□	9322- E□	9323- E□	9324- E□	9325- E□	9326- E□	9327- E□	9328- E□	9329- E□
					I _N	1.5	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	2.3	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
09F60-	2.4	6000	4.5	1.50	M ₀				4.2	4.2				
					M _N				2.4	2.4				
					M _{0,max}				6.9	11.4				
					M _{max}				6.9	11.4				
					n _{eto}				7000	5035				
09H41-	3.8	4050	3.4	1.60	M ₀			5.0	5.5	5.5				
					M _N			3.8	3.8	3.8				
					M _{0,max}			7.5	12.5	20.1				
					M _{max}			7.5	12.5	20.1				
					n _{eto}			4250	2977	1988				
09H60-	3.0	6000	6.0	1.90	M ₀				4.5	5.5				
					M _N				3.0	3.0				
					M _{0,max}				6.7	11.7				
					M _{max}				6.7	11.7				
					n _{eto}				7000	7000				
09L41-	4.5	4050	4.2	1.90	M ₀			4.7	7.5	7.5				
					M _N			4.2	4.5	4.5				
					M _{0,max}			6.7	11.7	20.8				
					M _{max}			6.7	11.7	20.8				
					n _{eto}			4450	4154	2796				
09L51-	3.6	5100	6.9	1.90	M ₀				4.2	7.5	7.5			
					M _N				3.6	3.6	3.6			
					M _{0,max}				6.0	11.1	13.2			
					M _{max}				6.0	11.1	19.1			
					n _{eto}				7000	7000	7000			
12D20-	5.5	1950	2.6	1.10	M ₀		5.9	6.4	6.4					
					M _N		5.3	5.5	5.5					
					M _{0,max}		7.6	11.6	17.7					
					M _{max}		7.6	11.6	17.7					
					n _{eto}		1790	1358	919					
12D41-	4.3	4050	4.5	1.80	M ₀			4.6	6.4	6.4				
					M _N			3.7	4.3	4.3				
					M _{0,max}			5.9	10.1	17.3				
					M _{max}			5.9	10.1	17.3				
					n _{eto}			4344	3275	2116				
12H15-	10.0	1500	3.8	1.60	M ₀			10.9	11.4	11.4				
					M _N			10.0	10.0	10.0				
					M _{0,max}			15.1	25.8	29.0				
					M _{max}			15.1	25.8	29.0				
					n _{eto}			1676	1013	918				
12H35-	7.5	3525	5.7	2.80	M ₀				9.8	11.4				
					M _N				7.5	7.5				
					M _{0,max}				13.5	24.1				
					M _{max}				13.5	24.1				
					n _{eto}				3618	2447				

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321- E□	9322- E□	9323- E□	9324- E□	9325- E□	9326- E□	9327- E□	9328- E□	9329- E□
					I _N	1.5	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	2.3	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
12L20-	13.5	1950	5.9	2.80	M ₀				15.0	15.0				
					M _N				13.5	13.5				
					M _{0,max}				24.4	41.9				
					M _{max}				24.4	41.9				
					n _{eto}				1718	1158				
12L41-	11.0	4050	10.2	4.70	M ₀					15.0	15.0	15.0		
					M _N					11.0	11.0	11.0		
					M _{0,max}					22.8	27.0	35.5		
					M _{max}					22.8	38.5	49.6		
					n _{eto}					4287	2799	2236		
14D15-	9.2	1500	4.5	1.45	M ₀			8.5	11.0	11.0				
					M _N			8.0	9.2	9.2				
					M _{0,max}			12.1	20.2	29.0				
					M _{max}			12.1	20.2	29.0				
					n _{eto}			1437	928	676				
14D36-	7.5	3600	7.5	2.80	M ₀				7.7	11.0	11.0			
					M _N				7.0	7.5	7.5			
					M _{0,max}				10.9	19.0	22.2			
					M _{max}				10.9	19.0	29.0			
					n _{eto}				3479	2159	1593			
14H15-	16.0	1500	6.6	2.50	M ₀				17.3	21.0				
					M _N				16.0	16.0				
					M _{0,max}				25.4	43.9				
					M _{max}				25.4	43.9				
					n _{eto}				1247	800				
14H32-	14.0	3225	11.9	4.70	M ₀					16.2	21.0	21.0		
					M _N					14.0	14.0	14.0		
					M _{0,max}					23.8	28.2	37.1		
					M _{max}					23.8	40.2	51.9		
					n _{eto}					2875	1817	1471		
14L15-	23.0	1500	9.7	3.60	M ₀					28.0	28.0			
					M _N					23.0	23.0			
					M _{0,max}					45.0	52.9			
					M _{max}					45.0	73.8			
					n _{eto}					1126	788			
14L32-	17.2	3225	15.0	5.80	M ₀					15.2	27.4	28.0	28.0	
					M _N					14.9	17.2	17.2	17.2	
					M _{0,max}					23.5	28.3	37.6	52.9	
					M _{max}					23.5	41.0	53.9	73.9	
					n _{eto}					3953	2608	2096	1672	
14P14-	30.0	1350	10.8	4.20	M ₀					37.0	37.0	37.0		
					M _N					30.0	30.0	30.0		
					M _{0,max}					52.5	61.8	80.0		
					M _{max}					52.5	86.3	105.1		
					n _{eto}					998	668	573		

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321- E□	9322- E□	9323- E□	9324- E□	9325- E□	9326- E□	9327- E□	9328- E□	9329- E□
					I _N	1.5	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	2.3	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
14P32-	21.0	3225	15.6	7.10	M ₀					19.8	35.8	37.0	37.0	
					M _N					17.5	21.0	21.0	21.0	
					M _{0,max}					27.4	33.0	43.9	61.8	
					M _{max}					27.4	47.9	63.0	86.4	
					n _{eto}					3300	2299	1829	1404	
19F14-	27.0	1425	8.6	4.00	M ₀				22.6	32.0	32.0			
					M _N				22.0	27.0	27.0			
					M _{0,max}				33.0	58.2	68.3			
					M _{max}				33.0	58.2	86.0			
					n _{eto}				1459	1056	746			
19F30-	21.0	3000	14.0	6.60	M ₀					21.0	32.0	32.0		
					M _N					19.5	21.0	21.0		
					M _{0,max}					29.2	35.2	47.2		
					M _{max}					29.2	51.5	68.3		
					n _{eto}					3352	2573	2033		
19J14-	40.0	1425	12.3	6.00	M ₀					43.6	51.0	51.0		
					M _N					40.0	40.0	40.0		
					M _{0,max}					60.8	72.4	96.0		
					M _{max}					60.8	104.5	129.0		
					n _{eto}					1376	996	839		
19J30-	29.0	3000	18.5	9.10	M ₀						39.3	51.0	51.0	51.0
					M _N						29.0	29.0	29.0	29.0
					M _{0,max}						36.8	50.2	72.4	79.5
					M _{max}						55.2	73.8	104.7	127.6
					n _{eto}						3150	2850	2162	1817
19P14-	51.0	1350	14.3	7.20	M ₀					47.5	64.0	64.0		
					M _N					46.4	51.0	51.0		
					M _{0,max}					69.5	79.6	106.7		
					M _{max}					69.5	116.7	155.5		
					n _{eto}					1400	1187	996		
19P30-	32.0	3000	19.0	10.00	M ₀						43.1	58.7	64.0	64.0
					M _N						32.0	32.0	32.0	32.0
					M _{0,max}						39.6	53.9	79.6	87.6
					M _{max}						59.3	81.2	116.9	144.3
					n _{eto}						3000	2938	2638	2298

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E□	9323-E□	9324-E□	9325-E□	9326-E□	9327-E□	9328-E□	9329-E□
					I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
12D17-	7.0	1650	3.0	1.20	M ₀	5.9	7.5	7.5					
					M _N	5.3	7.0	7.0					
					M _{0,max}	7.6	11.6	17.7					
					M _{max}	7.6	11.6	17.7					
					n _{eto}	1790	1358	919					
12D35-	6.0	3525	5.6	2.20	M ₀		4.6	7.5	7.5				
					M _N		3.7	6.0	6.0				
					M _{0,max}		5.9	10.1	17.3				
					M _{max}		5.9	10.1	17.3				
					n _{eto}		4344	3275	2116				
12H14-	12.0	1350	4.1	1.70	M ₀		10.9	12.8	12.8				
					M _N		10.3	12.0	12.0				
					M _{0,max}		15.1	25.8	29.0				
					M _{max}		15.1	25.8	29.0				
					n _{eto}		1676	1013	918				
12H34-	10.5	3375	7.5	3.70	M ₀			9.8	12.8				
					M _N			9.6	10.5				
					M _{0,max}			13.5	24.1				
					M _{max}			13.5	24.1				
					n _{eto}			3618	2447				
12L17-	17.0	1650	6.7	2.90	M ₀			18.5	19.0				
					M _N			17.0	17.0				
					M _{0,max}			24.4	41.9				
					M _{max}			24.4	41.9				
					n _{eto}			1718	1158				
12L39-	14.0	3900	11.7	5.70	M ₀				17.2	19.0	19.0		
					M _N				14.0	14.0	14.0		
					M _{0,max}				22.8	27.0	35.5		
					M _{max}				22.8	38.5	49.6		
					n _{eto}				4287	2799	2236		
14D14-	12.0	1350	5.4	1.70	M ₀		8.5	12.5	12.5				
					M _N		8.0	12.0	12.0				
					M _{0,max}		12.1	20.2	29.0				
					M _{max}		12.1	20.2	29.0				
					n _{eto}		1437	928	676				
14D30-	10.5	3000	9.7	3.30	M ₀			7.7	12.5	12.5			
					M _N			7.0	10.0	10.0			
					M _{0,max}			10.9	19.0	22.2			
					M _{max}			10.9	19.0	29.0			
					n _{eto}			3479	2159	1593			
14H12-	23.5	1200	8.3	3.00	M ₀			17.3	25.5				
					M _N			17.2	23.5				
					M _{0,max}			25.4	43.9				
					M _{max}			25.4	43.9				
					n _{eto}			1247	800				

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E□	9323-E□	9324-E□	9325-E□	9326-E□	9327-E□	9328-E□	9329-E□
					I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
					I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
MCS	M _N	n _N	I _N	P _N									
14H28-	20.5	2775	15.0	6.00	M ₀				16.2	25.5	25.5		
					M _N				16.1	20.5	20.5		
					M _{0,max}				23.8	28.2	37.1		
					M _{max}				23.8	40.2	51.9		
					n _{eto}				2875	1817	1471		
14L14-	30.5	1350	11.8	4.30	M ₀				33.4	34.5			
					M _N				30.5	30.5			
					M _{0,max}				45.0	52.9			
					M _{max}				45.0	73.8			
					n _{eto}				1126	788			
14L30-	25.5	3000	20.8	8.00	M ₀					27.4	34.5	34.5	
					M _N					25.5	25.5	25.5	
					M _{0,max}					28.3	37.6	52.9	
					M _{max}					41.0	53.9	73.9	
					n _{eto}					2608	2096	1672	
14P11-	42.0	1050	13.4	4.60	M ₀				40.1	43.5	43.5		
					M _N				40.0	42.0	42.0		
					M _{0,max}				52.5	61.8	80.0		
					M _{max}				52.5	86.3	105.1		
					n _{eto}				998	668	573		
14P26-	33.0	2625	21.9	9.10	M ₀					35.8	43.5	43.5	
					M _N					33.0	33.0	33.0	
					M _{0,max}					33.0	43.9	61.8	
					M _{max}					47.9	63.0	86.4	
					n _{eto}					2299	1829	1404	
19F12-	38.0	1200	11.3	4.80	M ₀			22.6	41.5	41.5			
					M _N			22.0	38.0	38.0			
					M _{0,max}			33.0	58.2	68.3			
					M _{max}			33.0	58.2	86.0			
					n _{eto}			1459	1056	746			
19F29-	32.5	2850	20.1	9.70	M ₀					39.9	41.5		
					M _N					32.5	32.5		
					M _{0,max}					35.2	47.2		
					M _{max}					51.5	68.3		
					n _{eto}					2573	2033		
19J12-	62.5	1200	18.3	7.90	M ₀				43.6	70.5	70.5		
					M _N				43.4	62.5	62.5		
					M _{0,max}				60.8	72.4	96.0		
					M _{max}				60.8	104.5	129.0		
					n _{eto}				1376	996	839		
19J29-	50.5	2850	31.0	15.10	M ₀						55.5	70.5	70.5
					M _N						50.5	50.5	50.5
					M _{0,max}						50.2	72.4	79.5
					M _{max}						73.8	104.7	127.6
					n _{eto}						2850	2162	1817

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E□	9323-E□	9324-E□	9325-E□	9326-E□	9327-E□	9328-E□	9329-E□
					I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
19P12-	72.0	1200	21.3	9.00	M ₀				47.5	86.0	86.0		
					M _N				46.4	72.0	72.0		
					M _{0,max}				69.5	79.6	106.7		
					M _{max}				69.5	116.7	155.5		
					n _{eto}				1400	1187	996		
19P29-	53.0	2850	29.5	15.80	M ₀						58.7	86.0	86.0
					M _N						53.0	53.0	53.0
					M _{0,max}						53.9	79.6	87.6
					M _{max}						81.2	116.9	144.3
					n _{eto}						2938	2638	2298

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06C41- (non-ventilated)

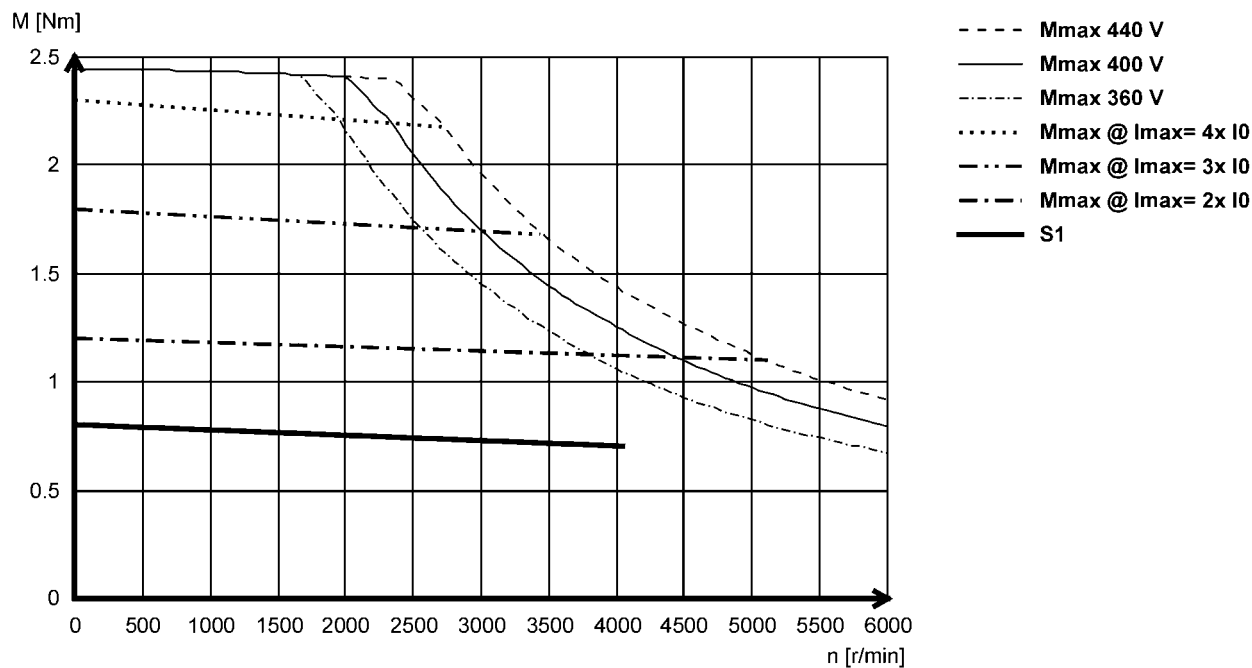

MCS06C60- (non-ventilated)

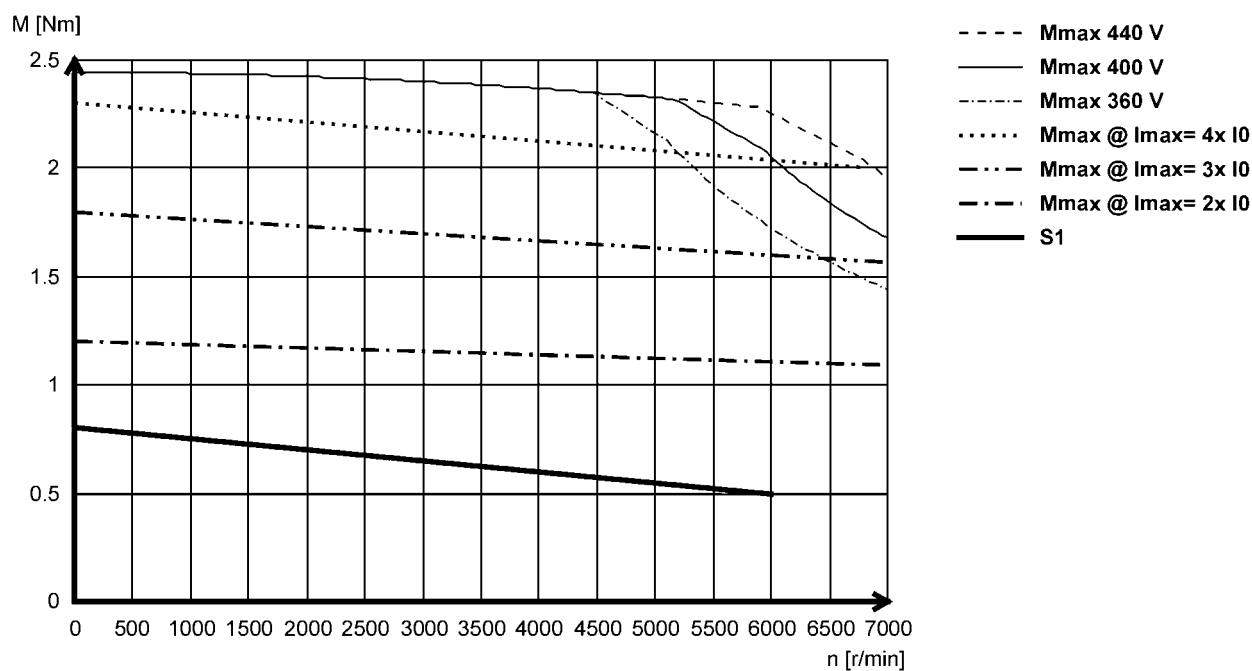

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06F41- (non-ventilated)

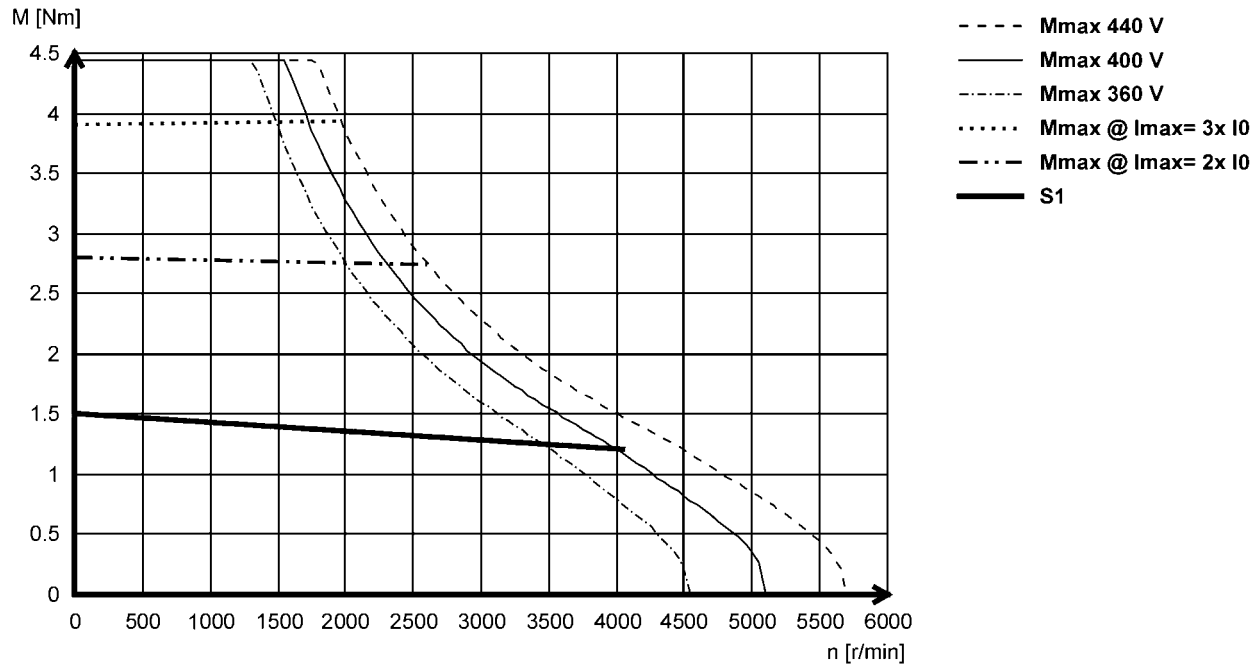

MCS06F60- (non-ventilated)

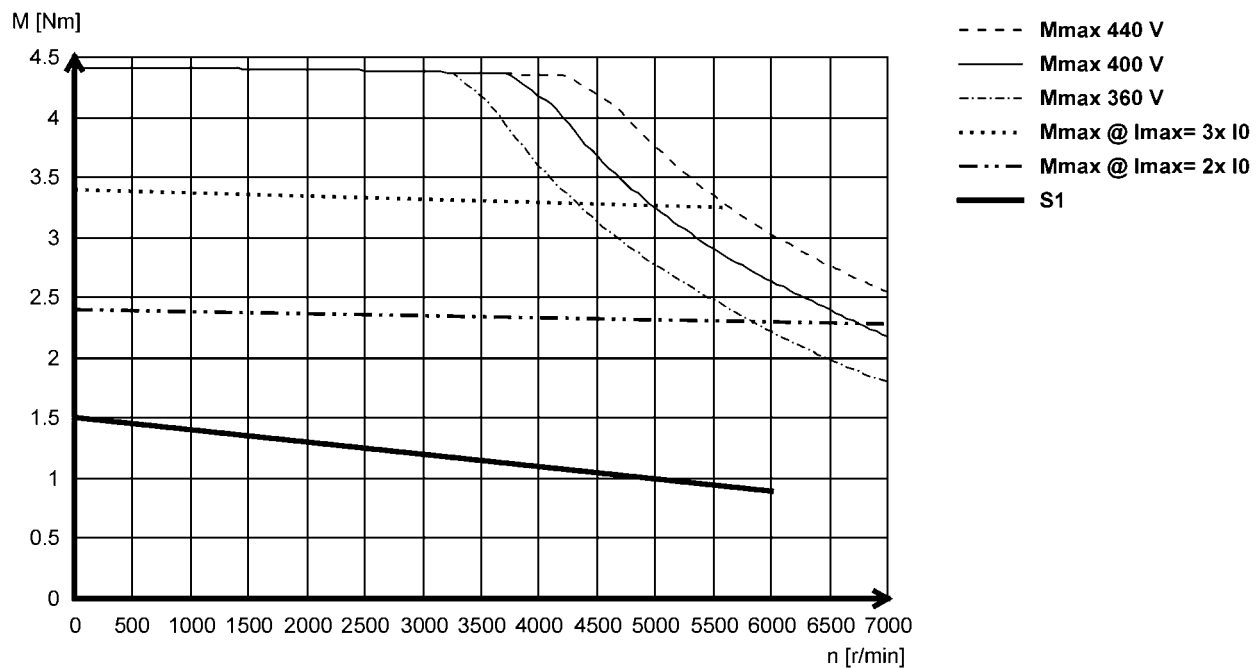

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06I41- (non-ventilated)

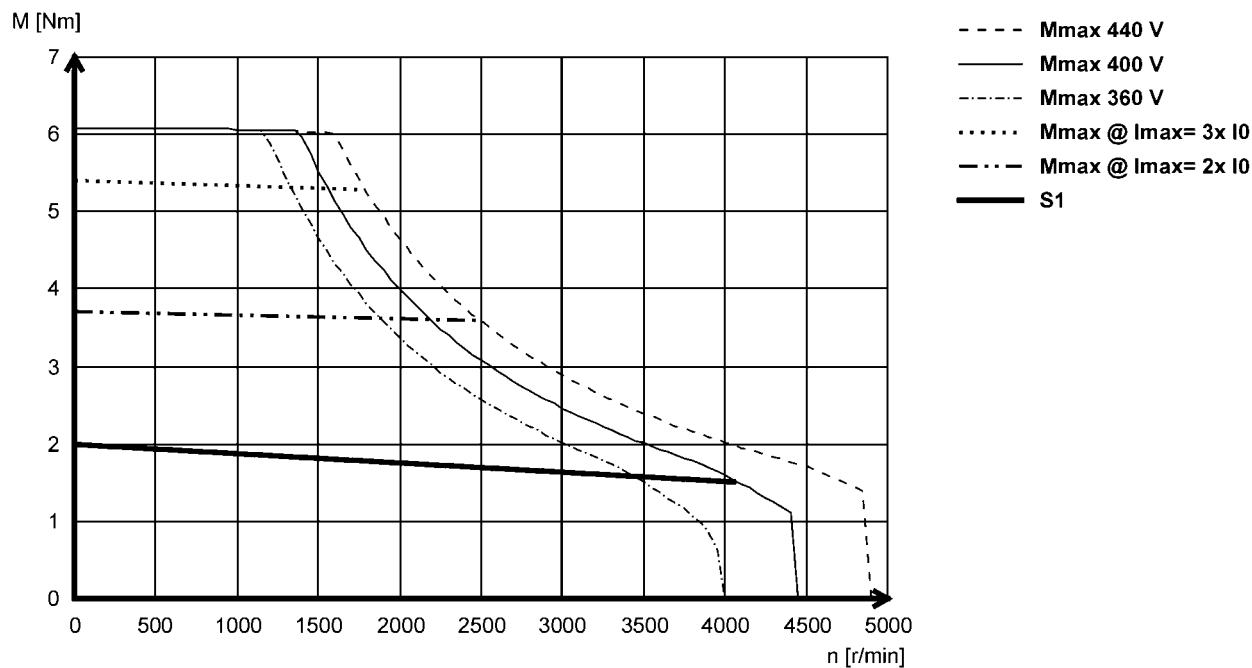

MCS06I60- (non-ventilated)

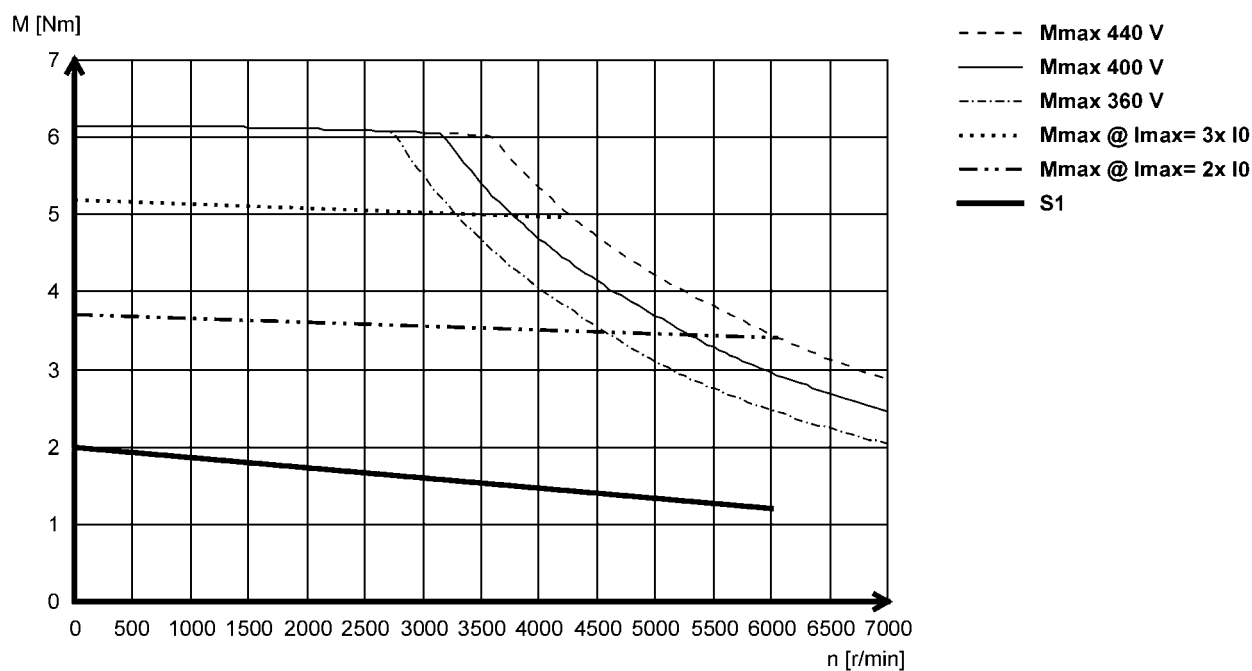

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09D41- (non-ventilated)

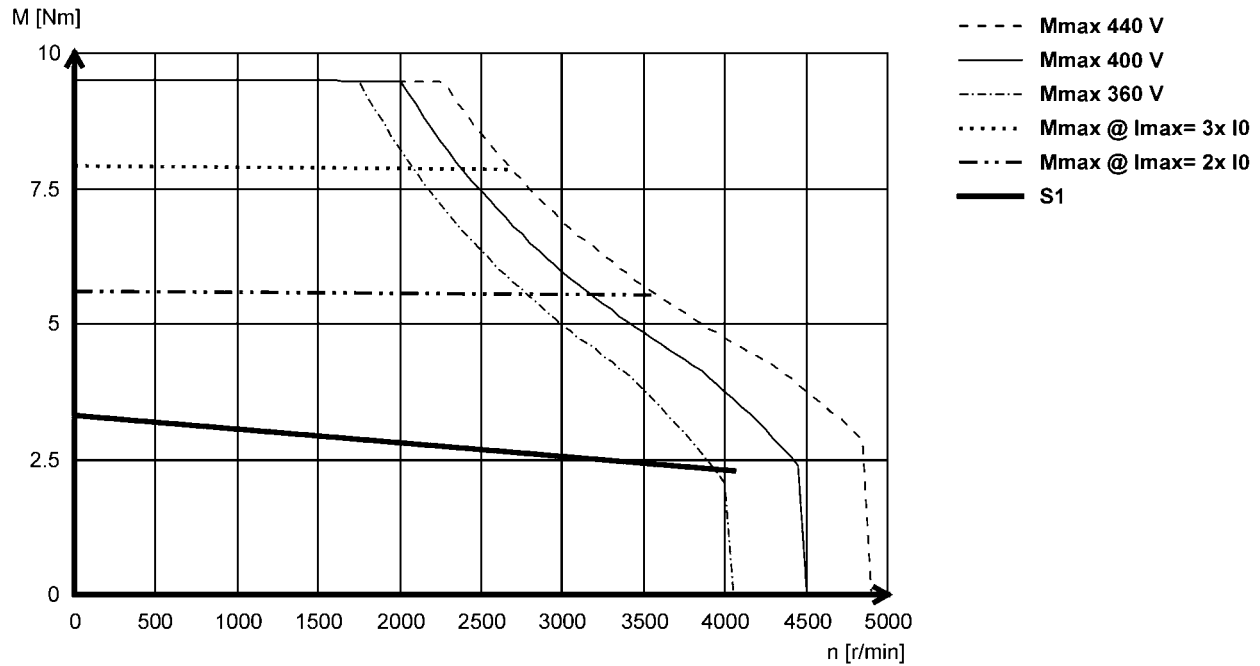

MCS09D60- (non-ventilated)

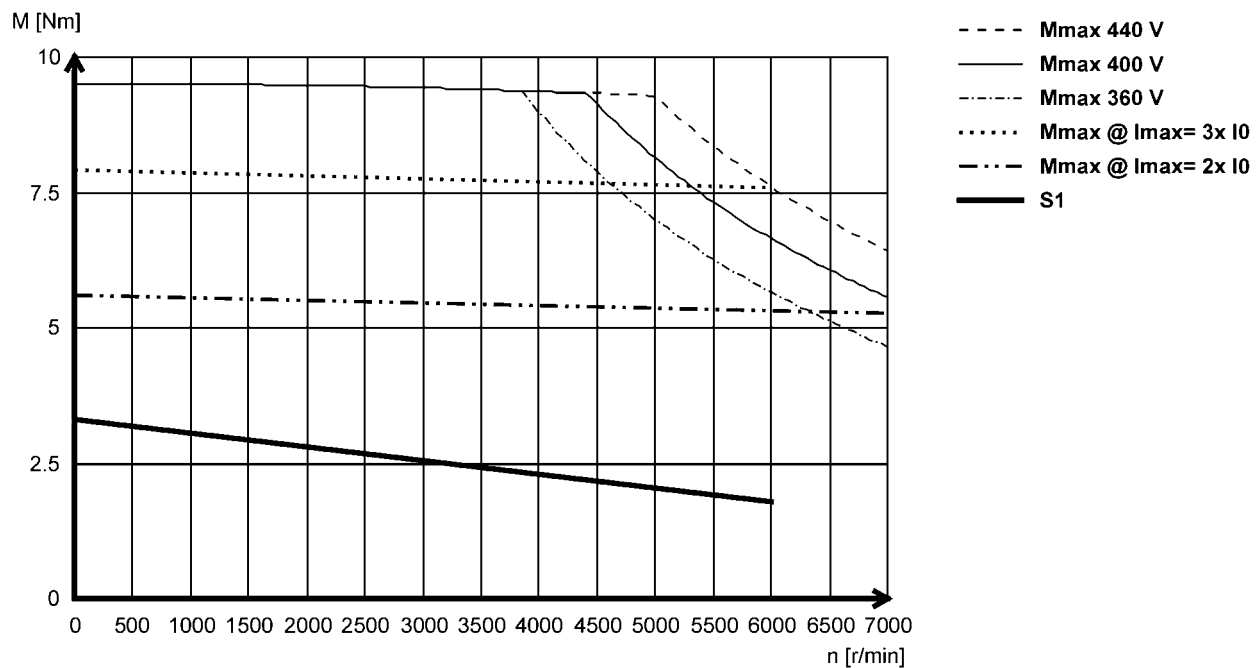

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09F38- (non-ventilated)

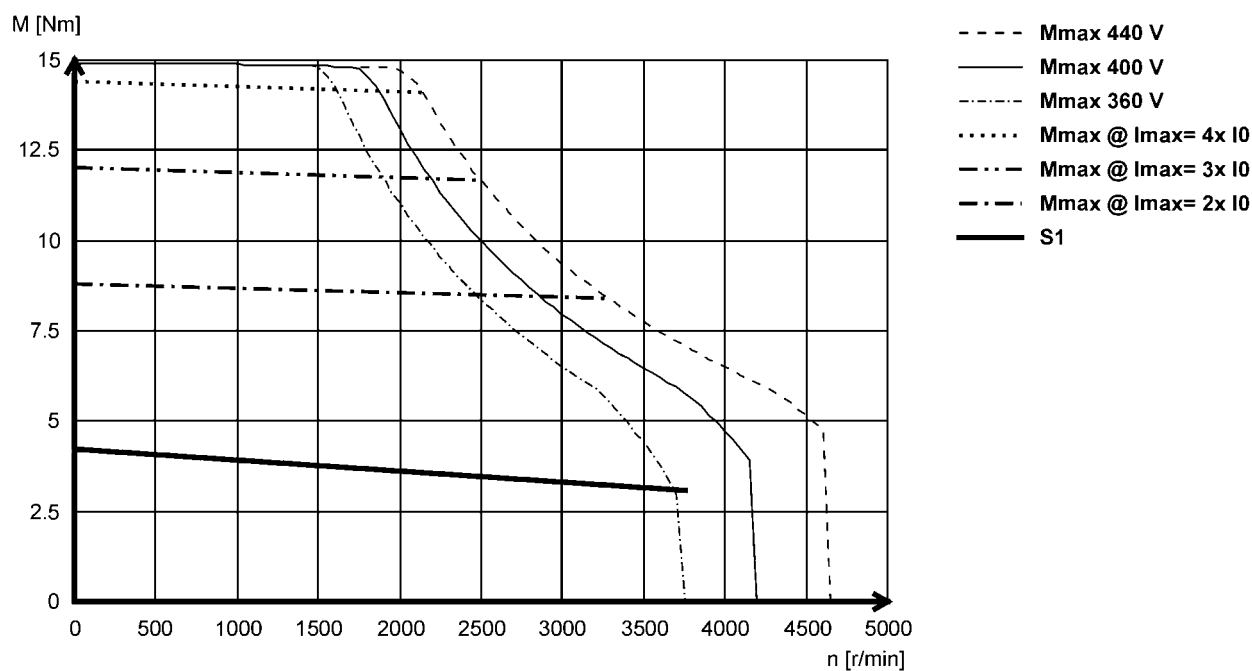

MCS09F60- (non-ventilated)

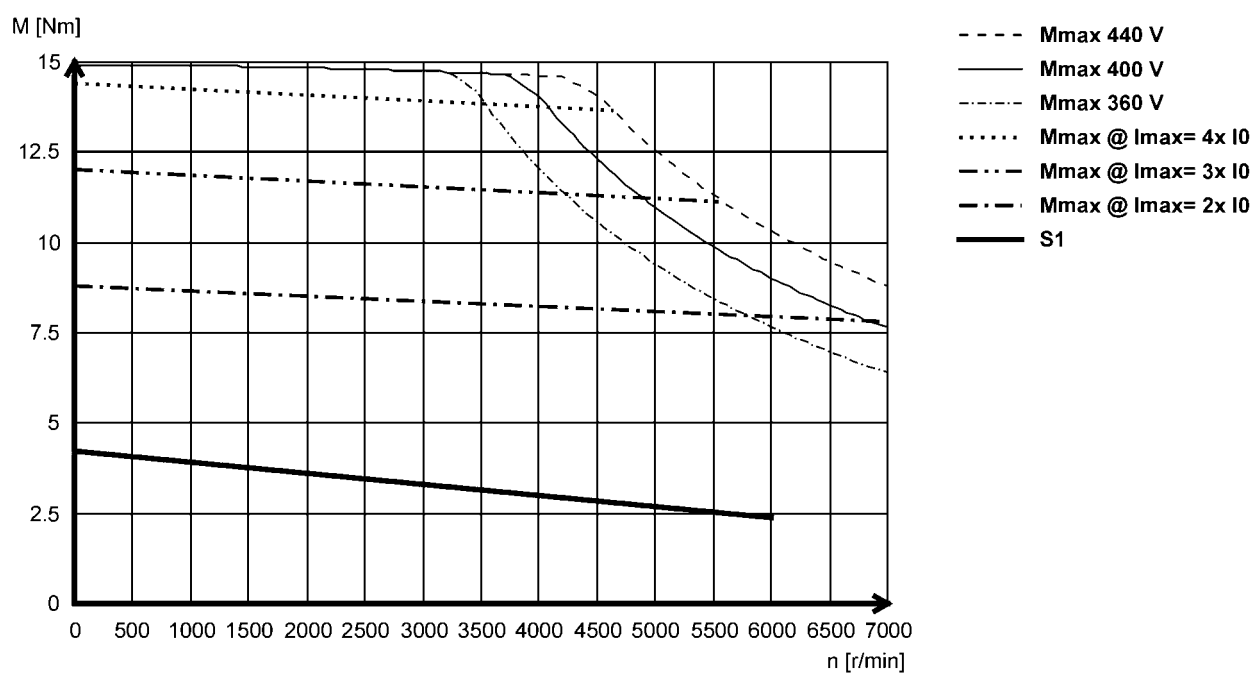

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09H41- (non-ventilated)

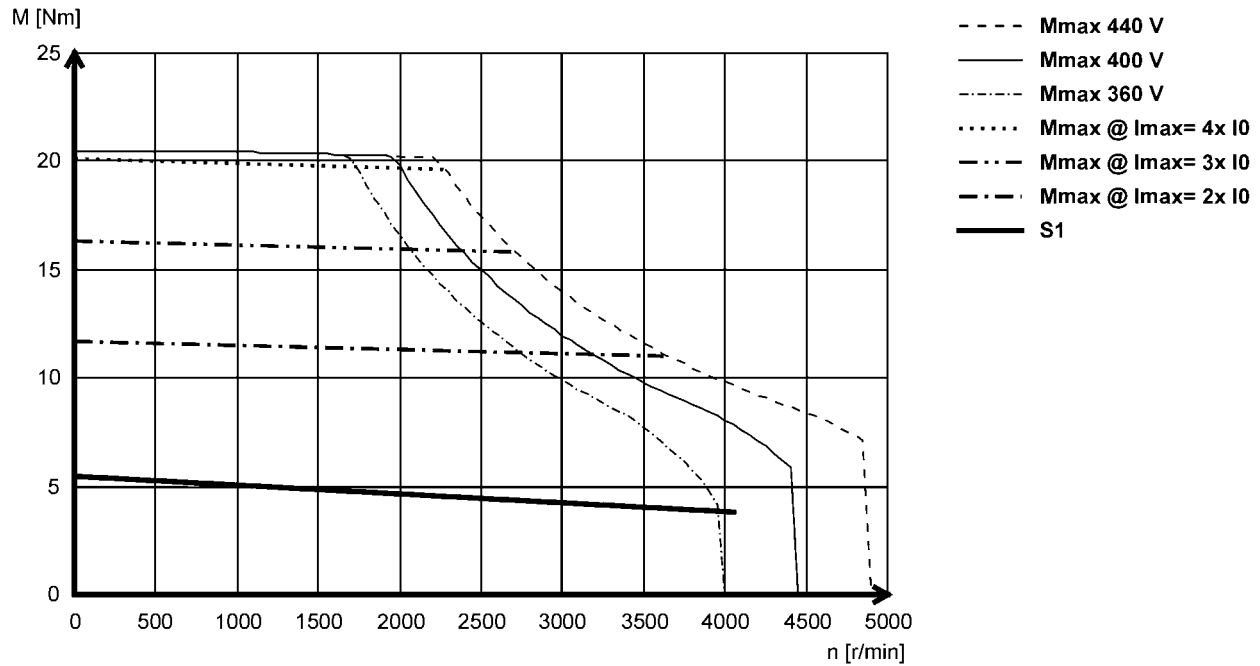

MCS09H60- (non-ventilated)

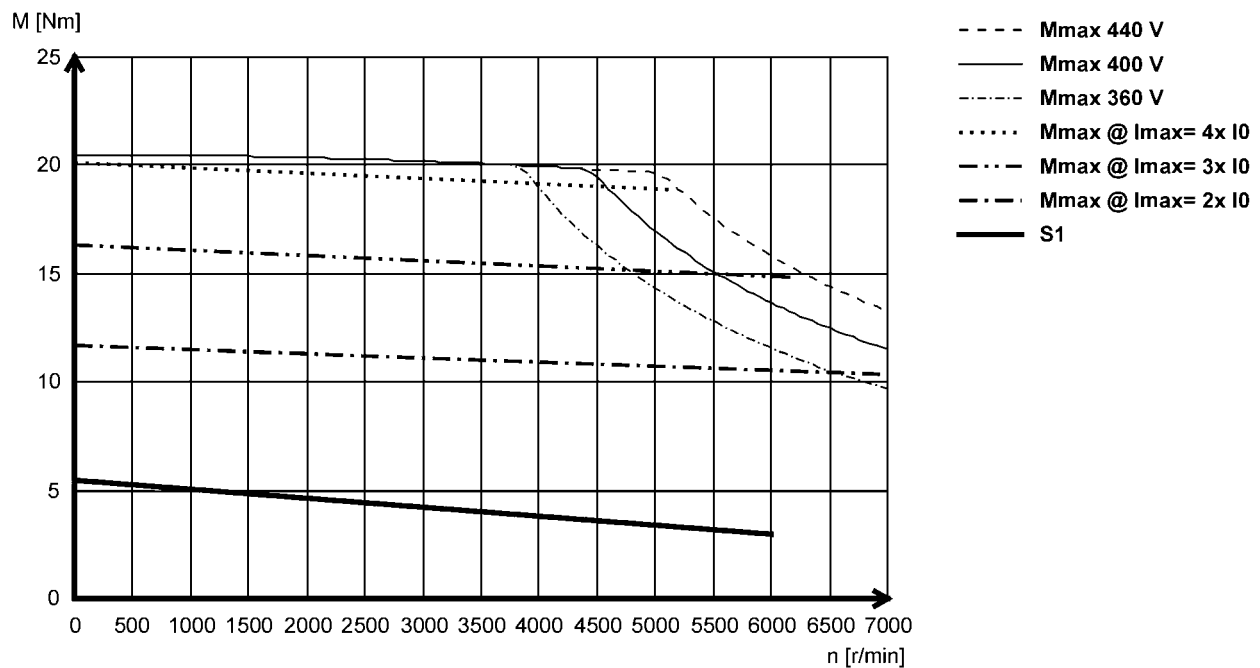

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09L41- (non-ventilated)

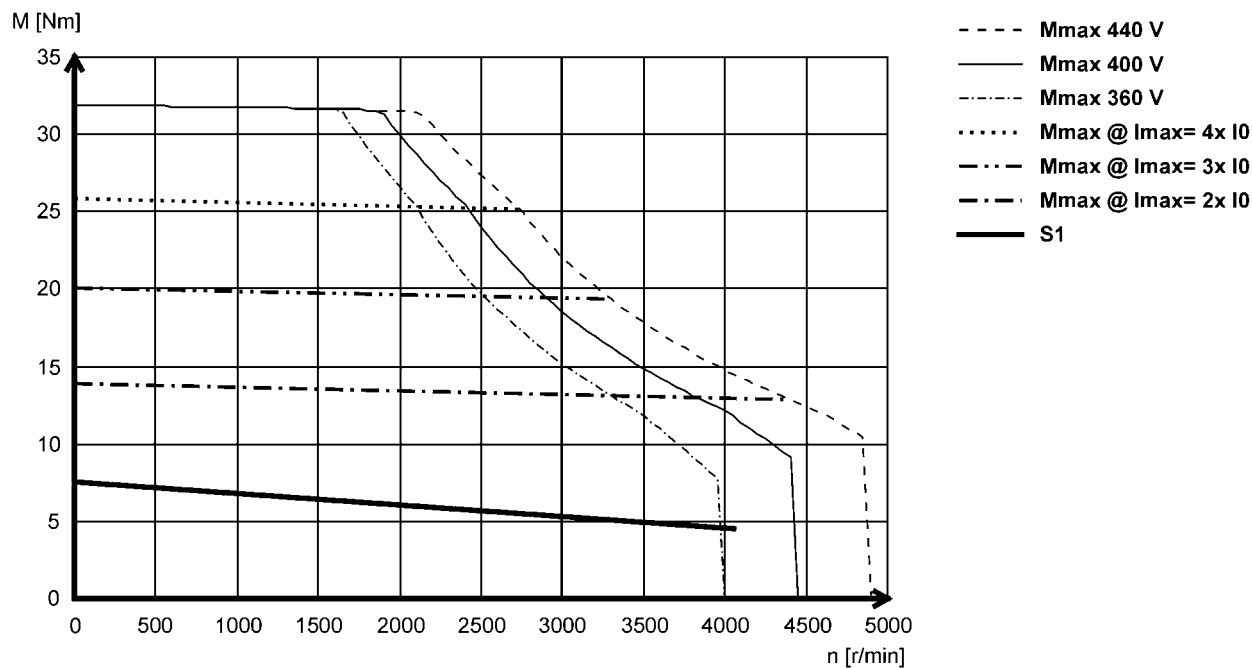

MCS09L51- (non-ventilated)

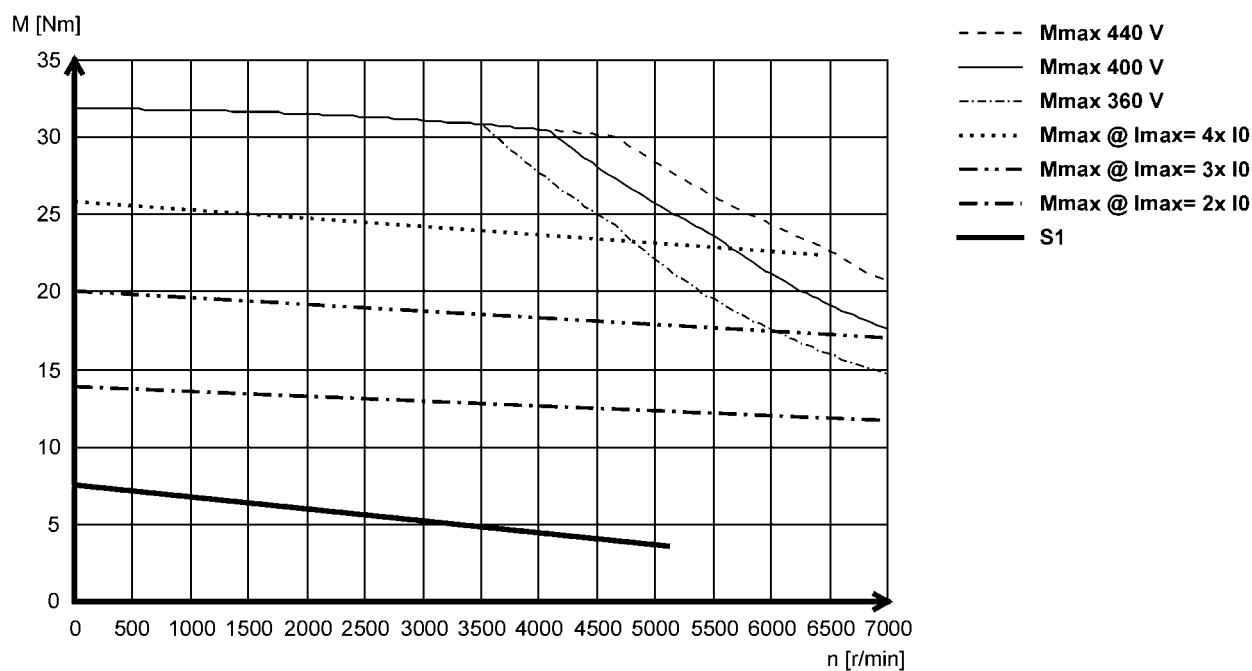

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12D17 (forced ventilated)

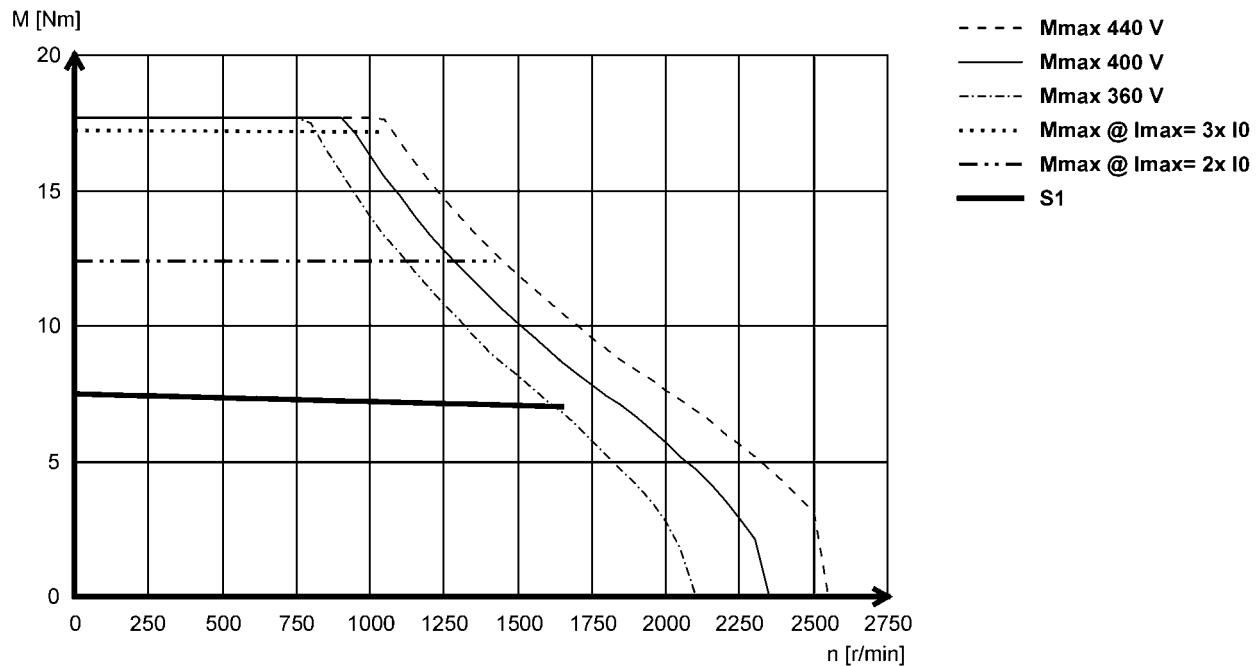

MCS12D20- (non-ventilated)

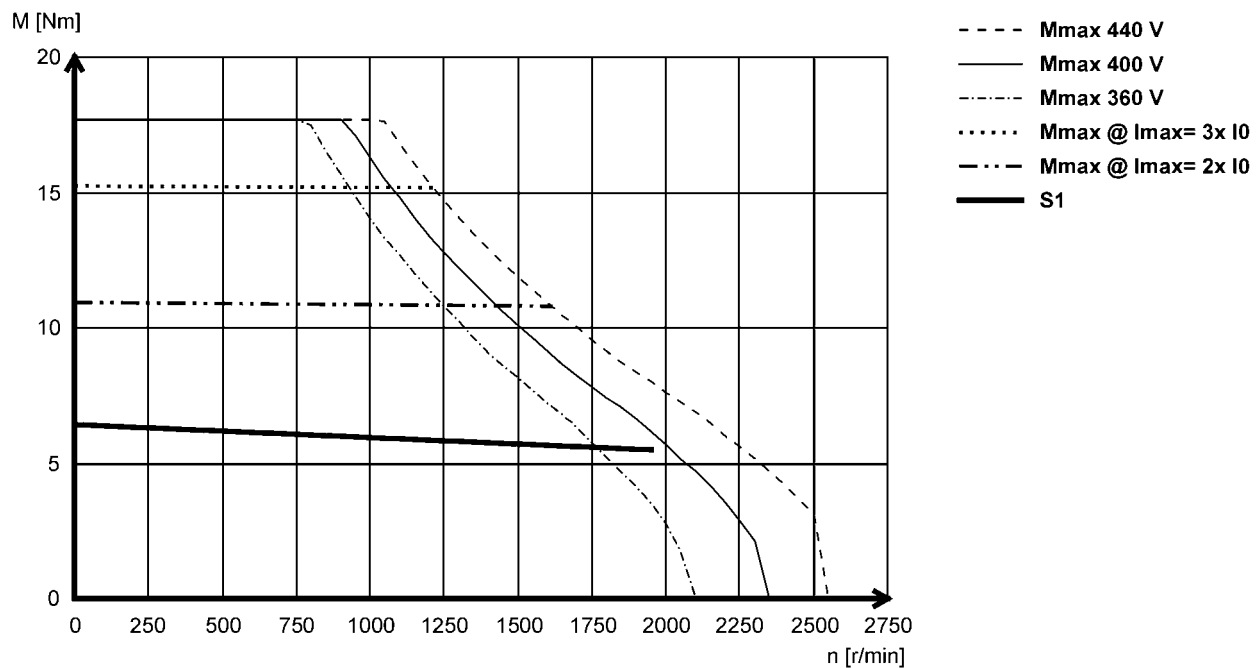

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12D35- (forced ventilated)

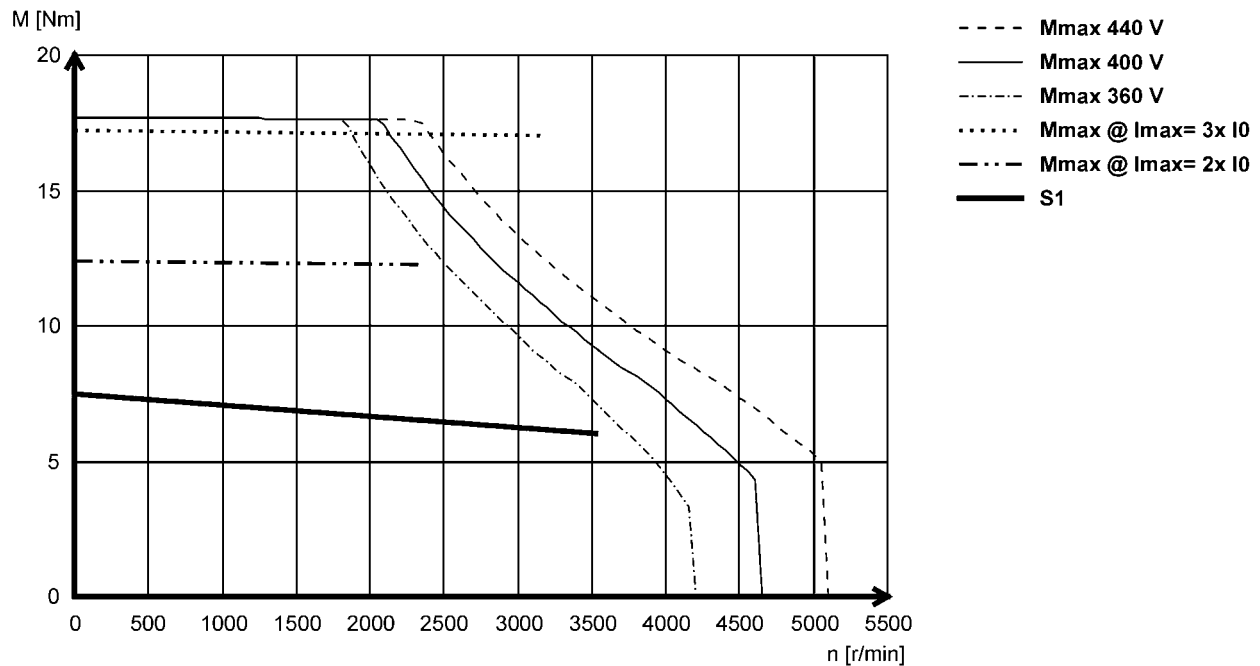

MCS12D41- (non-ventilated)

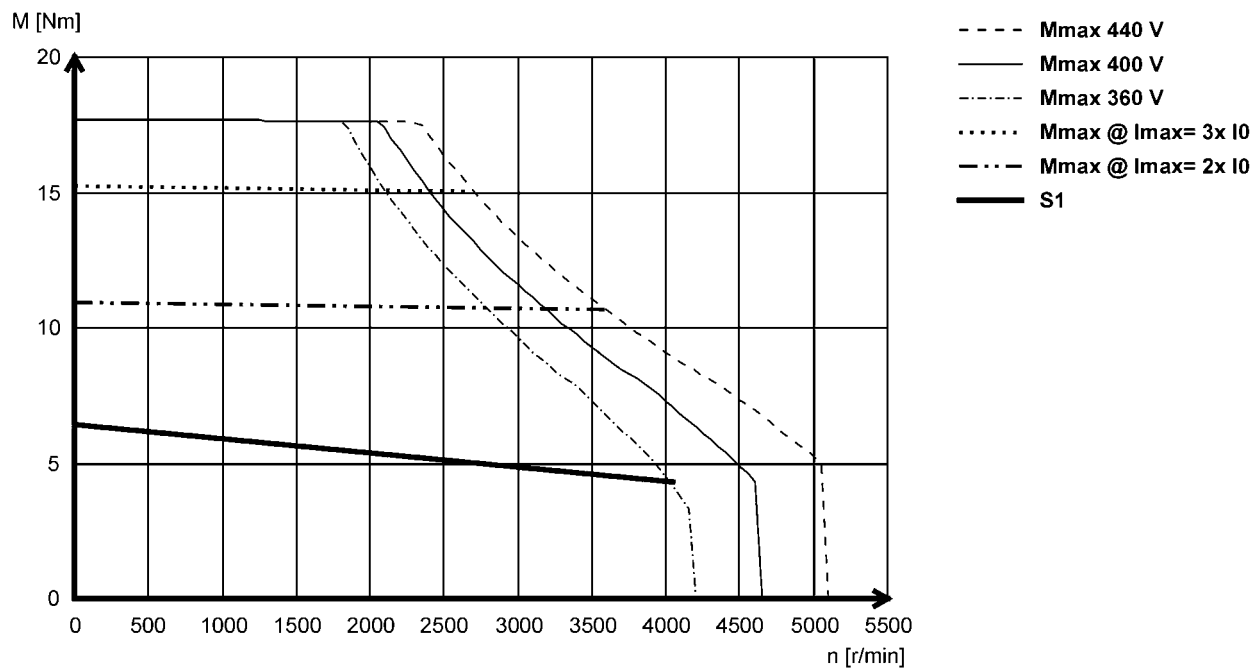

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12H14- (forced ventilated)

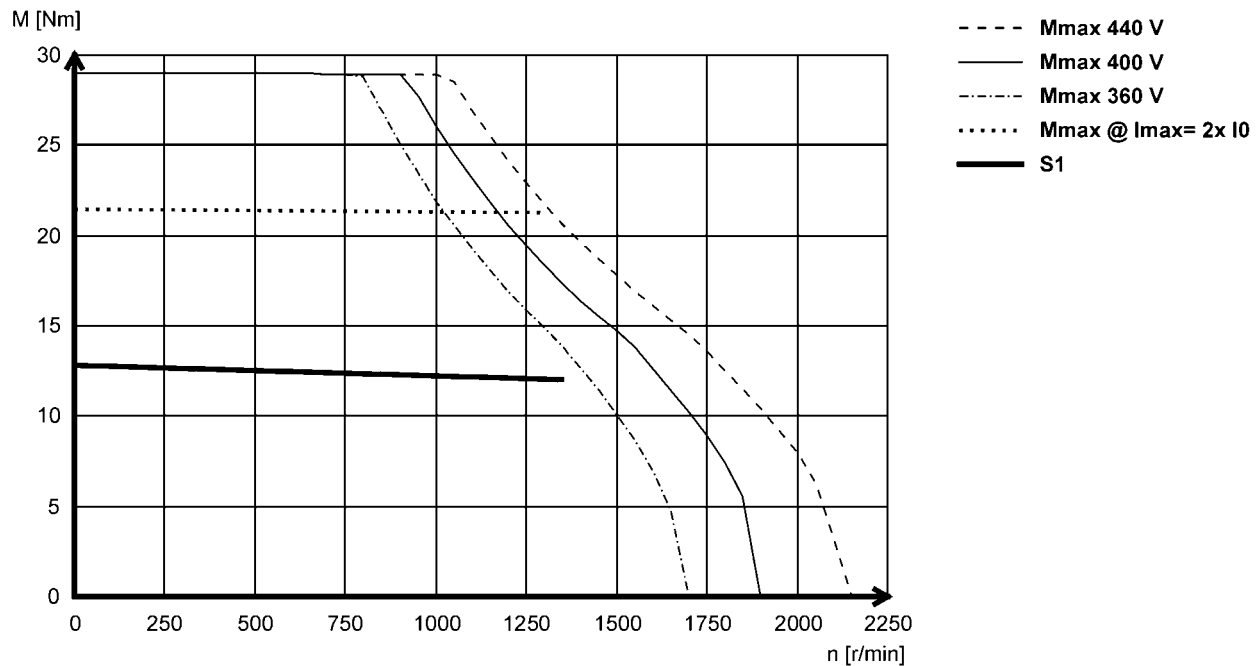

MCS12H15- (non-ventilated)

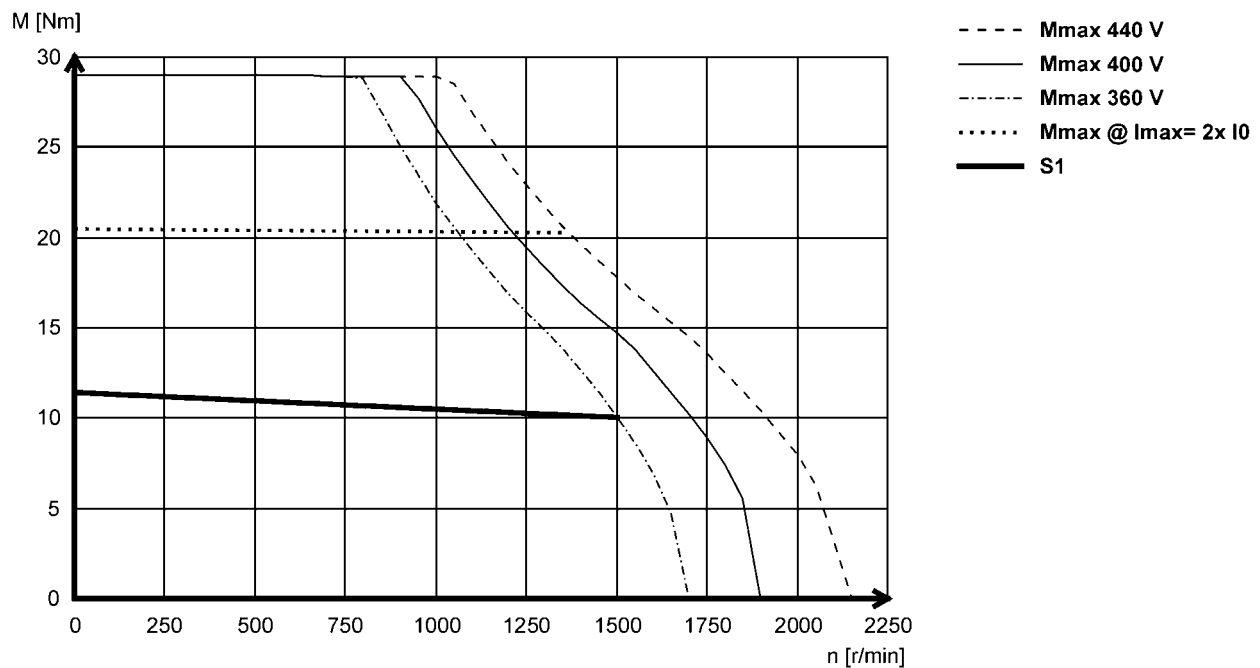

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12H34- (forced ventilated)

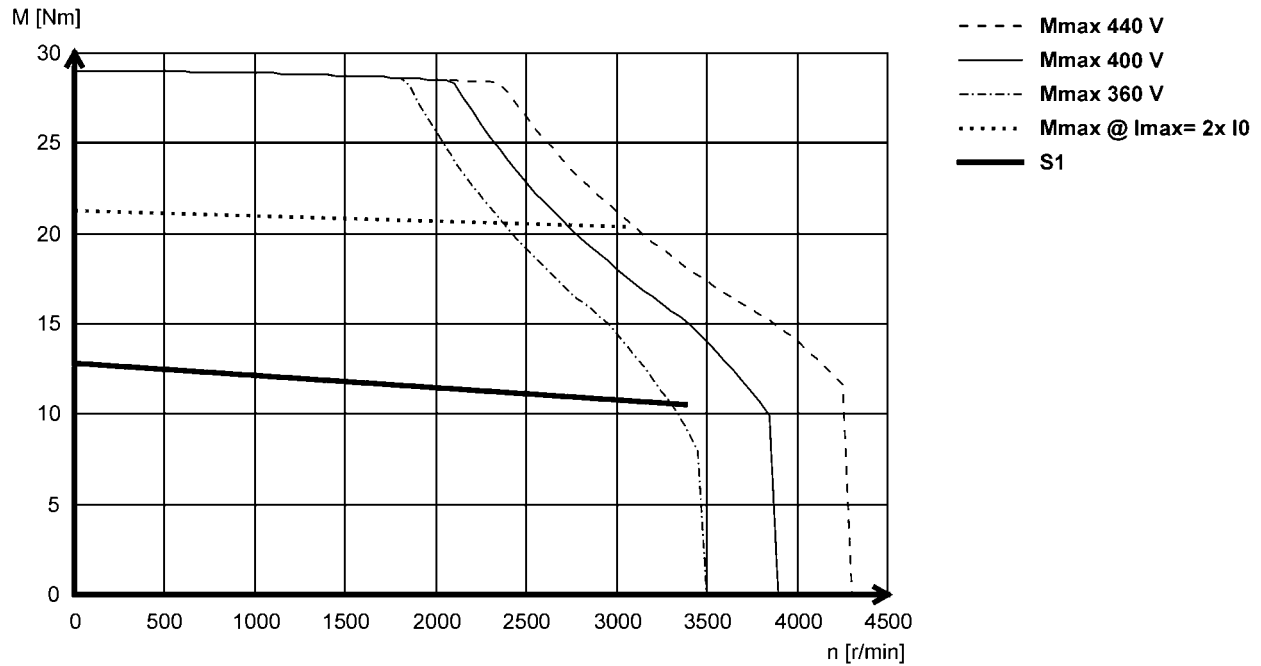

MCS12H35- (non-ventilated)

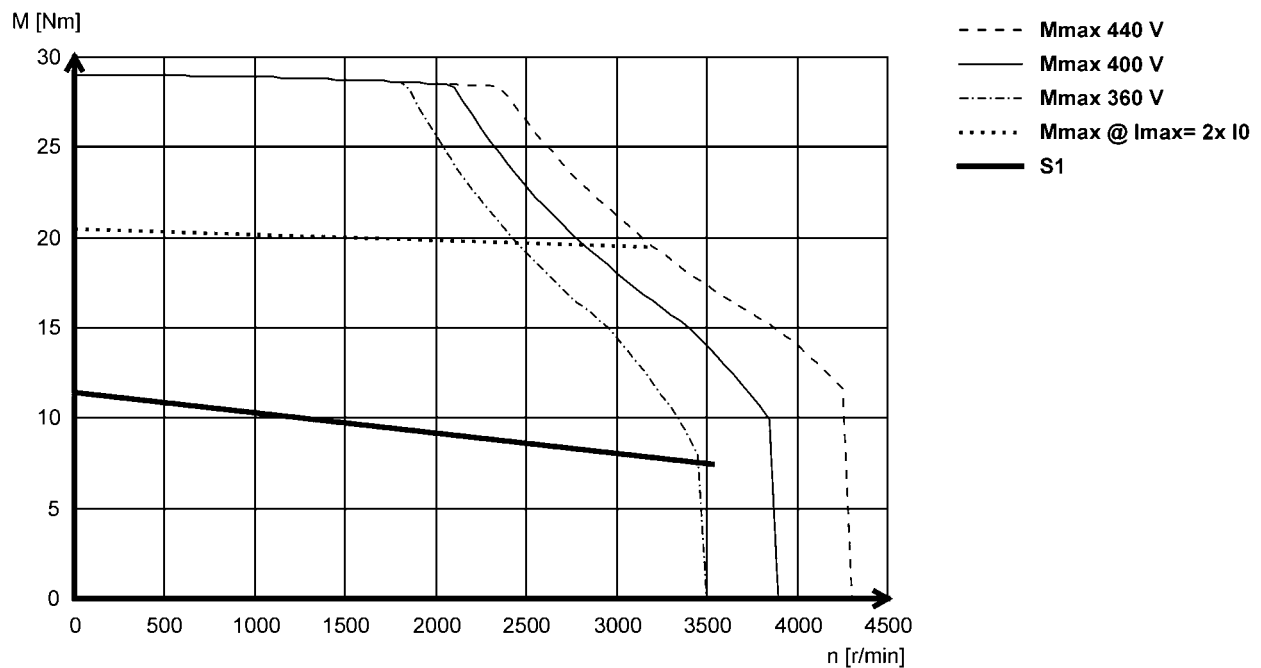

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12L17- (forced ventilated)

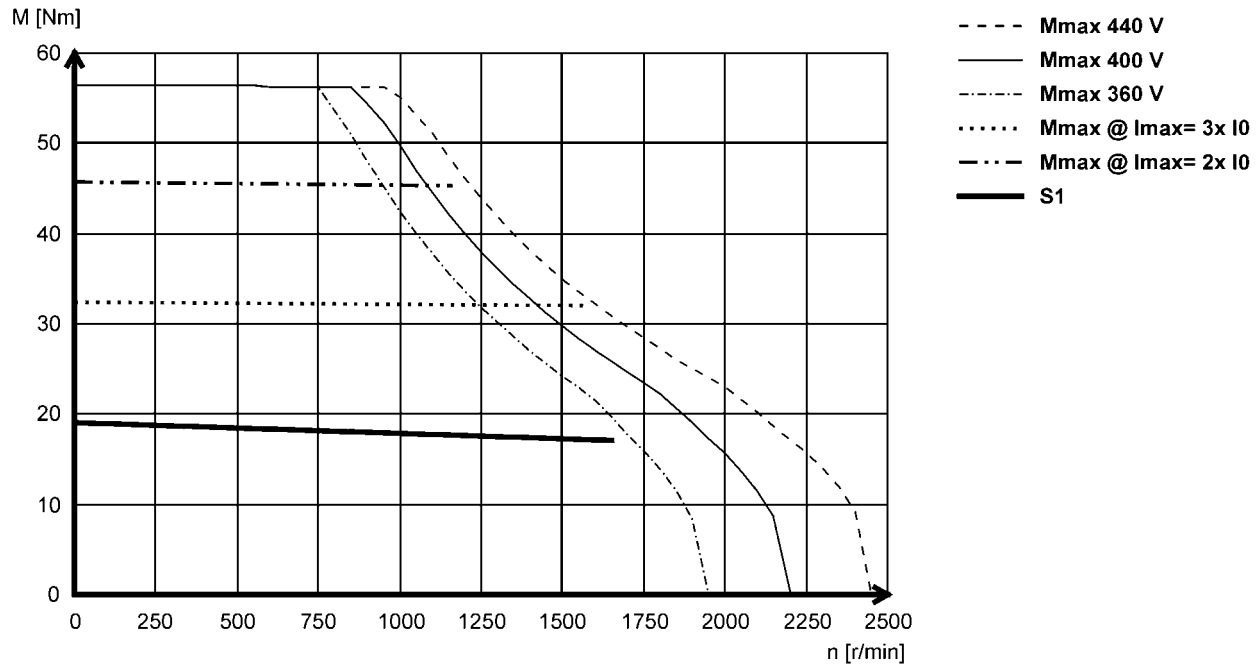

MCS12L20- (non-ventilated)

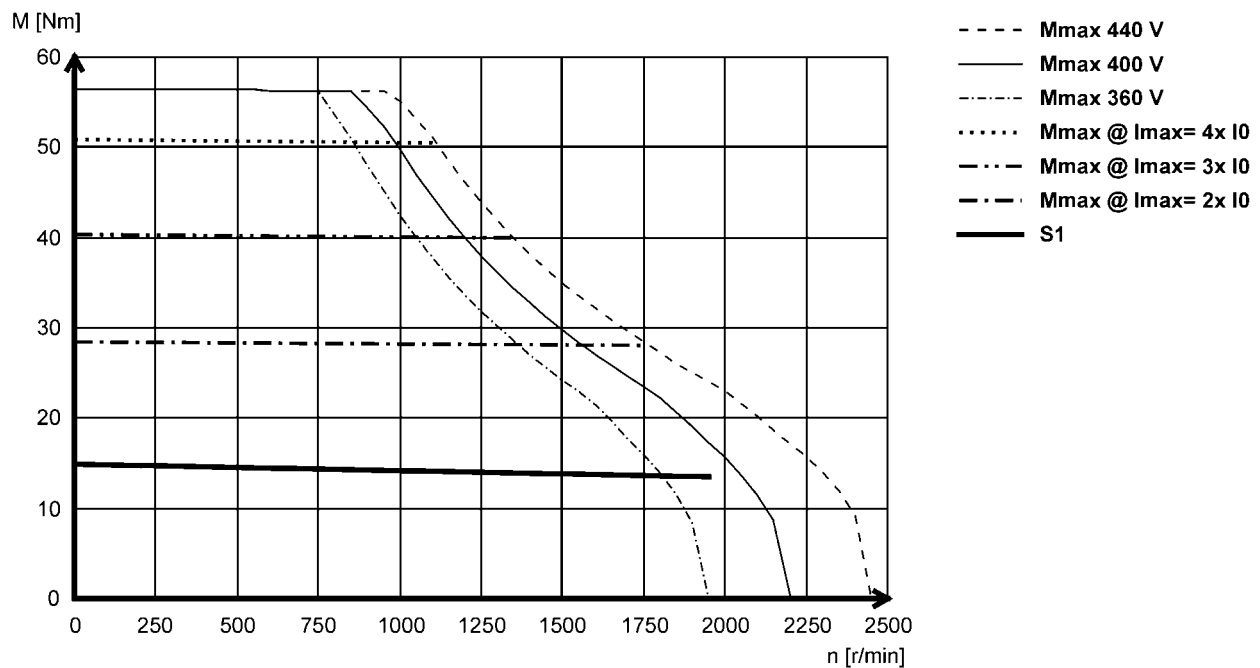

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12L39- (forced ventilated)

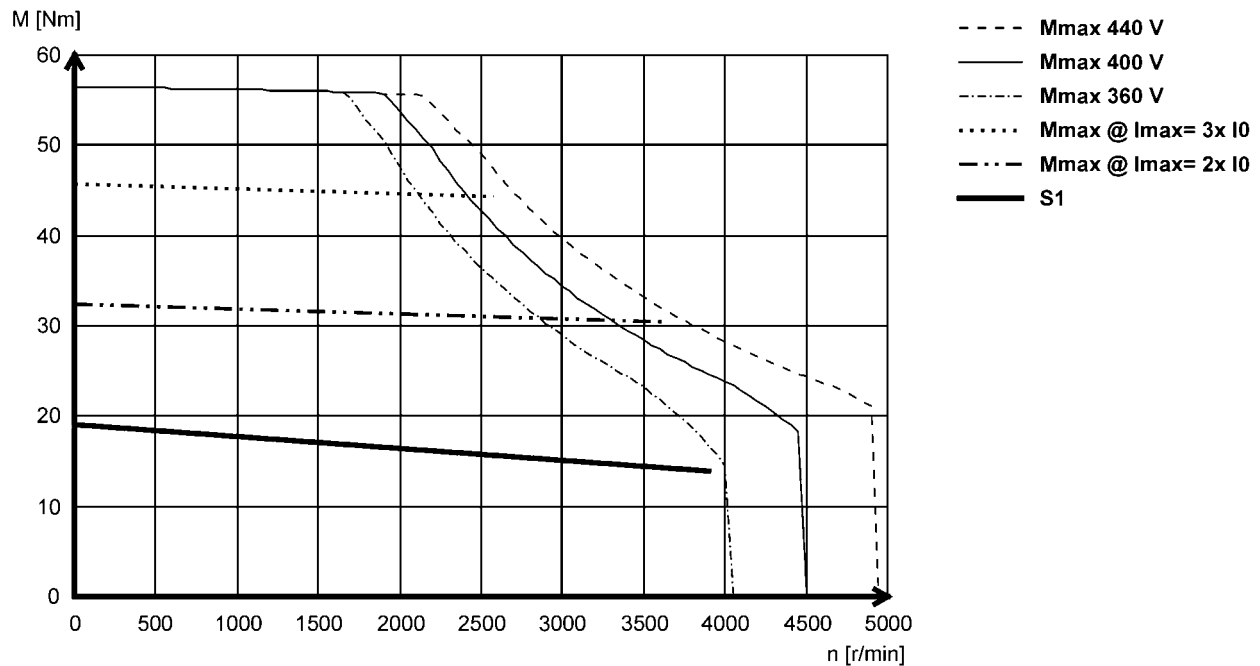

MCS12L41- (non-ventilated)

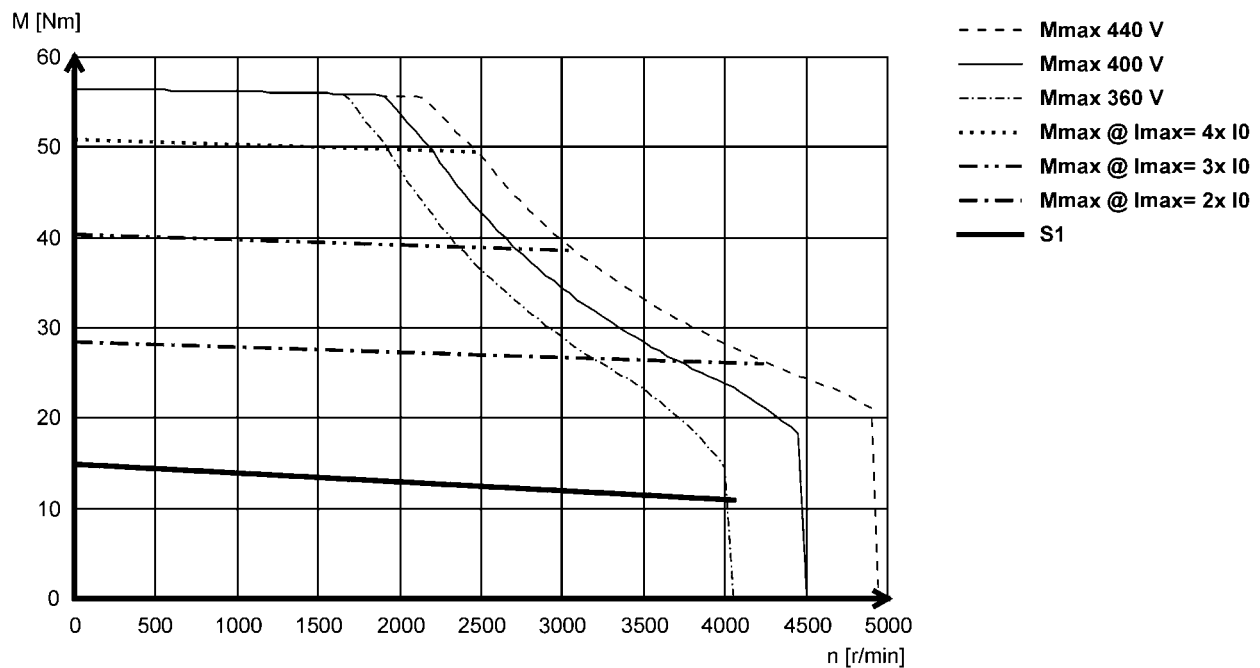

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14D14- (forced ventilated)

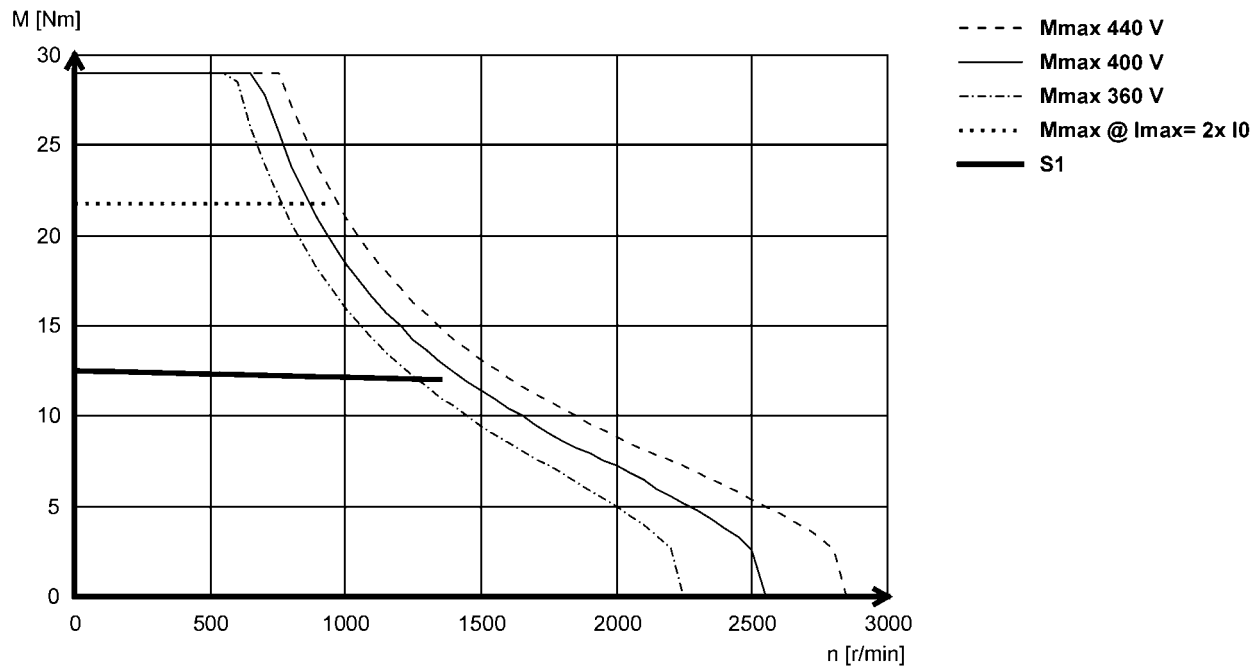

MCS14D15- (non-ventilated)

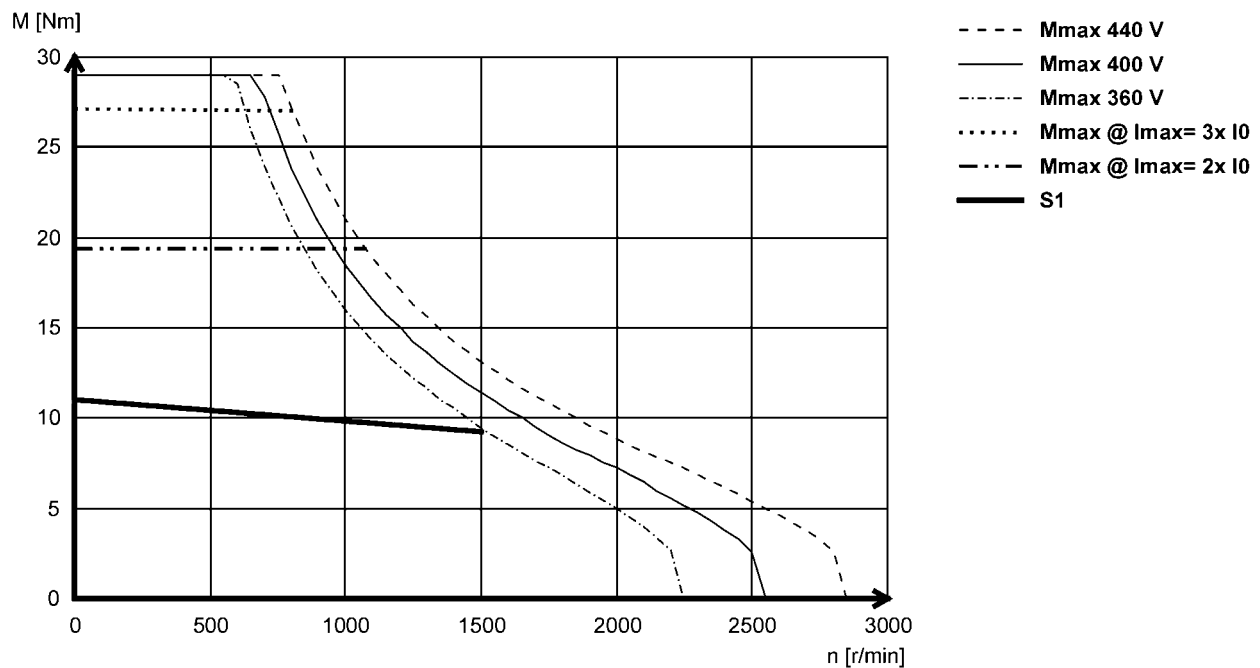

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14D30 (forced ventilated)

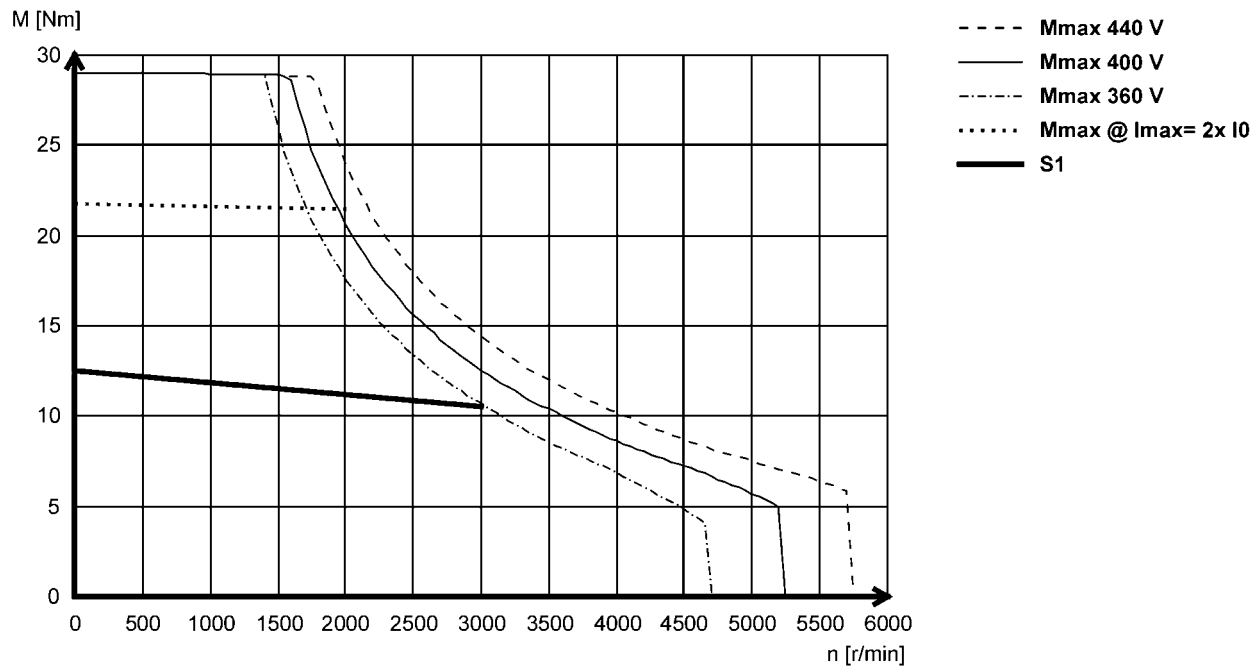

MCS14D36- (non-ventilated)

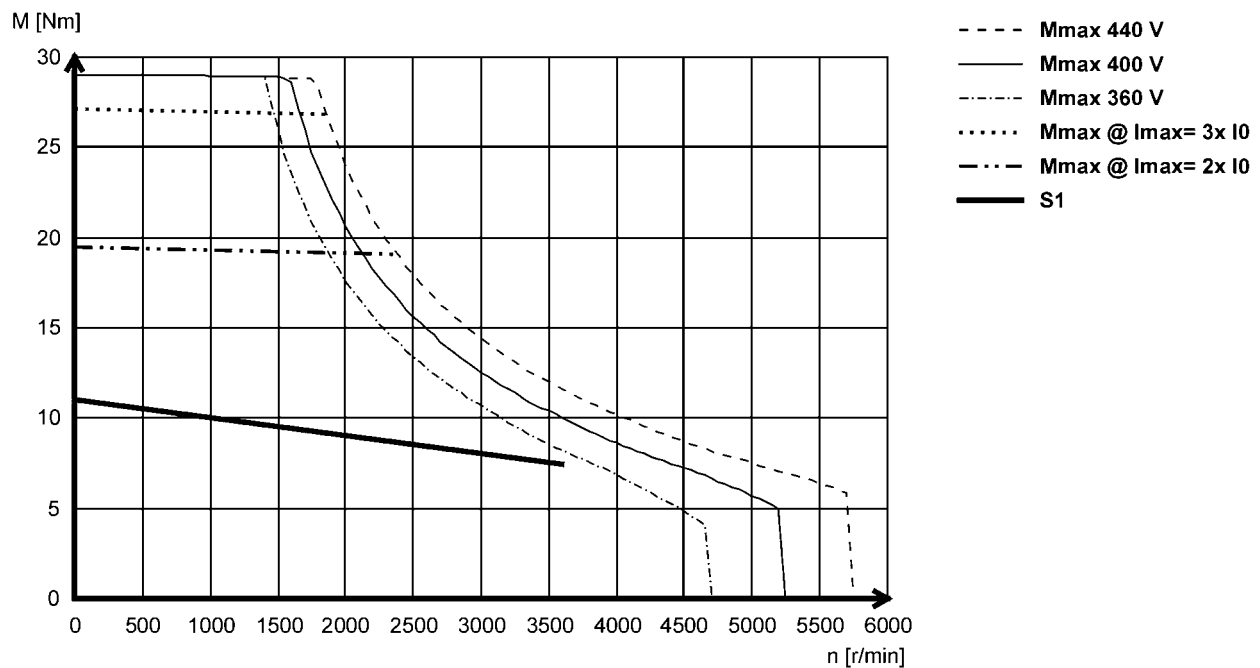

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14H12- (forced ventilated)

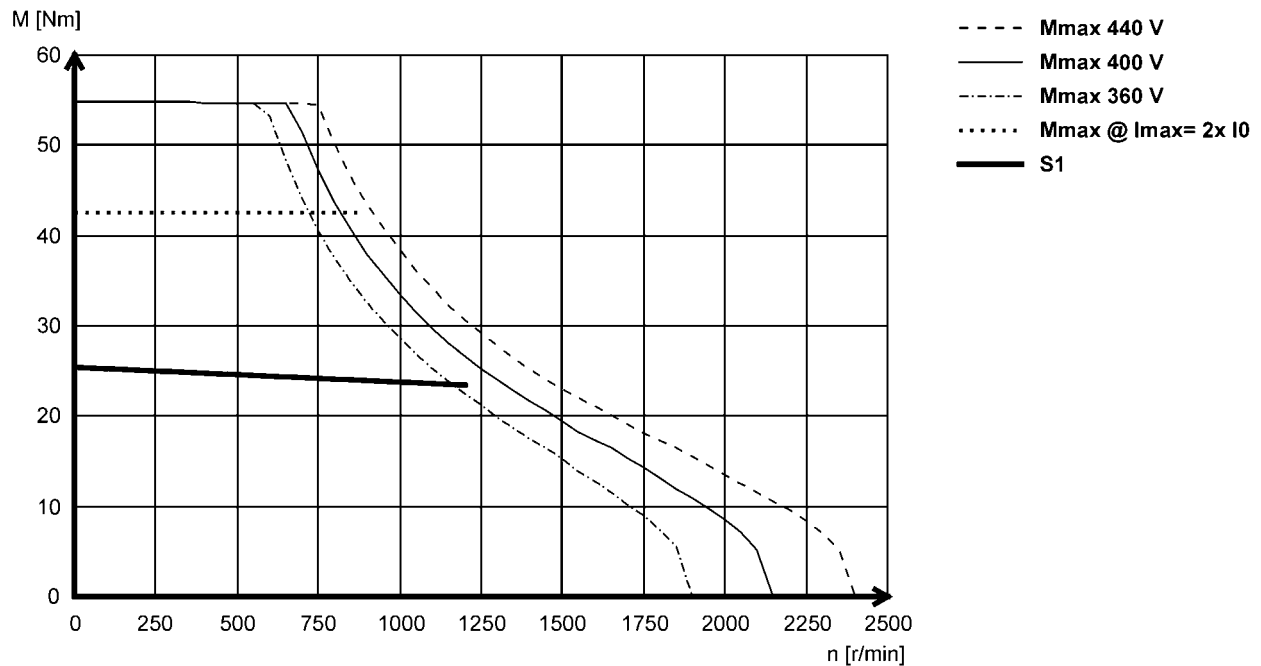

MCS14H15- (non-ventilated)

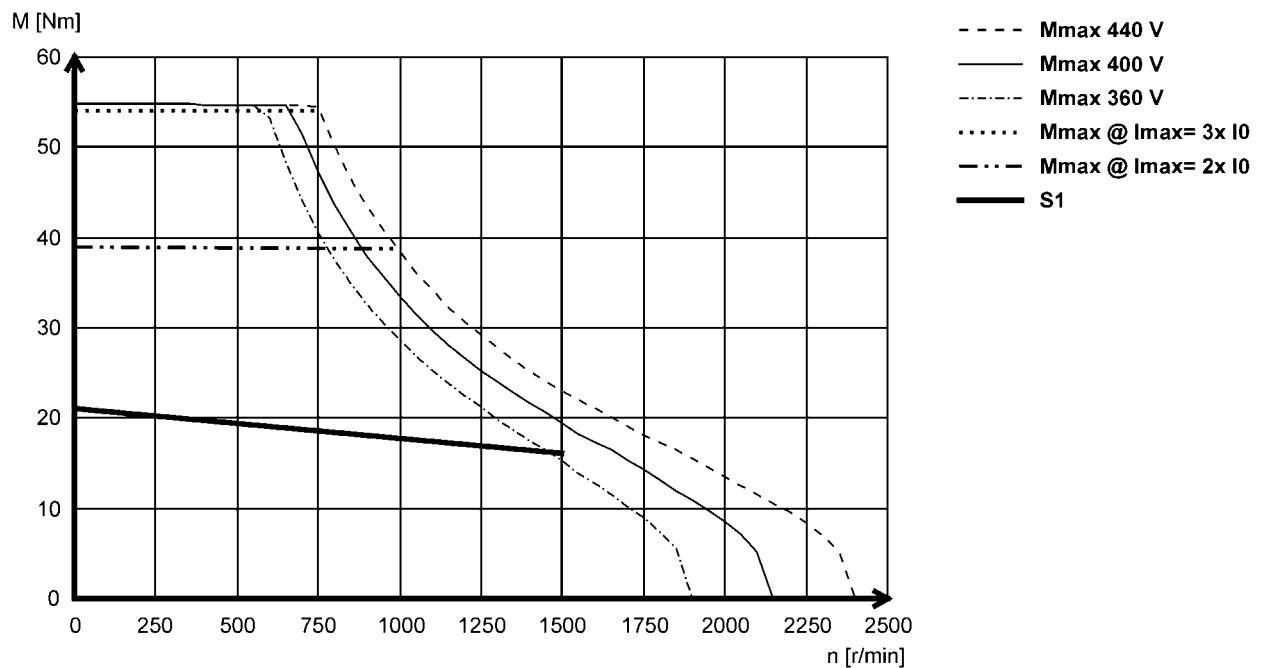

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14H28- (forced ventilated)

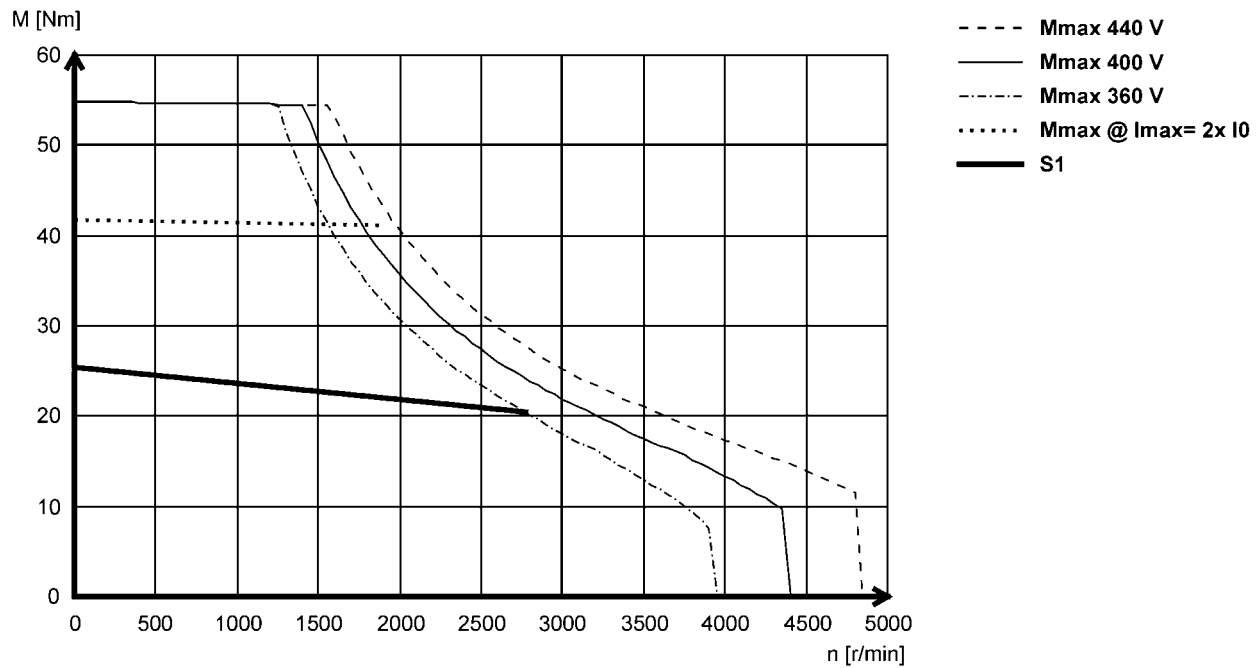

MCS14H32- (non-ventilated)

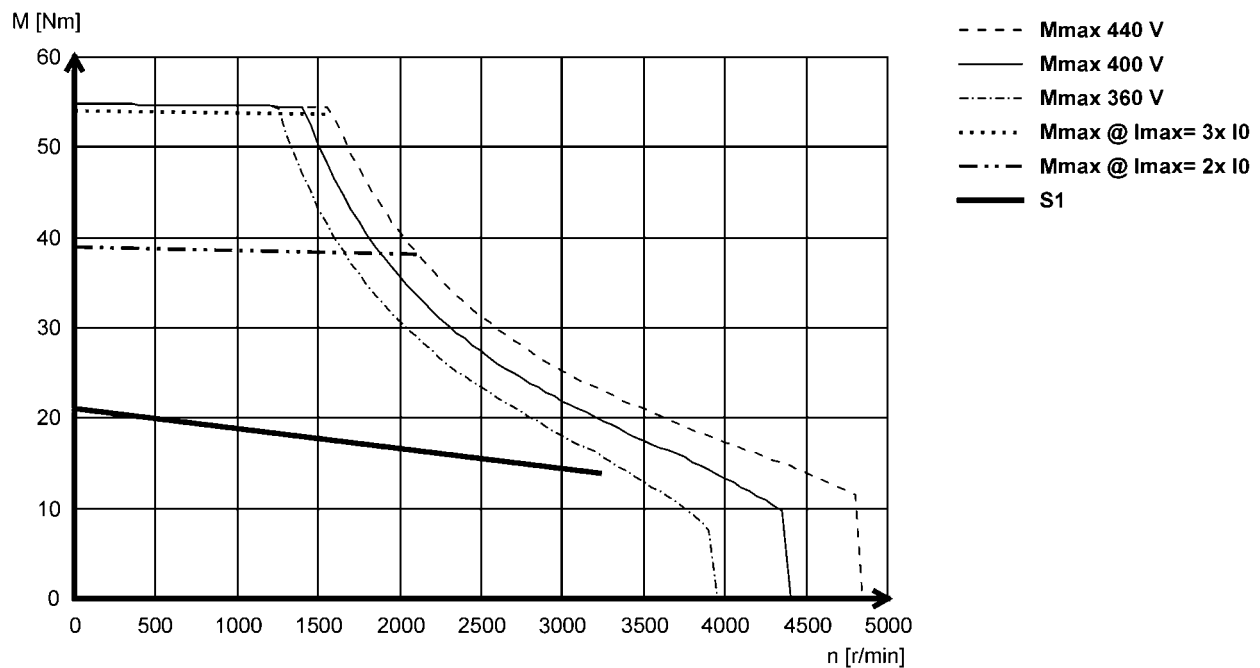

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14L14- (forced ventilated)

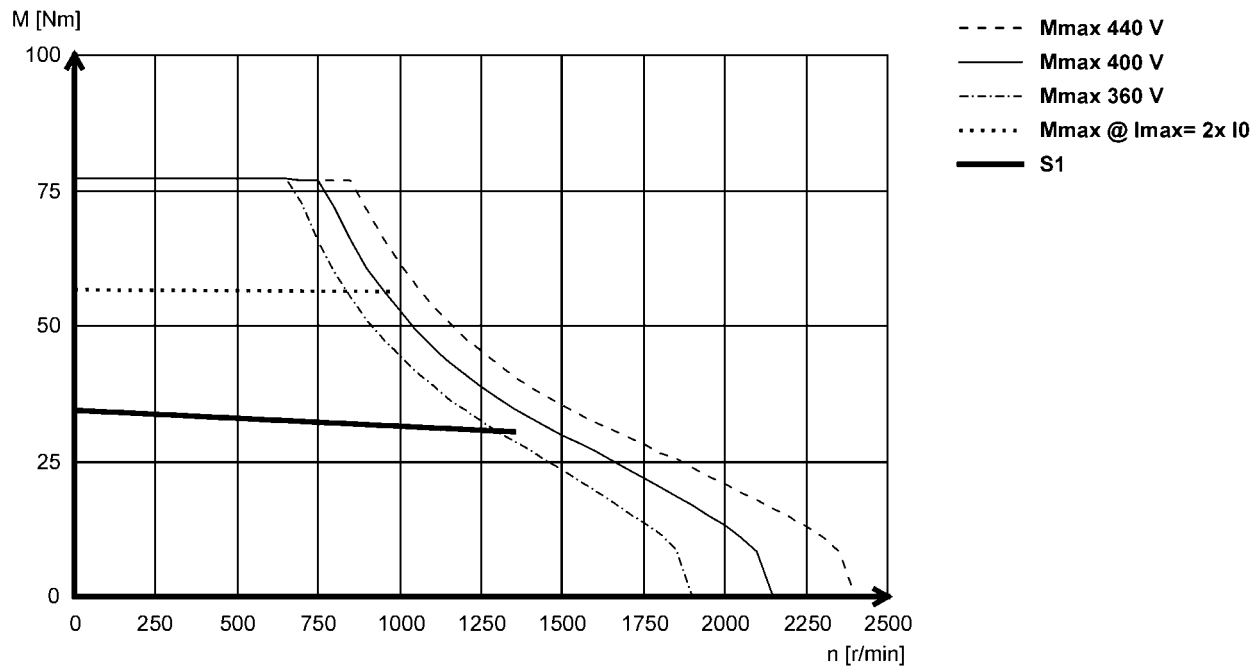

MCS14L15- (non-ventilated)

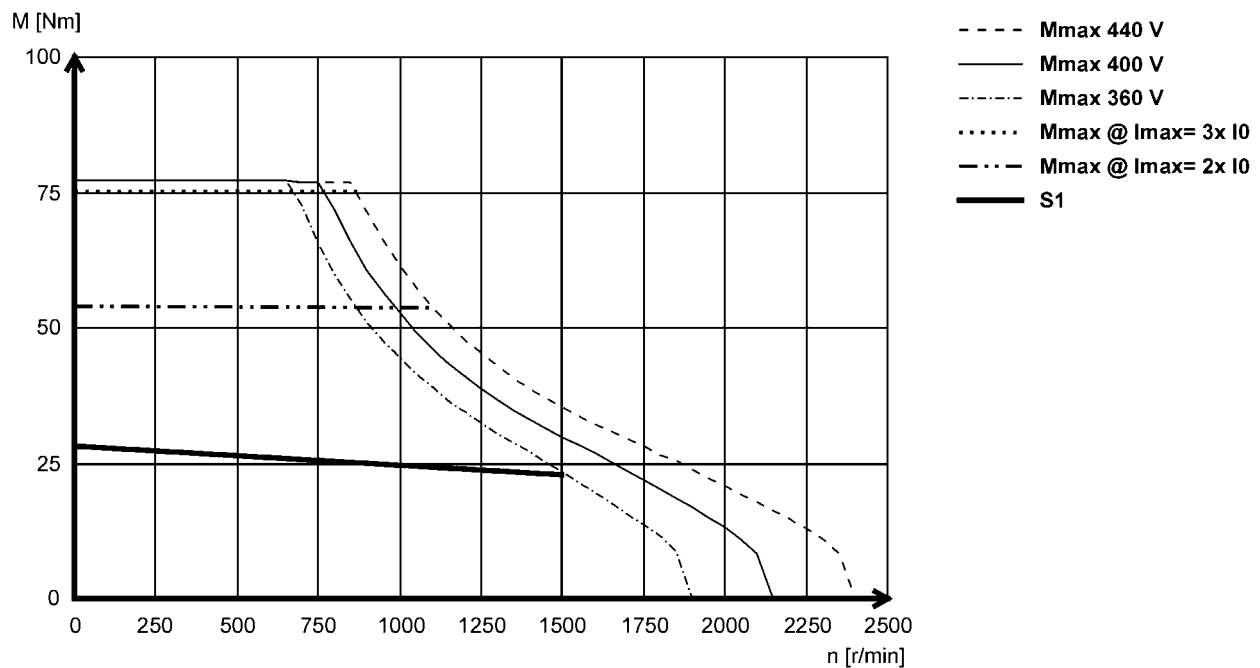

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14L30- (forced ventilated)

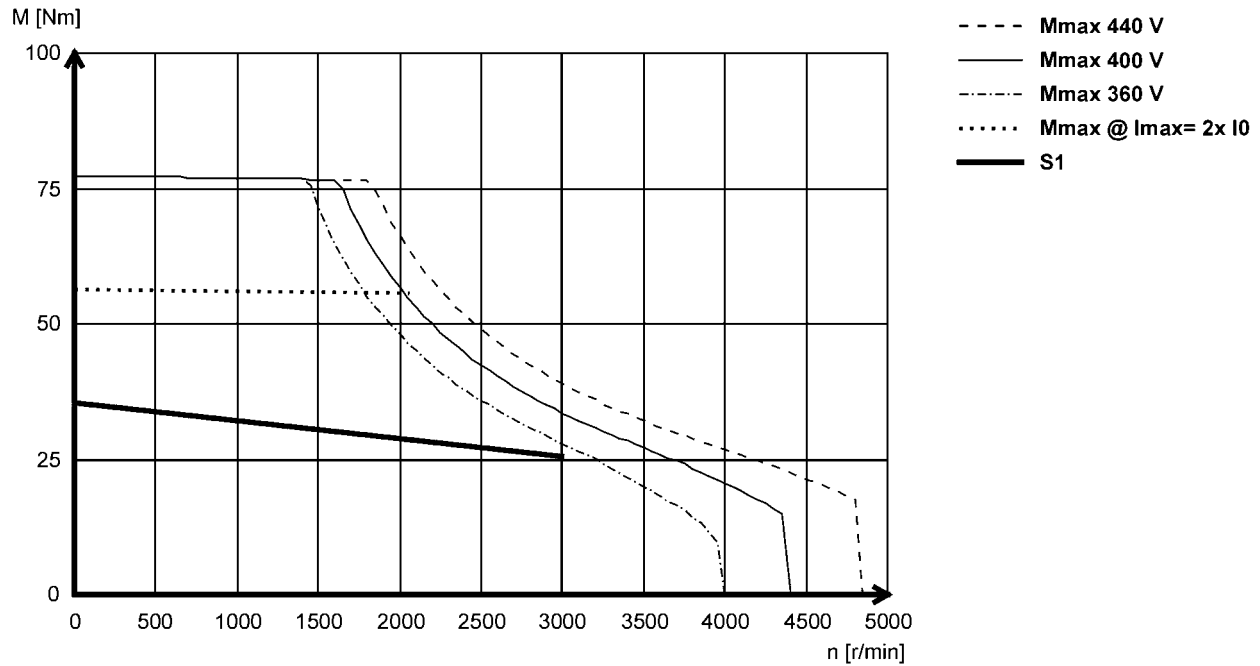

MCS14L32- (non-ventilated)

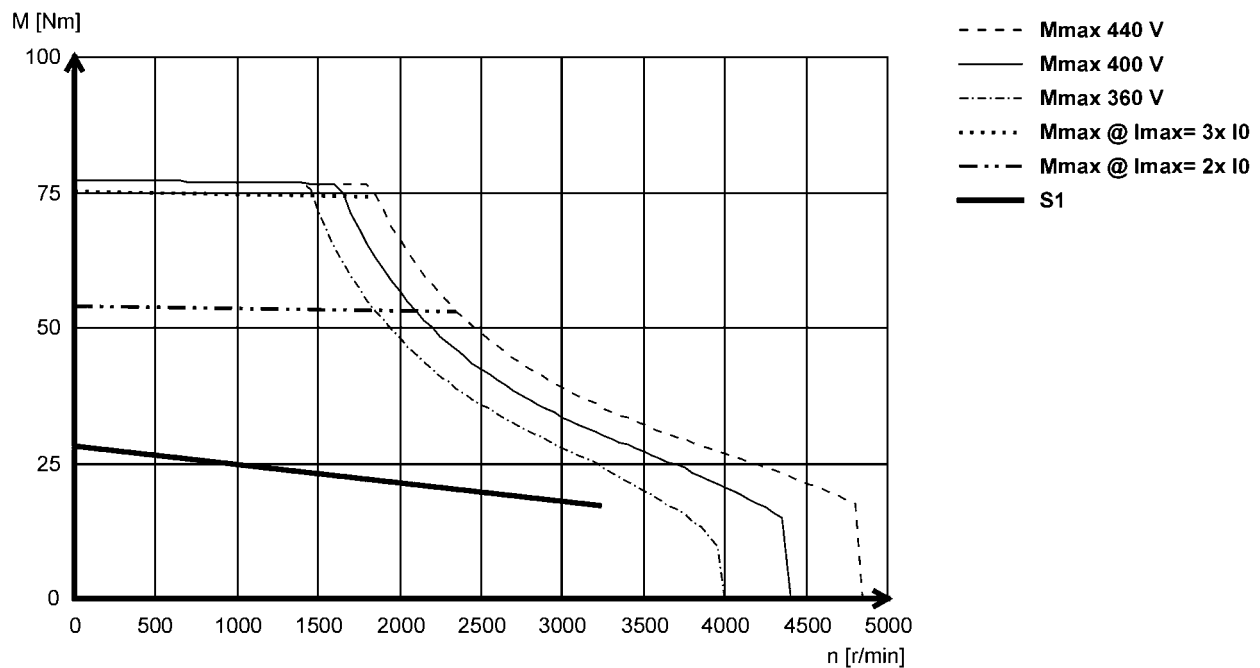

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14P11- (forced ventilated)

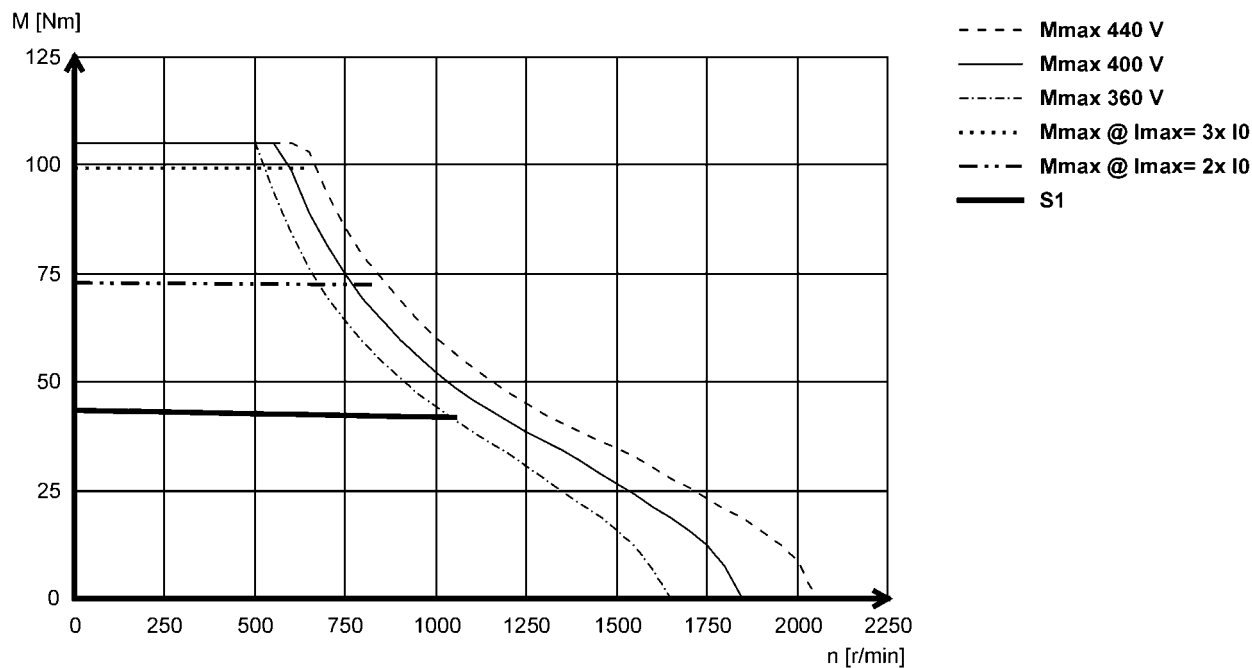

MCS14P14- (non-ventilated)

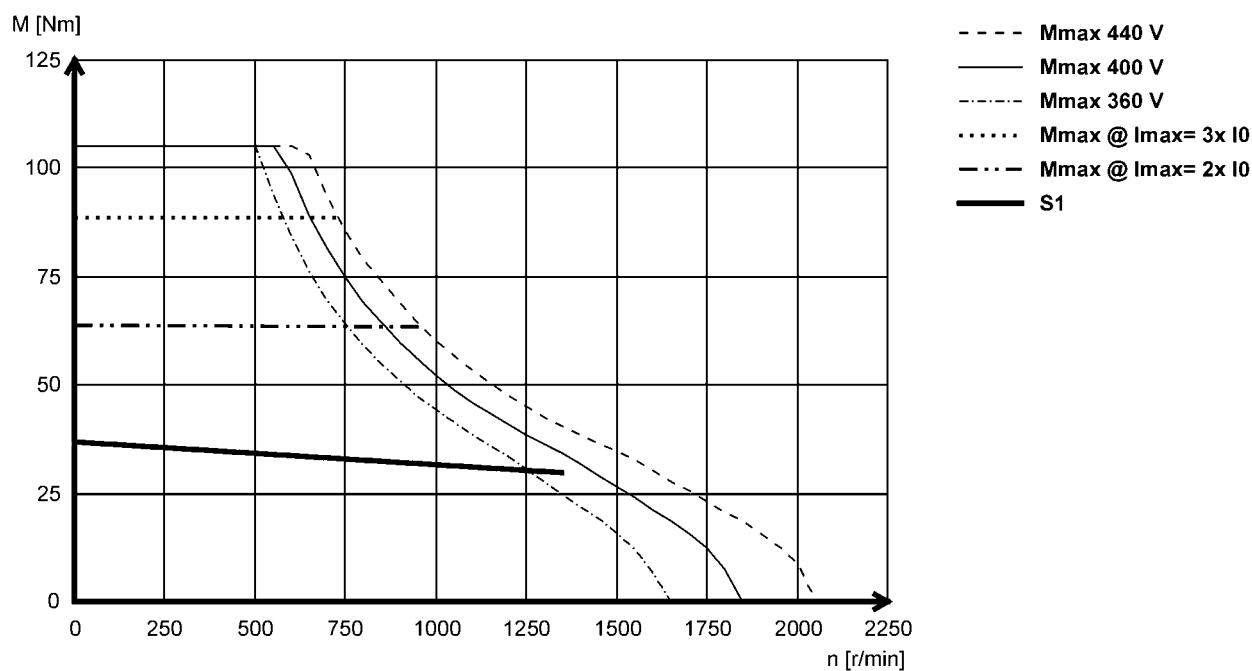

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14P26- (forced ventilated)

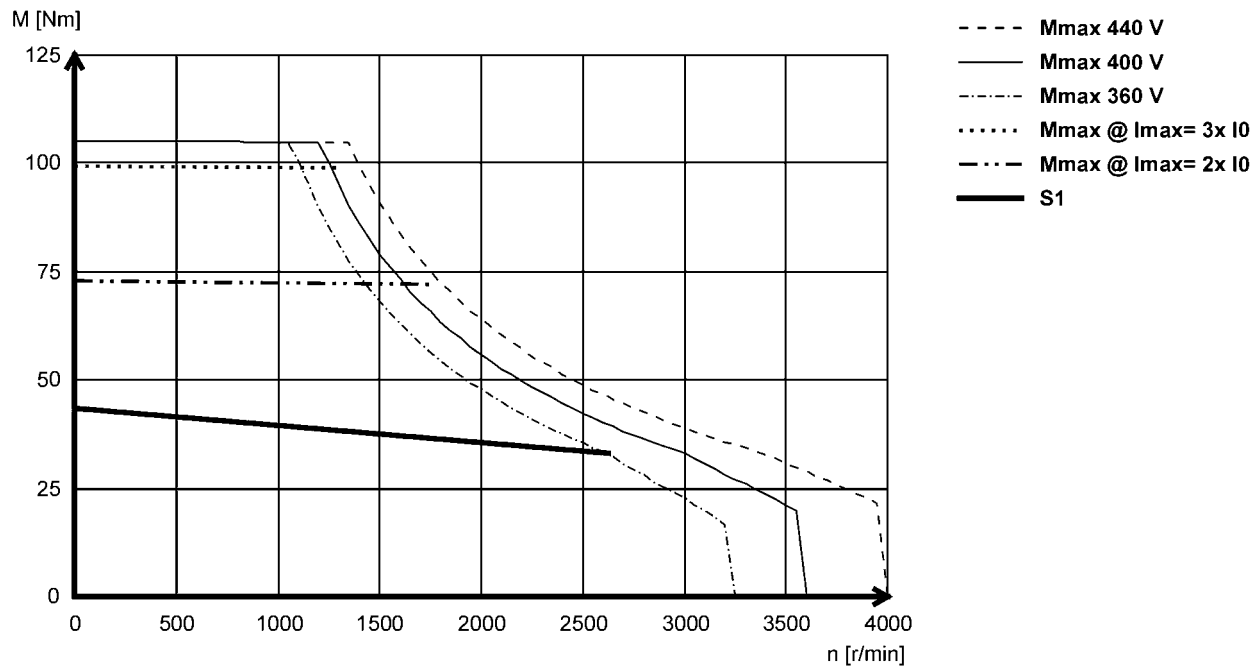

MCS14P32- (non-ventilated)

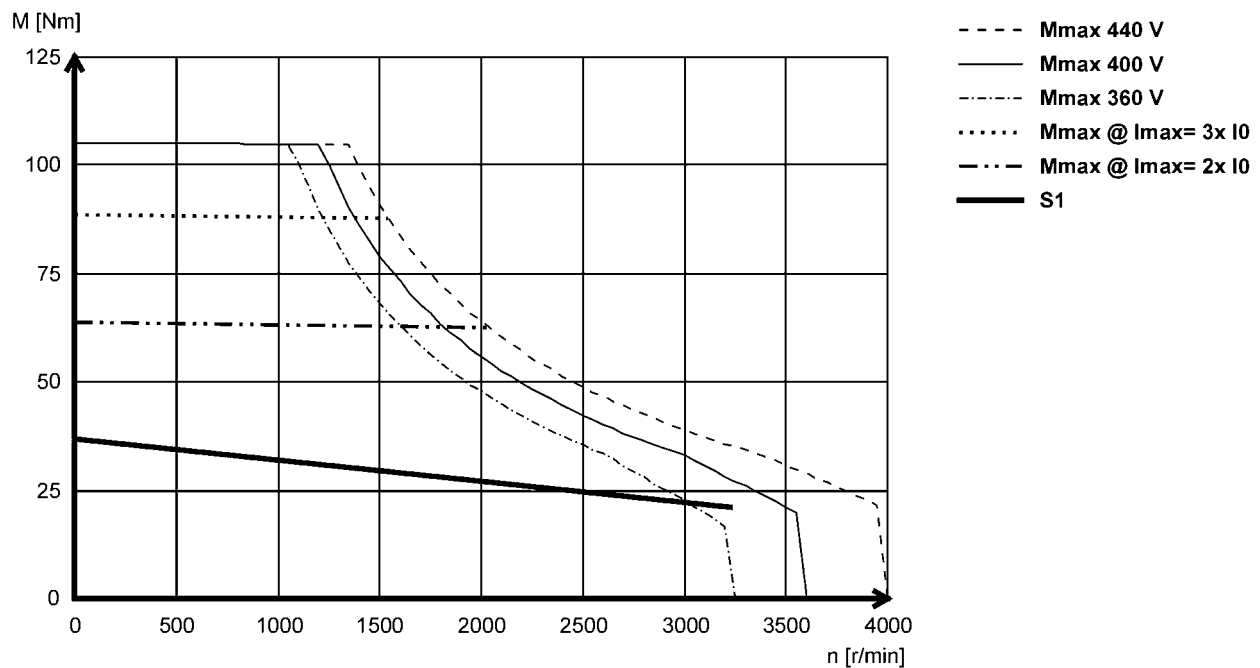

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19F12- (forced ventilated)

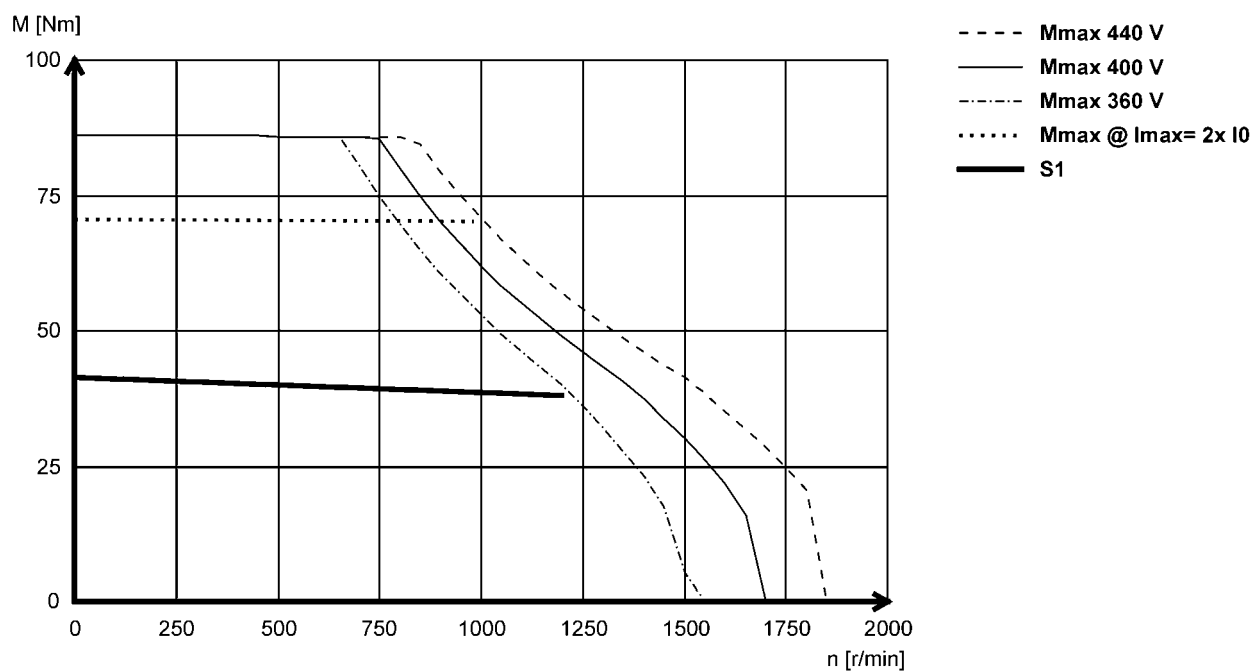

MCS19F14- (non-ventilated)

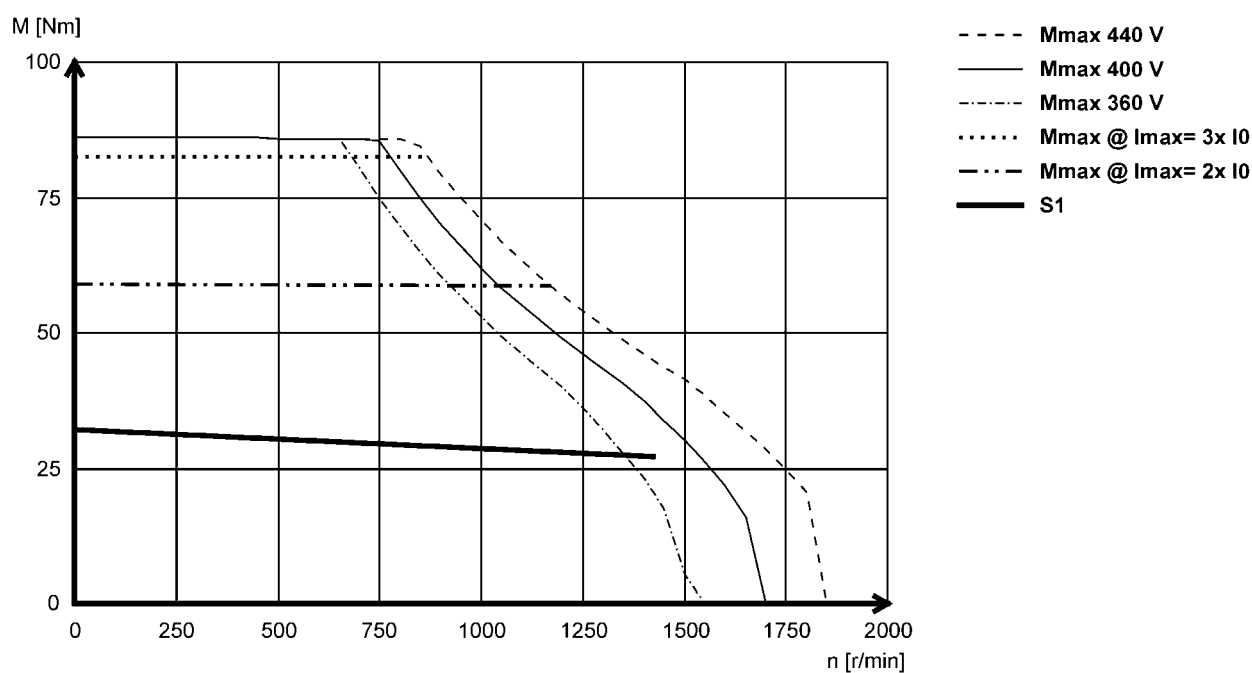

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19F29- (forced ventilated)

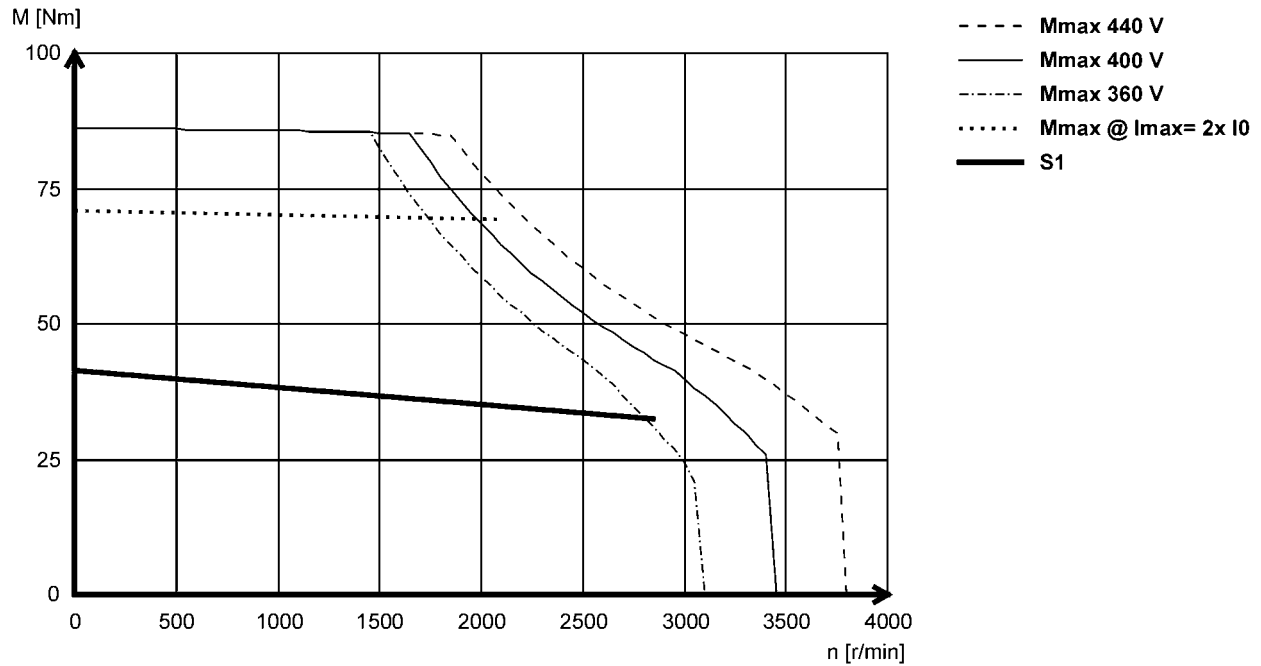

MCS19F30- (non-ventilated)

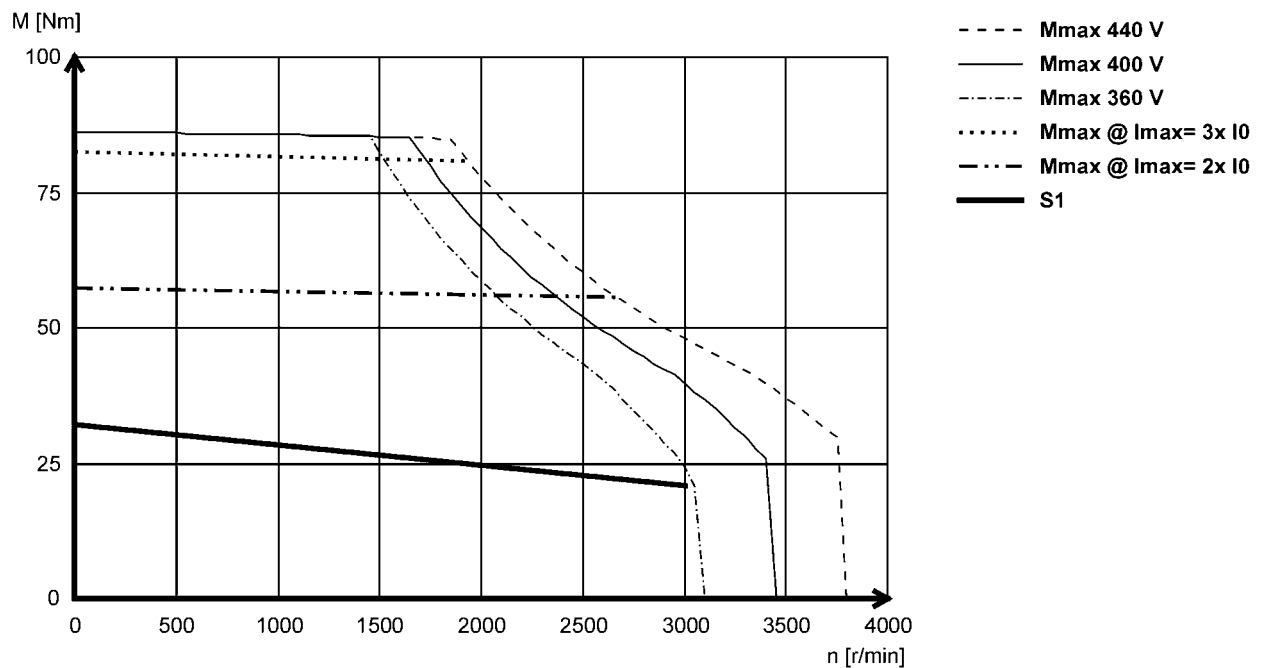

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19J12- (forced ventilated)

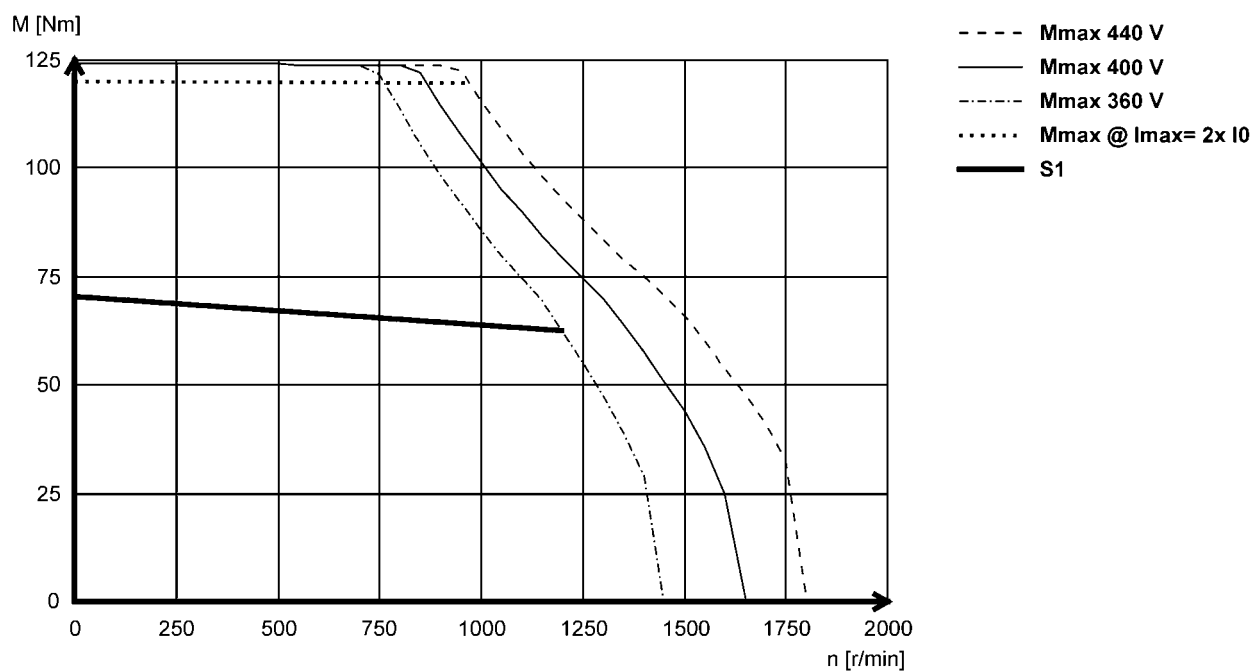

MCS19J14- (non-ventilated)

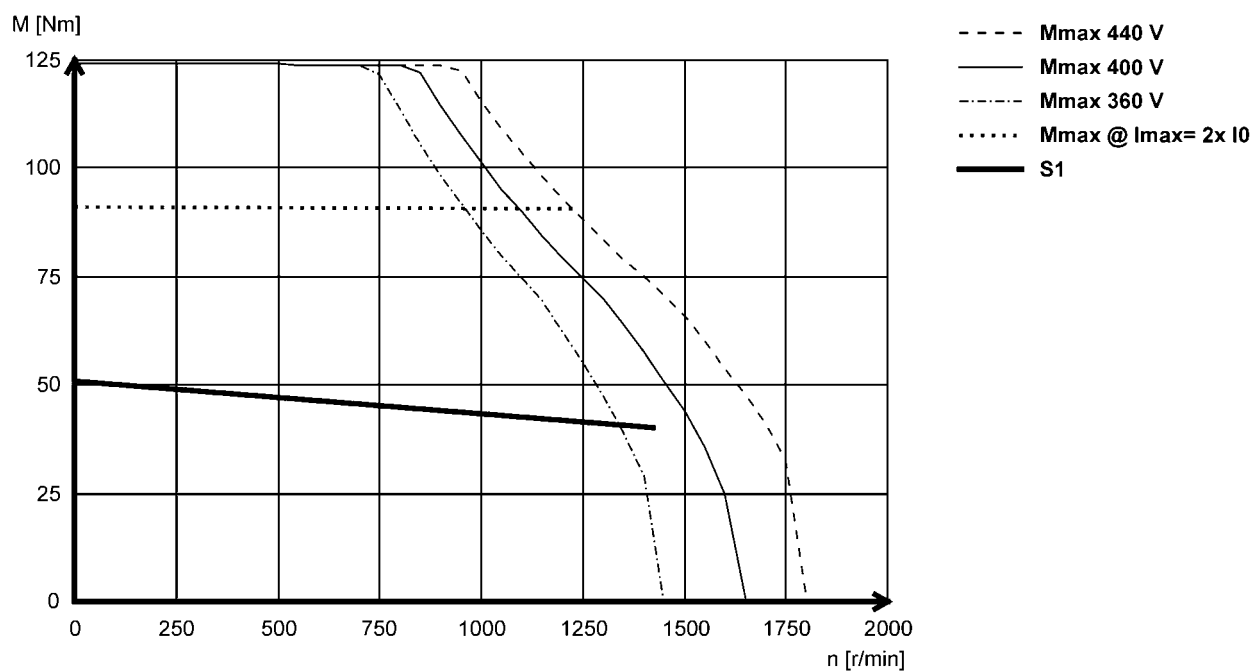

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19J29- (forced ventilated)

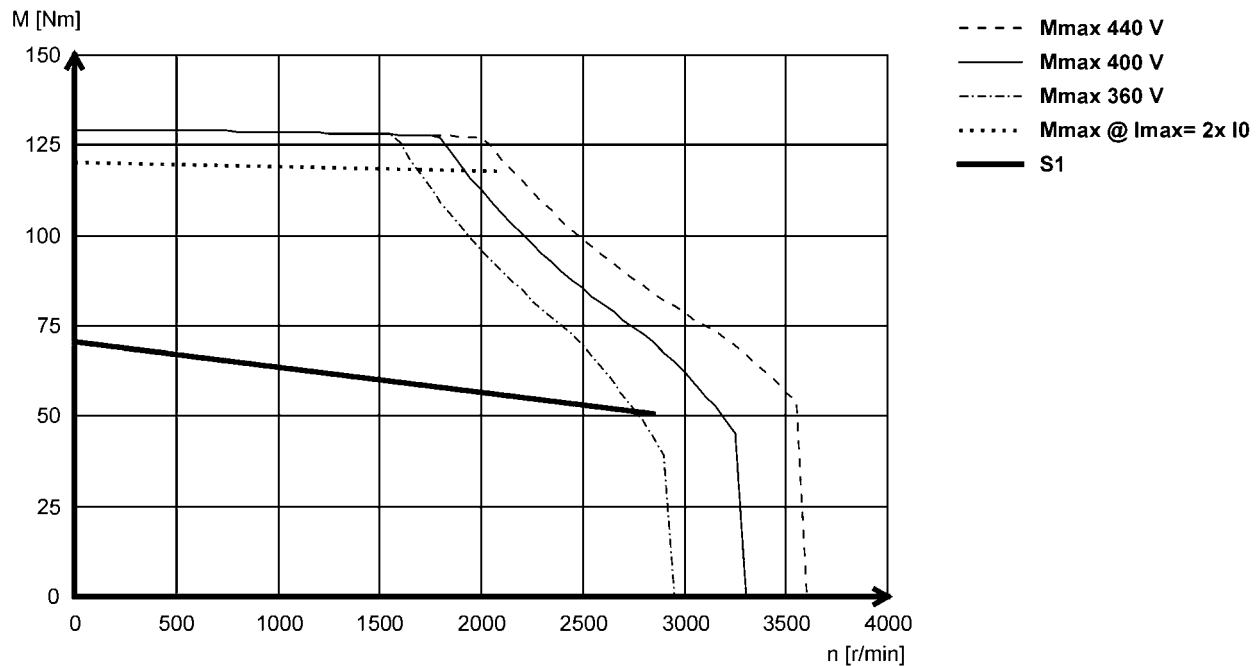

MCS19J30- (non-ventilated)

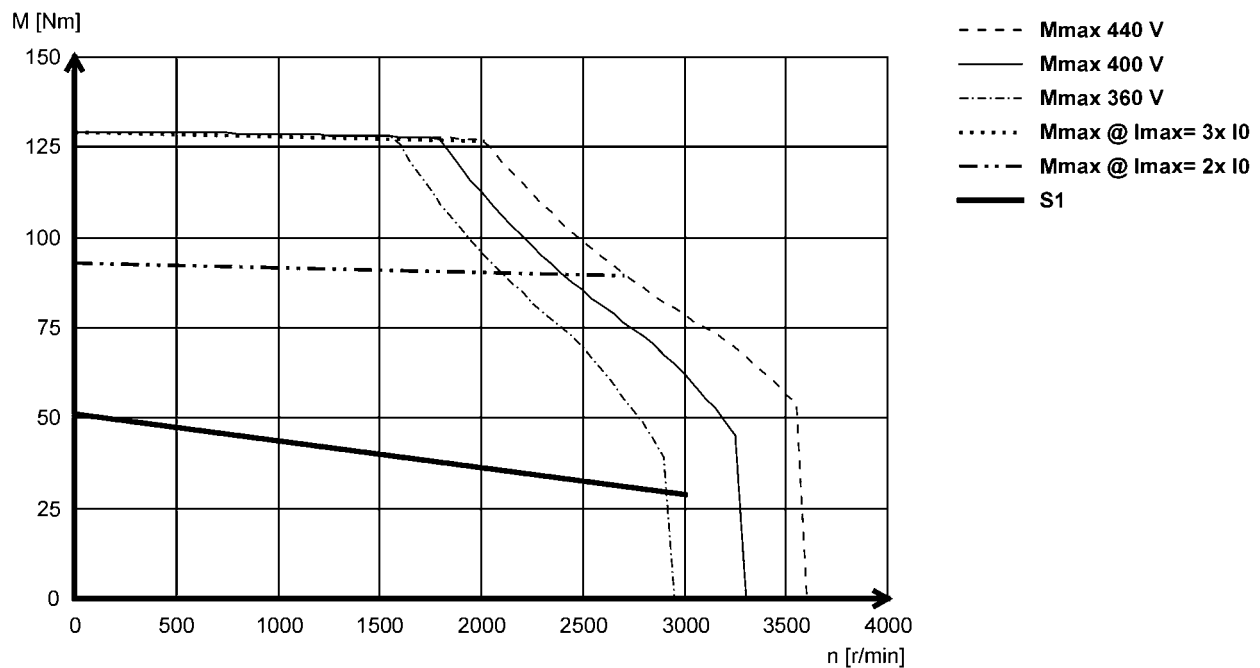

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19P12 (forced ventilated)

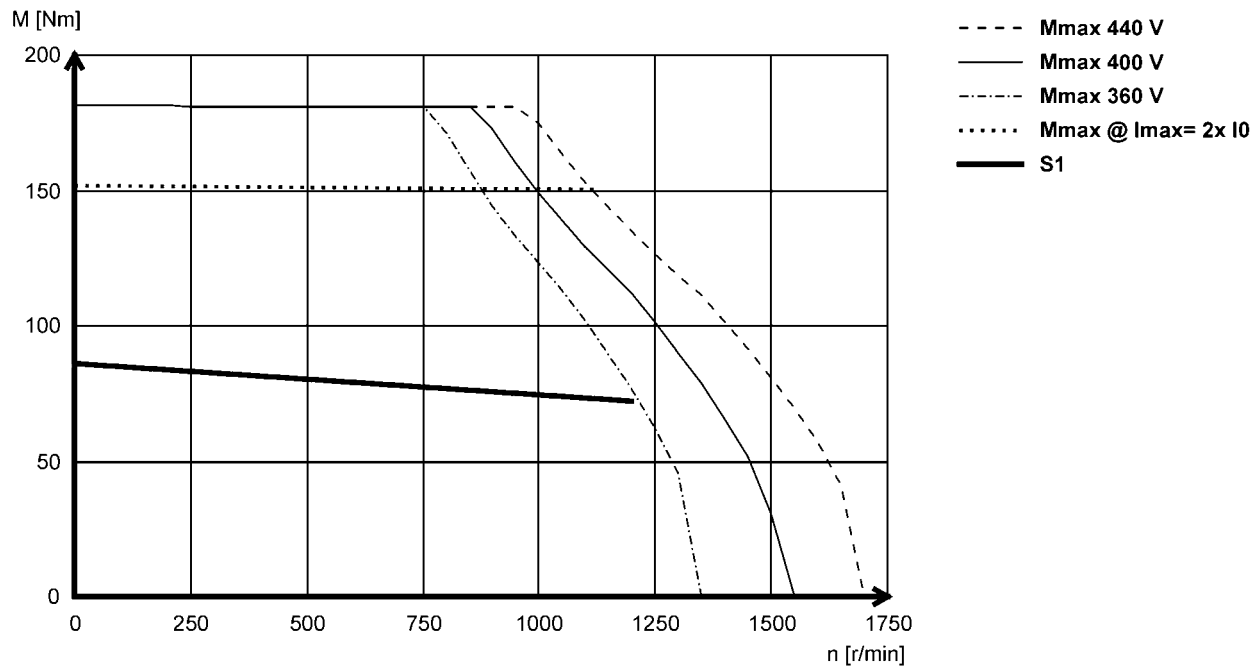

MCS19P14- (non-ventilated)

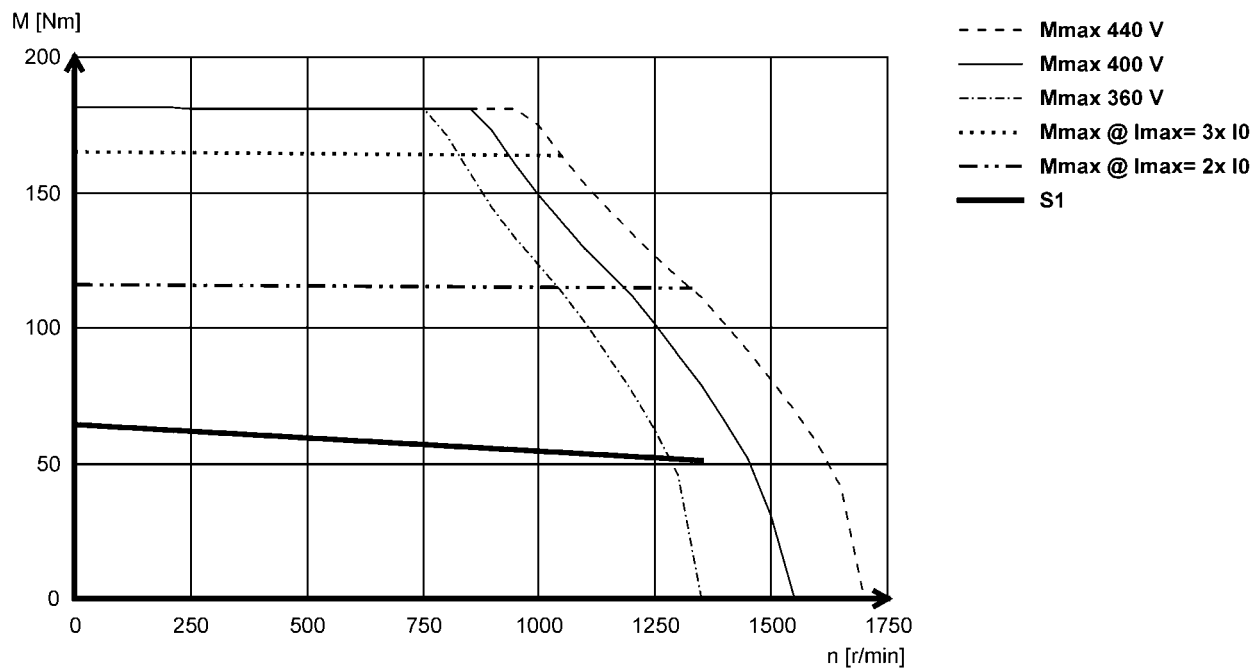

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19P29- (forced ventilated)

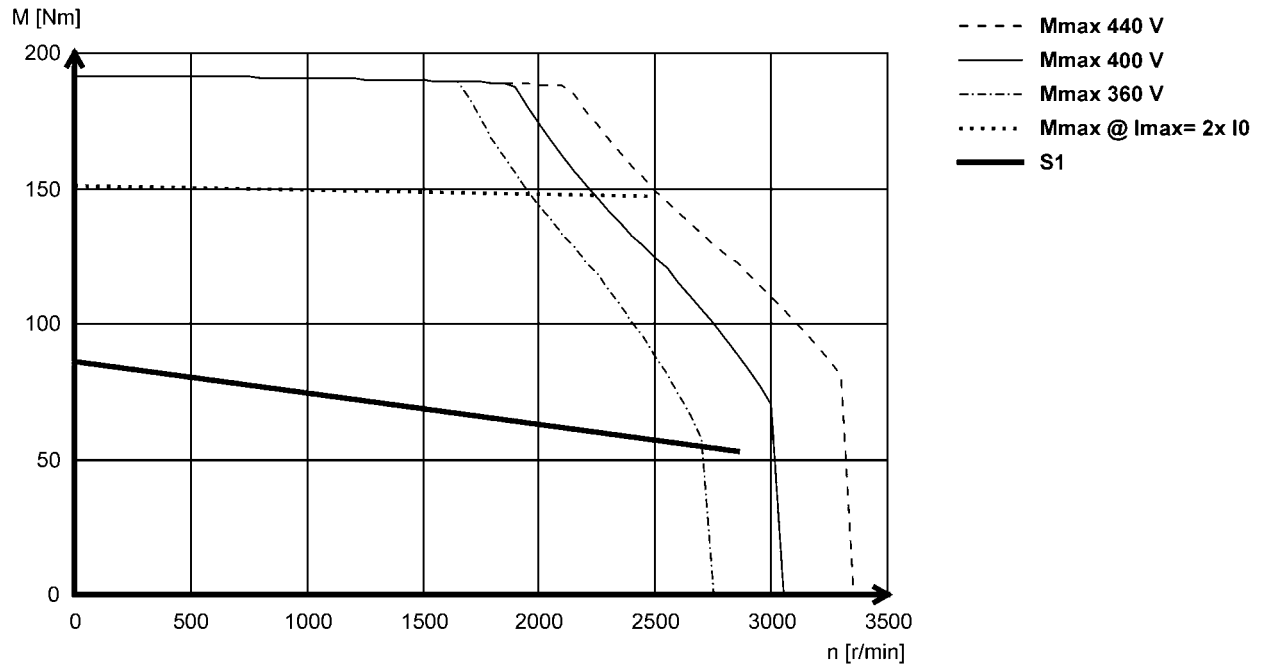

MCS19P30- (non-ventilated)

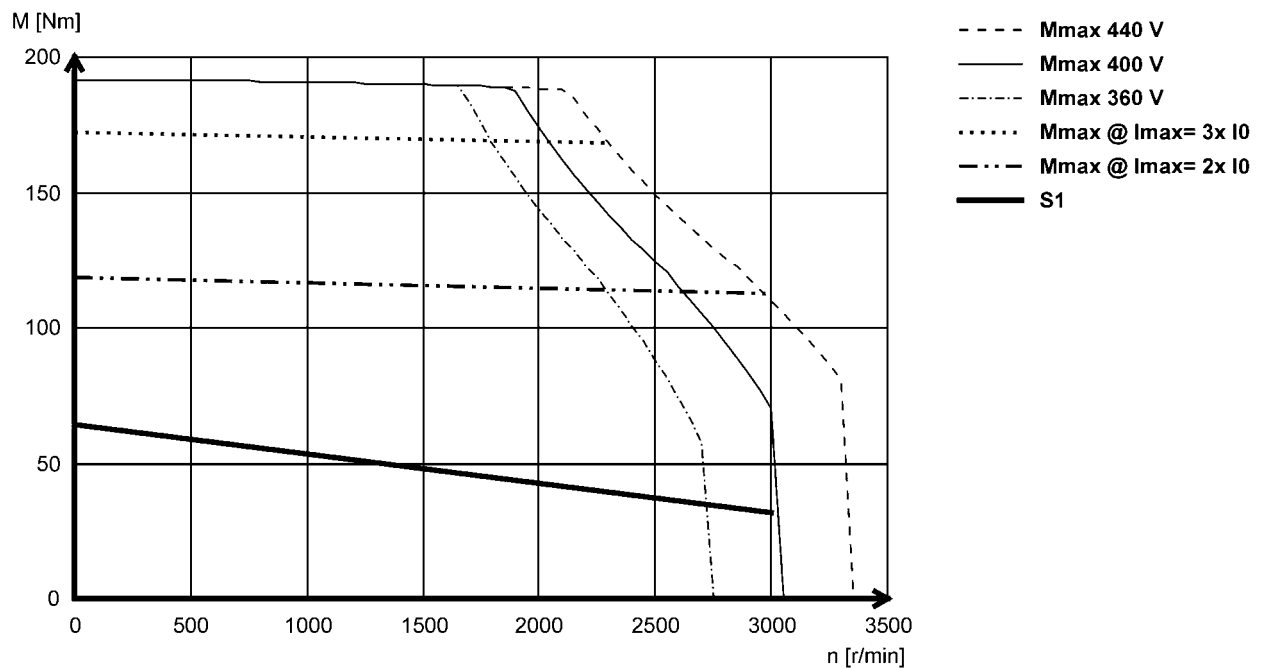

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06C41L (non-ventilated)

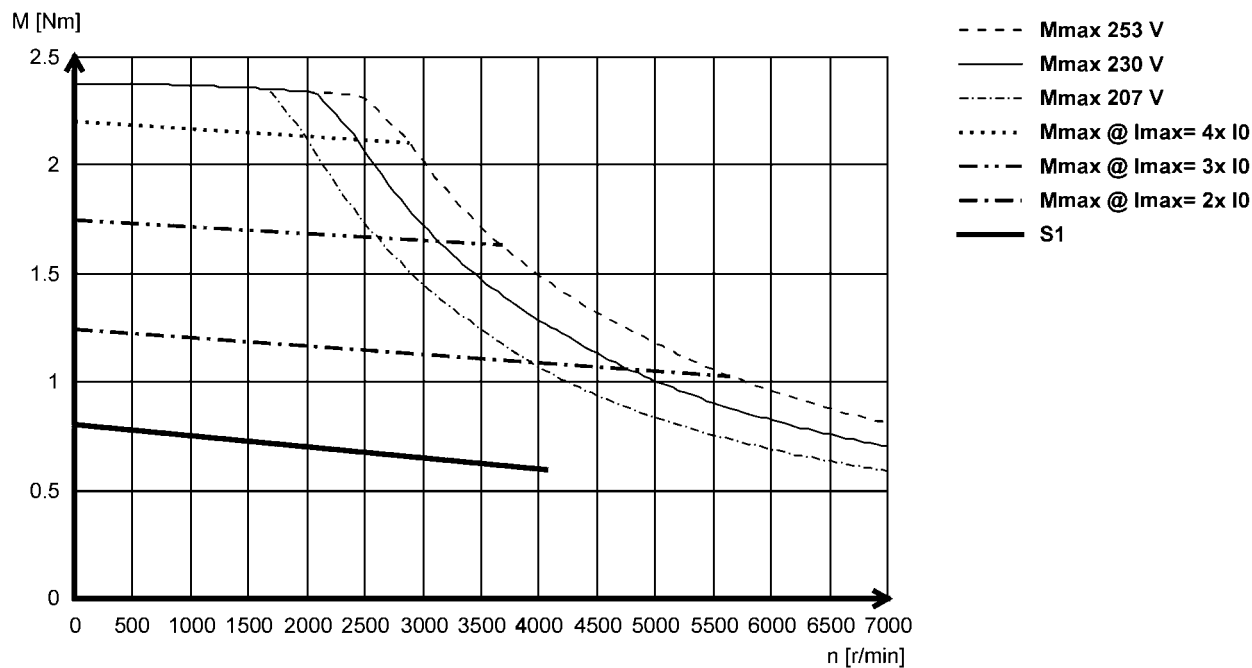

MCS06C60L (non-ventilated)

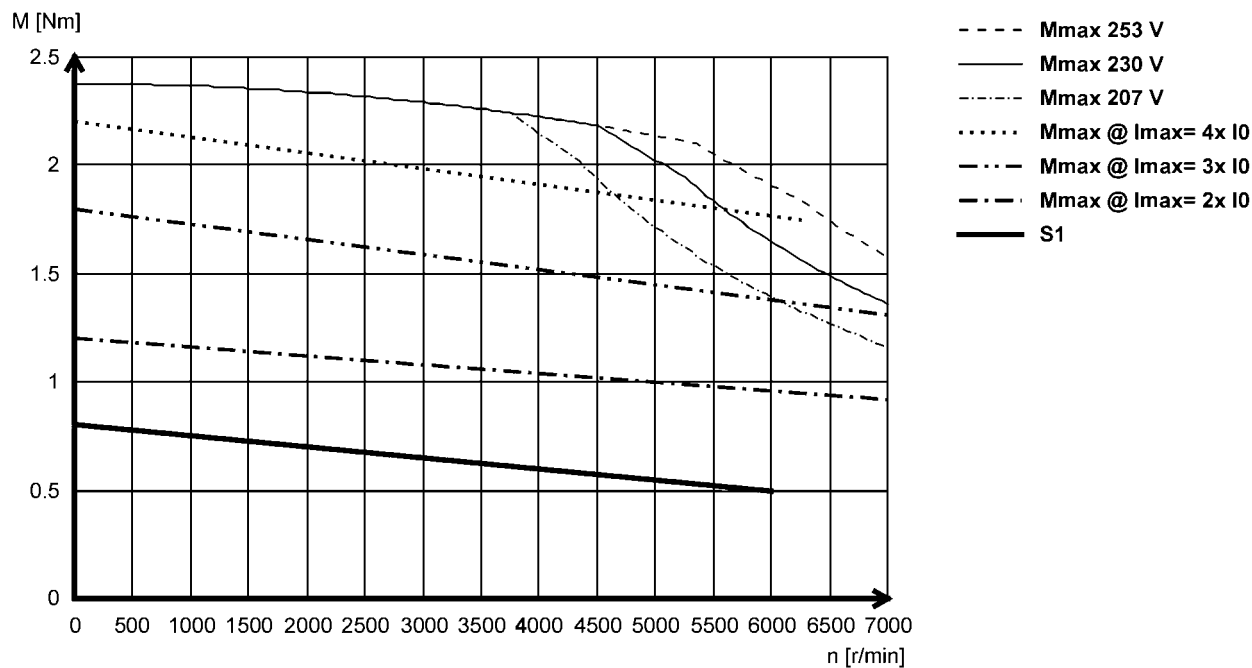

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06F41L (non-ventilated)

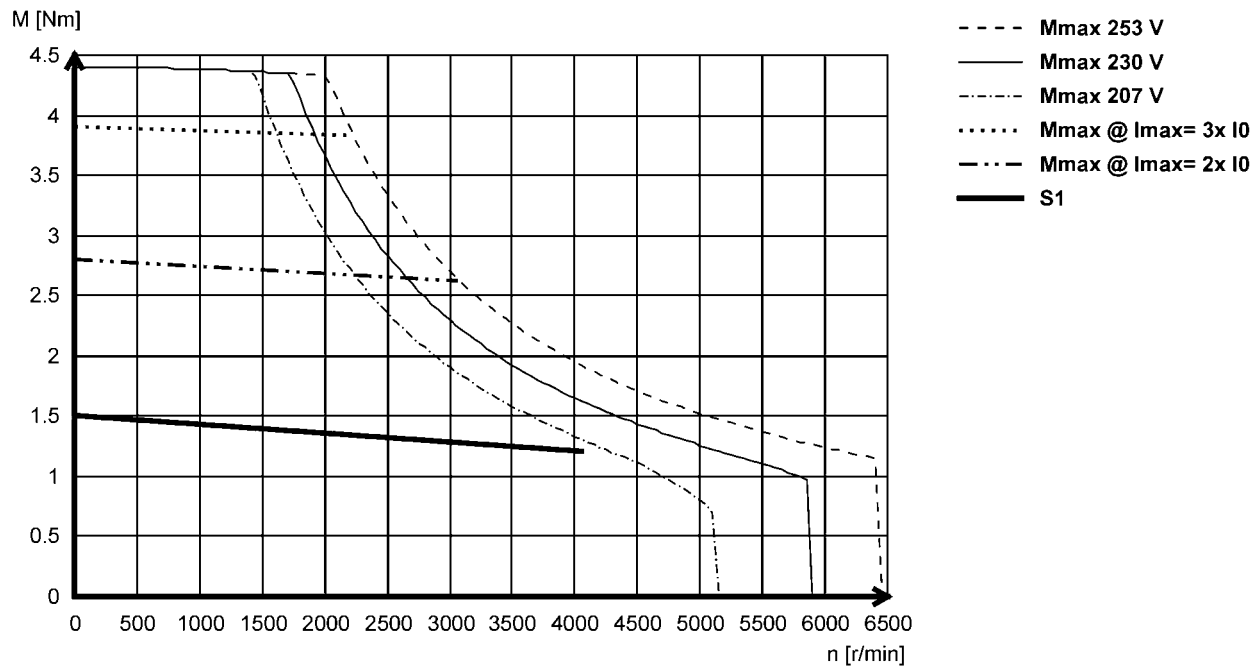

MCS06F60L (non-ventilated)

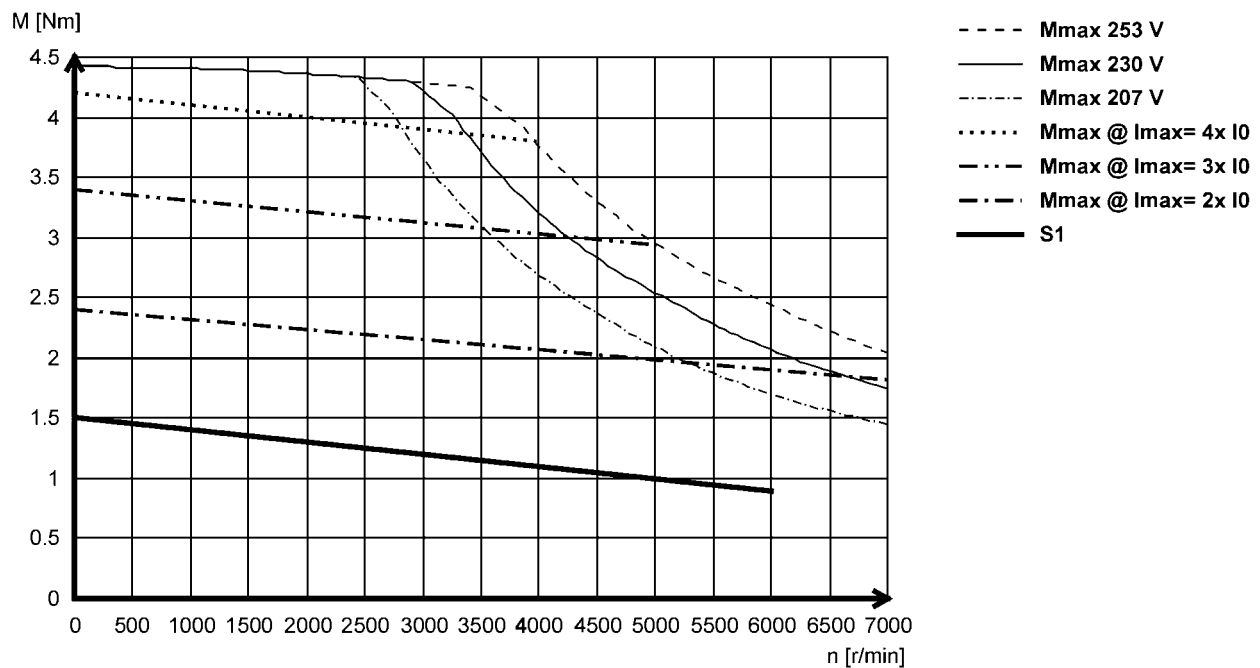

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06I41L (non-ventilated)

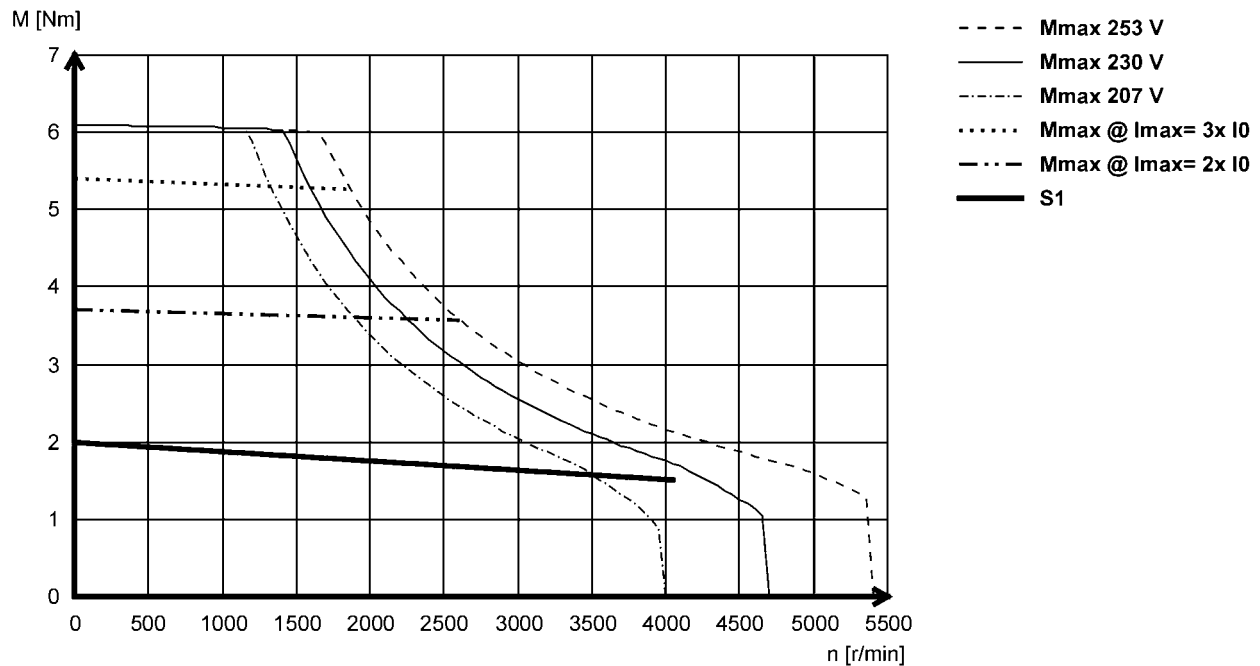

MCS06I60L (non-ventilated)

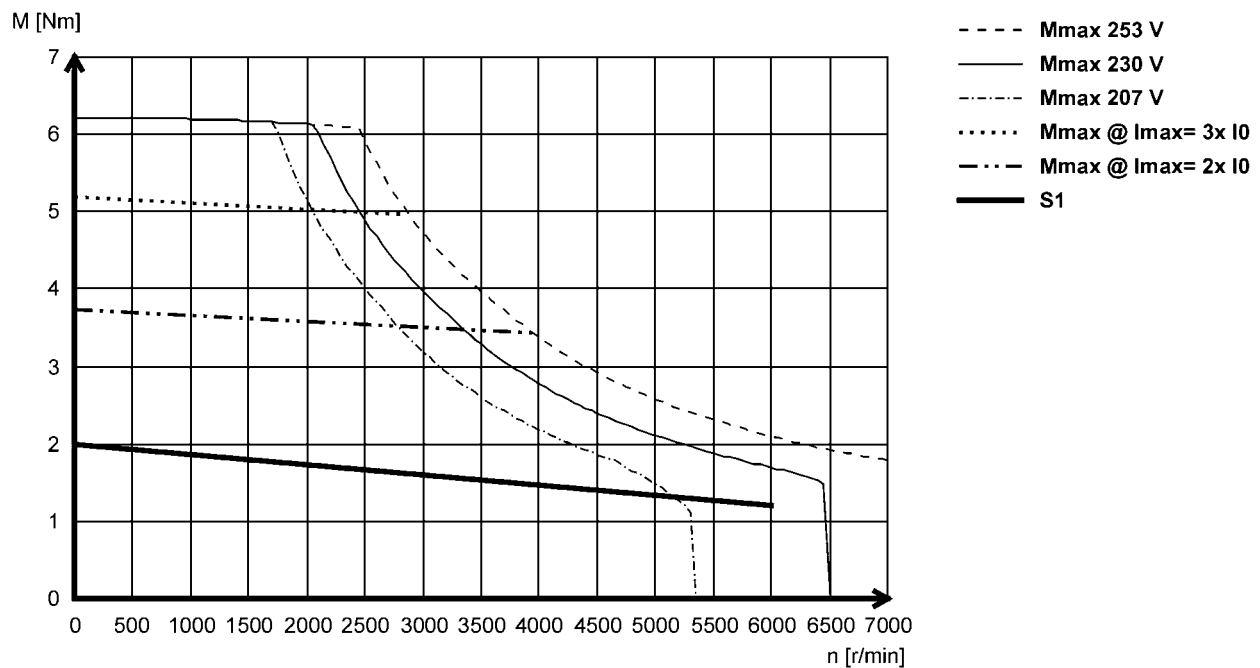

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09D41L (non-ventilated)

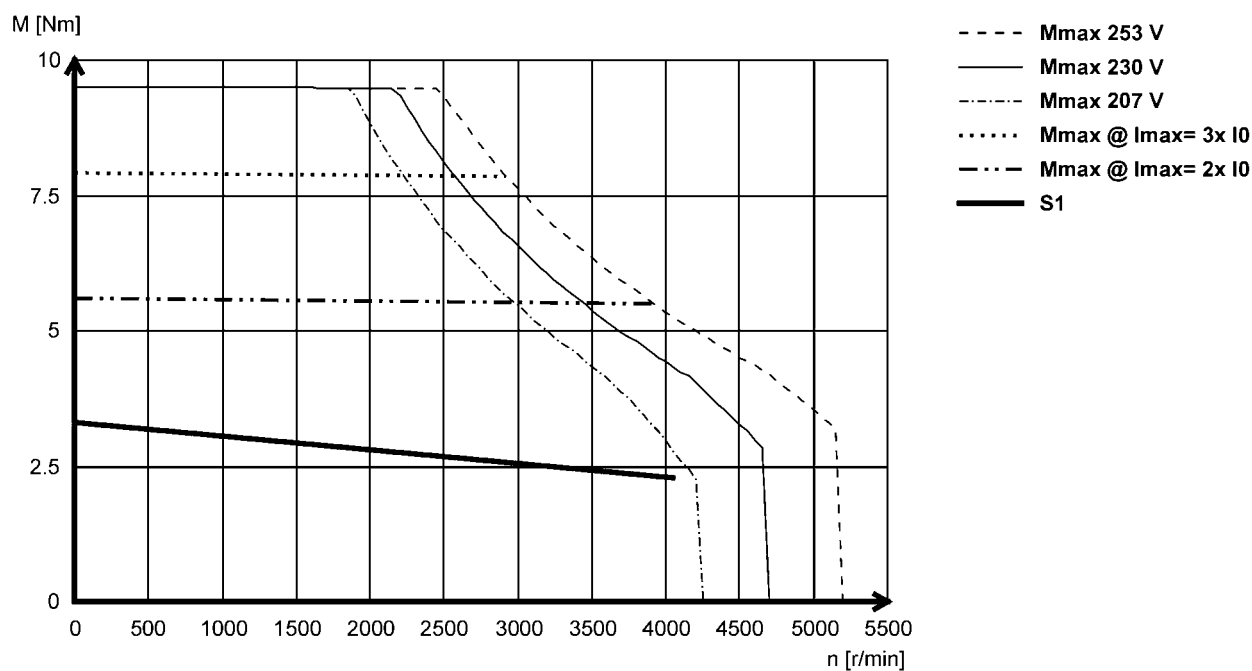

MCS09D60L (non-ventilated)

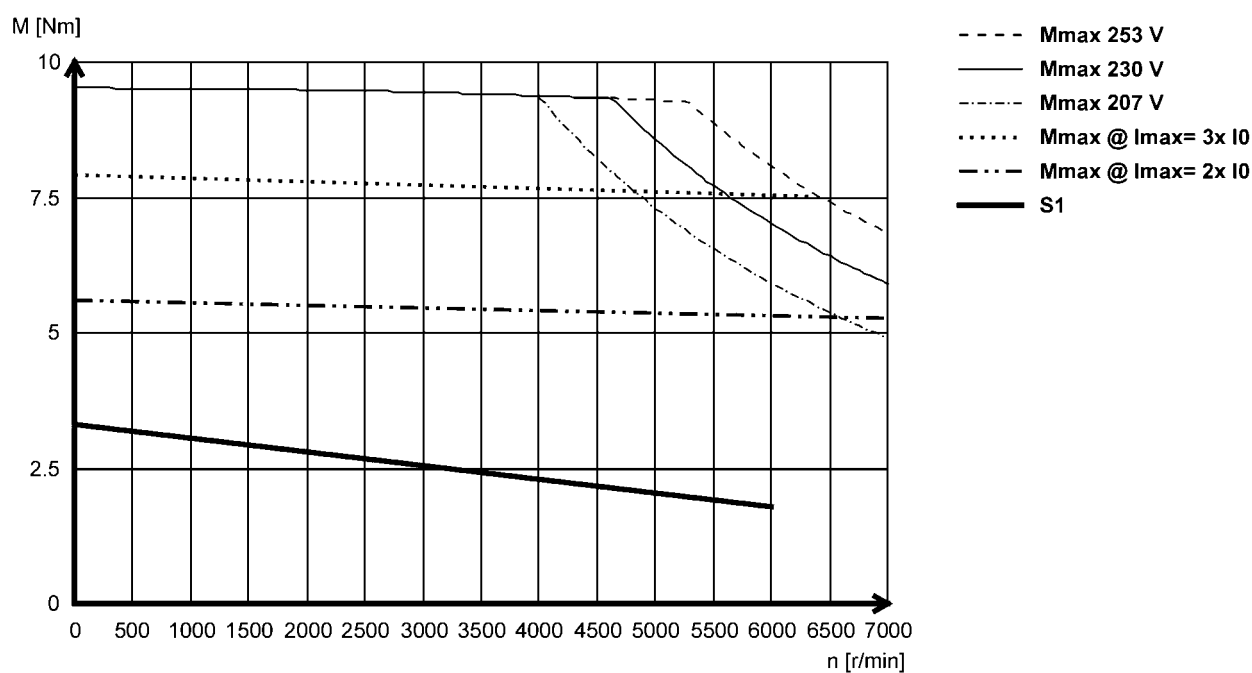

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09F38L (non-ventilated)

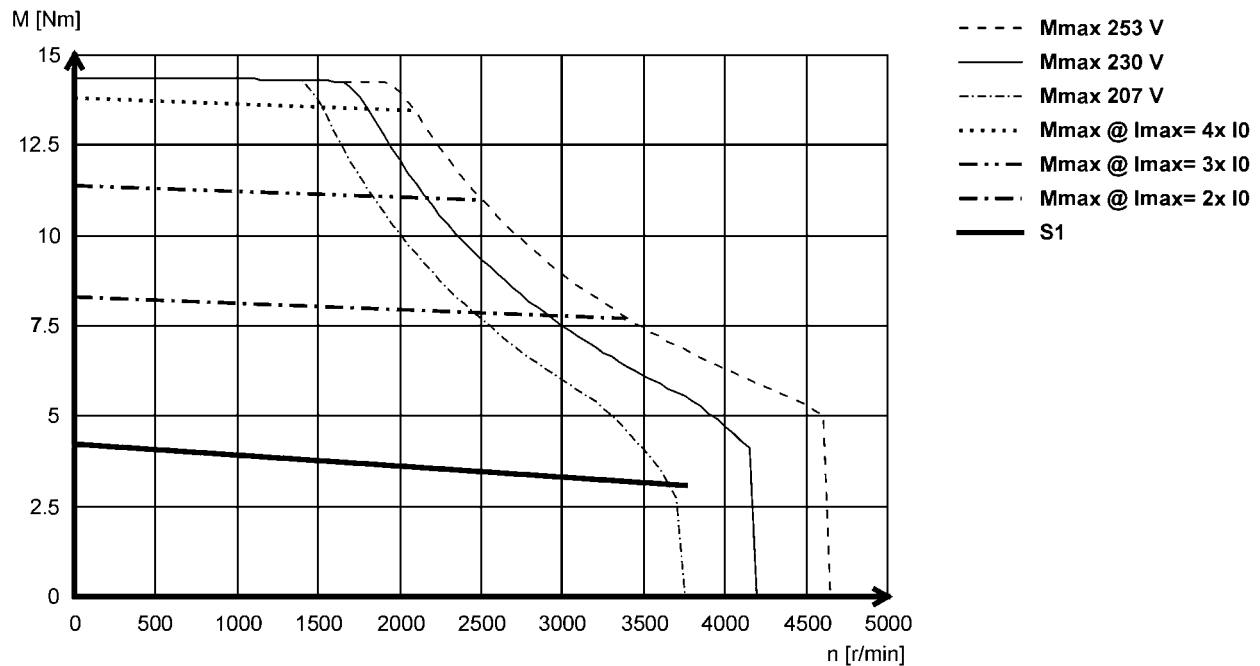

MCS09F60L (non-ventilated)

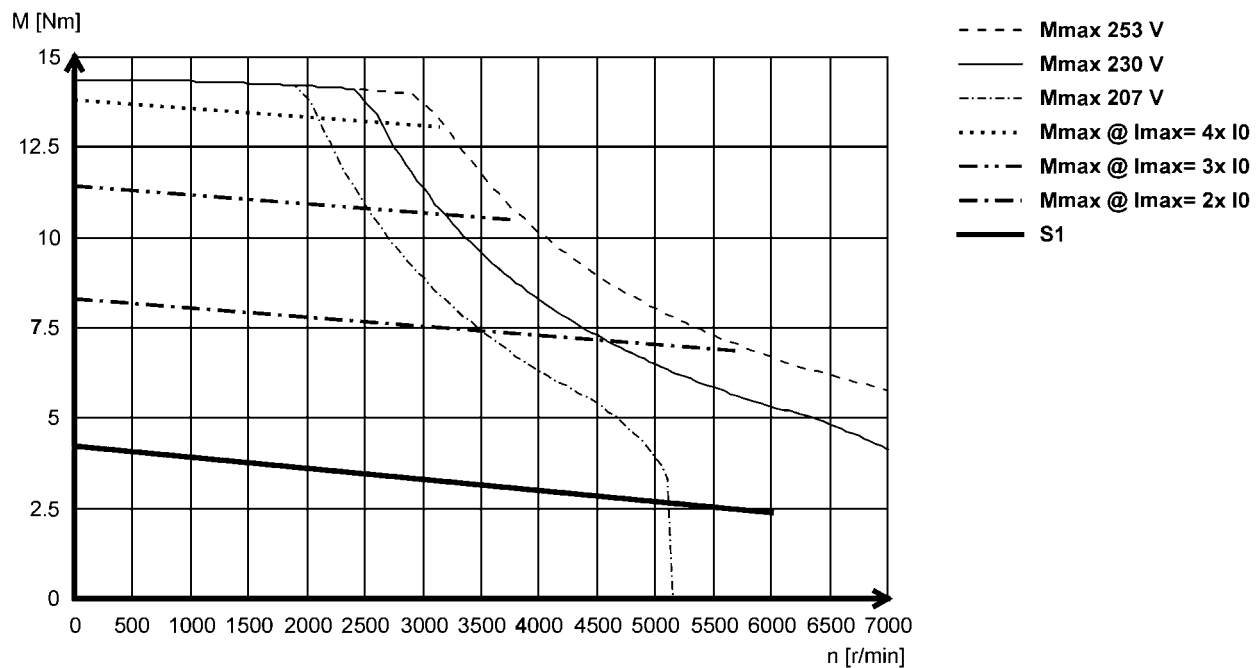

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09H41L (non-ventilated)

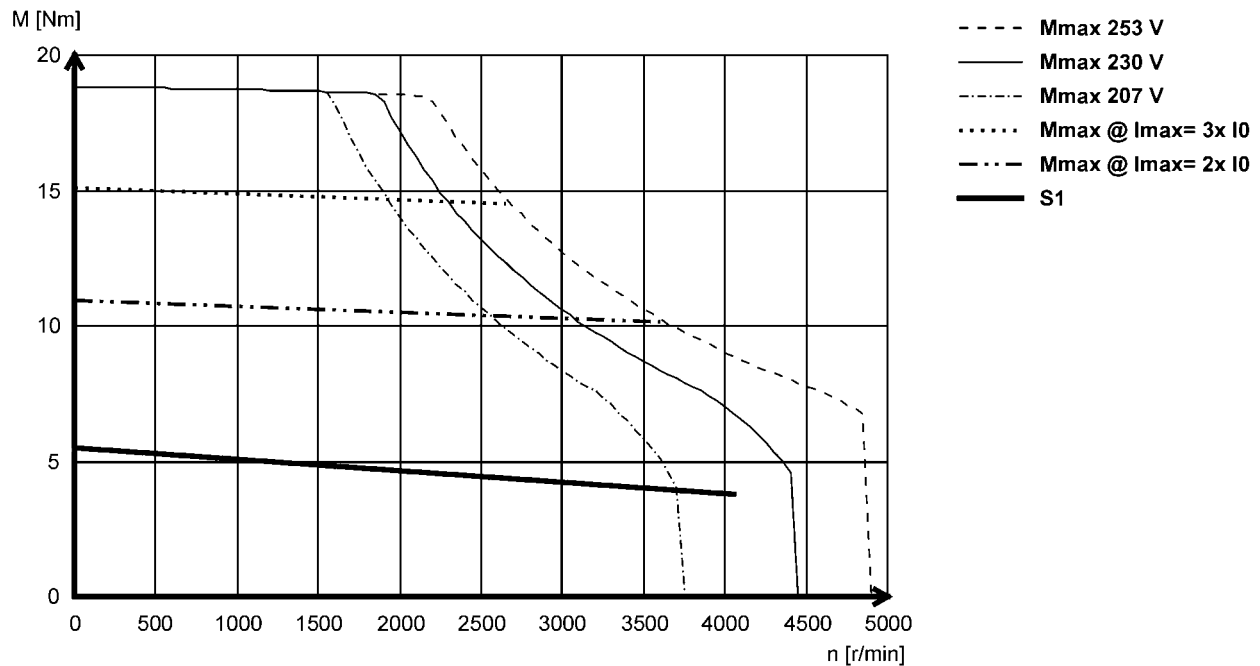

MCS09H60L (non-ventilated)

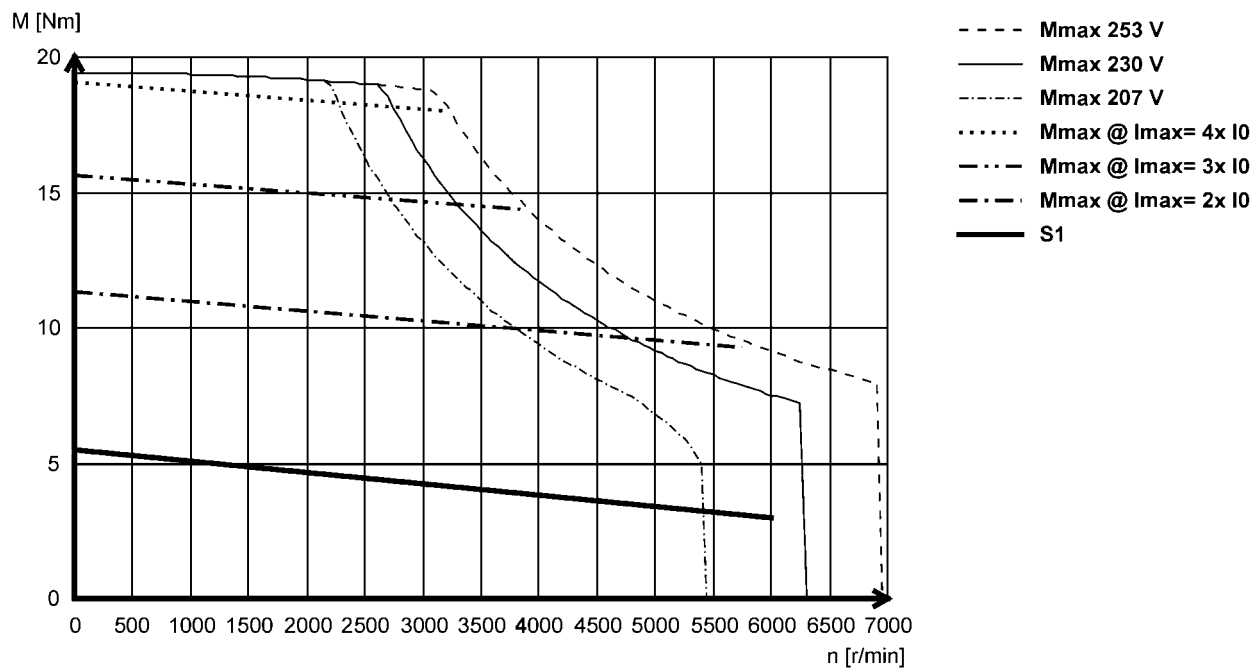

MCS synchronous servo motors


Technical data



Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09L41L (non-ventilated)

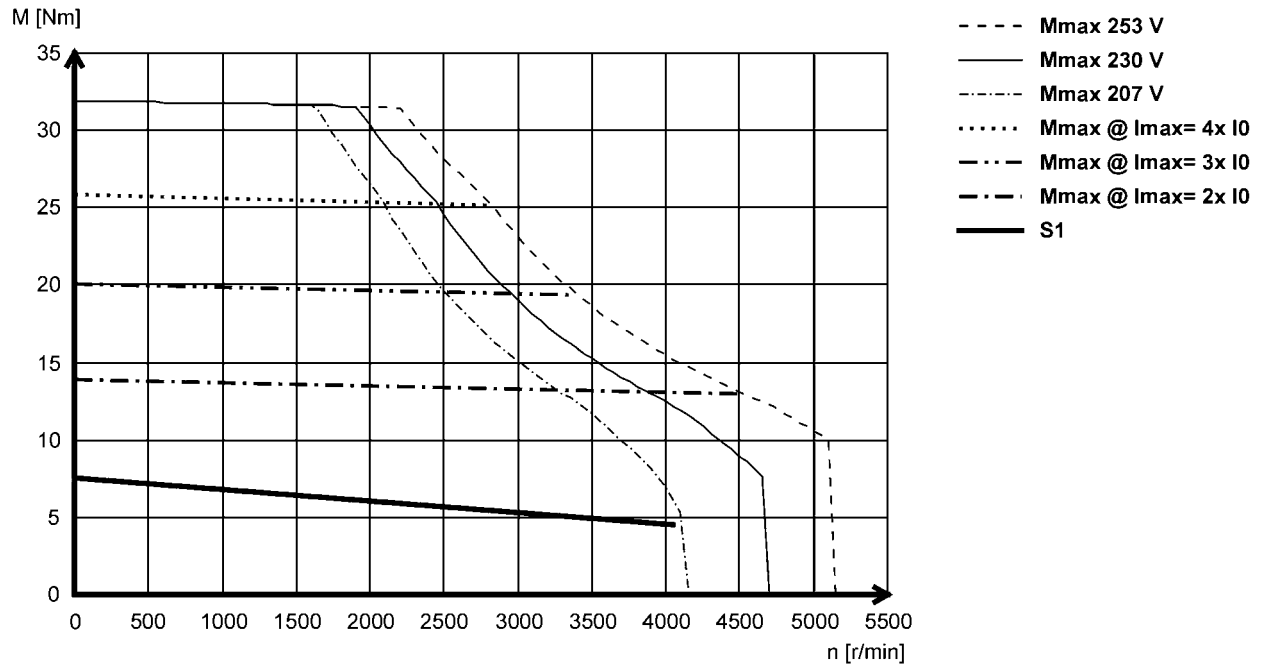

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12D20L (non-ventilated)

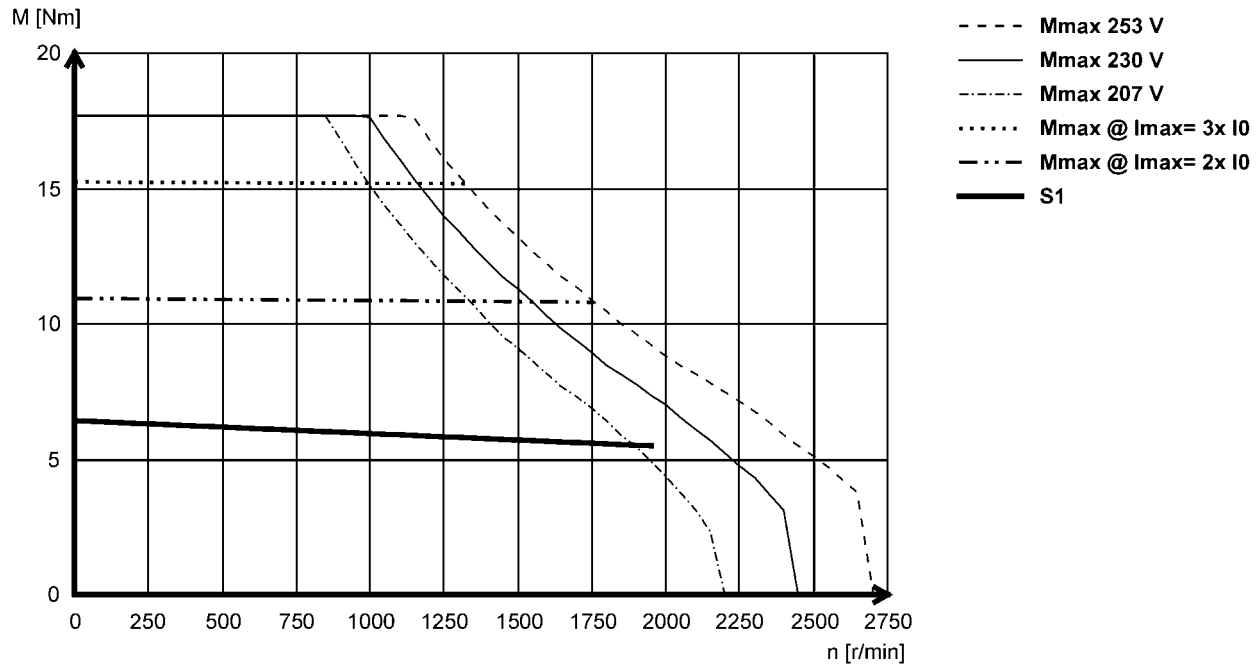

MCS12D41L (non-ventilated)

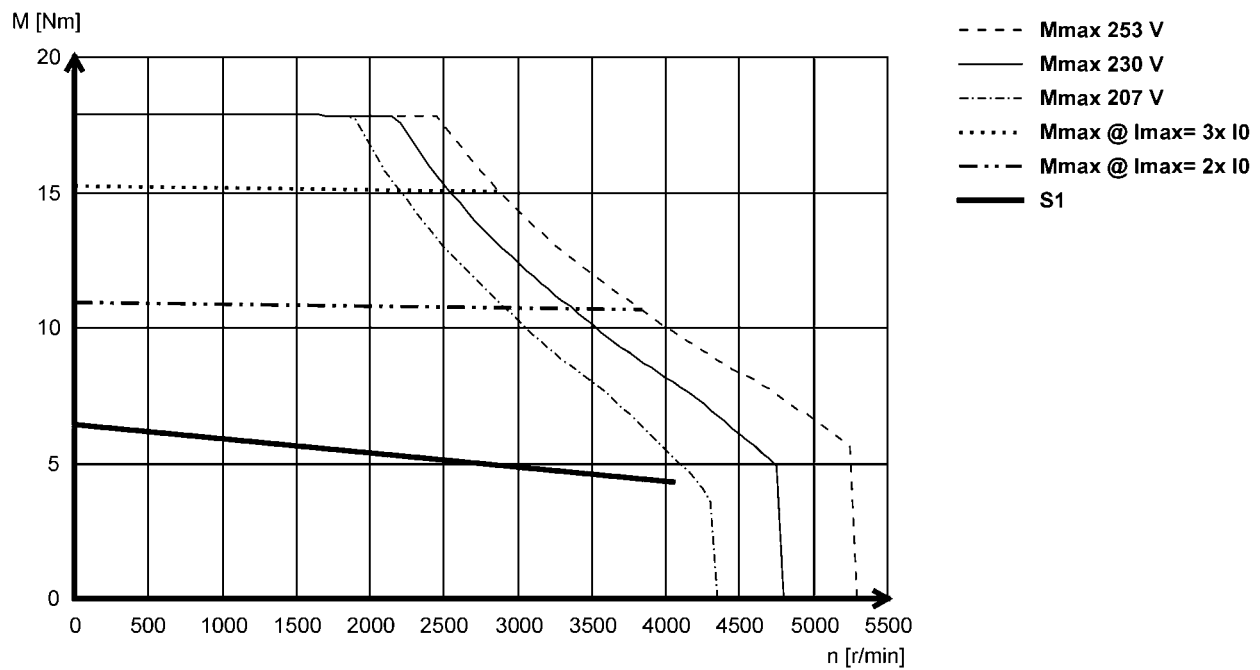

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12H15L (non-ventilated)

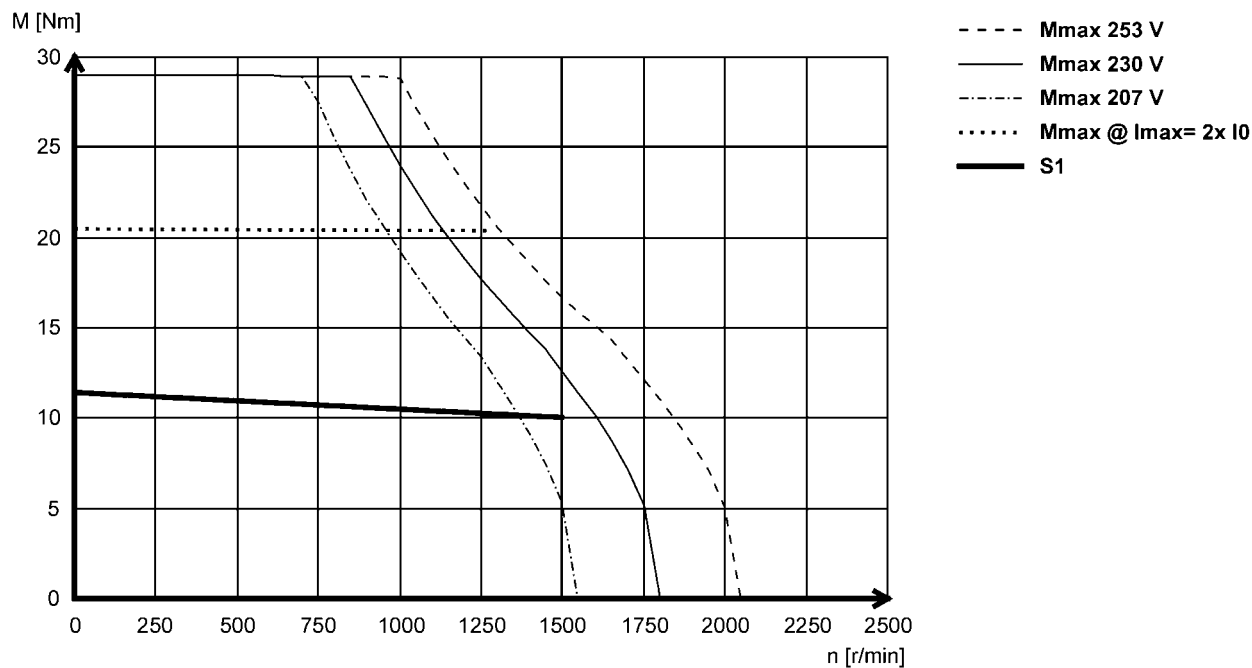

MCS12H30L- (non-ventilated)

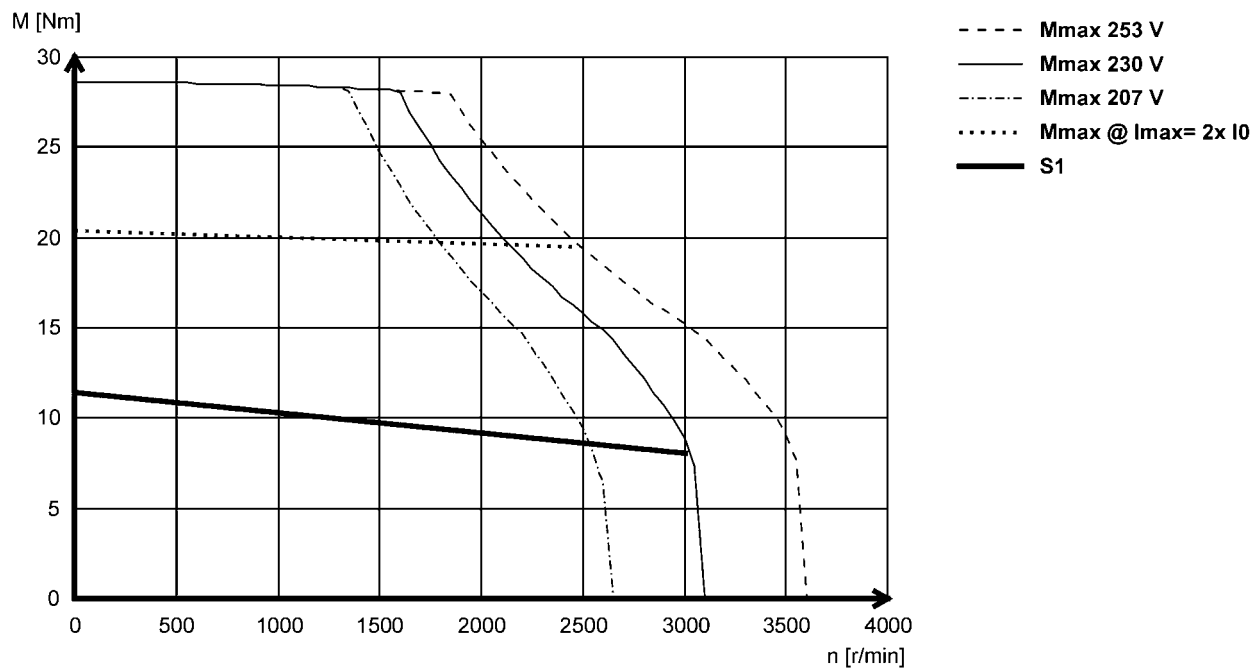

MCS synchronous servo motors


Technical data



Torque characteristics


- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12L20L (non-ventilated)

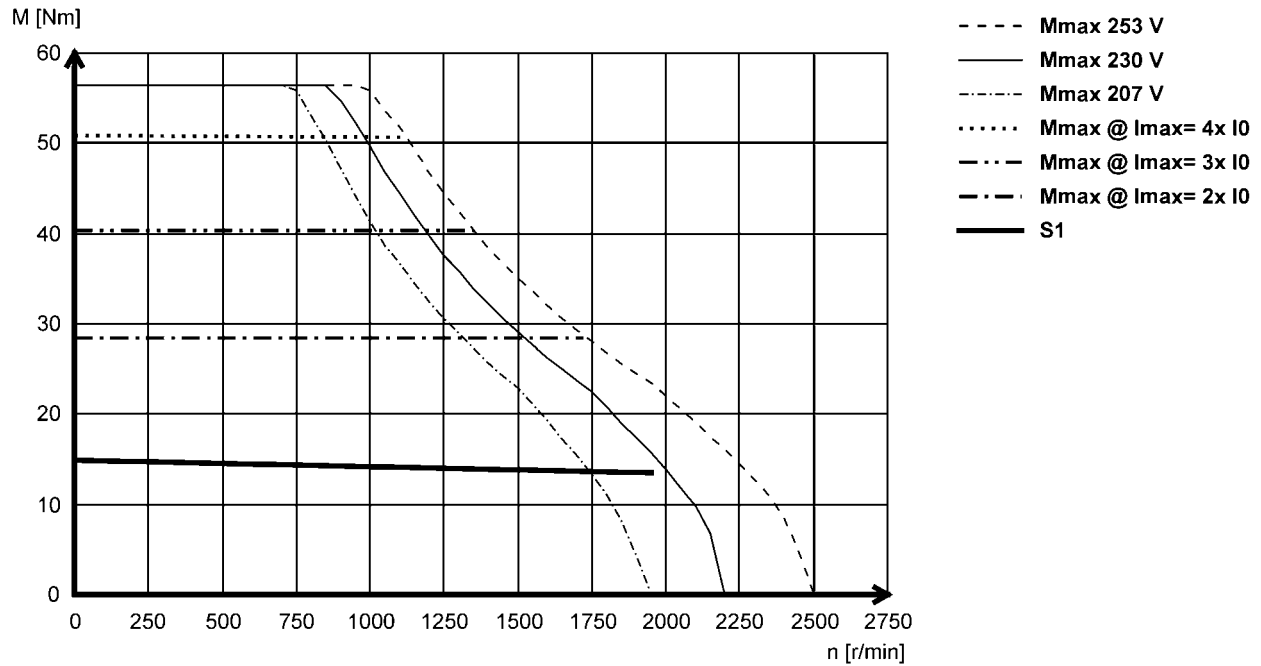



Dimensions, self-ventilated

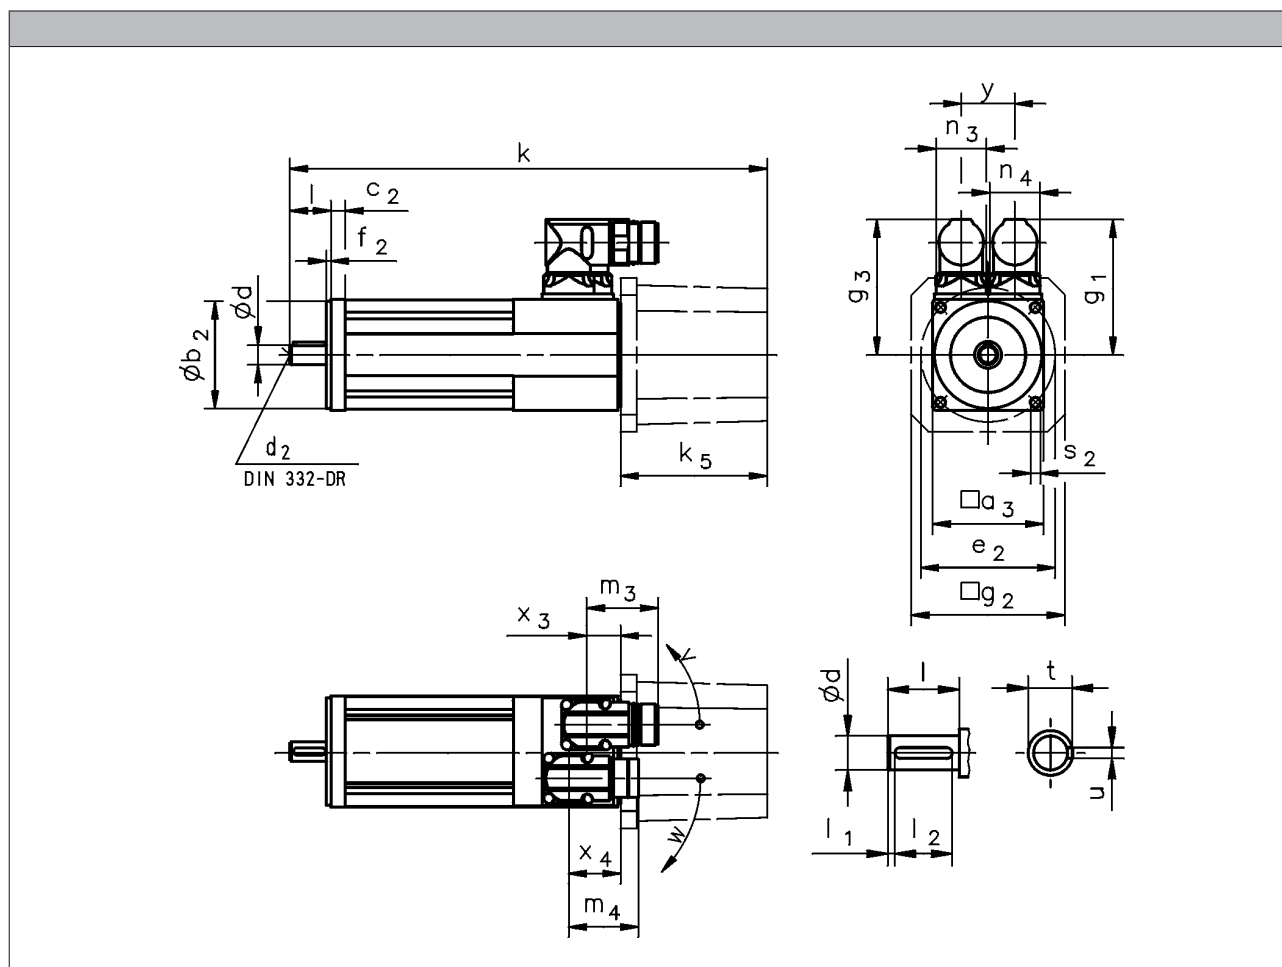

			MCS06C	MCS06F	MCS06I
R□ / C40 B0	k	[mm]	155	185	215
R□ / C40 P□	k	[mm]	174	204	233
SR□ / SV□ / E□□ B0	k	[mm]	237	266	297
SR□ / SV□ / E□□ P□	k	[mm]	255	285	315
SR□ / SV□ / E□□	k ₅	[mm]	82.0		
	g ₂	[mm]	86.0		
SKM B0	k	[mm]	190	220	250
SKM P□	k	[mm]	209	239	268
SKM	k ₅	[mm]	35.0		
	g ₂	[mm]	62.0		

- Speed / angle sensor: R□ / C□□ / S□□ / E□□
- Brake: B0 / P□

MCS synchronous servo motors

Technical data



Dimensions, self-ventilated


	g ₁	g ₃	x ₃	x ₄	m ₃	m ₄	n ₃	n ₄	y	v	w
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[°]	[°]
MCS06	77	77	19	29	40	40	28	28	30	190	230

	d	d ₂	l	l ₁	l ₂	u	t
	k6		-0.7 ... 0.3				
	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]
MCS06	11	M4	23	2.0	18	4.0	12.5

	a ₃	b ₂	c ₂	e ₂	f ₂	s ₂
		j6				
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
MCS06	62	60	8	75	2.5	5.5



Dimensions, self-ventilated

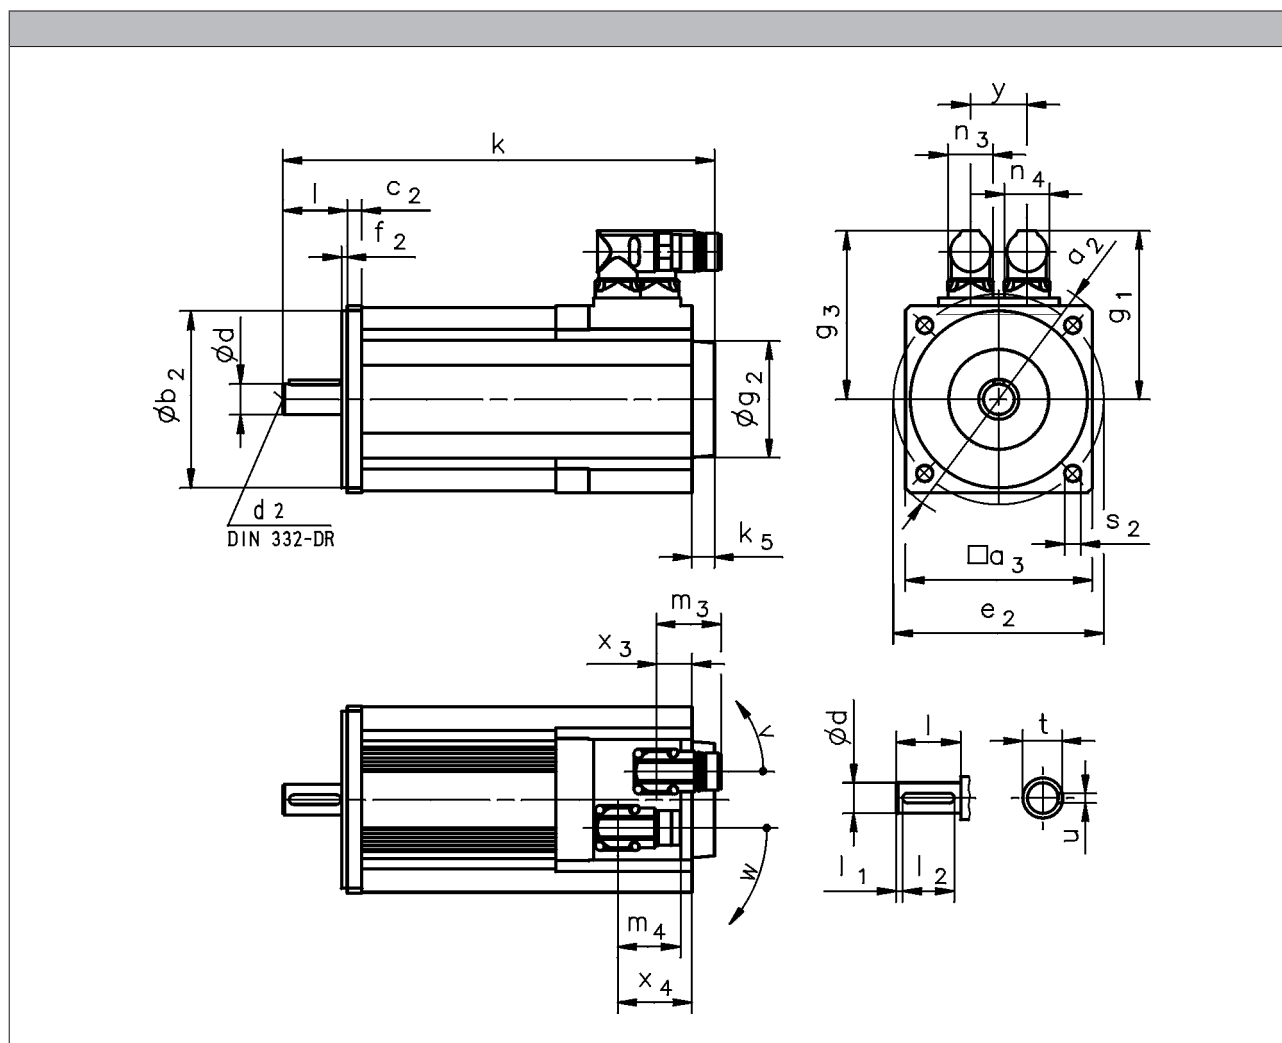

			MCS09D	MCS09F	MCS09H	MCS09L	MCS12D	MCS12H	MCS12L
R□□ / C40 B0	k	[mm]	213	233	253	293	228	268	308
R□□ / C40 P□	k	[mm]	233	253	273	313	248	288	328
R□□ / C40	k ₅	[mm]	13				14		
	g ₂	[mm]	67				72		
S□□ / E□□ B0	k	[mm]	264	284	304	344	277	317	357
S□□ / E□□ P□	k	[mm]	284	304	324	364	297	337	377
S□□ / E□□	k ₅	[mm]	64				63		
	g ₂	[mm]	81				89		

			MCS14D	MCS14H	MCS14L	MCS14P	MCS19F	MCS19J	MCS19P
R□□ / C40 B0	k	[mm]	251	291	331	371	280	320	380
R□□ / C40 P□	k	[mm]	279	319	359	399	314	364	424
R□□ / C40	k ₅	[mm]	24				15		
	g ₂	[mm]	78						
S□□ / E□□ B0	k	[mm]	301	341	381	421	329	369	429
S□□ / E□□ P□	k	[mm]	329	369	409	449	363	413	473
S□□ / E□□	k ₅	[mm]	74				64		
	g ₂	[mm]	101						

- Speed / angle sensor: R□□ / C□□ / S□□ / E□□
- Brake: B0 / P□

MCS synchronous servo motors

Technical data



Dimensions, self-ventilated

	g ₁	g ₃	x ₃	x ₄	m ₃	m ₄	n ₃	n ₄	y	v	w
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[°]	[°]
MCS09	90	90	20	44	40	40	28	28	35	195	260
MCS12	105	105	22	46							

	g ₁	g ₃	x ₃	x ₄	m ₃	m ₄	n ₃	n ₄	y	v	w
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[°]	[°]
MCS14D15-	117	117	24	48	40	40	28	28	35	195	260
MCS14D36-											
MCS14H15-											
MCS14H32-											
MCS14L15-											
MCS14L32-	146	126	29	36		75		45		180	205
MCS14P14-	117	117	24	48		40		28		195	260
MCS14P32-	146	126	29	36		75		45		180	205
MCS19F14-	142	142	24 51 ¹⁾	48 75 ¹⁾		40		28		195	260
MCS19F30-	171	151	29 56 ¹⁾	36 63 ¹⁾		75		45		180	205
MCS19J14-	142	142	24 51 ¹⁾	48 75 ¹⁾		40		28		195	260
MCS19J30-	171	151	29 56 ¹⁾	36 63 ¹⁾		75		45		180	205
MCS19P14-	142	142	24 51 ¹⁾	48 75 ¹⁾		40		28		195	260
MCS19P30-	171	151	29 56 ¹⁾	36 63 ¹⁾		75		45		180	205

	d	d ₂	l	l ₁	l ₂	u	t
	k6		-0.7 ... 0.3				
	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]
MCS09	14	M5	30	2.5	25	5.0	16.0
MCS12	19	M6	40	4.0	32	6.0	21.5
MCS14	24	M8	50	5.0	40	8.0	27.0
MCS19	28	M10	60		50		31.0

	a ₂	a ₃	b ₂	c ₂	e ₂	f ₂	s ₂
			j6				
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
MCS09	120	89	80	8	100	3.0	7.0
MCS12	160	116	110	9	130	3.5	10.0
MCS14	188	143	130	13	165		12.0
MCS19	250	192	180	11	215	4.0	14.0


¹⁾ On version with brake (P□)

MCS synchronous servo motors

Technical data



Dimensions, forced ventilated

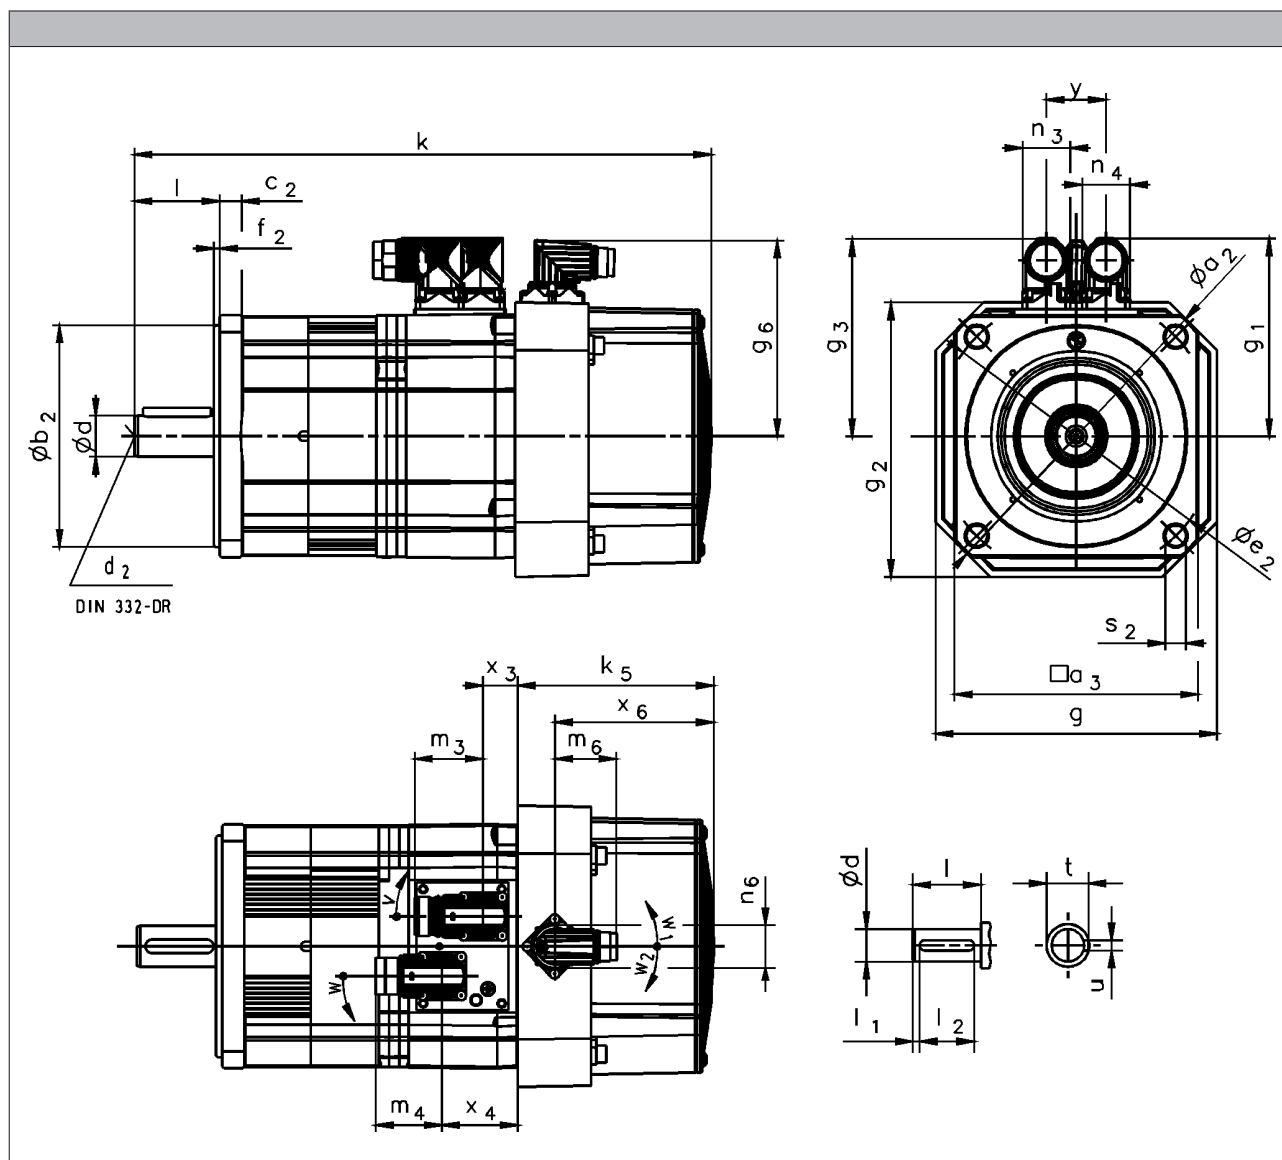

			MCS12D	MCS12H	MCS12L	MCS14D	MCS14H	MCS14L	MCS14P	MCS19F	MCS19J	MCS19P
R□□ / C40 B□	k	[mm]	301	341	381	339	379	419	459	387	427	487
R□□ / C40 P□	k	[mm]	321	361	401	368	408	448	488	421	471	531
R□□ / C40	k ₅	[mm]	92								126	
S□□ / E□□ B□	k	[mm]	344	384	424	392	432	472	512	425	465	525
S□□ / E□□ P□	k	[mm]	364	404	444	421	461	501	541	459	509	569
S□□ / E□□	k ₅	[mm]	135								165	
	g	[mm]	140								212	
	g ₂	[mm]	140								210	

- Speed / angle sensor: R□□ / C□□ / S□□ / E□□
- Brake: B□ / P□

MCS synchronous servo motors

Technical data



Dimensions, forced ventilated

	g ₁	g ₃	g ₆	x ₃	x ₄	x ₆	m ₃	m ₄	m ₆	n ₃	n ₄	n ₆	y	v	w	w ₁	w ₂	
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[°]	[°]	[°]	[°]	
MCS12D17	105	105	107	16	40	67	40	40	37	28	28	28	35	160	160	120	130	
MCS12D35																		
MCS12H14																		
MCS12H34																		
MCS12L17																		
MCS12L39																		
MCS14D14	117	117	115	20	44	93												
MCS14D30																		
MCS14H12																		
MCS14H28	146	126		24	31			75										
MCS14L14	117	117		20	44			40										
MCS14L30	146	126		24	31			75										
MCS14P11	117	117		20	44			40										
MCS14P26	146	126		24	31			75										
MCS19F12	142	142		19 46 ¹⁾	43 70 ¹⁾			96										40
MCS19F29	171	151		24 51 ¹⁾	31 58 ¹⁾	75												45
MCS19J12																		
MCS19J29																		
MCS19P12																		
MCS19P29																		

	d	d ₂	l	l ₁	l ₂	u	t
	k6		-0.7 ... 0.3				
	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]
MCS12	19	M6	40	4.0	32	6.0	21.5
MCS14	24	M8	50	5.0	40	8.0	27.0
MCS19	28	M10	60		50		31.0

	a ₂	a ₃	b ₂	c ₂	e ₂	f ₂	s ₂
	j6						
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
MCS12	160	116	110	9	130	3.5	10.0
MCS14	188	143	130	13	165		12.0
MCS19	250	192	180	11	215	4.0	14.0

¹⁾ On version with brake (P□)

MCS synchronous servo motors

Technical data





Permanent magnet holding brake

The synchronous servo motor can be fitted with integral permanent magnet holding brakes.

In the case of permanent magnet brakes, the rated torque applies solely as holding torque at standstill. This is due to the nature of their design. During braking from full motor speed, e.g. in the event of emergency stops, the braking torque is significantly reduced.

As such, they may not be used as safety elements (particularly with lifting axes) without additional measures being implemented.

The brakes are activated when the supply voltage is disconnected (closed-circuit principle). When using the brakes purely as holding brakes, virtually no wear occurs on the friction surfaces.

For traversing axes, adherence to the permissible load/brake motor (J_L / J_{MB}) moment of inertia ensures that the permissible maximum switching rate of the brake will not be exceeded and at least 2,000 emergency stop functions can be performed from a speed of 3,000 rpm.

For lifting axes, the load torque resulting from the weight acts additionally. In this case the specifications for J_L / J_{MB} do not apply.

Caution:

The brakes used are not safety brakes in the sense that a reduction in torque may arise as a result of disruptive factors that cannot be influenced, e.g. oil ingress.

The ohmic voltage drop along the cable must be taken into consideration in long motor supply cables and must be compensated for by a higher voltage at the line input.

The following applies for Lenze system cables:

$$U[V] = U_B[V] + 0.08 \frac{[V]}{[A] \cdot [m]} \cdot I_{Lg}[m] \cdot I_B[A]$$

If no suitable voltage (incorrect value, incorrect polarity) is applied to the brake, the brake will be applied and can be overheated and destroyed by the motor continuing to rotate.

The shortest switching times of the brakes are achieved by DC switching of the voltage. A spark suppressor is required to suppress interference and to increase the service life of the relay contacts here.



Permanent magnet holding brake



Permanent magnet holding brake

Rated data with standard braking torque

	$U_{N, DC}^{3, 5)}$	M_N 20 °C	M_N 120 °C	M_{av} 120 °C	$I_N^{2)}$	J	$t_1^{1)}$	$t_2^{1)}$	$Q_E^{4)}$	m	J_{MB}	J_L/J_{MB}
	[V]	[Nm]	[Nm]	[Nm]	[A]	[kgcm ²]	[ms]	[ms]	[J]	[kg]	[kgcm ²]	
MCS06C	24	2.20	2.00	0.60	0.34	0.12	15.0	30.0	30.0	0.30	0.26	22.1
MCS06F											0.34	16.6
MCS06I											0.42	13.3
MCS09D		8.00	6.00	4.50	0.65	1.07	20.0	40.0	400	0.80	2.17	36.4
MCS09F											2.57	30.5
MCS09H											2.97	26.3
MCS09L											3.87	19.9
MCS12D		12.0	10.0	7.00			13.0	43.0		0.90	5.07	15.0
MCS12H											8.40	8.70
MCS12L											11.7	5.90
MCS14D		22.0	18.0	8.00	0.88	3.20	15.0	150	640	1.90	11.3	10.5
MCS14H											17.4	6.50
MCS14L											26.6	3.90
MCS14P											37.9	2.40
MCS19F		37.0	32.0	15.0	0.93	12.4	96.0	113	2350	3.10	77.4	5.20

Rated data with increased braking torque

	$U_{N, DC}^{3, 5)}$	M_N 20 °C	M_N 120 °C	M_{av} 120 °C	$I_N^{2)}$	J	$t_1^{1)}$	$t_2^{1)}$	$Q_E^{4)}$	m	J_{MB}	J_L/J_{MB}
	[V]	[Nm]	[Nm]	[Nm]	[A]	[kgcm ²]	[ms]	[ms]	[J]	[kg]	[kgcm ²]	
MCS09D	24	12.0	10.0	7.00	0.65	1.07	20.0	40.0	400	0.80	2.17	36.4
MCS09F											2.57	30.5
MCS09H											2.97	26.3
MCS09L											3.87	19.9
MCS12D		24.0	19.0	12.0	0.71	3.13	16.0	90.0	890	1.20	7.10	24.3
MCS12H											10.4	16.3
MCS12L											13.7	12.1
MCS14D		37.0	32.0	15.0	0.93	12.4	96.0	113	2350	3.10	20.5	22.2
MCS14H											26.6	16.9
MCS14L											35.8	12.3
MCS14P											47.1	9.10
MCS19J		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	135	2.20
MCS19P											190	1.20

1) Engagement and disengagement times are valid for rated voltage ($\pm 0\%$) and protective circuit for brakes with varistor for DC switching. The times may increase without a protective circuit.

2) The currents are the maximum values when the brake is cold (value used for dimensioning the current supply). The values for a motor at operating temperature are considerably lower.

3) With 24V DC brake: smoothed DC voltage, ripple $\leq 1\%$.

4) Maximum switching energy per emergency stop at $n = 3000$ r/min for at least 2000 emergency stops.

5) Voltage tolerance: -10% to $+5\%$



Resolver

Stator-fed resolver with two stator windings offset by 90° and one rotor winding with transformer winding.

Speed/angle sensor				RS0	RV0
	1)			RS0	RV0
Product key				RS0	RV03
				RS0	RV03
Resolution				0.80	
Angle			[°]	0.80	
Accuracy				-10 ... 10	
			[°]	-10 ... 10	
Absolute positioning				1 revolution	
				1 revolution	
Max. speed				8000	
	$n_{\max}$		[r/min]	8000	
Max. input voltage				10.0	
DC	$U_{\text{in,max}}$		[V]	10.0	
Max. input frequency				4.00	
	$f_{\text{in,max}}$		[Hz]	4.00	
Ratio				0.30	
Stator / rotor		$\pm 5 \%$		0.30	
Rotor impedance				51 + j90	
	Z_{ro}		[Ω]	51 + j90	
Stator impedance				102 + j150	
	Z_{so}		[Ω]	102 + j150	
Impedance				44 + j76	
	Z_{rs}		[Ω]	44 + j76	
Min. insulation resistance				10.0	
At DC 500 V	R		[Ω]	10.0	
Number of pole pairs				1	
				1	
Max. angle error				-10 ... 10	
			[°]	-10 ... 10	
Inverter assignment				E84AVTC E94A ECS EVS93	
				E84AVTC E94A ECS EVS93	

1) 6 - Product key > speed/angle sensor

Speed-dependent safety functions

Suitable for safety function				No	Yes
				No	Yes
Max. permissible angular acceleration					
MCS06	α	[rad/s ²]			56 000
MCS09 ... MCS19 2)	α	[rad/s ²]			19 000
Functional safety					
IEC 61508					SIL3
EN 13849-1					Up to Performance Level e

2) 10 - Single encoder concepts with resolvers



Incremental encoder and SinCos absolute value encoder

Encoder type			TTL incremental	SinCos absolute value																						
Speed/angle sensor				C40	EQI	SRS	SVS																			
	1)		Product key																							
			IK4096-5V-T	AM32-5V-E	AS1024-8V-H	AS1024-8V-K2																				
Encoder type			Single-turn	Multi-turn	Single-turn																					
Pulses																										
			4096	32	1024																					
Output signals			TTL				1 Vss																			
Interfaces																										
			EnDat		HiPerface																					
Absolute revolutions			0	4096	1																					
Resolution																										
Angle 2)		[°]	1.30	0.40																						
Accuracy			-1 ... 1	-5 ... 5	-0.8 ... 0.8																					
		[°]																								
Min. input voltage			DC				U _{in,min}		[V]		4.50		4.75		7.00											
Max. input voltage																										
DC			DC				U _{in,max}				[V]				5.50				5.25				12.0			
Max. speed			n _{max}				[r/min]				7 324				12 000				6 000							
Max. current consumption																										
			I _{max}				[A]				0.075				0.17				0.080							
Limit frequency			f _{max}				[kHz]				500				6.00				200							
Inverter assignment																										
			E94P				E94A				E84AVTC				E94A				ECS				EVS93			

¹⁾ 6 - Product key > speed/angle sensor

²⁾ Inverter-dependent.

Speed-dependent safety functions

Suitable for safety function			No	No	No	Yes
Max. permissible angular acceleration						
MCS06	α	[rad/s ²]				970000
MCS09 ... MCS19	α	[rad/s ²]				240000
Functional safety						
IEC 61508						SIL2
EN 13849-1						Up to Performance Level d

MCS synchronous servo motors

Accessories



Incremental encoder and SinCos absolute value encoder

Encoder type			SinCos absolute value				
Speed/angle sensor							
			SKM	SRM	SVM	ECN	EQN
Product key							
			AM128-8V-H	AM1024-8V-H	AM1024-8V-K2	AS2048-5V-E	AM2048-5V-E
Encoder type							
			Multi-turn			Single-turn	Multi-turn
Pulses							
			128	1024		2048	
Output signals							
			1 Vss				
Interfaces							
			Hiperface			EnDat	
Absolute revolutions							
			4096			1	4096
Resolution							
Angle		[°]	0.40				
Accuracy							
		[°]	-1.3 ... 1.3	-0.8 ... 0.8		-0.6 ... 0.6	
Min. input voltage							
DC	U _{in,min}	[V]	7.00			4.75	
Max. input voltage							
DC	U _{in,max}	[V]	12.0			5.25	
Max. speed							
	n _{max}	[r/min]	9000	6000		12000	
Max. current consumption							
	I _{max}	[A]	0.060	0.080		0.15	0.25
Limit frequency							
	f _{max}	[kHz]	200				
Inverter assignment							
			E84AVTC E94A ECS EVS93			E94A	

¹⁾ Inverter-dependent.

Speed-dependent safety functions

Suitable for safety function			No	No	Yes	No	No
Max. permissible angular acceleration							
MCS06	α	[rad/s ²]			970000		
MCS09 ... MCS19	α	[rad/s ²]			240000		
Functional safety							
IEC 61508					SIL2		
EN 13849-1					Up to Performance Level d		

6.11

MCS synchronous servo motors

Accessories



Blowers

Rated data for 50 Hz

		Degree of protection	Number of phases	$U_{\min}$	$U_{\max}$	$U_{N, AC}$	P_N	I_N
				[V]	[V]	[V]	[kW]	[A]
MCS12	F10	IP54	1	210	240	230	0.019	0.12
	F50			104	122	115	0.018	0.22
MCS14	F10			210	240	230	0.040	0.25
	F50			104	122	115		0.53
MCS19	F10			210	240	230	0.060	0.26
	F50			104	122	115	0.047	0.45

Rated data for 60 Hz

		Degree of protection	Number of phases	$U_{\min}$	$U_{\max}$	$U_{N, AC}$	P_N	I_N
				[V]	[V]	[V]	[kW]	[A]
MCS12	F10	IP54	1	210	240	230	0.019	0.12
	F50			104	122	115	0.018	0.22
MCS14	F10			210	240	230	0.040	0.25
	F50			104	122	115		0.53
MCS19	F10			210	240	230	0.060	0.26
	F50			104	122	115	0.047	0.45



Temperature monitoring


The thermal sensors used in the MCS motors continuously monitor the motor temperature. The temperature signal is transmitted over the system cable of the feedback system to the servo controller. Because of the different physical conditions, there are two temperature monitoring mechanisms on the MCS motors (there is no complete motor protection in either case)

MCS06

on this motor, the winding temperature of one winding phase is monitored with a KTY 83-110 type thermal sensor.

MCS09 to 19

These motors are monitored by three thermal sensors (1x KTY 83-110 + 2x PTC 150 °C) connected in series. This means that the temperature of the motor is determined with great accuracy in the permitted operating range and at the same time the overtemperature response configured in the controller is executed in the event of overtemperature in one of the winding phases.

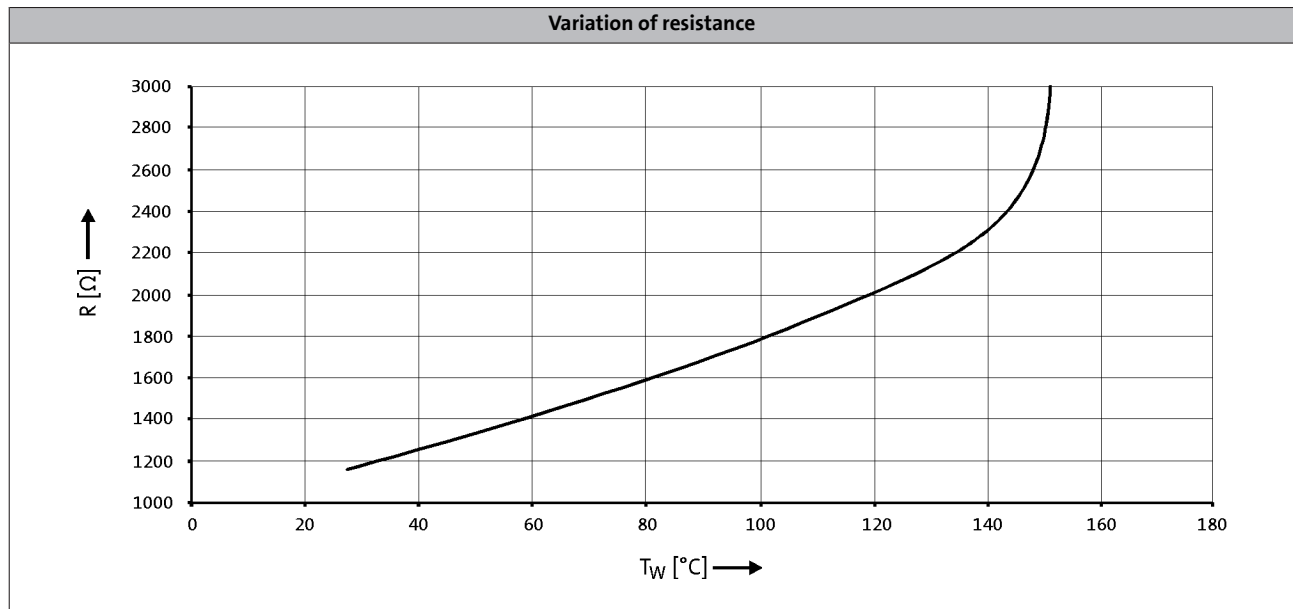

- If the detector is supplied with a measured current of 1 mA, the above relationship between the temperature and the resistance applies.

MCS synchronous servo motors

Accessories



Terminal box


If a servo motor is to be connected to an existing cable or plug connectors are not to be used for other reasons, the connection can also be made via a terminal box.

The terminals are designed as tension spring terminals to ensure here the long-term vibration resistance of the cable contacts with adequate contact pressure required.

The terminal boxes have generously dimensioned space for the customer's own wiring and large surface shield connection areas to ensure a secure EMC-compliant connection. The cable outlet may be to the left or to the right, depending on requirements.

It is not possible to attach a terminal box to the MCS06 or to models with the blower.

Connections

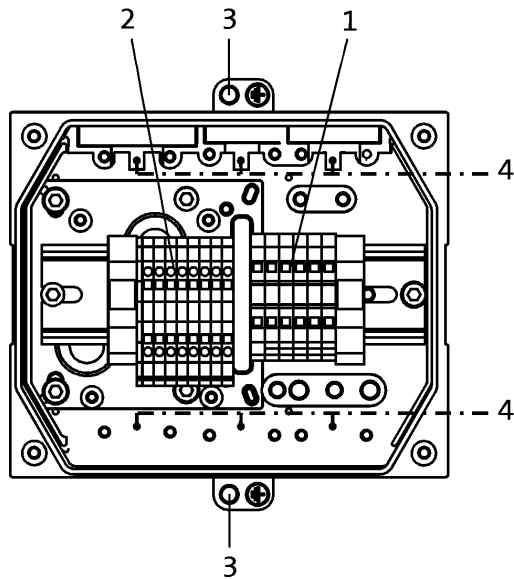


1: Power connection (terminals loadable up to 65 A) + brake connection.

2: Angle/speed sensor connection + thermal sensor connection.

3: PE connection.

4: Large area shield contact.


5: Openings for 2x M32, 2x M25, 2x M20 fittings. The openings are plugged and can be opened up as required by the customer.

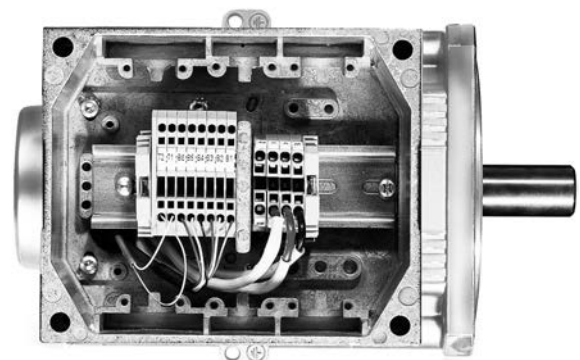



Terminal box

Dimensions

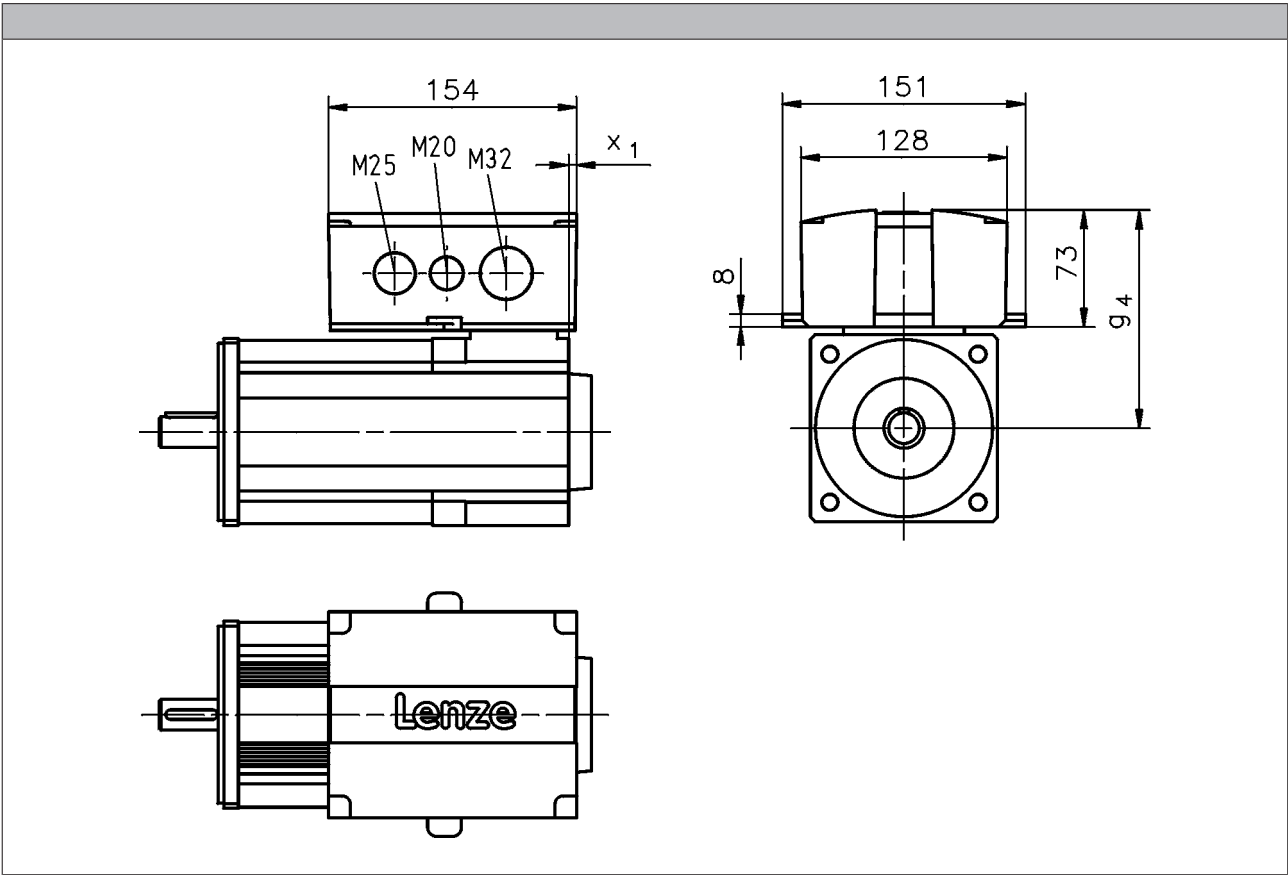

	g ₄ [mm]	x ₁ [mm]
MCS09	121	8
MCS12	136	5
MCS14	147	3
MCS19	172	

MCS synchronous servo motors

Accessories



ICN connector


An ICN connector is used as standard for the electrical connection to the servo motors.

A connector is used for the connection of motor and brake. The connections to the feedback system/temperature monitoring and the blower each employ a separate connector.


The connectors can be rotated through 270° and are fitted with a bayonet catch for SpeedTec connectors. As the connector fixing is also compatible with conventional union nuts. Existing mating connectors can therefore still be used without difficulty.

Connection for power and brake

► MCS06 to 12

Pin assignment			
Contact	Designation	Meaning	
1	BD1	Holding brake +	
2	BD2	Holding brake -	
PE	PE	PE conductor	
4	U	Phase U power	
5	V	Phase V power	
6	W	Phase W power	

► MCS14 to 19

Pin assignment			
Contact	Designation	Meaning	
1		Not assigned	
2			
+	BD1	Holding brake +	
-	BD2	Holding brake -	
PE	PE	PE conductor	
U	U	Phase U power	
V	V	Phase V power	
W	W	Phase W power	




ICN connector

Feedback connection

► Resolver

Pin assignment		
Contact	Designation	Meaning
1	+Ref	Transformer windings
2	-Ref	
3	+VCC ETS	Supply: Electronic nameplate
4	+COS	Cosine stator windings
5	-COS	
6	+SIN	Sine stator windings
7	-SIN	
8		Not assigned
9		
10		
11	+KTY	KTY temperature sensor
12	-KTY	



► Hiperface incremental encoder and SinCos absolute value encoder

Pin assignment		
Contact	Designation	Meaning
1	B	Track B /+SIN
2	A ⁻	Track A inverse/-COS
3	A	Track A /+COS
4	+U _B	Supply +
5	GND	Mass
6	Z ⁻	Zero track inverse/-RS485
7	Z	Zero track /+RS485
8		Not assigned
9	B ⁻	Track B inverse/-SIN
10		Not assigned
11	+KTY	KTY temperature sensor
12	-KTY	

Code 20°

MCS synchronous servo motors


Accessories



ICN connector

Feedback connection

- SinCos absolute value encoder with EnDat interface

Pin assignment				
Contact	Designation	Meaning		
1	U _p sensor	Supply: UP sensor		
2		Not assigned		
3				
4	0 V sensor	Supply: 0 V sensor		
5	+KTY	KTY temperature sensor		
6	-KTY			
7	+U _B	Supply +		
8	Cycle	EnDat interface cycle		
9	Cycle ⁻	EnDat interface inverse cycle		
10	GND	Mass		
11	Shield	Encoder housing screen		
12	B	Track B		
13	B ⁻	Track B inverse/-SIN		
14	Data	EnDat interface data		
15	A	Track A		
16	A ⁻	Track A inverse		
17	Data ⁻	EnDat interface inverse data		

Blower connection

Pin assignment			
Contact	Designation	Meaning	
PE	PE	PE conductor	
1	U1	Fan	
2	U2		
3		Not assigned	
4			
5			
6			

MCS synchronous servo motors

Accessories



MCS synchronous servo motors

Accessories



Internet version

Lenze SE
Hans-Lenze-Straße 1
D-31855 Aersen
Phone: +49 (0)5154 82-0
Telefax: +49 (0)5154 82 28 00

www.Lenze.com

Lenze