

Automation systems Drive solutions

Controls
Inverters

Motors

Gearboxes

Engineering Tools

Motors: MCS synchronous servo motors

Gearboxes: g500-S shaft-mounted helical gearbox

Contents of the L-force catalogue

About Lenze		Lenze makes many things easy for you.	
		A matter of principle: the right products for every application.	
		L-force product portfolio	
Automation systems		Controller-based Automation	1.1
		Drive-based automation	1.2
Drive solutions		HighLine tasks	2.1
		StateLine tasks	2.2
		BaseLine tasks	2.3
Controls	Cabinet Controller	Controller 3200 C	3.1
		Controller c300	3.2
	Panel Controller	Controller p500	3.3
		Controller p300	3.4
	I/O system 1000	I/O system 1000	3.5
		Monitor Panel	3.6
Inverters	Decentralised	Inverter Drives 8400 protec	4.1
		Inverter Drives 8400 motec	4.2
	Cabinet	Servo Drives 9400 HighLine	4.4
		Inverter Drives 8400 TopLine	4.5
		Servo Inverters i700	4.6
		Inverter Drives 8400 HighLine	4.7
		Inverter Drives 8400 StateLine	4.8
		Inverter Drives 8400 BaseLine	4.10
	Servo motors	MCS synchronous servo motors	5.1
		MD□KS synchronous servo motors	5.2
		MQA asynchronous servo motors	5.3
		MCA asynchronous servo motors	5.4
	Three-phase AC motors	MF three-phase AC motors	5.5
		MH three-phase AC motors	5.6
		MD three-phase AC motors	5.7
		m300 Lenze Smart Motor	5.8
		MD/MH basic three-phase AC motors	5.9
Gearboxes	Axial gearbox	g700-P planetary gearbox	6.1
		MPR/MPG planetary gearboxes	6.2
		g500-H helical gearbox	6.3
		GST helical gearboxes	6.4
		g500-S shaft-mounted helical gearbox	6.5
		GFL shaft-mounted helical gearboxes	6.6
	Right-angle gearbox	g500-B bevel gearbox	6.7
		GKR bevel gearboxes	6.8
		GKS helical-bevel gearboxes	6.9
		GSS helical-worm gearboxes	6.10
	Motor data	Assignment see above	6.11
Engineering Tools		Navigator	7.1
		Drive Solution Designer	7.2
		Drive Solution Catalogue	7.3
		Engineer	7.4
		PLC Designer	7.5
		VisiWinNET®	7.6
		EASY Starter	7.7

Lenze makes many things easy for you.

With our motivated and committed approach, we work together with you to create the best possible solution and set your ideas in motion - whether you are looking to optimise an existing machine or develop a new one. We always strive to make things easy and seek perfection therein. This is anchored in our thinking, in our services and in every detail of our products. It's as easy as that!

1

Developing ideas

Are you looking to build the best machine possible and already have some initial ideas? Then get these down on paper together with us, starting with small innovative details and stretching all the way to completely new machines. Working together, we will develop an intelligent and sustainable concept that is perfectly aligned with your specific requirements.

2

Drafting concepts

We see welcome challenges in your machine tasks, supporting you with our comprehensive expertise and providing valuable impetus for your innovations. We take a holistic view of the individual motion and control functions here and draw up consistent, end-to-end drive and automation solutions for you - keeping everything as easy as possible and as extensive as necessary.

3

Implementing solutions

Our easy formula for satisfied customers is to establish an active partnership with fast decision-making processes and an individually tailored offer. We have been using this simple principle to meet the ever more specialised customer requirements in the field of mechanical engineering for many years.

4

Manufacturing machines

Functional diversity in perfect harmony: as one of the few full-range providers in the market, we can provide you with precisely those products that you actually need for any machine task – no more and no less. Our L-force product portfolio, a consistent platform for implementing drive and automation tasks, is invaluable in this regard.

5

Ensuring productivity

Productivity, reliability and new performance peaks on a daily basis – these are our key success factors for your machine. After delivery, we offer you cleverly devised service concepts to ensure continued safe operation. The primary focus here is on technical support, based on the excellent application expertise of our highly-skilled and knowledgeable after-sales team.

A matter of principle: the right products for every application.


Lenze's extensive L-force product portfolio follows a very simple principle. The functions of our finely scaled products are assigned to the three lines Base-Line, State-Line or High-Line.

But what does this mean for you? It allows you to quickly recognise which products represent the best solution for your own specific requirements.

Powerful products with a major impact:


- Easy handling
- High quality and durability
- Reliable technologies in tune with the latest developments

Lenze products undergo the most stringent testing in our own laboratory. This allows us to ensure that you will receive consistently high quality and a long service life. In addition to this, five logistics centres ensure that the Lenze products you select are available for quick delivery anywhere across the globe. It's as easy as that!

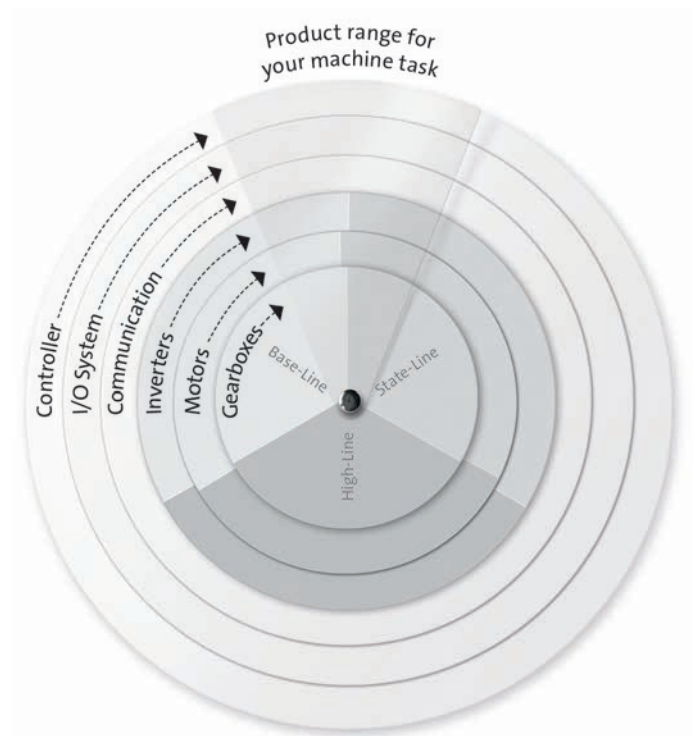


L-force product portfolio

Controls

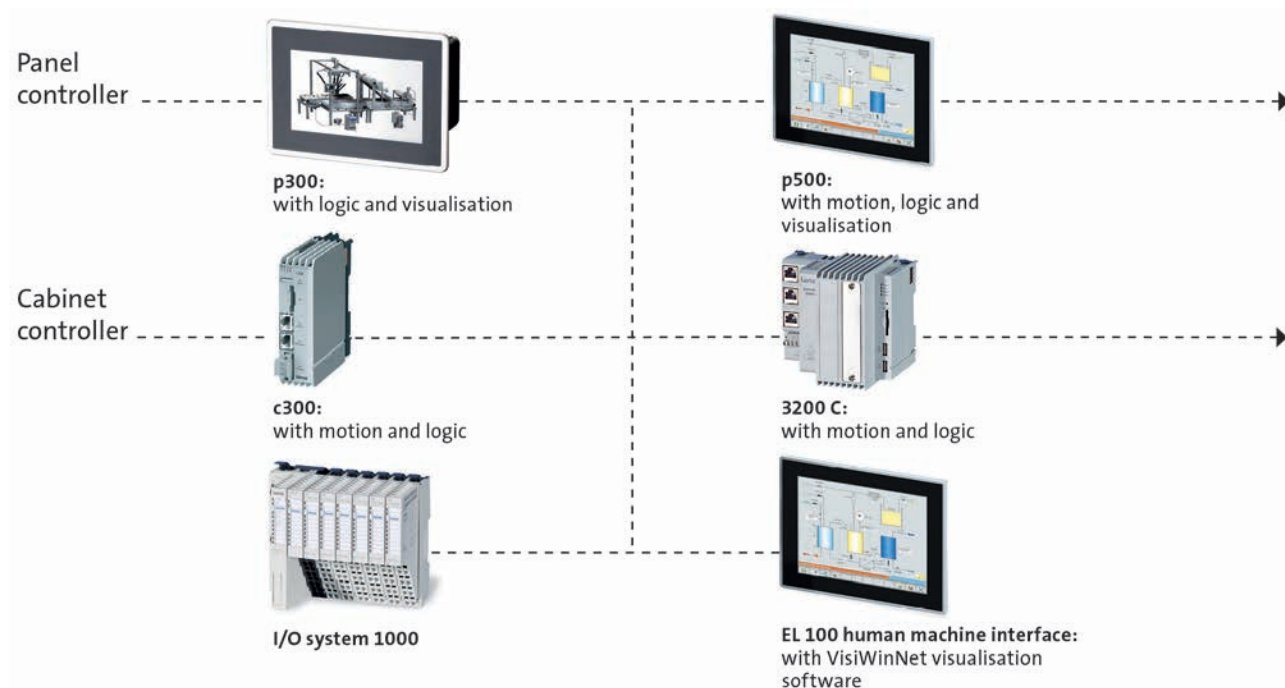


Engineering Tools

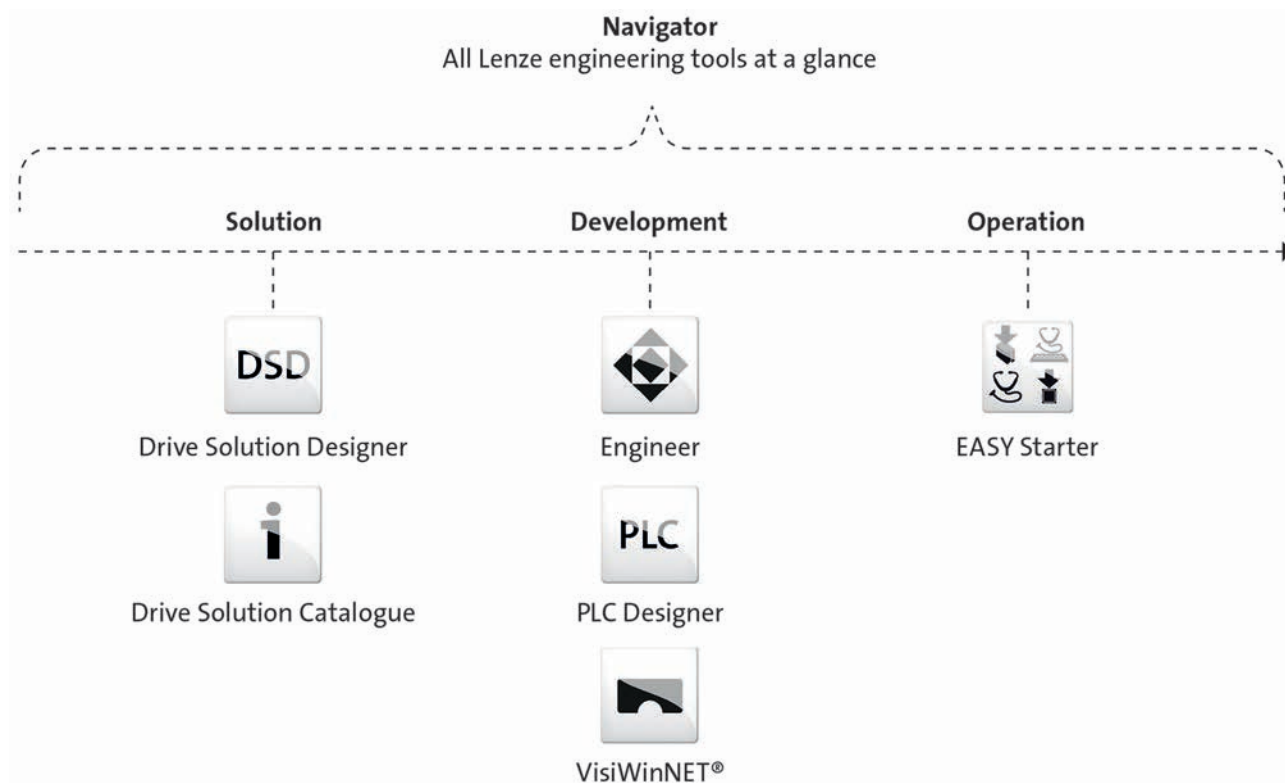


L-force product portfolio

Inverters

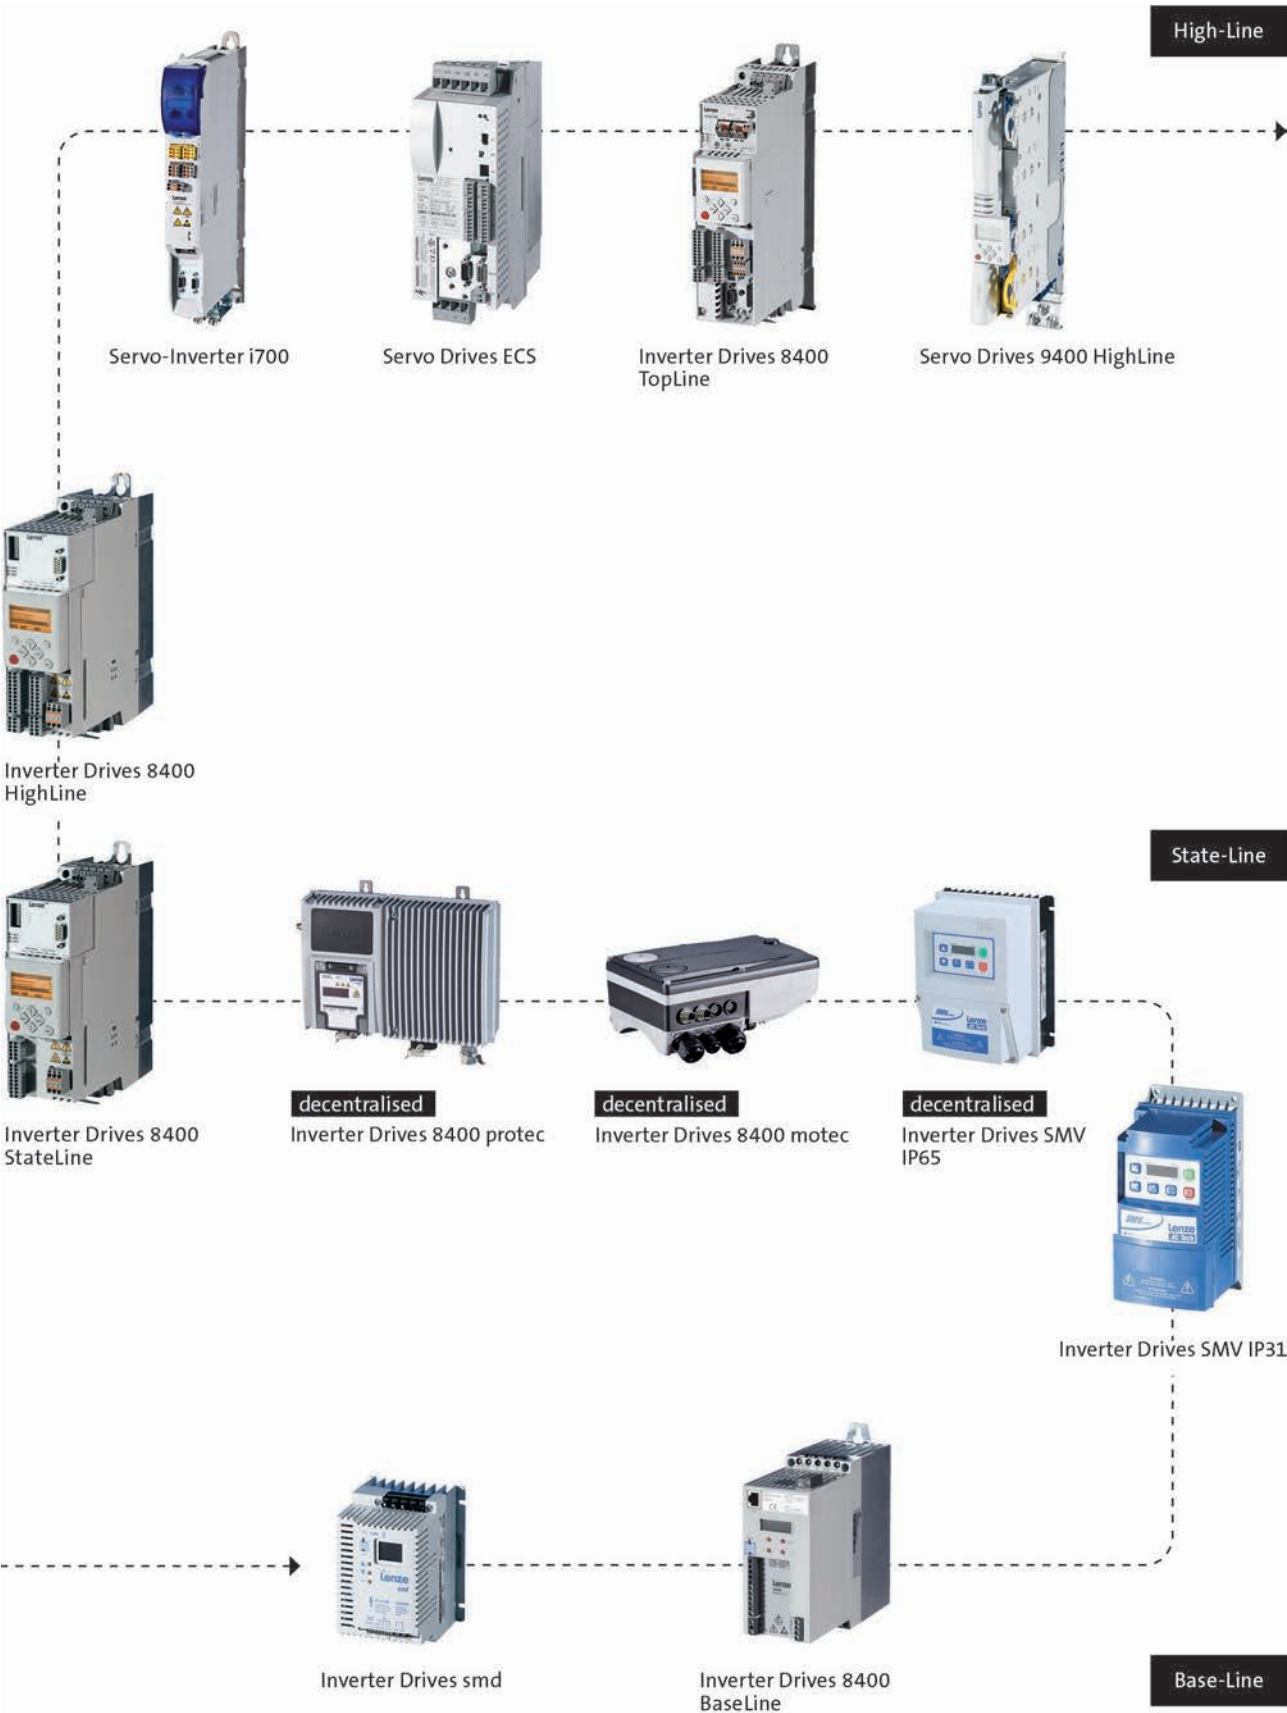


L-force product portfolio

Motors

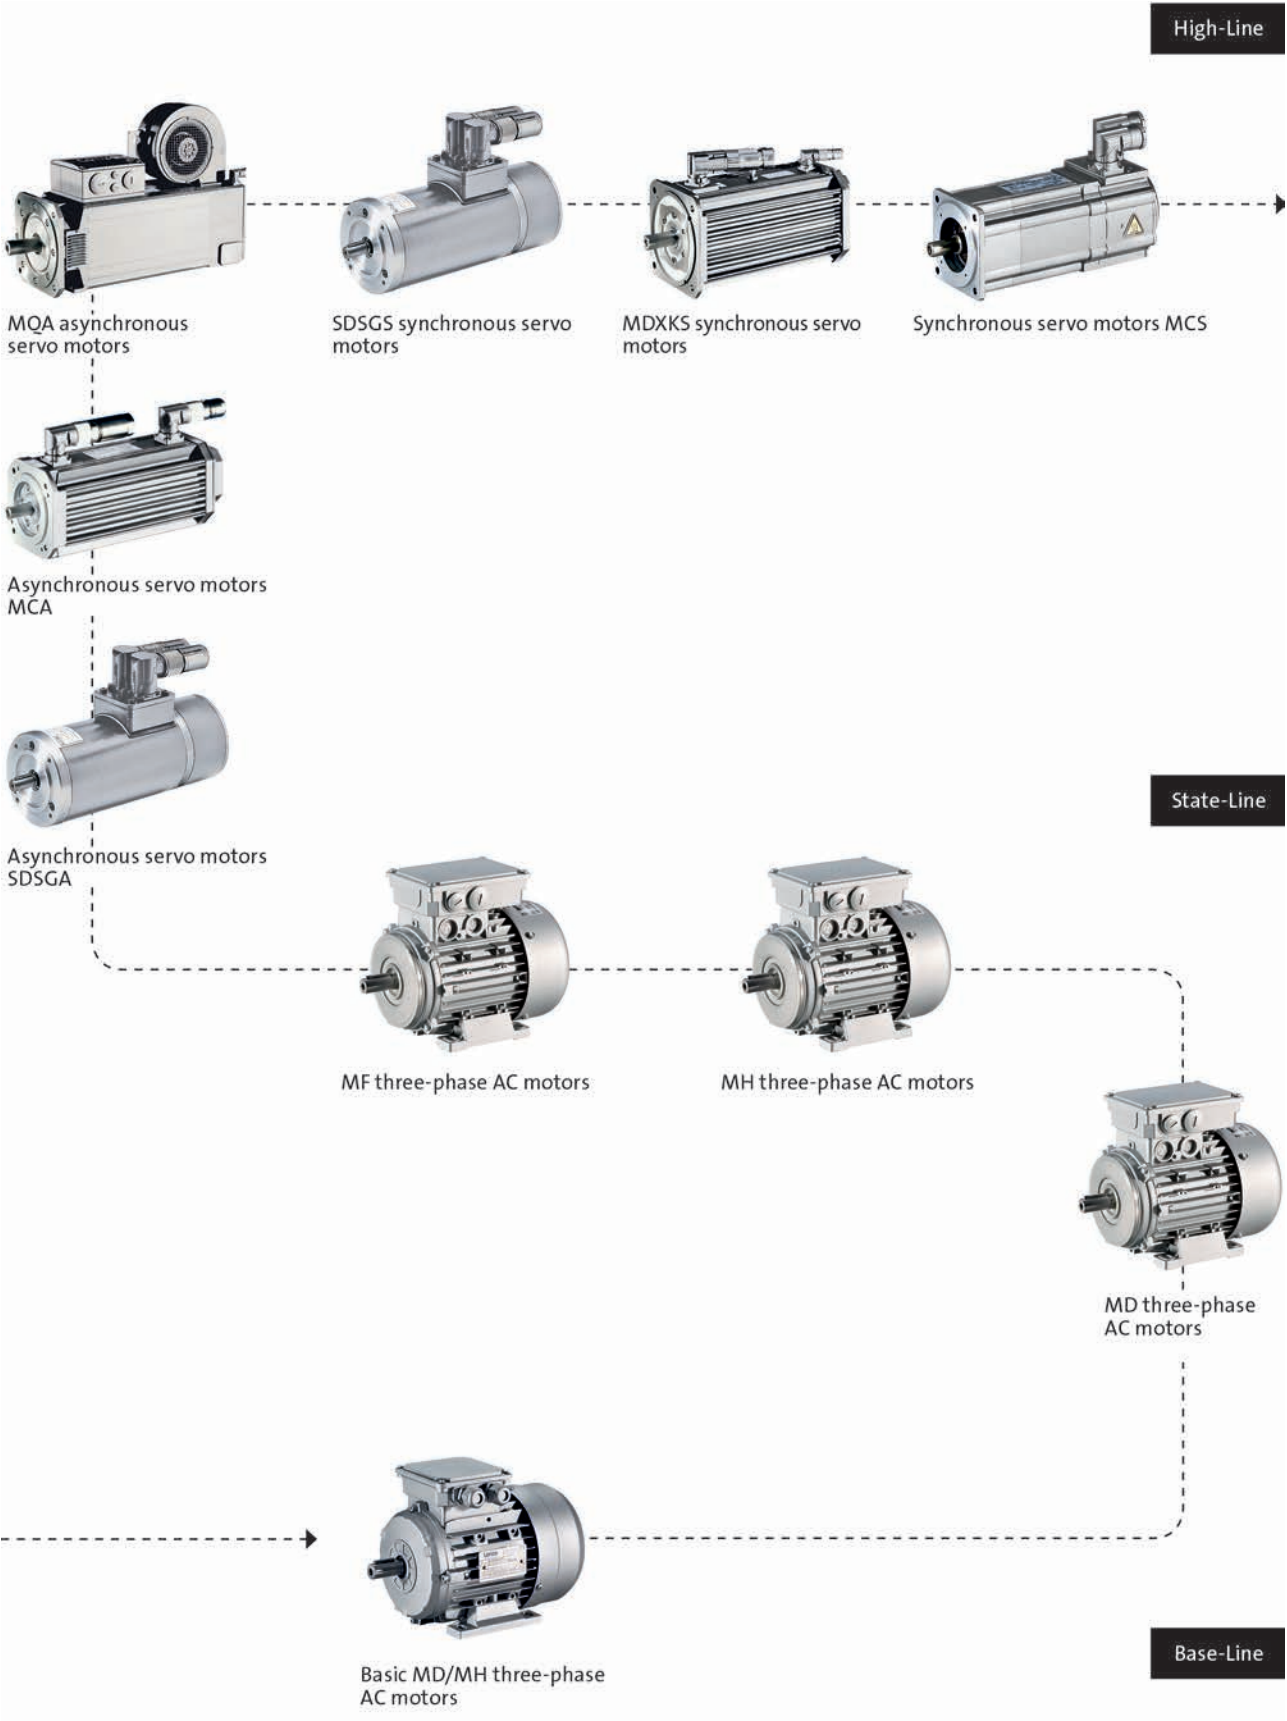


L-force product portfolio

Gearboxes

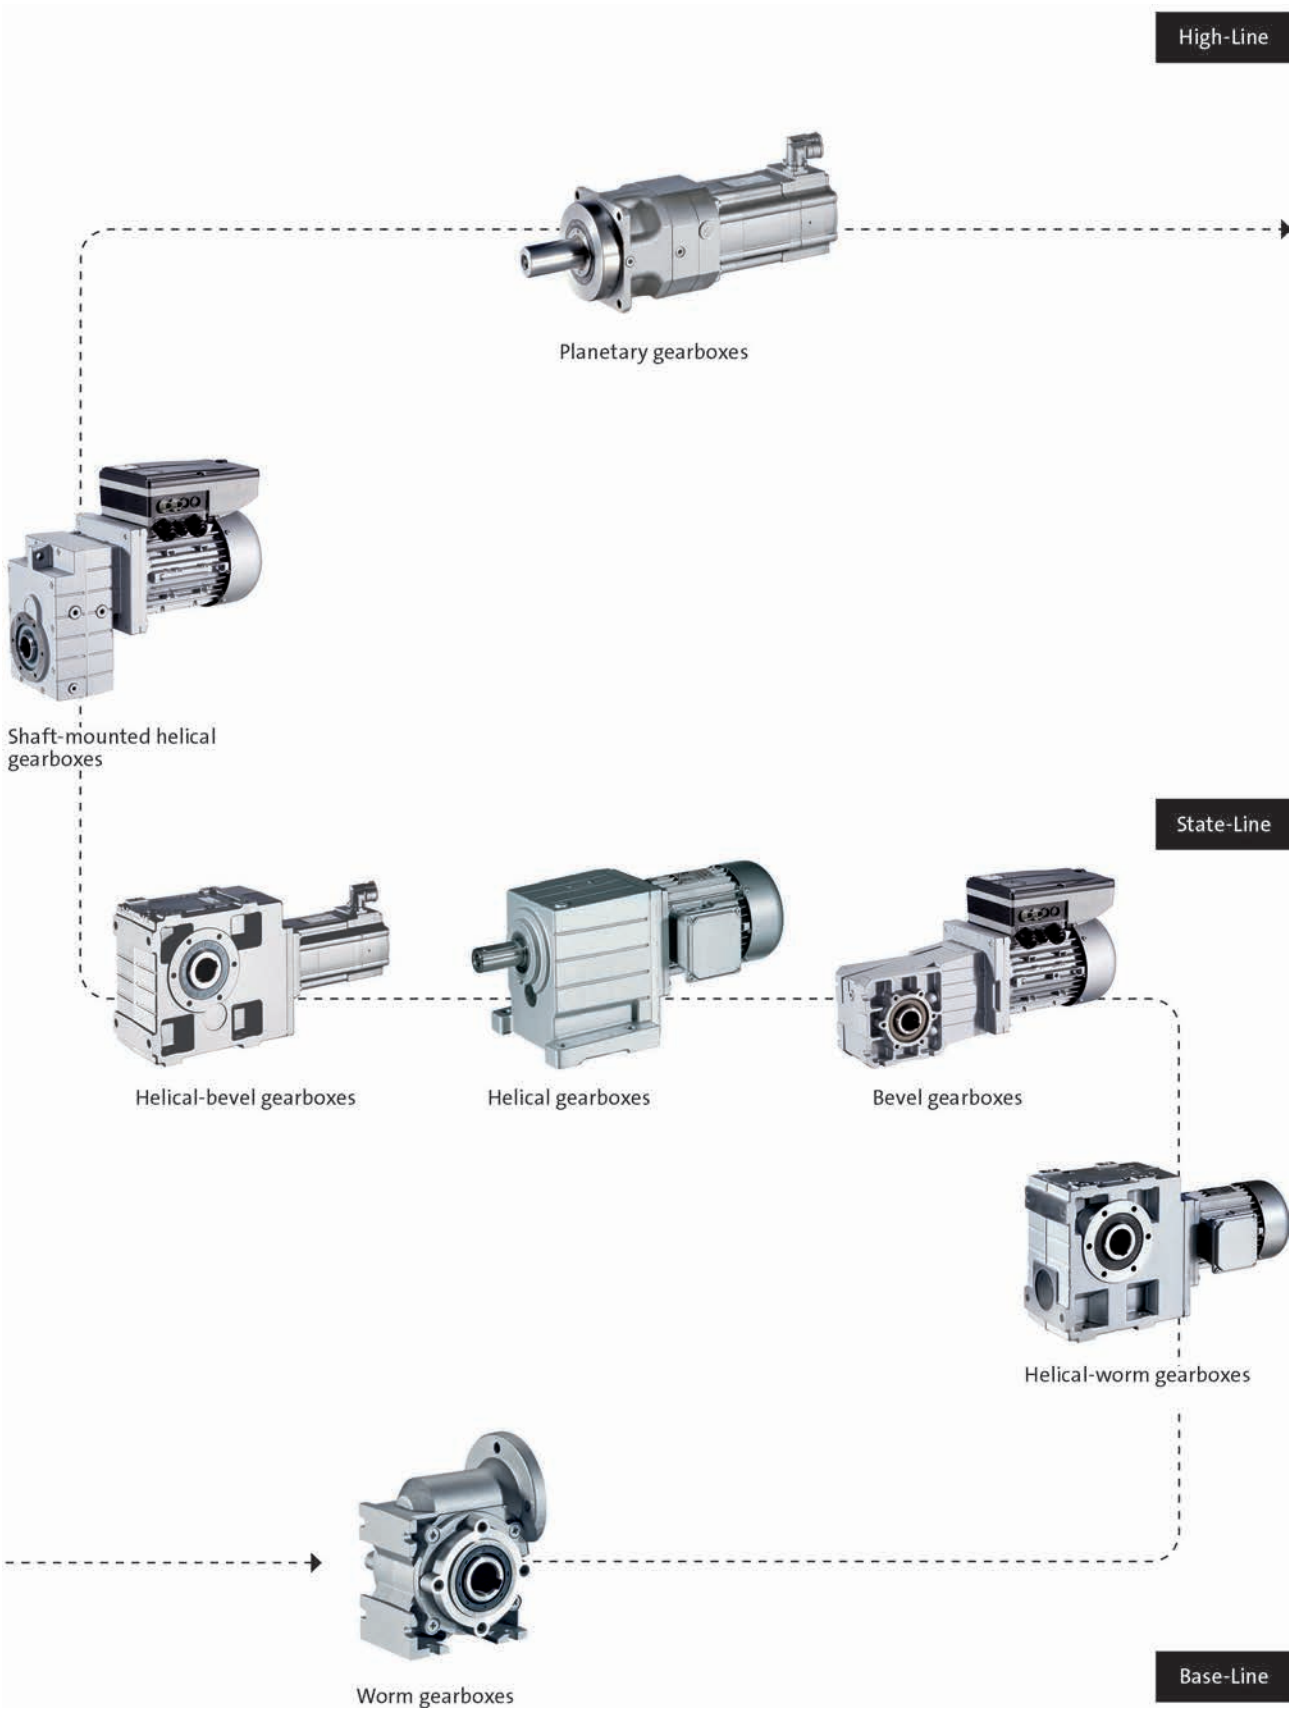

g500-S shaft-mounted helical geared motors

14 ... 650 Nm (synchronous servo motors)

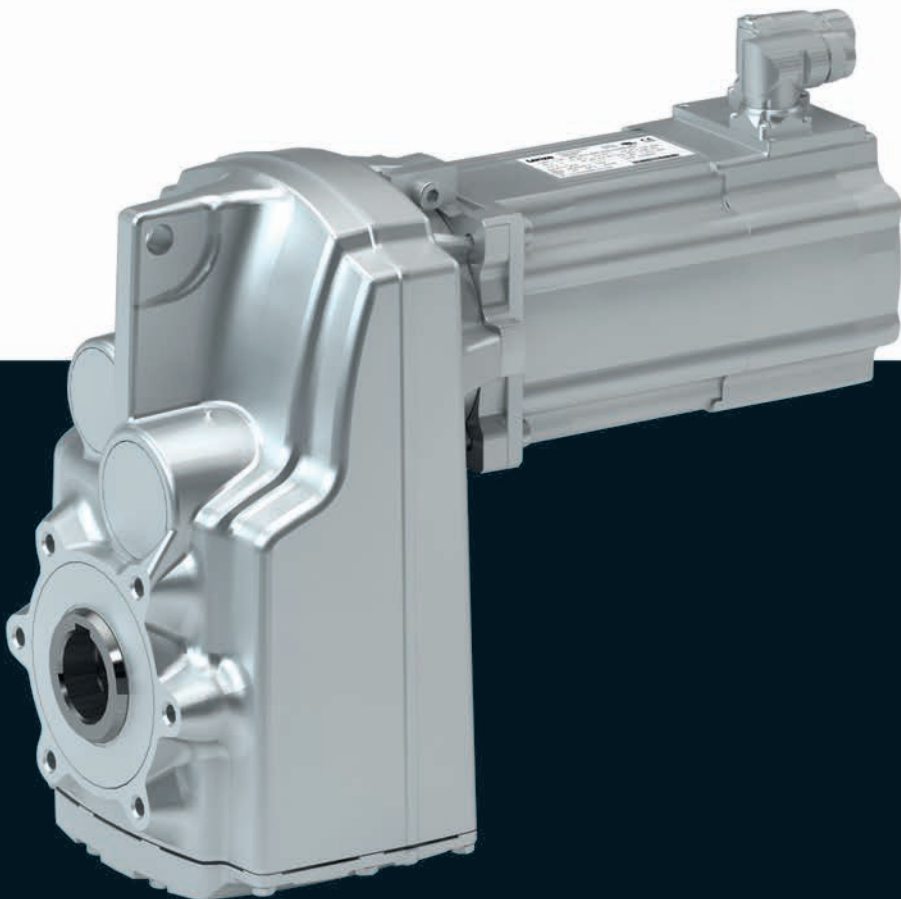

g500-S shaft-mounted helical geared motors

Contents



General information	List of abbreviations	6.5 - 5
	Product information	6.5 - 6
	Equipment	6.5 - 7
	The gearbox kit	6.5 - 8
	Dimensioning	6.5 - 14
Technical data	Selection tables, notes	6.5 - 19
	Selection tables	6.5 - 20
	Dimensions, notes	6.5 - 35
	Dimensions, self-ventilated motors	6.5 - 36
	Weights, self-ventilated motors	6.5 - 64
	Surface and corrosion protection	6.5 - 65

g500-S shaft-mounted helical geared motors

Contents



g500-S shaft-mounted helical geared motors

General information



List of abbreviations

c		Load capacity
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass
M ₂	[Nm]	Output torque
M _{2, max}	[Nm]	Max. output torque
n _{2, eto}	[r/min]	Transition speed
n _{2, th}	[r/min]	Thermal limit speed

CCC	China Compulsory Certificate
CE	Communauté Européenne
CSA	Canadian Standards Association
cURus	Combined certification marks of UL for the USA and Canada
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

g500-S shaft-mounted helical geared motors

General information



Product information

In combination with servo motors, our shaft-mounted helical gearboxes form a compact and powerful drive unit. Numerous options at the input and output end provide for the drive to be exactly adapted to your application.

The slim shaft-mounted helical gearboxes feature high reliable radial forces, closely stepped gear reductions and a low backlash. They are available in 2-pole and 3-pole design with a torque up to 660 Nm and a ratio of up to $i = 495$.

Versions

- Slimline design saves installation space of the machine
- Solid shaft, hollow shaft and shrink disc for direct integration into the machine
- High accuracy with axial output provide for the highest efficiency
- With MCS synchronous servo motors, rated torque: 0.5 Nm ... 72 Nm

The product name

Gearbox type	Product range		Design	Rated torque [Nm]	Product
Shaft-mounted helical gearbox	g500	-	S	130	g500-S130
				220	g500-S220
				400	g500-S400
				660	g500-S660

g500-S shaft-mounted helical geared motors

General information



Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

Ventilation

(depending on the mounting position)

Oil filler plug

(depending on the mounting position)

Oil control plug

(depending on the mounting position)

Torque plate

Rubber buffers

Output shaft

Hollow shaft without keyway
Solid shaft with featherkey
Hollow shaft with shrink disc

Oil drain plug

(depending on the mounting position)

Housing design

Threaded pitch circle with centering
Flange with through holes
Foot

Temperature monitoring

KTY

PTC

Motor connection

Connector

Terminal box

Cooling

self-ventilated

forced ventilated


Feedback

Resolver

Incremental encoder

Absolute value encoder

Permanent magnet brake

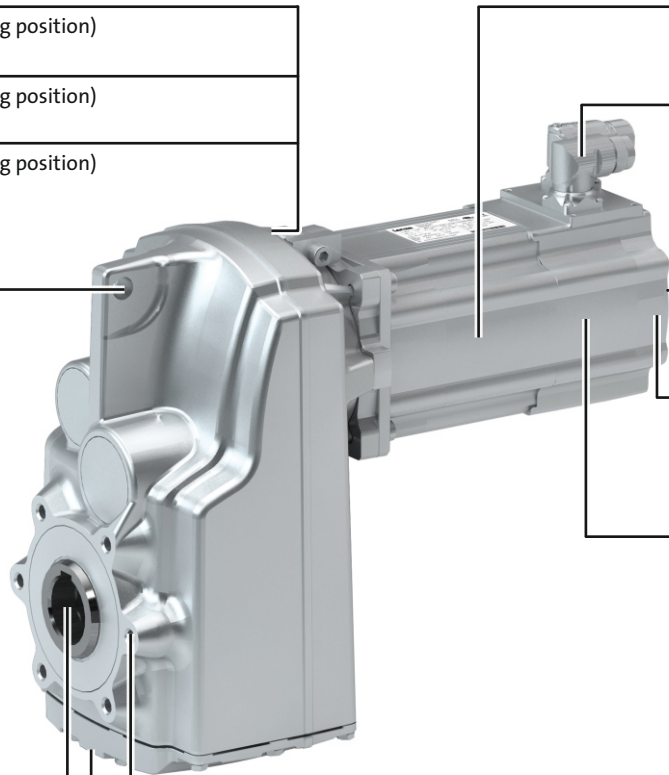

g500-S shaft-mounted helical geared motors

General information



The gearbox kit

Geared motor

Product	g500-S130	g500-S220	g500-S400	g500-S660
Motor type	Synchronous servo motor			
Servo motor				
0.6 - 1.5 Nm	MCS06			
2.3 - 4.5 Nm	MCS09			
5.5 - 17 Nm	MCS12			
9.2 - 42 Nm	MCS14			
Technical data				
Output torque	See selection table			
Output speed	See selection table			
Ratio	See selection table			
Load capacity	See selection table			
Moment of inertia	See selection table			
Mounting position				
Standard	A/B/C/D/E/F			
Combined	AEF			
Colour	Not coated Primed Paint in various corrosion-protection designs in accordance with RAL colours			
Surface and corrosion protection	Without OKS(uncoated) OKS-G (primed) OKS-S (small) OKS-M (medium) OKS-L (large)			

g500-S shaft-mounted helical geared motors


General information



The gearbox kit

Mounting positions

- Mounting position (A to F) and position of system blocks (1 to 6)

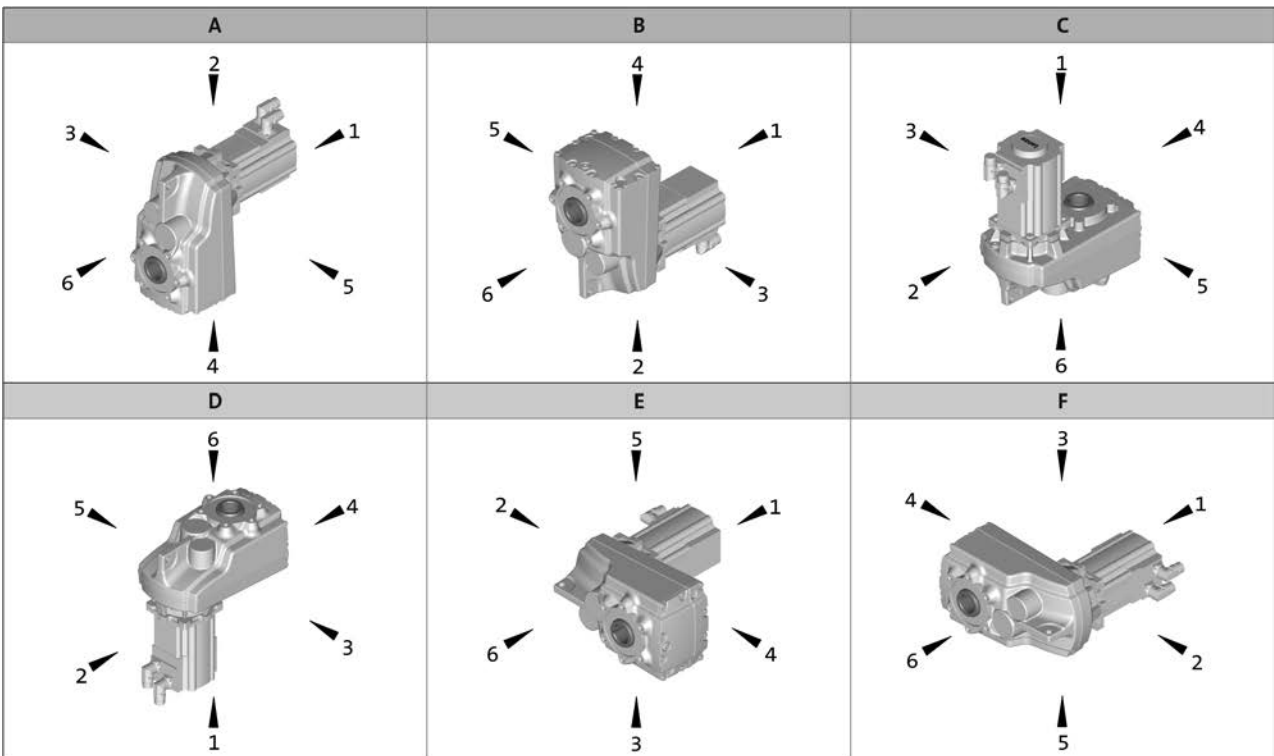

Hollow shaft: 0
Solid shaft: 6
Hollow shaft with shrink disc: 1, 6

Without foot: 0
Foot: 3, 4
Connector / terminal box: 2, 3, 4, 5

g500-S shaft-mounted helical geared motors

General information



The gearbox kit

Motor details

Product				
	MCS			
	06C41	09D41	12D20	14D15
	06F41	09L41	12D41	14D36
	06L41	09F38	12H15	14H15
		09H41	12H30	14H32
			12H35	14L15
			12L20	14L32
			12L41	14P14
				14P32
Connection type				
	Plug connectors	Plug connectors Terminal box		
Permanent magnet holding brake				
Rated torque [Nm]	2.2	8.0	12	22
Brake voltage [V]	DC 24			
Feedback				
	With absolute value encoder With incremental encoder With resolver			
Cooling				
	Self-ventilated			
Temperature monitoring				
	KTY83-110 thermal de- tector	KTY83-110 thermal detector PTC thermistor		
Approval				
	cURus GOST_R UkrSepro			
Degree of protection				
	IP54 IP65			

- Further information and installation feasibilities can be found in the Motors chapter.

g500-S shaft-mounted helical geared motors

General information



The gearbox kit

Motor details

Connection type		
		
Plug connectors	Terminal box	

Cooling: self-ventilated		
		
With resolver	With permanent magnet brake	With feedback With feedback and permanent magnet brake

g500-S shaft-mounted helical geared motors

General information



The gearbox kit

Gearbox details

Product				
	g500-S130	g500-S220	g500-S400	g500-S660
Driven shaft				
Solid shaft with featherkey [mm]	25x50		30x60	35x70 40x80
Hollow shaft with keyway [mm]	25	25/30	30/35	40/45
Hollow shaft with shrink disc [mm]	25	25/30	35	40
Design	Standard stainless steel			
Gasket	Standard FPM (Viton)			
Bearing	Standard			
Fitting grease	Not enclosed Enclosed			
Housing				
Housing version	With foot without centring With centering			
Output flange				
flange diameter [mm]	160		200	200/250 ¹⁾
Lubricant				
Type	CLP 460 ²⁾ CLP HC 320 CLP HC 220 CLP HC 220 USDA H1			
Oil-level inspection	Without inspection With inspection			
Breather element	Without		Standard mounting position: Mounted Combined mounting position: loosely enclosed	
Backlash				
Backlash	Standard			
Accessories				
Torque plate	Rubber buffers			
Shaft cover	Shrink disc: Rotating cover Shrink disc: Fixed cover			

¹⁾ 200 mm flange diameter only possible on hollow shaft version.

²⁾ Not suitable for geared servo motors.

- Further information and installation feasibilities can be found in the Gearboxes chapter.




g500-S shaft-mounted helical geared motors

General information



The gearbox kit

Gearbox details

Solid shaft		
		
without centring	With centering	Flange with through holes
Hollow shaft		
		
without centring	With centering	Flange with through holes
Hollow shaft with shrink disc		
		
without centring	With centering	Flange with through holes
Accessories		
		
Foot mounting	With rubber buffer	Shrink disc cover

6.5

g500-S shaft-mounted helical geared motors

General information



Dimensioning

General information about the data provided in this catalogue

The powers, torques and speeds specified in this catalogue are rounded values and are valid under the following conditions:

- Operating time/day = 8 h (100% OT)
- Duty class I for up to 10 switching operations/h
- Mounting positions and designs in this catalogue
- Standard lubricant
- $T_{amb} = 20\text{ °C}$ for gearboxes,
 $T_{amb} = 40\text{ °C}$ for motors (in accordance with EN 60034)
- Site altitude $< = 1000\text{ m amsl}$
- The selection tables provide the permissible mechanical powers and torques. For notes on the thermal power limit, see chapter drive dimensioning.
- The rated power specified for motors and geared motors applies to operating mode S1 (in accordance with EN 60034).

Under different operating conditions, the values obtained may vary from those listed here.

In the case of extreme operating conditions, please consult your Lenze sales office.

g500-S shaft-mounted helical geared motors

General information



Dimensioning

Thermal power limit

The thermal power limit, defined by the heat balance, limits the permissible gearbox continuous power. It may be less than the mechanical power ratings listed in the selection tables.

The thermal power limit is affected by:

- the churning losses in the lubricant. These are determined by the mounting position and the circumferential speed of the gears;
- the load and the speed
- the ambient conditions: temperature, air circulation, input or dissipation via shafts and the foundation

If the following input speeds n_1 are exceeded, please contact Lenze:

Motor frame size	Mounting position A, B, E, F	Mounting position C, D
MCS06 ... 12	4000 r/min	3000 r/min
MCS14	3000 r/min	1500 r/min

- For a short period of time up to 5 min, 30 % higher speeds are permissible

Possible ways of extending the application area

- shaft sealing rings made from FP material/Viton (option)
- reduction in lubricant quantity
- cooling of the geared motor by means of air convection on the machine/system

g500-S shaft-mounted helical geared motors

General information



Dimensioning

Load capacity and application factor

Load capacity c of gearbox

Rated value for the load capacity of Lenze geared motors.

- c is the ratio of the permissible rated torque of the gearbox to the rated torque supplied by the drive component (e.g. the built-in Lenze motor).
- The value of c must always be greater than the value of the application factor k calculated for the application.


Application factor k (according to DIN 3990)

Takes into account the influence of temporally variable loads which are actually present during the anticipated operating time of gearboxes and geared motors.

k is determined by:

- the type of load
- the load intensity
- temporal influences

Duty class	Load type
I	Smooth operation, small or light jolts
II	Uneven operation, average jolts
III	Uneven operation, severe jolts and/or alternating load

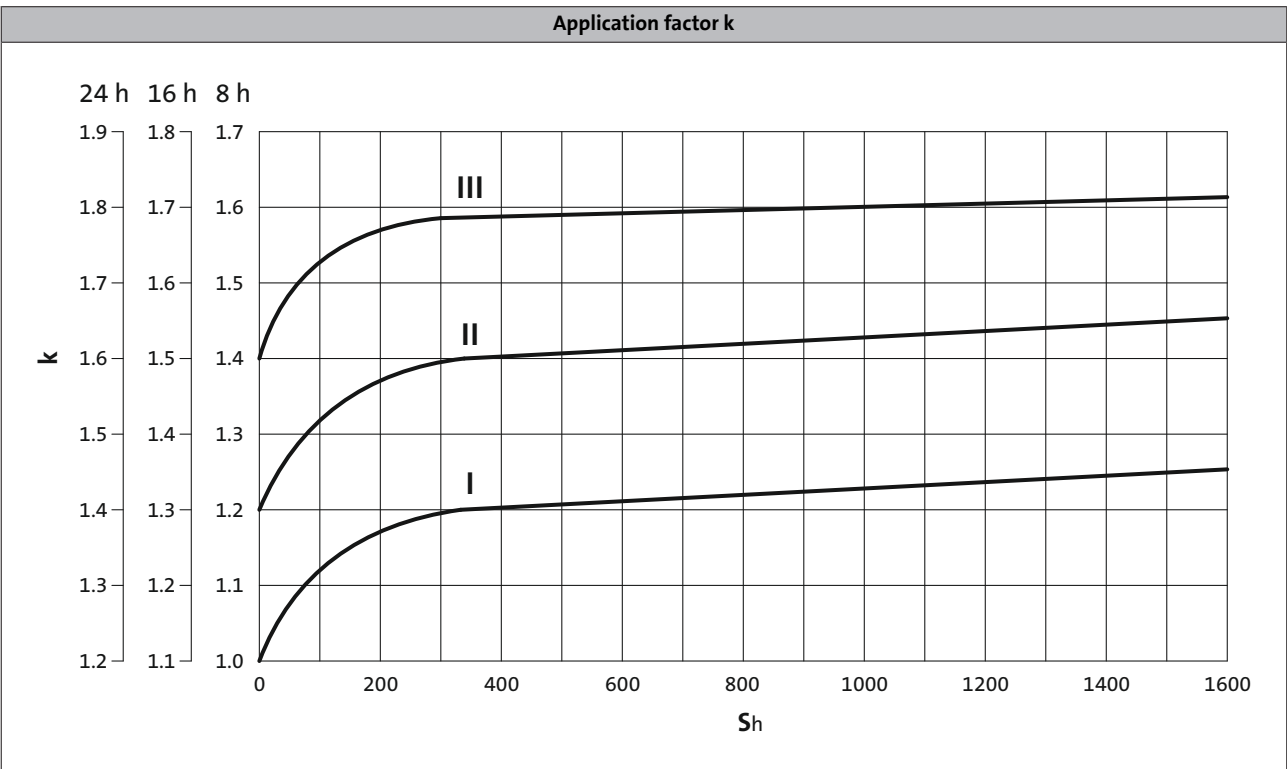

► S_h = switchings/h

g500-S shaft-mounted helical geared motors

General information



Dimensioning

Weights

The values given in the tables consider the following gearbox/motor combination:

- Gearbox with solid shaft including lubricant amount
- Motor with feedback

For versions deviating from this, additional weights have to be considered.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data
- Motor options: Brake
 - > Chapter: Motors/Accessories

Moments of inertia

The given moments of inertia of the gearbox refer to the drive shaft. The influence of the ratio (i^2) has been considered in the data.

When the total moment of inertia of the geared motor is calculated, the values of the geared motors and the brake have to be added.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data/Selection tables
- Motor options: Brake
 - > Chapter: Motors/Accessories

g500-S shaft-mounted helical geared motors

General information



g500-S shaft-mounted helical geared motors

Technical data



Selection tables, notes

Notes on the selection tables

The selection tables show the available combinations of gearbox type, number of stages, ratio and motor. They are used only to provide basic orientation.

The following legend indicates the structure of the selection tables.

Number of the gear stage of the gearbox
↓
2-stage gearboxes

Inverter operation						i	Product		Cooling	
$M_{2, \max}$ [Nm]	$n_{2, th}$ [r/min]	M_2 [Nm]	$n_{2, eto}$ [r/min]	c	J [kgcm ²]		g500	MCS		
95	747	15	747	3.7	2.400	5.021	-S130	09F38	Selbst	31
109	630	14	630	4.4	1.700	6.425	-S130	09D41	Selbst	31
109	630	24	630	2.6	2.500	6.425	-S130	09H41	Selbst	31
109	630	28	630	2.2	3.400	6.425	-S130	09L41	Selbst	31

For operating mode S1
Torque M_2 and
thermal output speed $n_{2, th}$

For operating mode S2, S3 und S6
Max. permissible acceleration torque of geared
motor $M_{2, \max}$ and
output speed $n_{2, eto}$

Load capacity of the gearbox
c is the ratio between the permissible rated torque of the
gearbox and the rated torque of the three-phase AC
motor (converted to the driven shaft).
c must be always higher than the service factor k
determined for the application k.

$$c = \frac{M_{2, zul}}{M_{1N} \cdot i \cdot \eta_{Getr}} > k$$

Moment of inertia of
geared motor

Ratio i

Product
Gearbox

Product
Motor

Type of
motor cooling

Page number
for dimensions

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
59	630	14	630	4.4	1.700	6.425	-S130	09D41	natural	36
62	277	17	277	5.5	0.500	14.606	-S130	06F41	natural	36
65	576	16	576	4.2	1.600	7.029	-S130	09D41	natural	36
68	254	19	254	5.0	0.500	15.979	-S130	06F41	natural	36
69	355	17	355	5.6	0.700	11.413	-S130	06I41	natural	36
73	747	15	747	3.7	2.400	5.021	-S130	09F38	natural	36
77	224	21	224	5.0	0.600	18.069	-S130	06F41	natural	36
83	114	21	114	5.7	0.300	35.493	-S130	06C41	natural	36
85	640	18	640	6.0	3.400	5.860	-S400	09F38	natural	48
87	630	24	630	2.6	2.500	6.425	-S130	09H41	natural	36
87	630	28	630	2.2	3.400	6.425	-S130	09L41	natural	36
87	584	19	584	3.3	2.100	6.425	-S130	09F38	natural	36
87	199	24	199	4.5	0.400	20.381	-S130	06F41	natural	36
88	277	21	277	4.4	0.600	14.606	-S130	06I41	natural	36
92	576	26	576	2.5	2.400	7.029	-S130	09H41	natural	36
92	576	31	576	2.1	3.300	7.029	-S130	09L41	natural	36
92	534	21	534	3.2	2.000	7.029	-S130	09F38	natural	36
92	370	28	370	5.9	5.500	5.267	-S220	12D20	natural	40
94	100	24	100	5.0	0.200	40.422	-S130	06C41	natural	36
96	254	23	254	4.0	0.600	15.979	-S130	06I41	natural	36
98	176	27	176	4.0	0.500	23.048	-S130	06F41	natural	36
102	333	31	333	5.4	5.900	5.860	-S400	12D20	natural	48
106	89	27	89	4.4	0.200	45.711	-S130	06C41	natural	36
107	162	29	162	3.6	0.400	24.967	-S130	06F41	natural	36
108	391	37	391	4.6	9.900	3.840	-S220	12H15	natural	40
109	224	26	224	4.0	0.600	18.069	-S130	06I41	natural	36
110	383	38	383	5.8	16.000	3.920	-S660	12H15	natural	56
112	304	34	304	5.2	5.600	6.411	-S400	12D20	natural	48
121	143	33	143	3.2	0.400	28.233	-S130	06F41	natural	36
123	199	30	199	3.6	0.500	20.381	-S130	06I41	natural	36
129	655	36	655	3.9	10.000	4.579	-S400	12H30	natural	48
129	328	41	328	6.0	11.000	4.579	-S400	14D15	natural	48
129	328	44	328	3.9	10.000	4.579	-S400	12H15	natural	48
130	277	33	277	2.9	1.400	14.606	-S130	09D41	natural	36
130	257	44	257	2.2	1.800	14.606	-S130	09F38	natural	36
130	254	36	254	2.6	1.400	15.979	-S130	09D41	natural	36
130	235	48	235	2.0	1.800	15.979	-S130	09F38	natural	36
130	224	40	224	2.6	1.400	18.069	-S130	09D41	natural	36
130	208	54	208	2.0	1.800	18.069	-S130	09F38	natural	36
130	199	45	199	2.3	1.300	20.381	-S130	09D41	natural	36

6.5

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
130	184	61	184	1.8	1.700	20.381	-S130	09F38	natural	36
130	176	34	176	3.2	0.500	23.048	-S130	06I41	natural	36
130	176	51	176	2.1	1.300	23.048	-S130	09D41	natural	36
130	163	69	163	1.6	1.700	23.048	-S130	09F38	natural	36
130	162	36	162	2.9	0.400	24.967	-S130	06I41	natural	36
130	162	56	162	1.9	1.200	24.967	-S130	09D41	natural	36
130	162	92	162	1.1	2.000	24.967	-S130	09H41	natural	36
130	150	75	150	1.4	1.600	24.967	-S130	09F38	natural	36
130	143	41	143	2.6	0.500	28.233	-S130	06I41	natural	36
130	143	63	143	1.7	1.300	28.233	-S130	09D41	natural	36
130	143	104	143	1.0	2.100	28.233	-S130	09H41	natural	36
130	133	85	133	1.3	1.700	28.233	-S130	09F38	natural	36
130	129	37	129	3.2	0.300	31.387	-S130	06F41	natural	36
130	129	46	129	2.6	0.400	31.387	-S130	06I41	natural	36
130	114	41	114	2.9	0.300	35.493	-S130	06F41	natural	36
130	114	52	114	2.3	0.400	35.493	-S130	06I41	natural	36
130	100	47	100	2.5	0.300	40.422	-S130	06F41	natural	36
130	100	59	100	2.0	0.400	40.422	-S130	06I41	natural	36
130	89	53	89	2.2	0.300	45.711	-S130	06F41	natural	36
130	89	67	89	1.8	0.400	45.711	-S130	06I41	natural	36
134	254	41	254	4.9	5.500	7.667	-S220	12D20	natural	40
148	570	41	570	3.5	8.800	5.267	-S220	12H30	natural	40
148	285	51	285	3.5	8.800	5.267	-S220	12H15	natural	40
150	584	44	584	3.1	16.000	3.339	-S400	12L20	natural	48
153	244	37	244	4.3	1.500	16.571	-S220	09D41	natural	40
162	210	50	210	4.1	5.000	9.280	-S220	12D20	natural	40
165	602	43	602	3.3	9.200	5.860	-S400	12H35	natural	48
165	512	45	512	3.2	9.200	5.860	-S400	12H30	natural	48
165	256	52	256	4.9	10.000	5.860	-S400	14D15	natural	48
165	256	57	256	3.3	9.200	5.860	-S400	12H15	natural	48
172	426	60	426	2.6	14.000	4.579	-S400	12L20	natural	48
173	508	50	508	3.1	13.000	3.840	-S220	12L20	natural	40
173	216	42	216	4.3	1.500	18.776	-S220	09D41	natural	40
178	449	52	449	3.9	19.000	3.339	-S400	14H15	natural	48
180	550	47	550	3.1	8.900	6.411	-S400	12H35	natural	48
180	468	50	468	3.1	8.900	6.411	-S400	12H30	natural	48
180	234	57	234	4.6	9.700	6.411	-S400	14D15	natural	48
180	234	62	234	3.1	8.900	6.411	-S400	12H15	natural	48
180	135	44	135	4.1	0.500	29.937	-S220	06I41	natural	40
181	370	69	370	2.4	12.000	5.267	-S220	12L20	natural	40

6.5

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
182	95	50	95	4.0	0.300	42.533	-S220	06F41	natural	40
184	186	56	186	3.6	5.000	10.514	-S220	12D20	natural	40
185	333	77	333	2.2	12.000	5.860	-S400	12L20	natural	48
187	200	45	200	4.0	1.400	20.300	-S220	09D41	natural	40
189	289	39	289	4.2	2.100	12.992	-S220	09F38	natural	40
190	222	66	222	3.4	8.900	6.767	-S220	12H15	natural	40
193	304	84	304	2.1	12.000	6.411	-S400	12L20	natural	48
194	436	53	436	4.0	11.000	6.880	-S660	12H30	natural	56
194	218	67	218	4.0	11.000	6.880	-S660	12H15	natural	56
198	123	48	123	4.2	0.500	32.867	-S220	06I41	natural	40
203	449	75	449	2.7	29.000	3.339	-S400	14L15	natural	48
203	404	97	404	2.1	40.000	3.339	-S400	14P14	natural	48
206	84	56	84	3.5	0.300	48.190	-S220	06F41	natural	40
207	164	63	164	3.2	4.700	11.876	-S220	12D20	natural	40
209	383	61	383	5.6	23.000	3.920	-S660	14H15	natural	56
210	201	67	201	5.5	10.000	7.467	-S400	14D15	natural	48
212	176	51	176	3.5	1.400	23.000	-S220	09D41	natural	40
213	497	51	497	3.9	19.000	3.920	-S660	12L20	natural	56
214	255	44	255	3.7	2.100	14.720	-S220	09F38	natural	40
215	253	45	253	6.0	2.300	14.806	-S400	09F38	natural	48
216	196	74	196	2.9	8.800	7.667	-S220	12H15	natural	40
217	254	100	254	2.0	12.000	7.667	-S220	12L20	natural	40
220	323	72	323	2.4	8.300	9.280	-S220	12H30	natural	40
220	288	89	288	2.3	12.000	6.767	-S220	12L20	natural	40
220	253	92	253	1.9	8.000	11.876	-S220	12H30	natural	40
220	244	61	244	2.6	2.300	16.571	-S220	09H41	natural	40
220	244	69	244	2.3	4.400	16.571	-S220	12D41	natural	40
220	244	72	244	2.2	3.200	16.571	-S220	09L41	natural	40
220	231	101	231	1.7	7.900	12.992	-S220	12H30	natural	40
220	226	50	226	3.3	1.900	16.571	-S220	09F38	natural	40
220	216	69	216	2.6	2.300	18.776	-S220	09H41	natural	40
220	216	78	216	2.3	4.400	18.776	-S220	12D41	natural	40
220	216	82	216	2.2	3.200	18.776	-S220	09L41	natural	40
220	210	122	210	1.7	12.000	9.280	-S220	12L20	natural	40
220	200	56	200	3.3	1.900	18.776	-S220	09F38	natural	40
220	200	75	200	2.4	2.200	20.300	-S220	09H41	natural	40
220	200	85	200	2.1	4.300	20.300	-S220	12D41	natural	40
220	200	89	200	2.0	3.100	20.300	-S220	09L41	natural	40
220	186	138	186	1.5	12.000	10.514	-S220	12L20	natural	40
220	185	61	185	3.0	1.800	20.300	-S220	09F38	natural	40

6.5

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
220	181	129	181	1.4	7.700	16.571	-S220	12H30	natural	40
220	176	85	176	2.1	2.200	23.000	-S220	09H41	natural	40
220	176	96	176	1.9	4.300	23.000	-S220	12D41	natural	40
220	176	100	176	1.8	3.100	23.000	-S220	09L41	natural	40
220	174	148	174	1.3	7.600	20.300	-S220	12H35	natural	40
220	164	156	164	1.3	11.000	11.876	-S220	12L20	natural	40
220	163	69	163	2.7	1.800	23.000	-S220	09F38	natural	40
220	162	90	162	2.4	8.300	9.280	-S220	12H15	natural	40
220	160	146	160	1.4	7.700	18.776	-S220	12H30	natural	40
220	153	59	153	3.0	1.300	26.422	-S220	09D41	natural	40
220	153	97	153	1.8	2.100	26.422	-S220	09H41	natural	40
220	153	115	153	1.6	3.000	26.422	-S220	09L41	natural	40
220	150	69	150	2.9	4.600	12.992	-S220	12D20	natural	40
220	150	170	150	1.2	11.000	12.992	-S220	12L20	natural	40
220	148	158	148	1.3	7.600	20.300	-S220	12H30	natural	40
220	145	72	145	2.8	4.700	13.456	-S220	12D20	natural	40
220	145	176	145	1.1	11.000	13.456	-S220	12L20	natural	40
220	143	102	143	2.2	8.300	10.514	-S220	12H15	natural	40
220	142	79	142	2.3	1.700	26.422	-S220	09F38	natural	40
220	135	67	135	2.7	1.300	29.937	-S220	09D41	natural	40
220	135	110	135	1.6	2.100	29.937	-S220	09H41	natural	40
220	135	131	135	1.4	3.000	29.937	-S220	09L41	natural	40
220	133	79	133	2.6	4.600	14.720	-S220	12D20	natural	40
220	133	193	133	1.1	11.000	14.720	-S220	12L20	natural	40
220	130	179	130	1.1	7.600	23.000	-S220	12H30	natural	40
220	126	115	126	1.9	8.000	11.876	-S220	12H15	natural	40
220	125	90	125	2.0	1.700	29.937	-S220	09F38	natural	40
220	123	73	123	2.7	1.300	32.867	-S220	09D41	natural	40
220	123	121	123	1.6	2.100	32.867	-S220	09H41	natural	40
220	123	143	123	1.4	3.000	32.867	-S220	09L41	natural	40
220	118	88	118	2.3	4.400	16.571	-S220	12D20	natural	40
220	116	126	116	1.8	7.900	12.992	-S220	12H15	natural	40
220	114	99	114	2.1	1.700	32.867	-S220	09F38	natural	40
220	112	131	112	1.7	8.000	13.456	-S220	12H15	natural	40
220	109	54	109	3.7	0.400	37.238	-S220	06I41	natural	40
220	109	83	109	2.4	1.200	37.238	-S220	09D41	natural	40
220	109	137	109	1.4	2.000	37.238	-S220	09H41	natural	40
220	109	163	109	1.2	2.900	37.238	-S220	09L41	natural	40
220	104	100	104	2.2	4.400	18.776	-S220	12D20	natural	40
220	102	143	102	1.5	7.900	14.720	-S220	12H15	natural	40

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
220	101	112	101	1.8	1.600	37.238	-S220	09F38	natural	40
220	96	108	96	2.0	4.300	20.300	-S220	12D20	natural	40
220	95	62	95	3.2	0.400	42.533	-S220	06I41	natural	40
220	91	161	91	1.4	7.700	16.571	-S220	12H15	natural	40
220	85	123	85	1.8	4.300	23.000	-S220	12D20	natural	40
220	84	70	84	2.8	0.400	48.190	-S220	06I41	natural	40
220	80	182	80	1.2	7.700	18.776	-S220	12H15	natural	40
220	79	60	79	3.3	0.300	51.620	-S220	06F41	natural	40
220	79	75	79	2.6	0.400	51.620	-S220	06I41	natural	40
220	74	197	74	1.1	7.600	20.300	-S220	12H15	natural	40
220	69	68	69	2.9	0.300	58.486	-S220	06F41	natural	40
220	69	85	69	2.3	0.400	58.486	-S220	06I41	natural	40
237	178	75	178	5.0	10.000	8.436	-S400	14D15	natural	48
243	328	71	328	3.4	17.000	4.579	-S400	14H15	natural	48
243	328	102	328	2.4	26.000	4.579	-S400	14L15	natural	48
243	295	133	295	1.8	38.000	4.579	-S400	14P14	natural	48
243	71	66	71	3.6	0.300	56.960	-S400	06F41	natural	48
250	363	70	363	3.3	16.000	5.376	-S660	12L20	natural	56
258	550	80	550	2.5	16.000	5.860	-S400	14H32	natural	48
258	550	98	550	2.0	25.000	5.860	-S400	14L32	natural	48
258	256	91	256	2.8	16.000	5.860	-S400	14H15	natural	48
258	256	131	256	2.0	25.000	5.860	-S400	14L15	natural	48
258	230	171	230	1.5	37.000	5.860	-S400	14P14	natural	48
259	132	79	132	4.6	4.800	14.806	-S400	12D20	natural	48
261	503	87	503	2.3	16.000	6.411	-S400	14H32	natural	48
261	503	107	503	1.9	25.000	6.411	-S400	14L32	natural	48
261	234	100	234	2.6	16.000	6.411	-S400	14H15	natural	48
261	234	143	234	1.8	25.000	6.411	-S400	14L15	natural	48
261	211	187	211	1.4	36.000	6.411	-S400	14P14	natural	48
268	71	83	71	2.9	0.400	56.960	-S400	06I41	natural	48
269	283	90	283	2.7	14.000	6.880	-S660	12L20	natural	56
275	63	75	63	3.6	0.300	64.354	-S400	06F41	natural	48
282	86	68	86	3.8	0.400	46.933	-S400	06I41	natural	48
283	120	86	120	4.2	4.700	16.197	-S400	12D20	natural	48
288	293	79	293	3.9	8.600	10.240	-S400	12H30	natural	48
288	147	91	147	4.4	9.400	10.240	-S400	14D15	natural	48
288	147	99	147	3.9	8.600	10.240	-S400	12H15	natural	48
293	383	87	383	3.9	32.000	3.920	-S660	14L15	natural	56
294	83	71	83	3.9	0.500	48.950	-S660	06I41	natural	56
302	63	94	63	2.9	0.400	64.354	-S400	06I41	natural	48

6.5

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
317	266	87	266	4.0	9.700	11.262	-S660	12H30	natural	56
317	133	109	133	4.0	9.700	11.262	-S660	12H15	natural	56
319	222	76	222	4.3	4.500	18.286	-S400	12D41	natural	48
319	107	98	107	4.1	4.500	18.286	-S400	12D20	natural	48
319	76	77	76	3.8	0.400	53.026	-S400	06I41	natural	48
326	259	90	259	3.5	8.500	11.569	-S400	12H30	natural	48
326	130	103	130	3.9	9.300	11.569	-S400	14D15	natural	48
326	130	112	130	3.6	8.500	11.569	-S400	12H15	natural	48
334	112	81	112	4.5	1.300	36.267	-S400	09D41	natural	48
335	73	81	73	3.9	0.500	55.773	-S660	06I41	natural	56
336	261	98	261	3.1	13.000	7.467	-S400	12L20	natural	48
338	344	114	344	3.0	44.000	3.920	-S660	14P14	natural	56
347	244	96	244	3.8	9.400	12.320	-S660	12H30	natural	56
347	122	120	122	3.9	9.400	12.320	-S660	12H15	natural	56
349	304	84	304	3.9	16.000	6.417	-S660	12L20	natural	56
355	222	67	222	4.3	2.400	18.286	-S400	09H41	natural	48
359	222	80	222	3.7	3.300	18.286	-S400	09L41	natural	48
361	234	100	234	4.0	9.500	12.832	-S660	12H30	natural	56
361	196	86	196	3.8	4.500	20.659	-S400	12D41	natural	48
361	117	124	117	4.0	9.500	12.832	-S660	12H15	natural	56
361	94	110	94	3.6	4.500	20.659	-S400	12D20	natural	48
365	201	116	201	3.1	16.000	7.467	-S400	14H15	natural	48
365	201	167	201	2.2	26.000	7.467	-S400	14L15	natural	48
365	181	217	181	1.7	37.000	7.467	-S400	14P14	natural	48
367	218	107	218	3.9	18.000	6.880	-S660	14H15	natural	56
368	148	76	148	4.4	1.900	25.308	-S400	09F38	natural	48
369	269	95	269	3.2	8.200	13.105	-S400	12H35	natural	48
369	229	102	229	3.1	8.200	13.105	-S400	12H30	natural	48
369	115	117	115	3.4	9.000	13.105	-S400	14D15	natural	48
369	115	127	115	3.1	8.200	13.105	-S400	12H15	natural	48
377	181	83	181	3.7	2.300	22.400	-S400	09H41	natural	48
377	181	98	181	3.1	3.200	22.400	-S400	09L41	natural	48
378	99	91	99	4.0	1.300	40.974	-S400	09D41	natural	48
380	231	110	231	3.1	13.000	8.436	-S400	12L20	natural	48
380	178	131	178	2.9	16.000	8.436	-S400	14H15	natural	48
380	178	188	178	2.0	25.000	8.436	-S400	14L15	natural	48
380	160	246	160	1.6	37.000	8.436	-S400	14P14	natural	48
385	190	134	190	2.6	12.000	10.240	-S400	12L20	natural	48
388	279	120	279	3.2	29.000	5.376	-S660	14L15	natural	56
388	251	156	251	2.5	40.000	5.376	-S660	14P14	natural	56

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
391	181	93	181	3.5	4.400	22.400	-S400	12D41	natural	48
391	87	120	87	3.4	4.400	22.400	-S400	12D20	natural	48
393	139	107	139	3.0	2.100	29.156	-S400	09H41	natural	48
393	139	127	139	2.5	3.000	29.156	-S400	09L41	natural	48
393	129	88	129	3.8	1.700	29.156	-S400	09F38	natural	48
395	214	109	214	3.8	9.300	14.037	-S660	12H30	natural	56
395	107	136	107	3.9	9.300	14.037	-S660	12H15	natural	56
397	267	96	267	3.9	15.000	7.311	-S660	12L20	natural	56
400	246	104	246	2.9	8.100	14.336	-S400	12H35	natural	48
400	218	118	218	2.5	8.000	16.197	-S400	12H35	natural	48
400	209	111	209	2.9	8.100	14.336	-S400	12H30	natural	48
400	203	115	203	2.8	8.100	14.806	-S400	12H30	natural	48
400	196	76	196	4.3	2.400	20.659	-S400	09H41	natural	48
400	196	90	196	3.6	3.300	20.659	-S400	09L41	natural	48
400	193	133	193	2.6	7.800	18.286	-S400	12H35	natural	48
400	185	126	185	2.5	8.000	16.197	-S400	12H30	natural	48
400	176	248	176	1.4	15.000	18.286	-S400	14H32	natural	48
400	171	150	171	2.3	7.800	20.659	-S400	12H35	natural	48
400	169	152	169	2.4	12.000	11.569	-S400	12L20	natural	48
400	164	142	164	2.5	7.800	18.286	-S400	12H30	natural	48
400	160	93	160	3.5	2.300	25.308	-S400	09H41	natural	48
400	160	106	160	3.1	4.400	25.308	-S400	12D41	natural	48
400	160	110	160	3.0	3.200	25.308	-S400	09L41	natural	48
400	157	163	157	2.1	7.700	22.400	-S400	12H35	natural	48
400	156	281	156	1.3	15.000	20.659	-S400	14H32	natural	48
400	149	172	149	2.1	11.000	13.105	-S400	12L20	natural	48
400	147	159	147	2.5	16.000	10.240	-S400	14H15	natural	48
400	147	229	147	1.8	25.000	10.240	-S400	14L15	natural	48
400	145	160	145	2.3	7.800	20.659	-S400	12H30	natural	48
400	139	184	139	1.9	7.700	25.308	-S400	12H35	natural	48
400	136	188	136	1.9	11.000	14.336	-S400	12L20	natural	48
400	134	174	134	2.1	7.700	22.400	-S400	12H30	natural	48
400	132	194	132	1.9	11.000	14.806	-S400	12L20	natural	48
400	132	298	132	1.3	36.000	10.240	-S400	14P14	natural	48
400	130	180	130	2.2	15.000	11.569	-S400	14H15	natural	48
400	130	258	130	1.6	25.000	11.569	-S400	14L15	natural	48
400	123	121	123	3.0	2.100	32.940	-S400	09H41	natural	48
400	123	144	123	2.5	3.000	32.940	-S400	09L41	natural	48
400	120	212	120	1.7	11.000	16.197	-S400	12L20	natural	48
400	119	196	119	1.8	7.700	25.308	-S400	12H30	natural	48

6.5

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
400	117	337	117	1.2	36.000	11.569	-S400	14P14	natural	48
400	115	203	115	2.0	15.000	13.105	-S400	14H15	natural	48
400	115	292	115	1.4	24.000	13.105	-S400	14L15	natural	48
400	114	99	114	3.8	1.700	32.940	-S400	09F38	natural	48
400	112	134	112	2.7	2.100	36.267	-S400	09H41	natural	48
400	112	158	112	2.3	3.000	36.267	-S400	09L41	natural	48
400	107	240	107	1.7	11.000	18.286	-S400	12L20	natural	48
400	105	128	105	3.1	8.900	14.336	-S400	14D15	natural	48
400	105	139	105	2.9	8.100	14.336	-S400	12H15	natural	48
400	105	223	105	1.8	15.000	14.336	-S400	14H15	natural	48
400	105	320	105	1.3	24.000	14.336	-S400	14L15	natural	48
400	103	109	103	3.4	1.700	36.267	-S400	09F38	natural	48
400	103	381	103	1.1	36.000	13.105	-S400	14P14	natural	48
400	101	132	101	3.0	8.900	14.806	-S400	14D15	natural	48
400	101	144	101	2.8	8.100	14.806	-S400	12H15	natural	48
400	101	230	101	1.7	15.000	14.806	-S400	14H15	natural	48
400	101	330	101	1.2	24.000	14.806	-S400	14L15	natural	48
400	99	151	99	2.4	2.100	40.974	-S400	09H41	natural	48
400	99	179	99	2.0	3.000	40.974	-S400	09L41	natural	48
400	94	271	94	1.5	11.000	20.659	-S400	12L20	natural	48
400	93	145	93	2.8	8.800	16.197	-S400	14D15	natural	48
400	93	157	93	2.5	8.000	16.197	-S400	12H15	natural	48
400	93	251	93	1.6	15.000	16.197	-S400	14H15	natural	48
400	93	361	93	1.1	24.000	16.197	-S400	14L15	natural	48
400	92	123	92	3.0	1.700	40.974	-S400	09F38	natural	48
400	87	293	87	1.4	11.000	22.400	-S400	12L20	natural	48
400	82	163	82	2.5	8.600	18.286	-S400	14D15	natural	48
400	82	177	82	2.3	7.800	18.286	-S400	12H15	natural	48
400	82	284	82	1.4	15.000	18.286	-S400	14H15	natural	48
400	77	135	77	3.0	4.400	25.308	-S400	12D20	natural	48
400	77	331	77	1.2	11.000	25.308	-S400	12L20	natural	48
400	73	184	73	2.2	8.600	20.659	-S400	14D15	natural	48
400	73	200	73	2.0	7.800	20.659	-S400	12H15	natural	48
400	73	321	73	1.3	15.000	20.659	-S400	14H15	natural	48
400	67	217	67	1.8	7.700	22.400	-S400	12H15	natural	48
400	59	246	59	1.6	7.700	25.308	-S400	12H15	natural	48
403	210	84	210	3.9	4.000	19.250	-S660	09L41	natural	56
410	222	115	222	3.3	14.000	8.800	-S660	12L20	natural	56
417	218	154	218	2.7	27.000	6.880	-S660	14L15	natural	56
417	196	200	196	2.1	38.000	6.880	-S660	14P14	natural	56

6.5

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
420	162	92	162	3.7	2.500	25.056	-S660	09H41	natural	56
420	162	109	162	3.1	3.400	25.056	-S660	09L41	natural	56
424	88	103	88	4.5	1.400	45.956	-S660	09D41	natural	56
436	130	115	130	3.4	2.400	31.167	-S660	09H41	natural	56
436	130	136	130	2.9	3.300	31.167	-S660	09L41	natural	56
436	120	94	120	4.3	2.000	31.167	-S660	09F38	natural	56
438	162	105	162	4.2	4.600	25.056	-S660	12D41	natural	56
438	78	134	78	4.1	4.600	25.056	-S660	12D20	natural	56
441	173	148	173	2.7	13.000	11.262	-S660	12L20	natural	56
442	224	114	224	3.3	8.800	15.714	-S660	12H35	natural	56
442	191	122	191	3.2	8.800	15.714	-S660	12H30	natural	56
442	96	152	96	3.3	8.800	15.714	-S660	12H15	natural	56
446	83	109	83	3.7	1.300	48.950	-S660	09D41	natural	56
446	83	180	83	2.2	2.100	48.950	-S660	09H41	natural	56
446	83	214	83	1.9	3.000	48.950	-S660	09L41	natural	56
446	77	147	77	2.8	1.700	48.950	-S660	09F38	natural	56
452	100	149	100	2.8	2.200	40.333	-S660	09H41	natural	56
452	100	176	100	2.3	3.100	40.333	-S660	09L41	natural	56
452	93	121	93	3.5	1.800	40.333	-S660	09F38	natural	56
459	185	96	185	3.9	3.900	21.933	-S660	09L41	natural	56
461	158	161	158	2.6	13.000	12.320	-S660	12L20	natural	56
467	195	131	195	3.3	14.000	10.027	-S660	12L20	natural	56
470	171	137	171	4.7	18.000	8.800	-S660	14H15	natural	56
479	234	143	234	3.9	29.000	6.417	-S660	14L15	natural	56
479	142	105	142	3.7	2.500	28.548	-S660	09H41	natural	56
479	142	125	142	3.1	3.400	28.548	-S660	09L41	natural	56
495	124	206	124	2.2	12.000	15.714	-S660	12L20	natural	56
497	114	131	114	3.4	2.300	35.511	-S660	09H41	natural	56
497	114	155	114	2.9	3.200	35.511	-S660	09L41	natural	56
497	106	107	106	4.3	1.900	35.511	-S660	09F38	natural	56
499	142	119	142	4.2	4.600	28.548	-S660	12D41	natural	56
499	68	152	68	4.1	4.600	28.548	-S660	12D20	natural	56
502	152	168	152	2.7	13.000	12.832	-S660	12L20	natural	56
504	197	130	197	3.3	8.700	17.905	-S660	12H35	natural	56
504	168	139	168	3.2	8.700	17.905	-S660	12H30	natural	56
504	84	160	84	4.1	9.500	17.905	-S660	14D15	natural	56
504	84	174	84	3.3	8.700	17.905	-S660	12H15	natural	56
508	73	124	73	3.7	1.300	55.773	-S660	09D41	natural	56
508	73	206	73	2.2	2.100	55.773	-S660	09H41	natural	56
508	73	244	73	1.9	3.000	55.773	-S660	09L41	natural	56

6.5

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
508	67	168	67	2.8	1.700	55.773	-S660	09F38	natural	56
515	88	169	88	2.8	2.200	45.956	-S660	09H41	natural	56
515	88	201	88	2.3	3.100	45.956	-S660	09L41	natural	56
515	82	138	82	3.5	1.800	45.956	-S660	09F38	natural	56
521	183	140	183	3.2	8.500	19.250	-S660	12H35	natural	56
521	156	149	156	3.1	8.500	19.250	-S660	12H30	natural	56
521	101	252	101	2.1	12.000	19.250	-S660	12L20	natural	56
521	78	187	78	2.8	8.500	19.250	-S660	12H15	natural	56
525	139	184	139	2.6	13.000	14.037	-S660	12L20	natural	56
535	150	156	150	4.0	17.000	10.027	-S660	14H15	natural	56
542	162	267	162	1.6	11.000	25.056	-S660	12L41	natural	56
542	141	182	141	2.5	7.900	25.056	-S660	12H35	natural	56
542	120	194	120	2.5	7.900	25.056	-S660	12H30	natural	56
542	78	172	78	3.8	9.300	19.250	-S660	14D15	natural	56
542	78	328	78	1.6	11.000	25.056	-S660	12L20	natural	56
542	60	243	60	2.2	7.900	25.056	-S660	12H15	natural	56
544	130	130	130	3.9	4.500	31.167	-S660	12D41	natural	56
544	63	166	63	3.4	4.500	31.167	-S660	12D20	natural	56
546	205	163	205	3.6	28.000	7.311	-S660	14L15	natural	56
554	210	187	210	3.0	40.000	6.417	-S660	14P14	natural	56
563	130	333	130	1.5	11.000	31.167	-S660	12L41	natural	56
563	113	227	113	2.4	7.800	31.167	-S660	12H35	natural	56
563	96	242	96	2.3	7.800	31.167	-S660	12H30	natural	56
563	63	408	63	1.4	11.000	31.167	-S660	12L20	natural	56
563	48	302	48	1.9	7.800	31.167	-S660	12H15	natural	56
564	109	235	109	2.2	12.000	17.905	-S660	12L20	natural	56
578	129	340	129	1.5	15.000	25.056	-S660	14H32	natural	56
578	129	418	129	1.2	24.000	25.056	-S660	14L32	natural	56
578	129	511	129	1.0	35.000	25.056	-S660	14P32	natural	56
578	60	224	60	2.6	8.700	25.056	-S660	14D15	natural	56
578	60	389	60	1.5	15.000	25.056	-S660	14H15	natural	56
578	60	559	60	1.0	24.000	25.056	-S660	14L15	natural	56
593	185	213	185	2.8	40.000	7.311	-S660	14P14	natural	56
593	161	160	161	3.2	8.400	21.933	-S660	12H35	natural	56
593	137	170	137	3.1	8.400	21.933	-S660	12H30	natural	56
593	89	287	89	2.1	12.000	21.933	-S660	12L20	natural	56
593	68	213	68	2.8	8.400	21.933	-S660	12H15	natural	56
601	133	175	133	3.8	17.000	11.262	-S660	14H15	natural	56
617	68	196	68	3.4	9.200	21.933	-S660	14D15	natural	56
618	142	305	142	1.6	11.000	28.548	-S660	12L41	natural	56

6.5

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
618	124	208	124	2.5	7.900	28.548	-S660	12H35	natural	56
618	105	222	105	2.5	7.900	28.548	-S660	12H30	natural	56
618	68	374	68	1.6	11.000	28.548	-S660	12L20	natural	56
618	53	277	53	2.2	7.900	28.548	-S660	12H15	natural	56
620	114	148	114	3.9	4.400	35.511	-S660	12D41	natural	56
620	55	189	55	3.4	4.400	35.511	-S660	12D20	natural	56
625	150	224	150	2.8	27.000	10.027	-S660	14L15	natural	56
625	135	292	135	2.1	38.000	10.027	-S660	14P14	natural	56
635	171	196	171	3.2	27.000	8.800	-S660	14L15	natural	56
635	153	256	153	2.5	38.000	8.800	-S660	14P14	natural	56
642	114	379	114	1.5	11.000	35.511	-S660	12L41	natural	56
642	99	258	99	2.4	7.700	35.511	-S660	12H35	natural	56
642	85	276	85	2.3	7.700	35.511	-S660	12H30	natural	56
642	55	465	55	1.4	11.000	35.511	-S660	12L20	natural	56
642	42	345	42	1.9	7.700	35.511	-S660	12H15	natural	56
657	122	191	122	3.5	16.000	12.320	-S660	14H15	natural	56
660	205	213	205	2.4	16.000	15.714	-S660	14H32	natural	56
660	205	262	205	1.9	25.000	15.714	-S660	14L32	natural	56
660	180	243	180	2.1	16.000	17.905	-S660	14H32	natural	56
660	168	261	168	2.2	15.000	19.250	-S660	14H32	natural	56
660	168	321	168	1.8	25.000	19.250	-S660	14L32	natural	56
660	168	392	168	1.5	36.000	19.250	-S660	14P32	natural	56
660	147	298	147	1.9	15.000	21.933	-S660	14H32	natural	56
660	147	366	147	1.6	24.000	21.933	-S660	14L32	natural	56
660	133	251	133	2.6	26.000	11.262	-S660	14L15	natural	56
660	122	275	122	2.4	26.000	12.320	-S660	14L15	natural	56
660	120	328	120	2.0	37.000	11.262	-S660	14P14	natural	56
660	117	199	117	3.3	16.000	12.832	-S660	14H15	natural	56
660	117	286	117	2.3	26.000	12.832	-S660	14L15	natural	56
660	113	388	113	1.5	15.000	28.548	-S660	14H32	natural	56
660	113	476	113	1.2	24.000	28.548	-S660	14L32	natural	56
660	113	582	113	1.0	35.000	28.548	-S660	14P32	natural	56
660	110	359	110	1.8	37.000	12.320	-S660	14P14	natural	56
660	107	218	107	3.0	16.000	14.037	-S660	14H15	natural	56
660	107	313	107	2.1	25.000	14.037	-S660	14L15	natural	56
660	105	373	105	1.8	37.000	12.832	-S660	14P14	natural	56
660	96	244	96	2.7	16.000	15.714	-S660	14H15	natural	56
660	96	351	96	1.9	25.000	15.714	-S660	14L15	natural	56
660	96	409	96	1.6	37.000	14.037	-S660	14P14	natural	56
660	86	457	86	1.4	36.000	15.714	-S660	14P14	natural	56

6.5

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

2-stage gearboxes

Inverter operation						i	Product		Cooling	
$M_{2, \max}$ [Nm]	$n_{2, th}$ [r/min]	M_2 [Nm]	$n_{2, eto}$ [r/min]	c	J [kgcm ²]		g500	MCS		
660	84	278	84	2.4	16.000	17.905	-S660	14H15	natural	56
660	84	400	84	1.6	25.000	17.905	-S660	14L15	natural	56
660	78	299	78	2.2	15.000	19.250	-S660	14H15	natural	56
660	78	430	78	1.5	25.000	19.250	-S660	14L15	natural	56
660	75	521	75	1.3	36.000	17.905	-S660	14P14	natural	56
660	70	560	70	1.2	36.000	19.250	-S660	14P14	natural	56
660	68	340	68	1.9	15.000	21.933	-S660	14H15	natural	56
660	68	489	68	1.4	24.000	21.933	-S660	14L15	natural	56
660	62	638	62	1.0	36.000	21.933	-S660	14P14	natural	56
660	53	255	53	2.6	8.700	28.548	-S660	14D15	natural	56
660	53	443	53	1.5	15.000	28.548	-S660	14H15	natural	56
660	53	637	53	1.0	24.000	28.548	-S660	14L15	natural	56

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

3-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
121	77	30	77	6.0	0.300	52.587	-S220	06C41	natural	40
137	68	34	68	5.3	0.300	59.581	-S220	06C41	natural	40
154	60	39	60	4.7	0.200	67.298	-S220	06C41	natural	40
175	53	44	53	4.5	0.200	76.249	-S220	06C41	natural	40
197	47	49	47	4.0	0.200	86.079	-S220	06C41	natural	40
220	77	60	77	3.0	0.400	52.587	-S220	06F41	natural	40
220	77	75	77	2.4	0.400	52.587	-S220	06I41	natural	40
220	77	116	77	1.6	1.200	52.587	-S220	09D41	natural	40
220	71	156	71	1.2	1.600	52.587	-S220	09F38	natural	40
220	68	68	68	2.6	0.400	59.581	-S220	06F41	natural	40
220	68	85	68	2.1	0.400	59.581	-S220	06I41	natural	40
220	68	131	68	1.4	1.200	59.581	-S220	09D41	natural	40
220	63	177	63	1.0	1.600	59.581	-S220	09F38	natural	40
220	60	77	60	2.3	0.300	67.298	-S220	06F41	natural	40
220	60	96	60	1.9	0.400	67.298	-S220	06I41	natural	40
220	60	148	60	1.2	1.200	67.298	-S220	09D41	natural	40
220	53	87	53	2.3	0.300	76.249	-S220	06F41	natural	40
220	53	109	53	1.8	0.400	76.249	-S220	06I41	natural	40
220	53	168	53	1.2	1.200	76.249	-S220	09D41	natural	40
220	47	99	47	2.0	0.300	86.079	-S220	06F41	natural	40
220	47	123	47	1.6	0.400	86.079	-S220	06I41	natural	40
220	42	56	42	3.6	0.200	97.528	-S220	06C41	natural	40
220	42	112	42	1.8	0.300	97.528	-S220	06F41	natural	40
220	42	140	42	1.4	0.400	97.528	-S220	06I41	natural	40
220	36	64	36	3.1	0.200	111.747	-S220	06C41	natural	40
220	36	128	36	1.6	0.300	111.747	-S220	06F41	natural	40
220	36	160	36	1.2	0.300	111.747	-S220	06I41	natural	40
220	32	73	32	2.7	0.200	126.610	-S220	06C41	natural	40
220	32	145	32	1.4	0.300	126.610	-S220	06F41	natural	40
220	32	181	32	1.1	0.300	126.610	-S220	06I41	natural	40
276	62	75	62	4.3	0.400	65.559	-S400	06F41	natural	48
312	55	85	55	4.3	0.300	74.260	-S400	06F41	natural	48
320	29	80	29	4.5	0.200	139.313	-S400	06C41	natural	48
344	70	83	70	3.9	0.400	58.027	-S400	06I41	natural	48
353	48	96	48	3.8	0.300	83.900	-S400	06F41	natural	48
388	62	94	62	3.5	0.400	65.559	-S400	06I41	natural	48
399	43	109	43	3.3	0.300	94.984	-S400	06F41	natural	48
399	38	123	38	2.9	0.300	107.314	-S400	06F41	natural	48
399	38	154	38	2.4	0.400	107.314	-S400	06I41	natural	48
399	29	160	29	2.3	0.300	139.313	-S400	06F41	natural	48

6.5

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

3-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
399	29	200	29	1.8	0.300	139.313	-S400	06I41	natural	48
400	70	128	70	2.6	1.200	58.027	-S400	09D41	natural	48
400	70	211	70	1.6	2.000	58.027	-S400	09H41	natural	48
400	70	250	70	1.3	2.900	58.027	-S400	09L41	natural	48
400	65	172	65	1.9	1.600	58.027	-S400	09F38	natural	48
400	62	144	62	2.3	1.200	65.559	-S400	09D41	natural	48
400	62	238	62	1.4	2.000	65.559	-S400	09H41	natural	48
400	62	282	62	1.2	2.900	65.559	-S400	09L41	natural	48
400	57	194	57	1.7	1.600	65.559	-S400	09F38	natural	48
400	55	106	55	3.4	0.400	74.260	-S400	06I41	natural	48
400	55	163	55	2.2	1.200	74.260	-S400	09D41	natural	48
400	55	270	55	1.3	2.000	74.260	-S400	09H41	natural	48
400	55	319	55	1.1	2.900	74.260	-S400	09L41	natural	48
400	51	220	51	1.7	1.600	74.260	-S400	09F38	natural	48
400	48	120	48	3.0	0.400	83.900	-S400	06I41	natural	48
400	48	184	48	2.0	1.200	83.900	-S400	09D41	natural	48
400	48	305	48	1.2	2.000	83.900	-S400	09H41	natural	48
400	48	361	48	1.0	2.900	83.900	-S400	09L41	natural	48
400	45	249	45	1.5	1.600	83.900	-S400	09F38	natural	48
400	43	136	43	2.7	0.400	94.984	-S400	06I41	natural	48
400	33	141	33	2.6	0.300	123.307	-S400	06F41	natural	48
400	33	177	33	2.0	0.300	123.307	-S400	06I41	natural	48
405	23	101	23	5.9	0.200	176.611	-S660	06C41	natural	56
462	20	115	20	5.2	0.200	201.230	-S660	06C41	natural	56
516	71	125	71	4.3	1.500	56.818	-S660	09D41	natural	56
523	33	143	33	4.2	0.300	124.289	-S660	06F41	natural	56
577	30	157	30	3.8	0.300	137.133	-S660	06F41	natural	56
579	64	140	64	3.8	1.400	63.817	-S660	09D41	natural	56
601	40	145	40	4.1	0.500	101.460	-S660	06I41	natural	56
625	81	181	81	2.8	2.300	49.867	-S660	09H41	natural	56
625	81	214	81	2.4	3.200	49.867	-S660	09L41	natural	56
625	75	148	75	3.5	1.900	49.867	-S660	09F38	natural	56
634	58	153	58	3.5	1.300	69.813	-S660	09D41	natural	56
646	37	156	37	3.8	0.400	109.083	-S660	06I41	natural	56
650	71	206	71	2.6	2.300	56.818	-S660	09H41	natural	56
650	71	244	71	2.2	3.200	56.818	-S660	09L41	natural	56
650	66	168	66	3.2	1.900	56.818	-S660	09F38	natural	56
657	26	179	26	3.3	0.300	156.249	-S660	06F41	natural	56
660	64	232	64	2.3	2.200	63.817	-S660	09H41	natural	56
660	64	274	64	2.0	3.100	63.817	-S660	09L41	natural	56

6.5

g500-S shaft-mounted helical geared motors

Technical data



Selection tables

3-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g500	MCS		
660	59	189	59	2.9	1.800	63.817	-S660	09F38	natural	56
660	58	254	58	2.1	2.100	69.813	-S660	09H41	natural	56
660	58	300	58	1.8	3.000	69.813	-S660	09L41	natural	56
660	56	160	56	3.7	1.400	72.713	-S660	09D41	natural	56
660	56	264	56	2.3	2.200	72.713	-S660	09H41	natural	56
660	56	313	56	1.9	3.100	72.713	-S660	09L41	natural	56
660	54	207	54	2.7	1.700	69.813	-S660	09F38	natural	56
660	52	215	52	2.8	1.800	72.713	-S660	09F38	natural	56
660	51	175	51	3.4	1.300	79.545	-S660	09D41	natural	56
660	51	289	51	2.1	2.100	79.545	-S660	09H41	natural	56
660	51	342	51	1.8	3.000	79.545	-S660	09L41	natural	56
660	47	236	47	2.6	1.700	79.545	-S660	09F38	natural	56
660	46	196	46	3.0	1.300	89.048	-S660	09D41	natural	56
660	46	323	46	1.9	2.100	89.048	-S660	09H41	natural	56
660	46	383	46	1.6	3.000	89.048	-S660	09L41	natural	56
660	42	264	42	2.3	1.700	89.048	-S660	09F38	natural	56
660	40	223	40	2.7	1.300	101.460	-S660	09D41	natural	56
660	40	368	40	1.6	2.100	101.460	-S660	09H41	natural	56
660	40	436	40	1.4	3.000	101.460	-S660	09L41	natural	56
660	37	240	37	2.5	1.200	109.083	-S660	09D41	natural	56
660	37	301	37	2.0	1.700	101.460	-S660	09F38	natural	56
660	37	396	37	1.5	2.000	109.083	-S660	09H41	natural	56
660	37	469	37	1.3	2.900	109.083	-S660	09L41	natural	56
660	34	323	34	1.9	1.600	109.083	-S660	09F38	natural	56
660	33	178	33	3.4	0.400	124.289	-S660	06I41	natural	56
660	33	273	33	2.2	1.200	124.289	-S660	09D41	natural	56
660	33	451	33	1.3	2.000	124.289	-S660	09H41	natural	56
660	33	535	33	1.1	2.900	124.289	-S660	09L41	natural	56
660	30	197	30	3.0	0.400	137.133	-S660	06I41	natural	56
660	30	368	30	1.7	1.600	124.289	-S660	09F38	natural	56
660	26	224	26	2.7	0.400	156.249	-S660	06I41	natural	56
660	23	203	23	3.0	0.300	176.611	-S660	06F41	natural	56
660	23	253	23	2.4	0.400	176.611	-S660	06I41	natural	56
660	20	231	20	2.6	0.300	201.230	-S660	06F41	natural	56
660	20	288	20	2.1	0.400	201.230	-S660	06I41	natural	56

6.5

g500-S shaft-mounted helical geared motors


Technical data



Dimensions, notes

Notes on the dimensions

The following legend shows the layout of the dimension sheets.

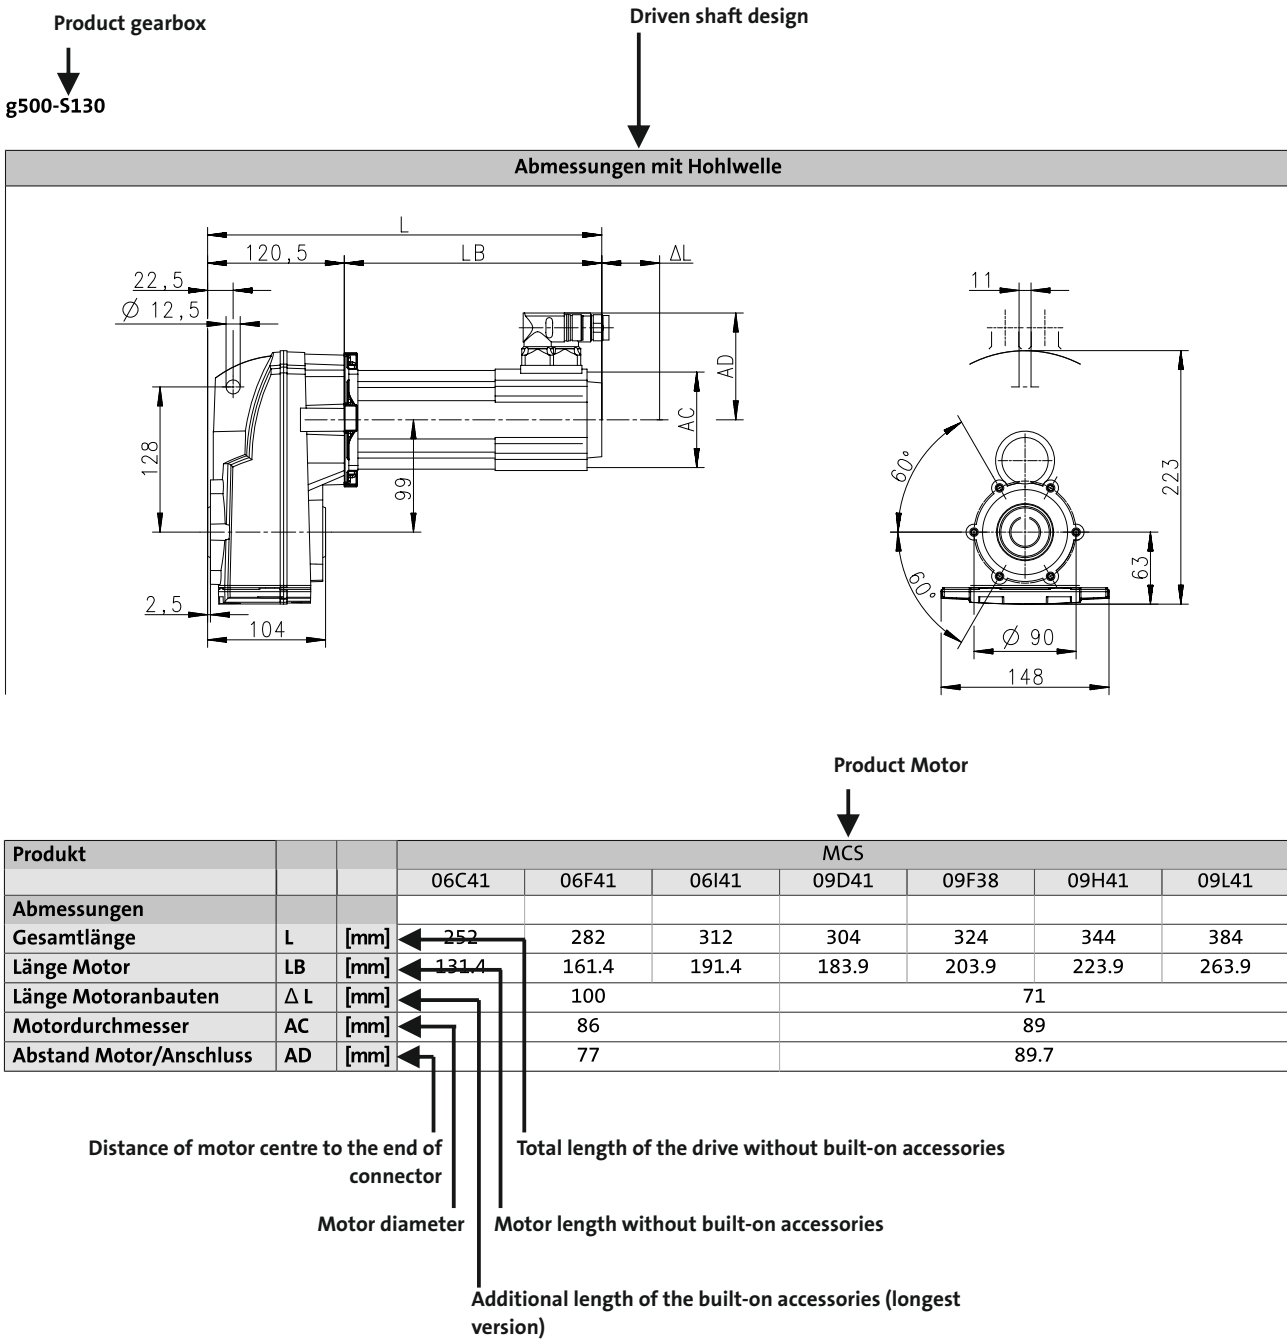


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S130

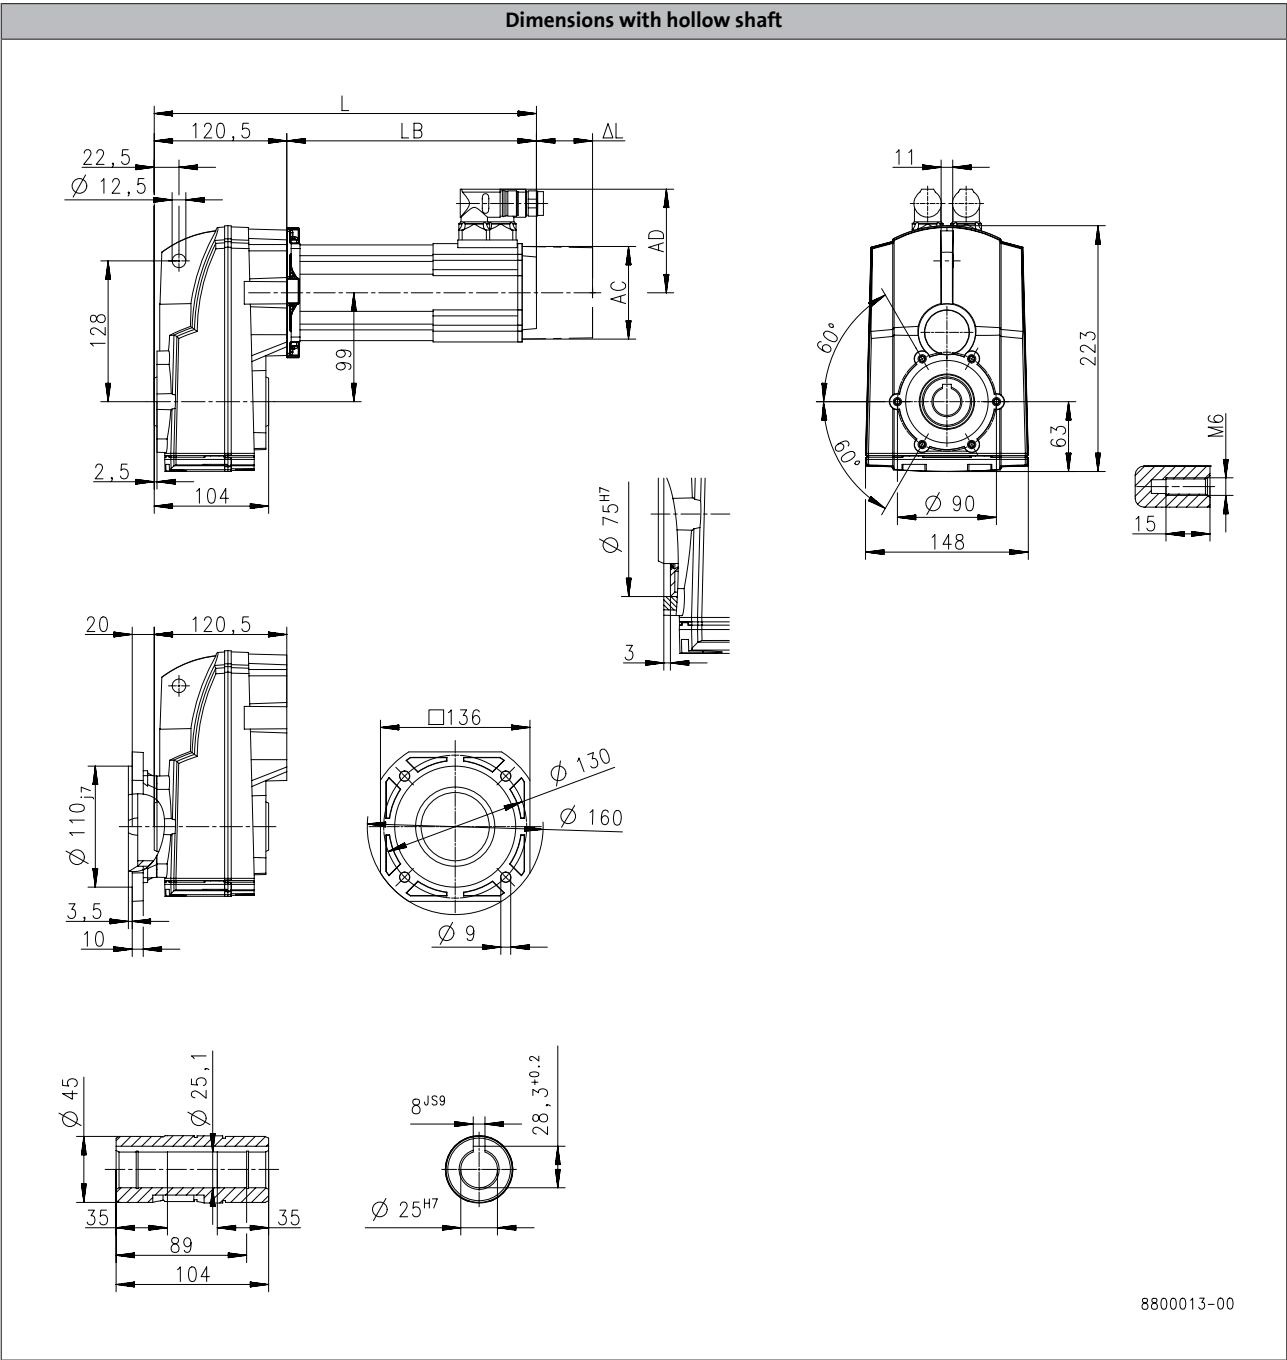

Product			MCS					
			06C41	06F41	06I41	09D41	09F38	09H41
Dimensions								
Total length	L	[mm]	252	282	312	304	324	344
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9
Length of motor options	Δ L	[mm]	100				71	
Motor diameter	AC	[mm]	86				89	
Distance motor/connection	AD	[mm]	77				89.7	


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S130

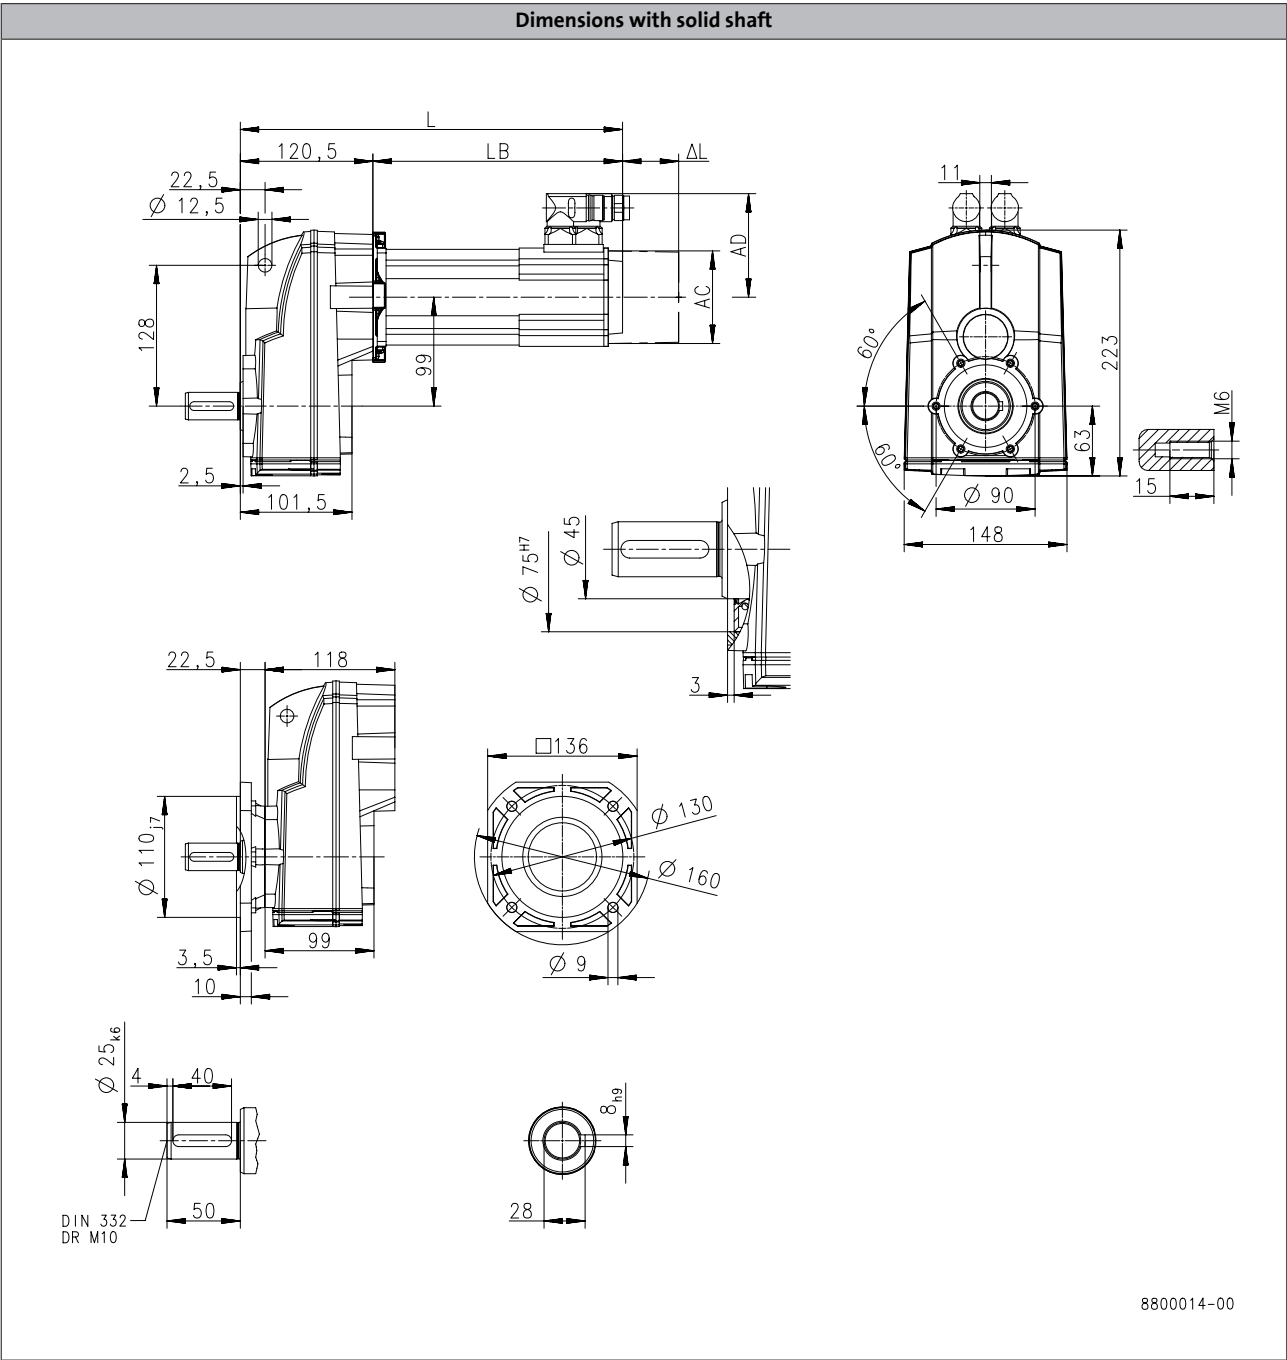

Product			MCS						
			06C41	06F41	06I41	09D41	09F38	09H41	09L41
Dimensions									
Total length	L	[mm]	252	282	312	304	324	344	384
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9
Length of motor options	ΔL	[mm]	100				71		
Motor diameter	AC	[mm]	86				89		
Distance motor/connection	AD	[mm]	77				89.7		

Dimensions, self-ventilated motors

g500-S130

Technical drawing of the 25k6 pump assembly, showing multiple views with dimensions in mm.

Top View (Left): Shows the main dimensions of the pump body. Key dimensions include: 5.5, 120.5, LB, ΔL , 22.5, $\varnothing 12.5$, 128, 99, 28, 4, 26, 62, 114.5, 4, 5.5, AC, AD.

Top View (Right): Shows the front view of the pump body. Key dimensions include: 74, 260, $R30$, 100, 80, 110, $\varnothing 11$, 80.

Bottom View (Left): Shows the bottom view of the pump body. Key dimensions include: 11, 18, 8, 100.

Bottom View (Middle): Shows the bottom view of the pump body. Key dimensions include: 11, 18, 8, 100.

Bottom View (Right): Shows the bottom view of the pump body. Key dimensions include: 110, 80, 4, 62, 114.5, 4, 26.


Side View (Bottom): Shows the side view of the pump body. Key dimensions include: $\varnothing 25_{k6}$, 50.

8800016-00

6.5 - 38

Dimensions, self-ventilated motors

Dimensions with shrink disc

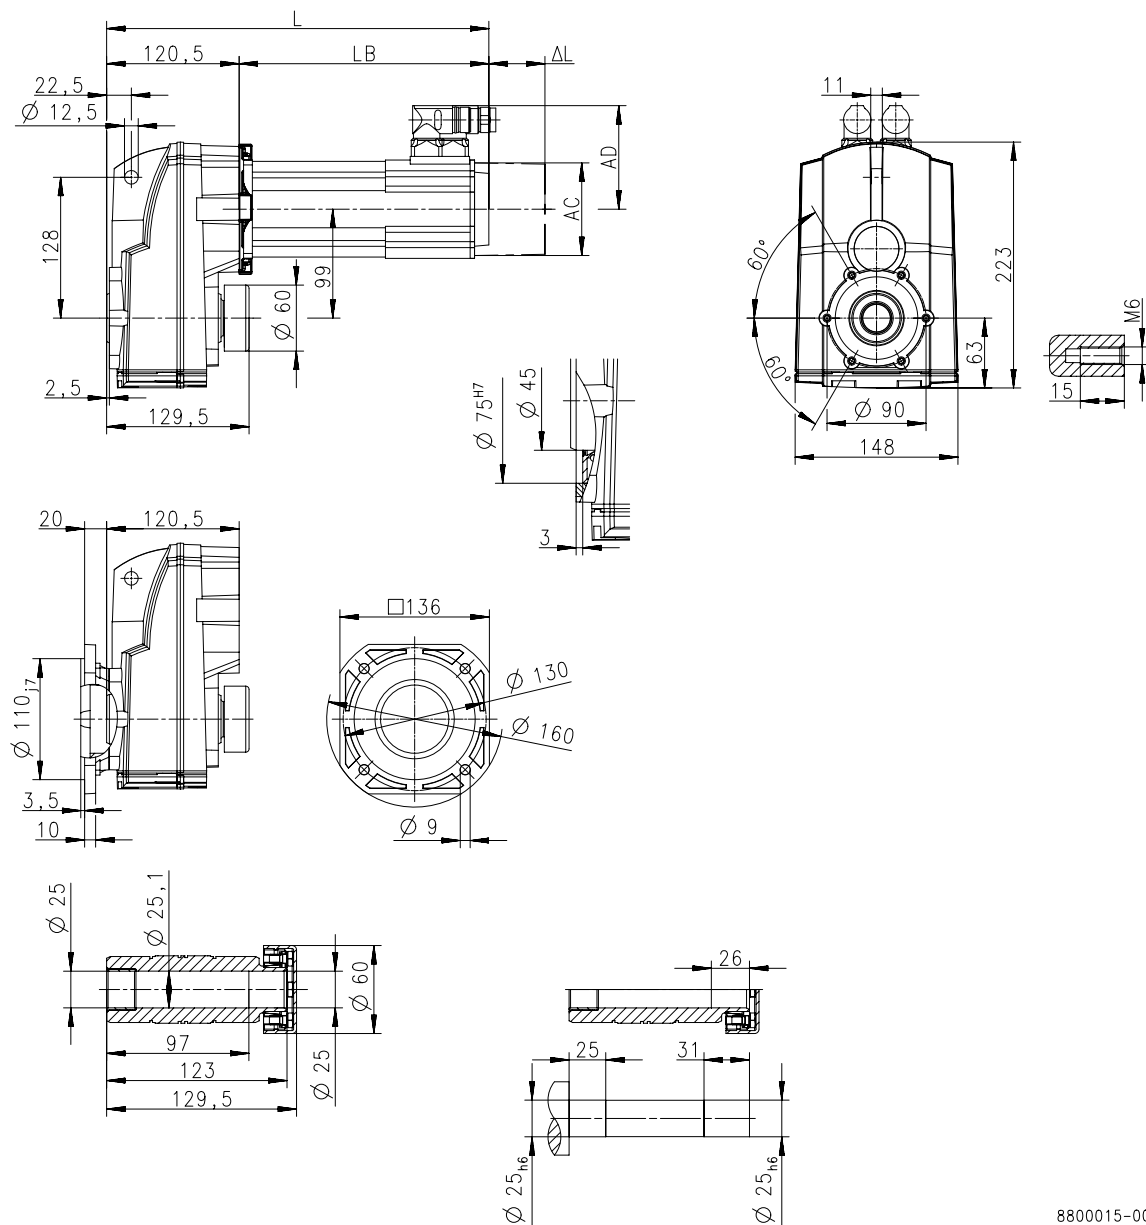

8800015-00

6.5

Lenze | V00-en_GB-04/2014


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S220

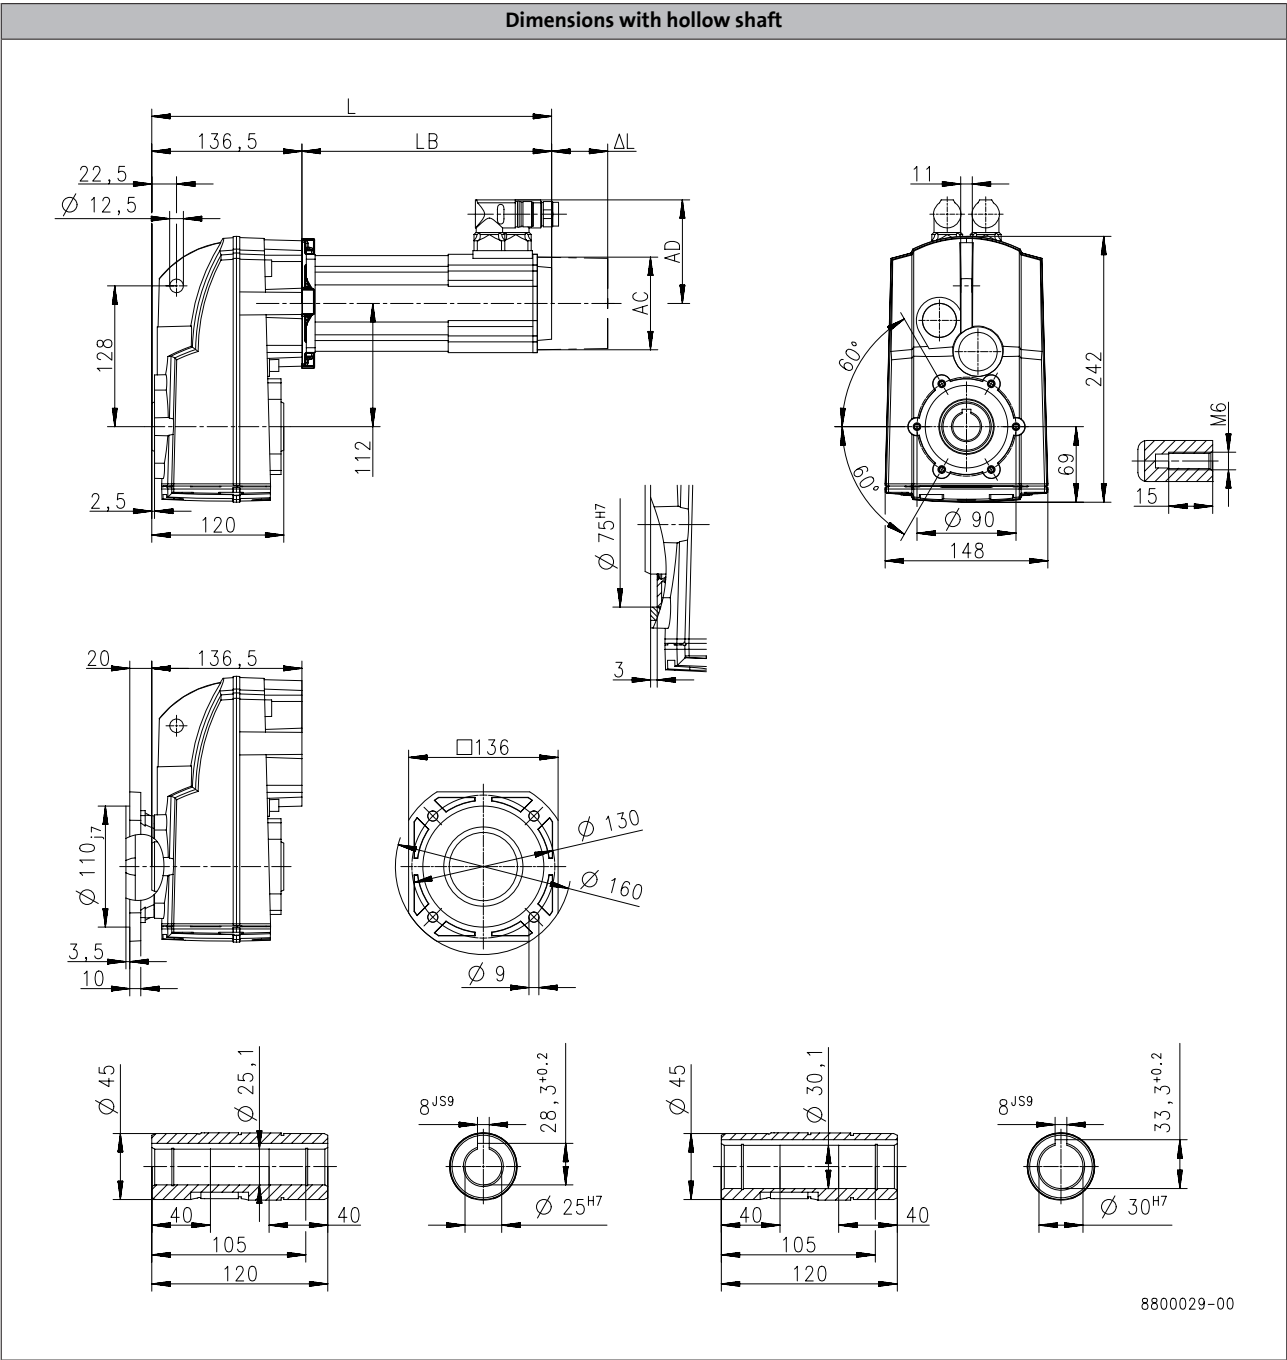


Product			MCS					
			06C41	06F41	06I41	09D41	09F38	09H41
Dimensions								
Total length	L	[mm]	268	298	328	320	340	360
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9
Length of motor options	Δ L	[mm]		100			71	
Motor diameter	AC	[mm]		86			89	
Distance motor/connection	AD	[mm]		77			89.7	

Dimensions, self-ventilated motors

g500-S220

Dimensions with hollow shaft

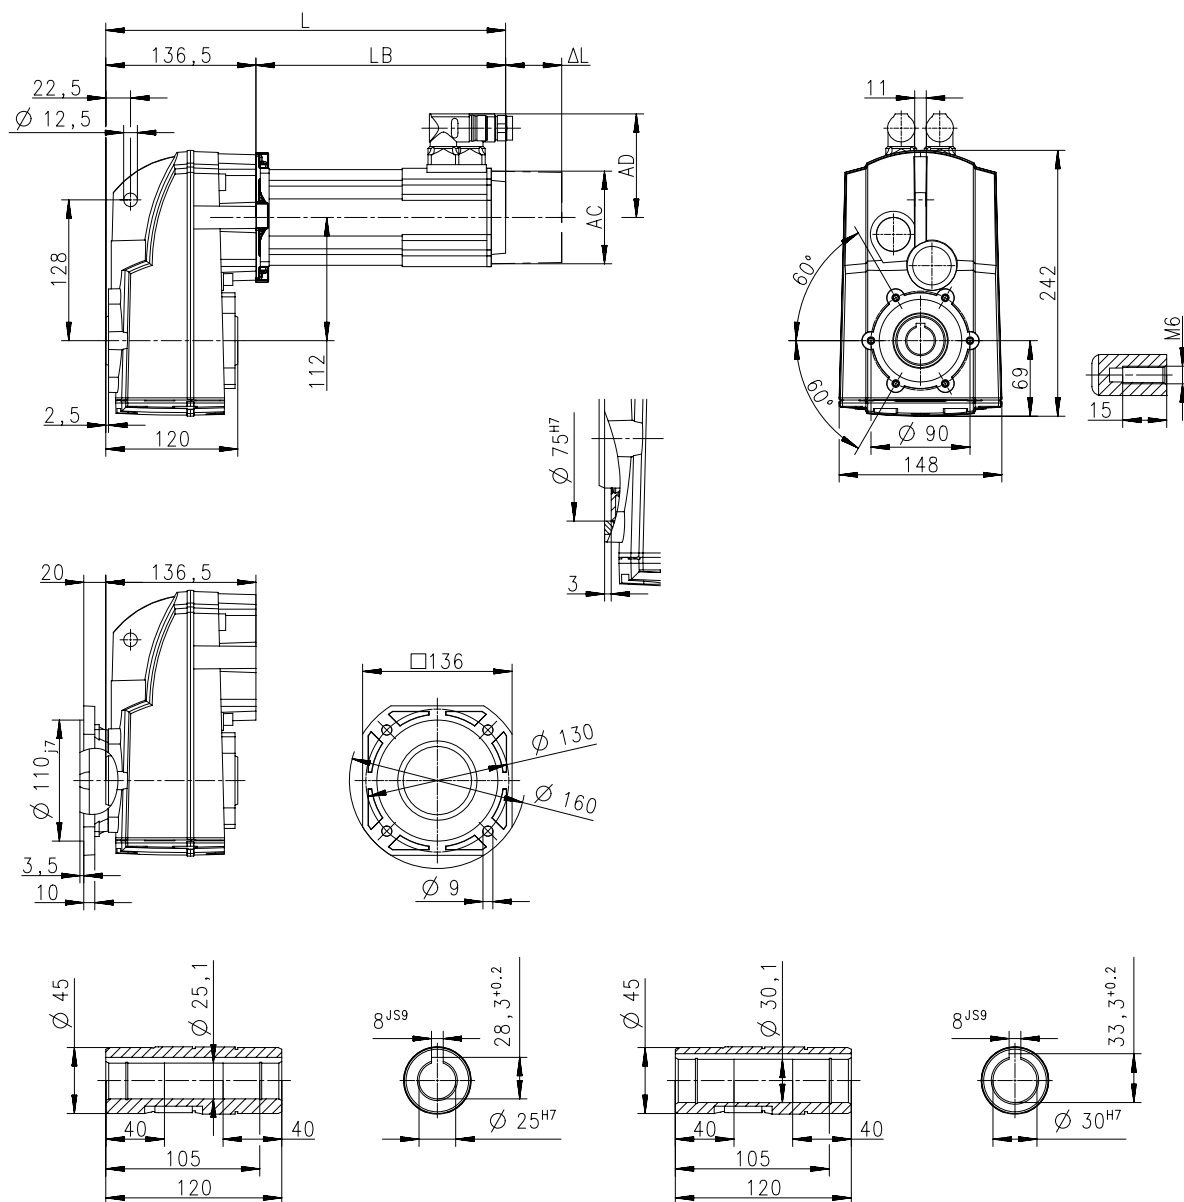

8800029-00

6.5

Lenze | V00-en_GB-04/2014


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S220

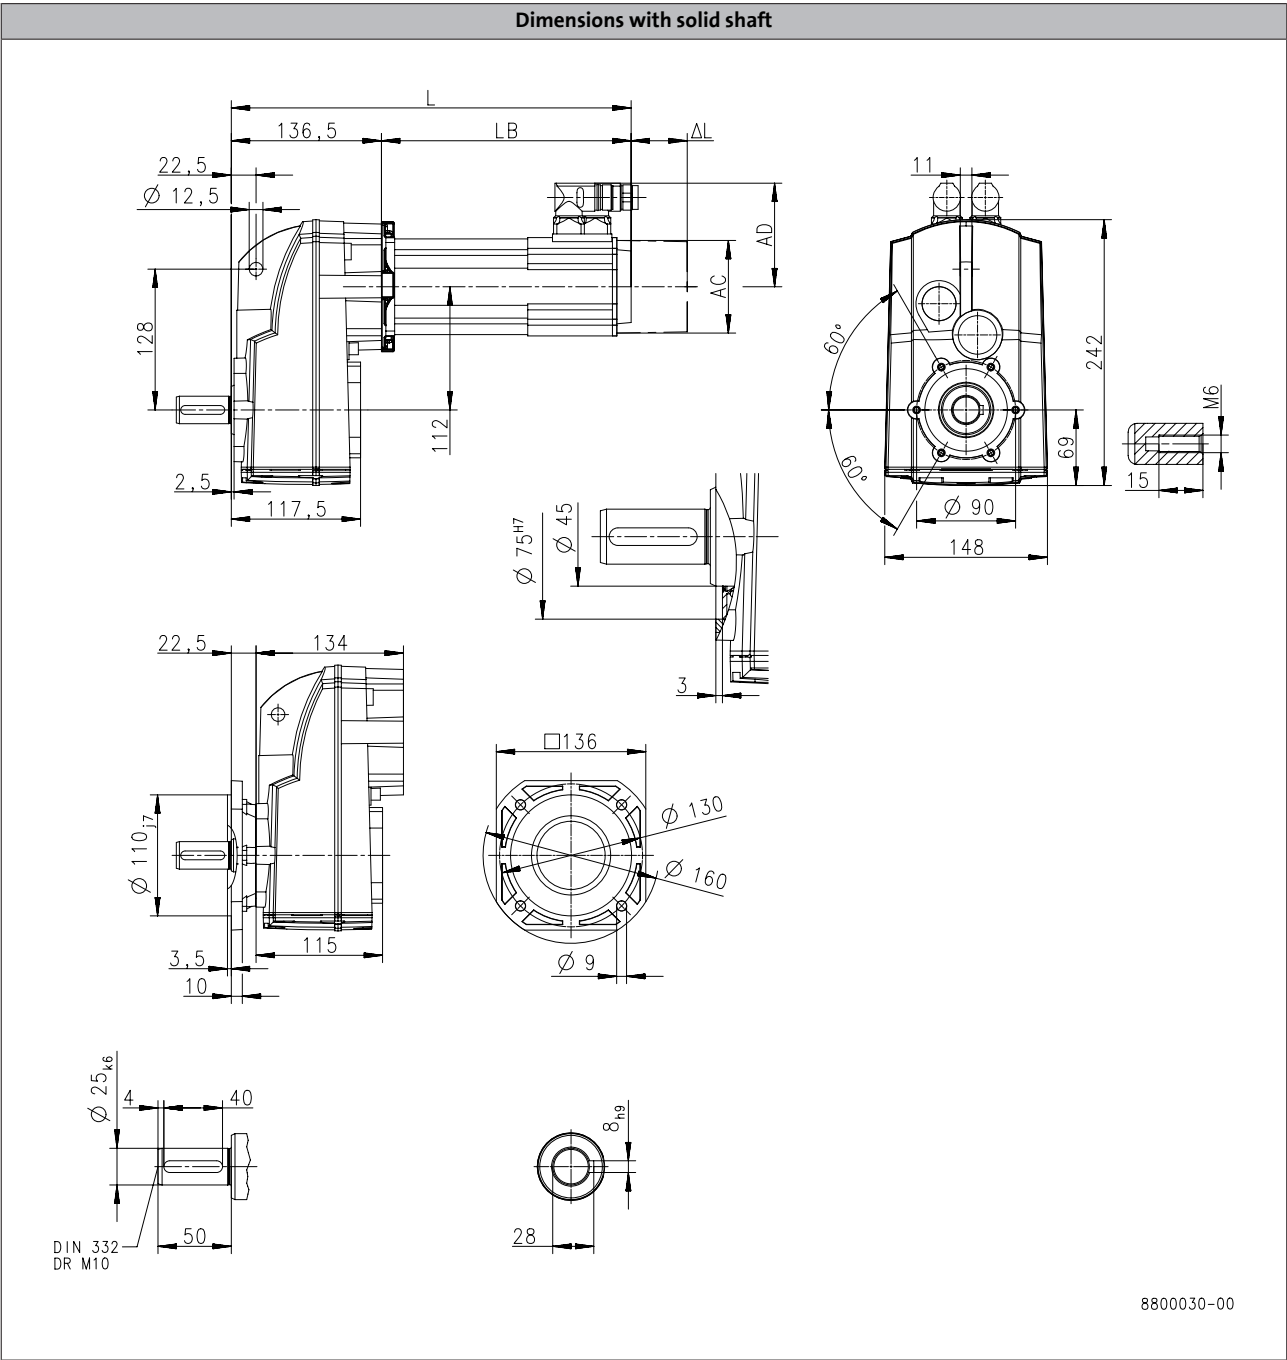

Product			MCS					
			06C41	06F41	06I41	09D41	09F38	09H41
Dimensions								
Total length	L	[mm]	268	298	328	320	340	360
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9
Length of motor options	Δ L	[mm]	100			71		
Motor diameter	AC	[mm]	86			89		
Distance motor/connection	AD	[mm]	77			89.7		


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S220

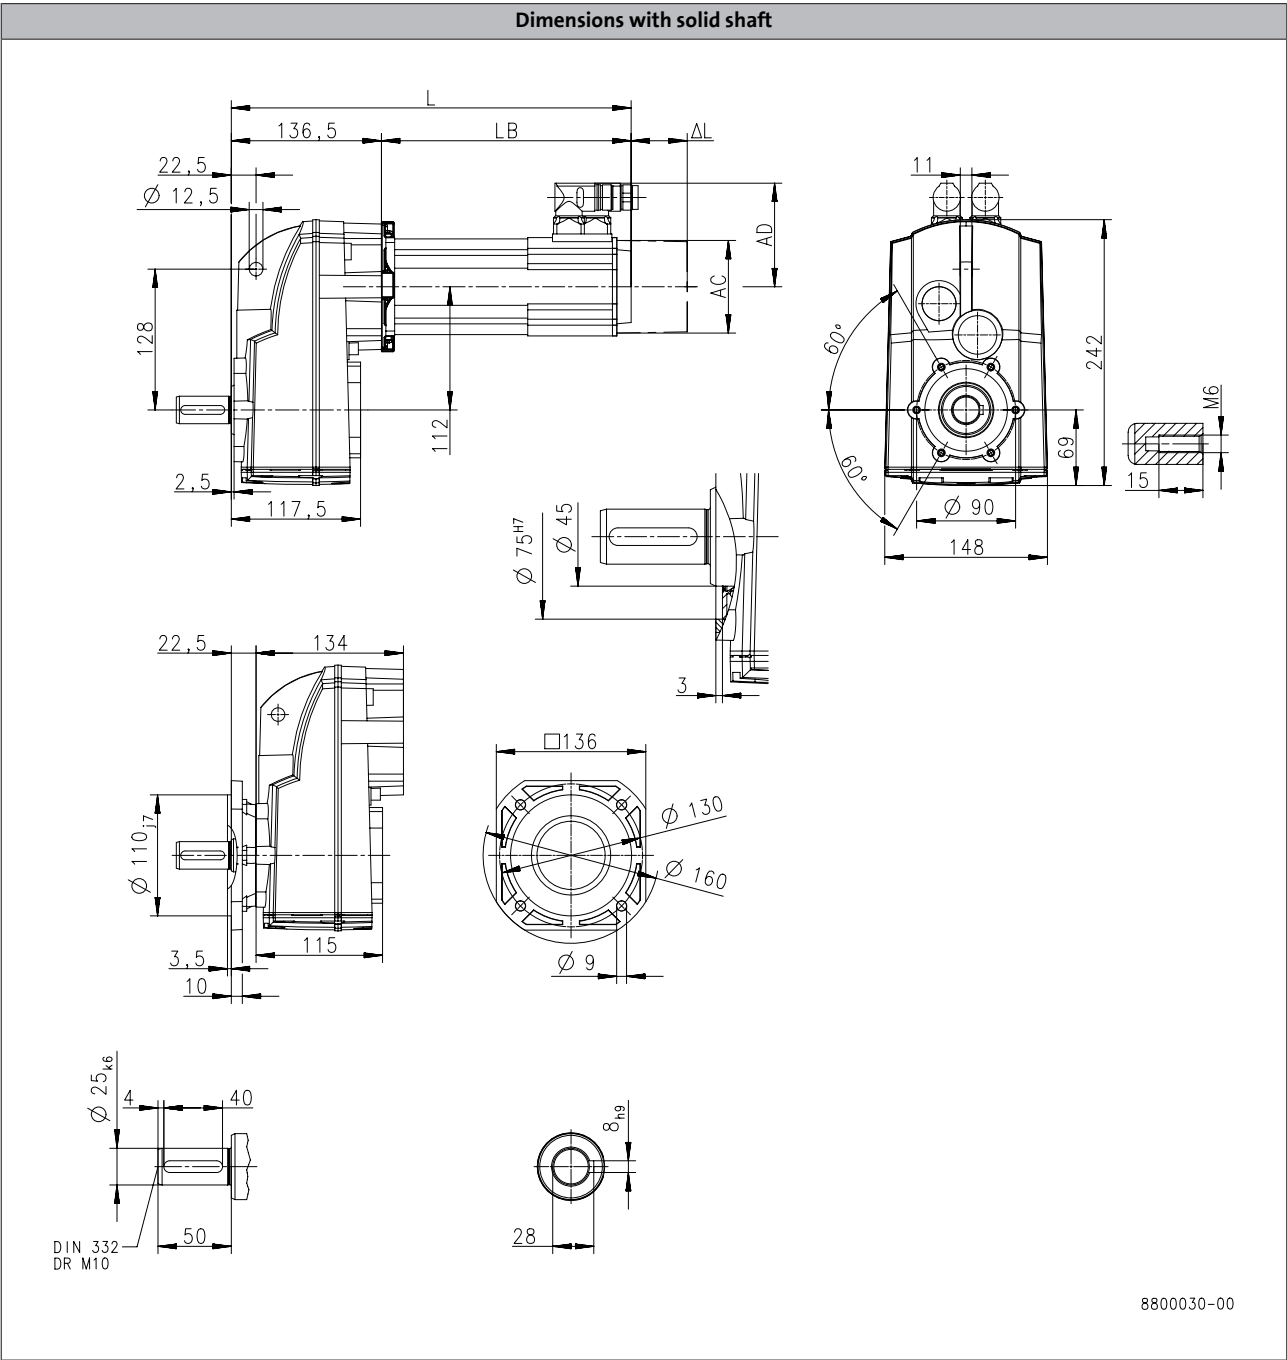

Product			MCS						
			09L41	12D20	12D41	12H15	12H30	12H35	12L20
Dimensions									
Total length	L	[mm]	400	337		377		417	
Motor length	LB	[mm]	263.9	200.5		240.5		280.5	
Length of motor options	Δ L	[mm]	71	69					
Motor diameter	AC	[mm]	89	116					
Distance motor/connection	AD	[mm]	89.7	105					

Dimensions, self-ventilated motors

The technical drawing consists of six views of a mechanical component:

- Top View (Left):** Shows the main body with dimensions: 5.5, 22.5, Ø 12.5, 136.5, L, LB, ΔL, AD, AC, 128, 23, 112, 4, 26, 62, 130.5.
- Front View (Right):** Shows the front face with dimensions: 74, 273, R31, 100, 80, 110, Ø 11.
- Side View (Bottom Left):** Shows the side profile with dimensions: Ø 11, 18, 8, 100.
- End View (Bottom Middle):** Shows the end face with dimensions: Ø 11, 18, 8, 100.
- Bottom View (Bottom Right):** Shows the bottom face with dimensions: 110, 80, 4, 62, 26, 130.5.
- Detail View (Bottom Left):** A small detail view of a hole with dimensions: Ø 25_{H6}, 50.

6.5 - 44


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S220

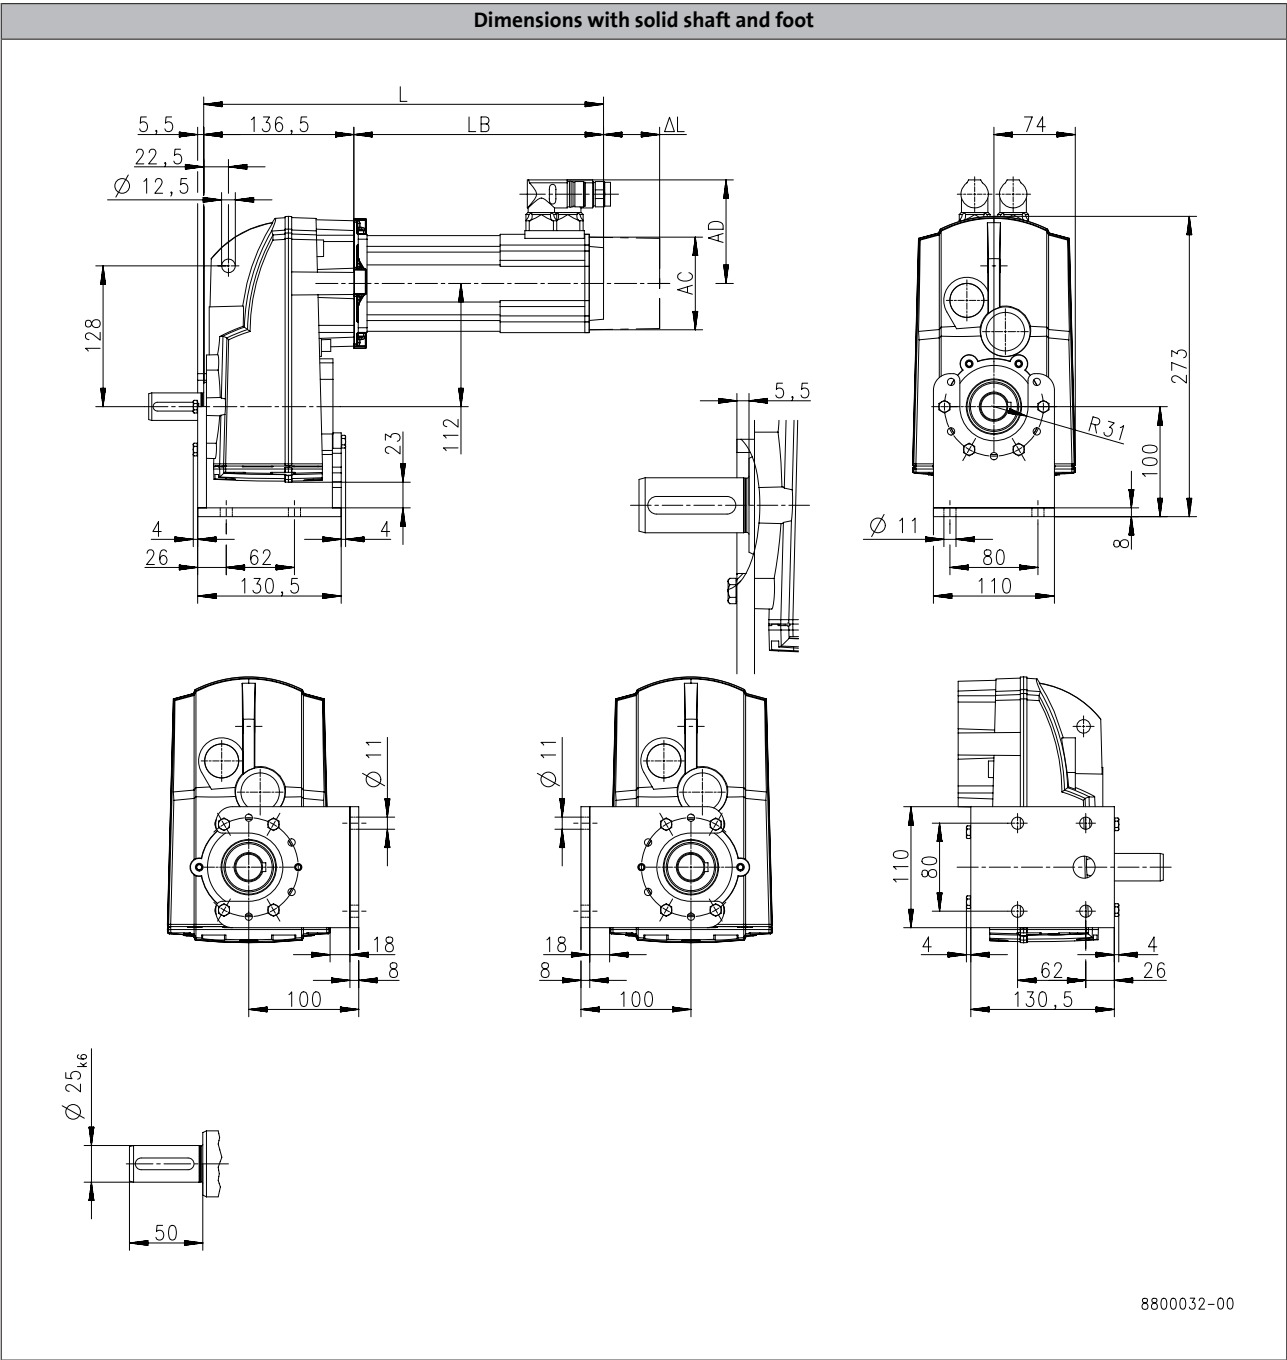

Product			MCS						
			09L41	12D20	12D41	12H15	12H30	12H35	12L20
Dimensions									
Total length	L	[mm]	400	337		377		417	
Motor length	LB	[mm]	263.9	200.5		240.5		280.5	
Length of motor options	Δ L	[mm]	71	69					
Motor diameter	AC	[mm]	89	116					
Distance motor/connection	AD	[mm]	89.7	105					


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S220

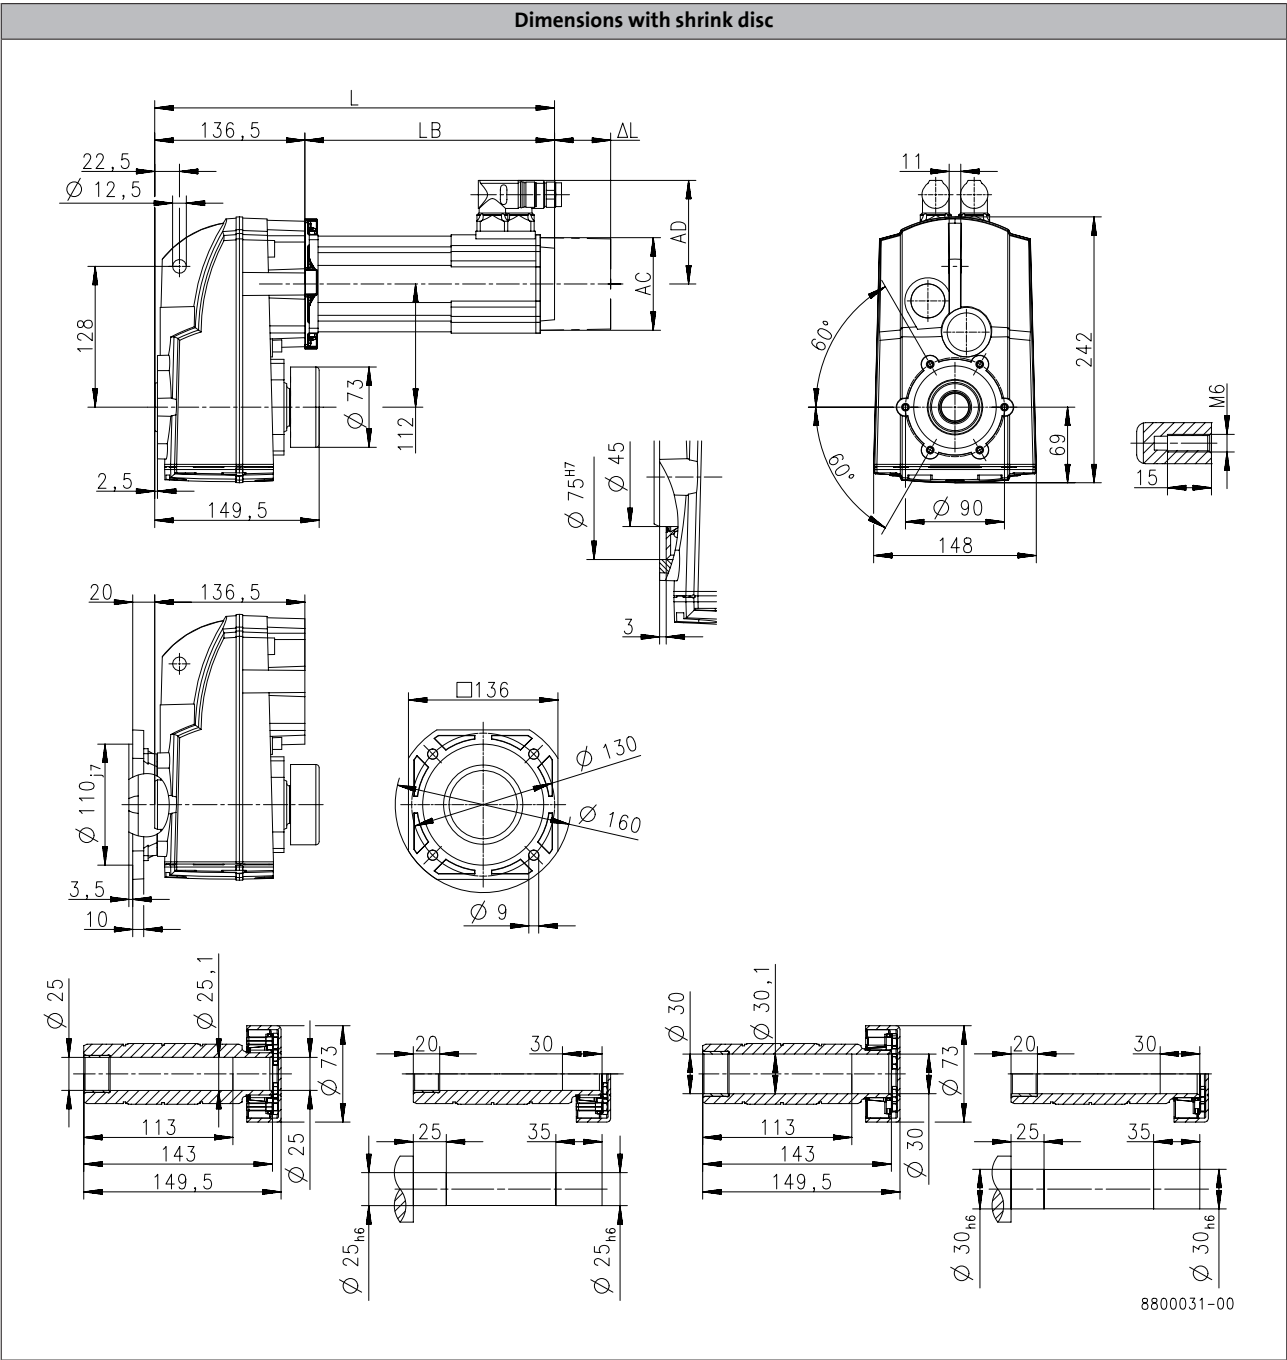

Product			MCS					
			06C41	06F41	06I41	09D41	09F38	09H41
Dimensions								
Total length	L	[mm]	268	298	328	320	340	360
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9
Length of motor options	Δ L	[mm]		100			71	
Motor diameter	AC	[mm]		86			89	
Distance motor/connection	AD	[mm]		77			89.7	


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S220

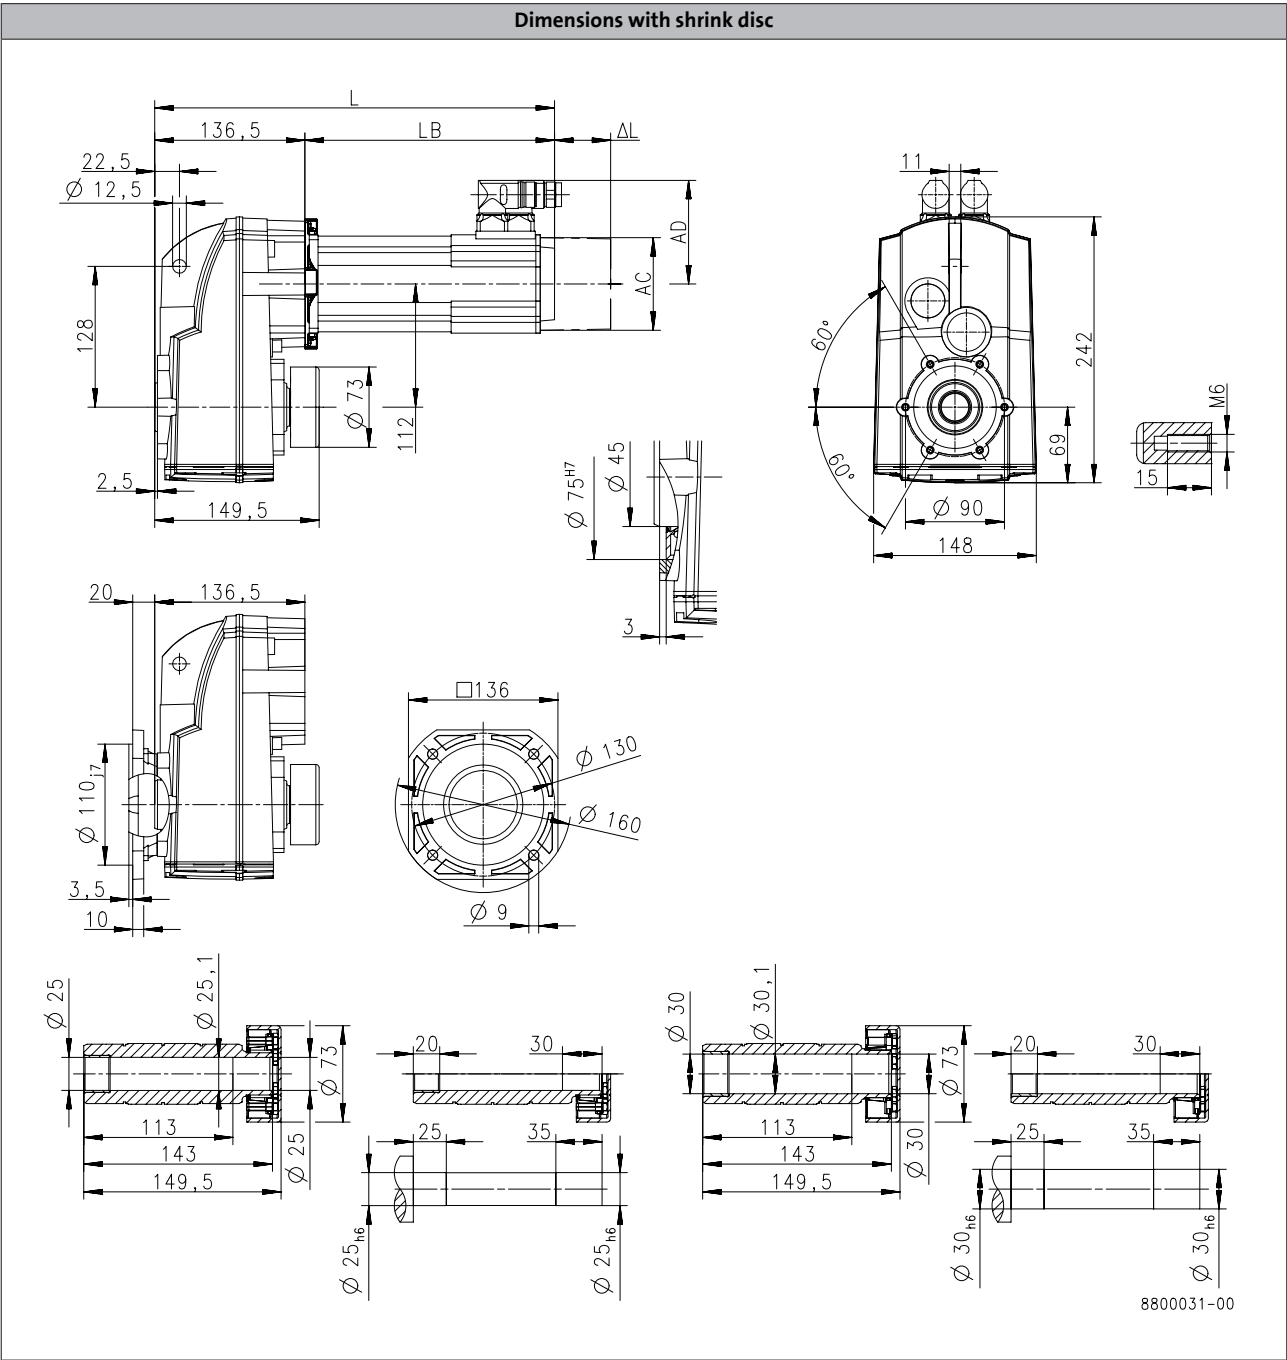

Product			MCS						
			09L41	12D20	12D41	12H15	12H30	12H35	12L20
Dimensions									
Total length	L	[mm]	400	337		377		417	
Motor length	LB	[mm]	263.9	200.5		240.5		280.5	
Length of motor options	Δ L	[mm]	71	69					
Motor diameter	AC	[mm]	89	116					
Distance motor/connection	AD	[mm]	89.7	105					


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S400

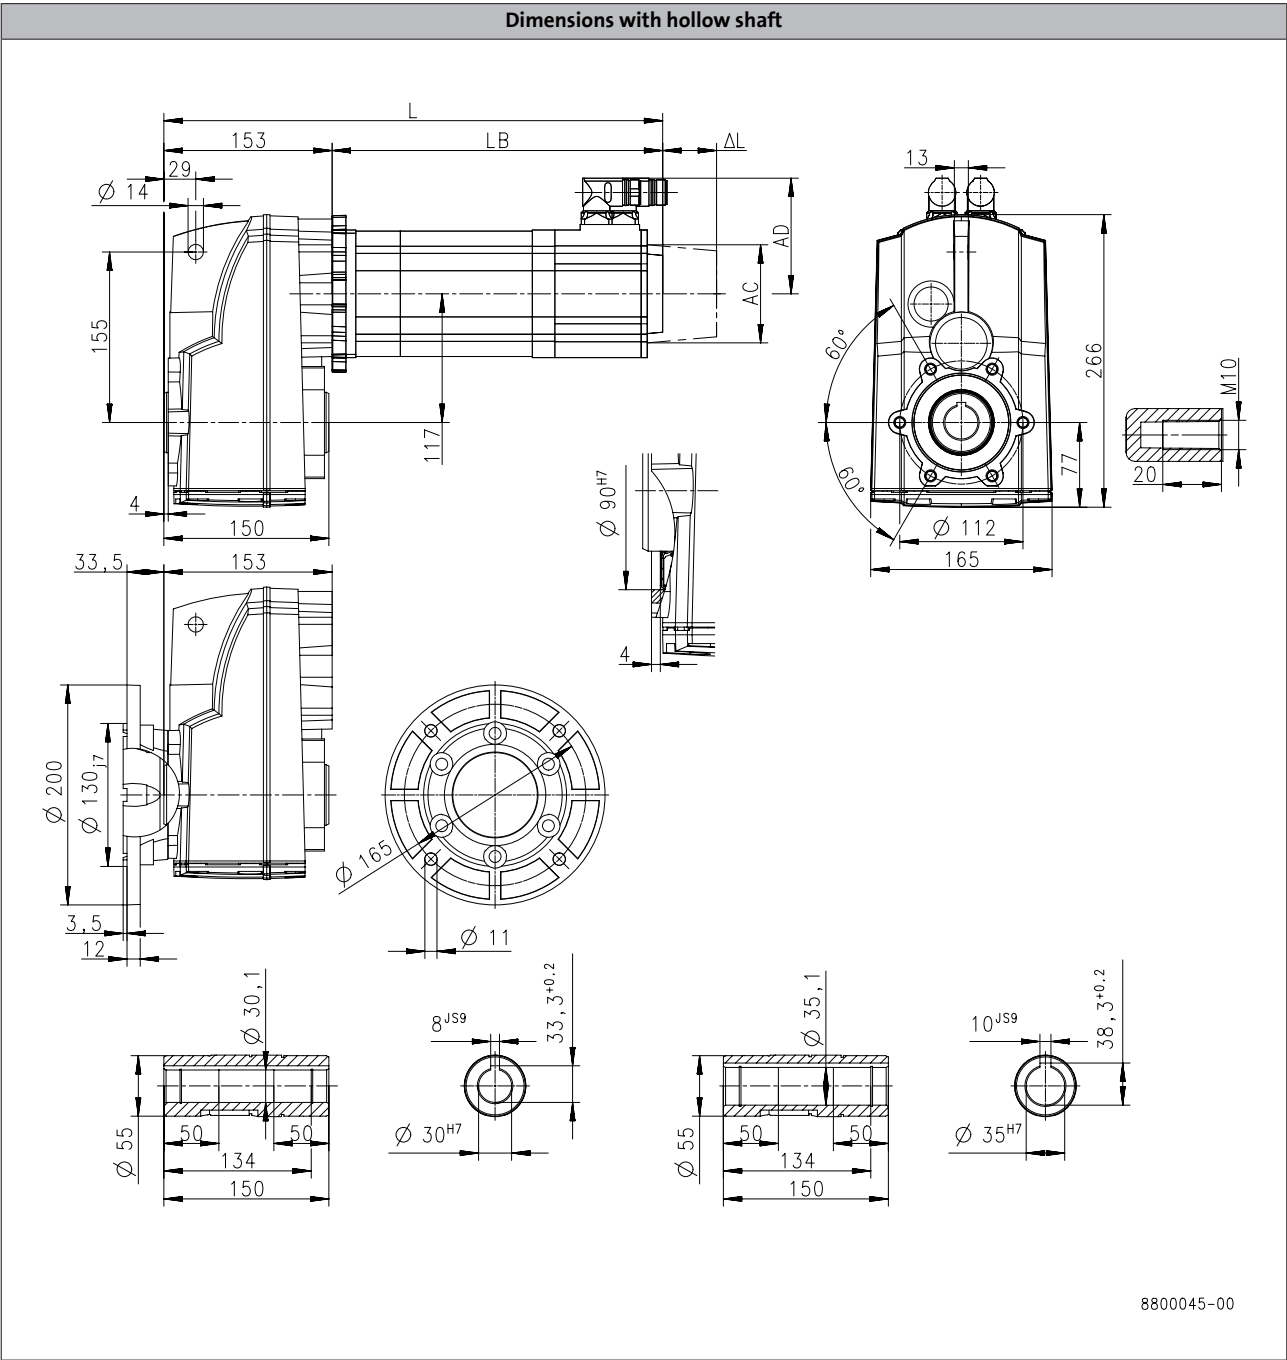

8800045-00

Product			MCS								
			06C41	06F41	06I41	09D41	09F38	09H41	09L41	12D20	12D41
Dimensions											
Total length	L	[mm]	284	314	344	337	357	377	417		354
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9		200.5
Length of motor options	Δ L		100				71			69	
Motor diameter	AC	[mm]	86				89			116	
Distance motor/connection	AD	[mm]	77				89.7			105	


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S400

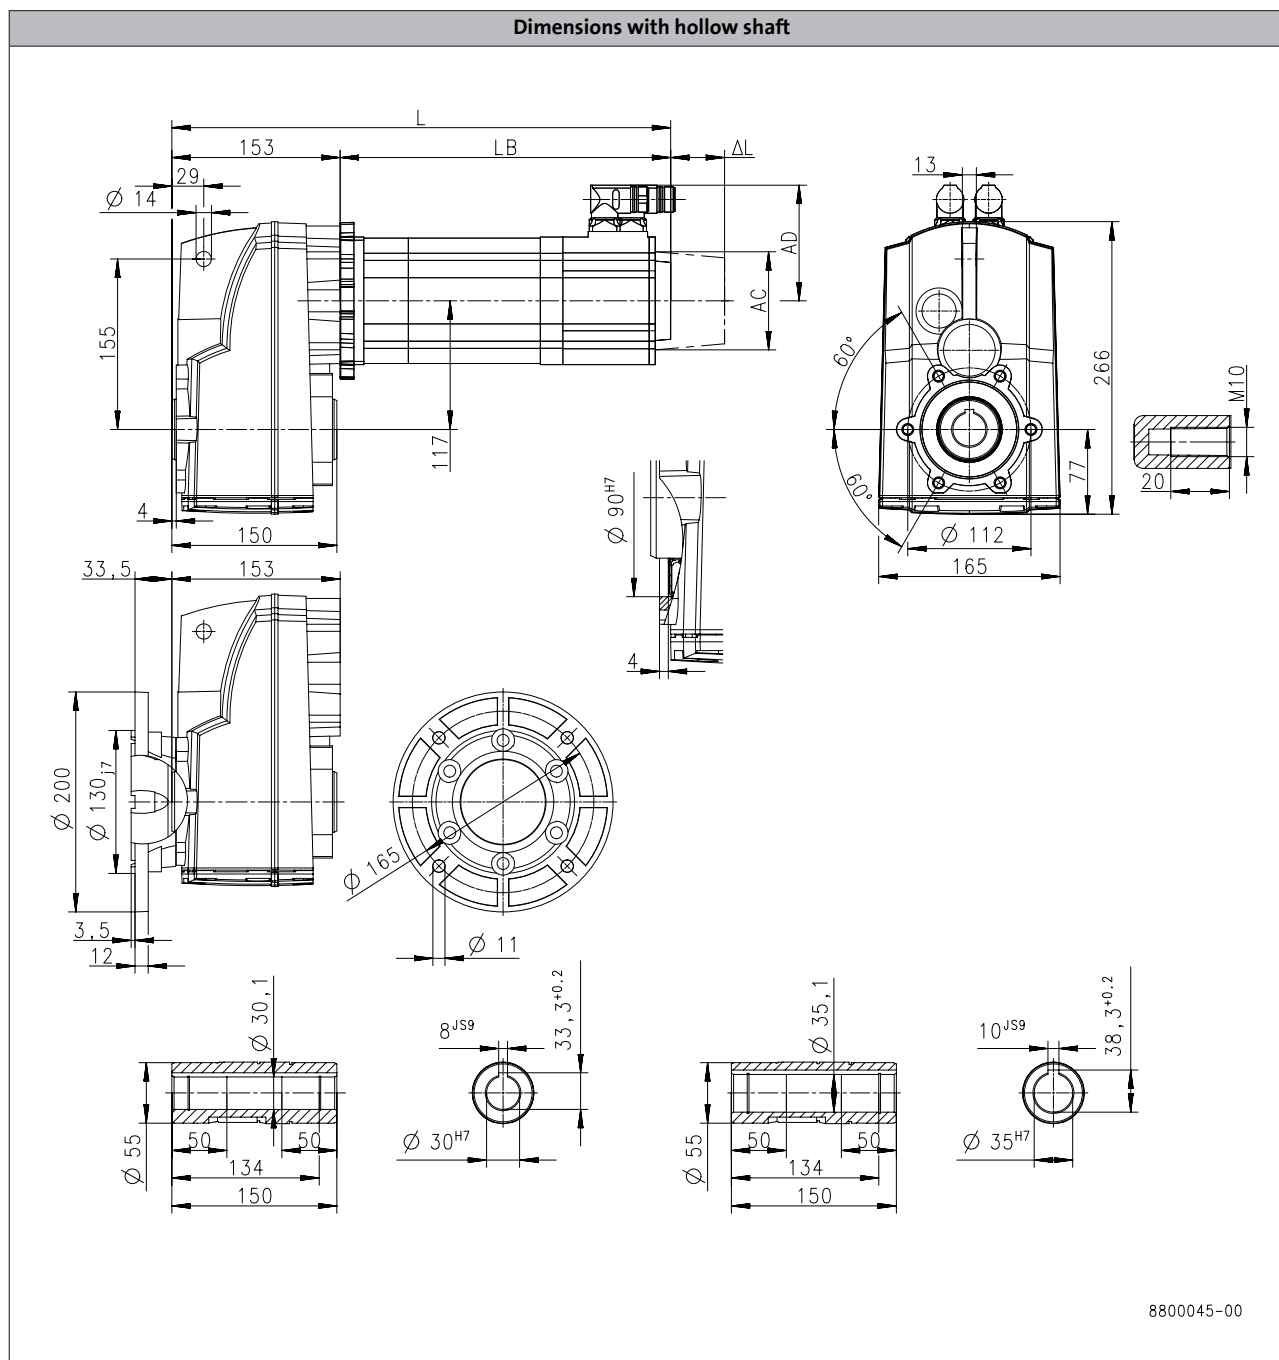

6.5

Product			MCS										
			12H15	12H30	12H35	12L20	14D15	14H15	14H32	14L15	14L32	14P14	
Dimensions													
Total length	L	[mm]	394			434	369	409		449		489	
Motor length	LB	[mm]	240.5			280.5	216	256		296		336	
Length of motor options	Δ L	[mm]	69				78						
Motor diameter	AC	[mm]	116				143						
Distance motor/connection	AD	[mm]	105				116.5					146	116.5

Dimensions, self-ventilated motors

g500-S400

[illegible]

8800046-00

6.5 - 50


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S400

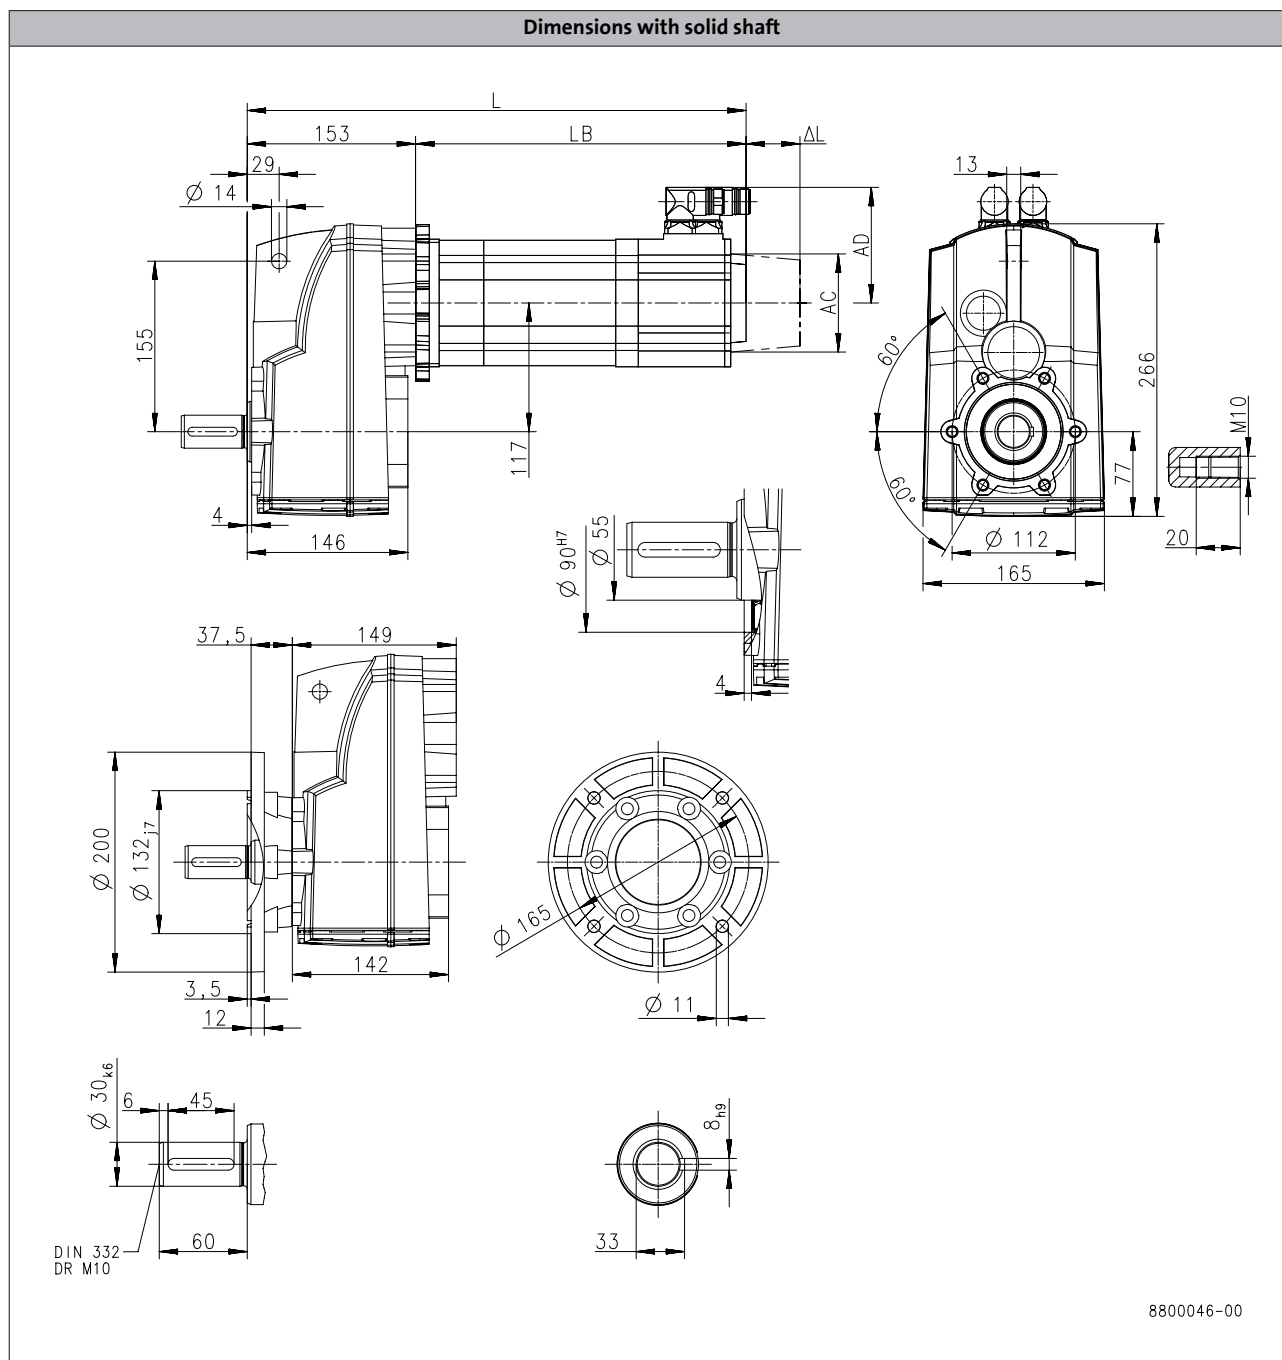

6.5

Product			MCS										
			12H15	12H30	12H35	12L20	14D15	14H15	14H32	14L15	14L32	14P14	
Dimensions													
Total length	L	[mm]	394			434	369	409		449		489	
Motor length	LB	[mm]	240.5			280.5	216	256		296		336	
Length of motor options	Δ L	[mm]	69				78						
Motor diameter	AC	[mm]	116				143						
Distance motor/connection	AD	[mm]	105				116.5					146	116.5


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S400

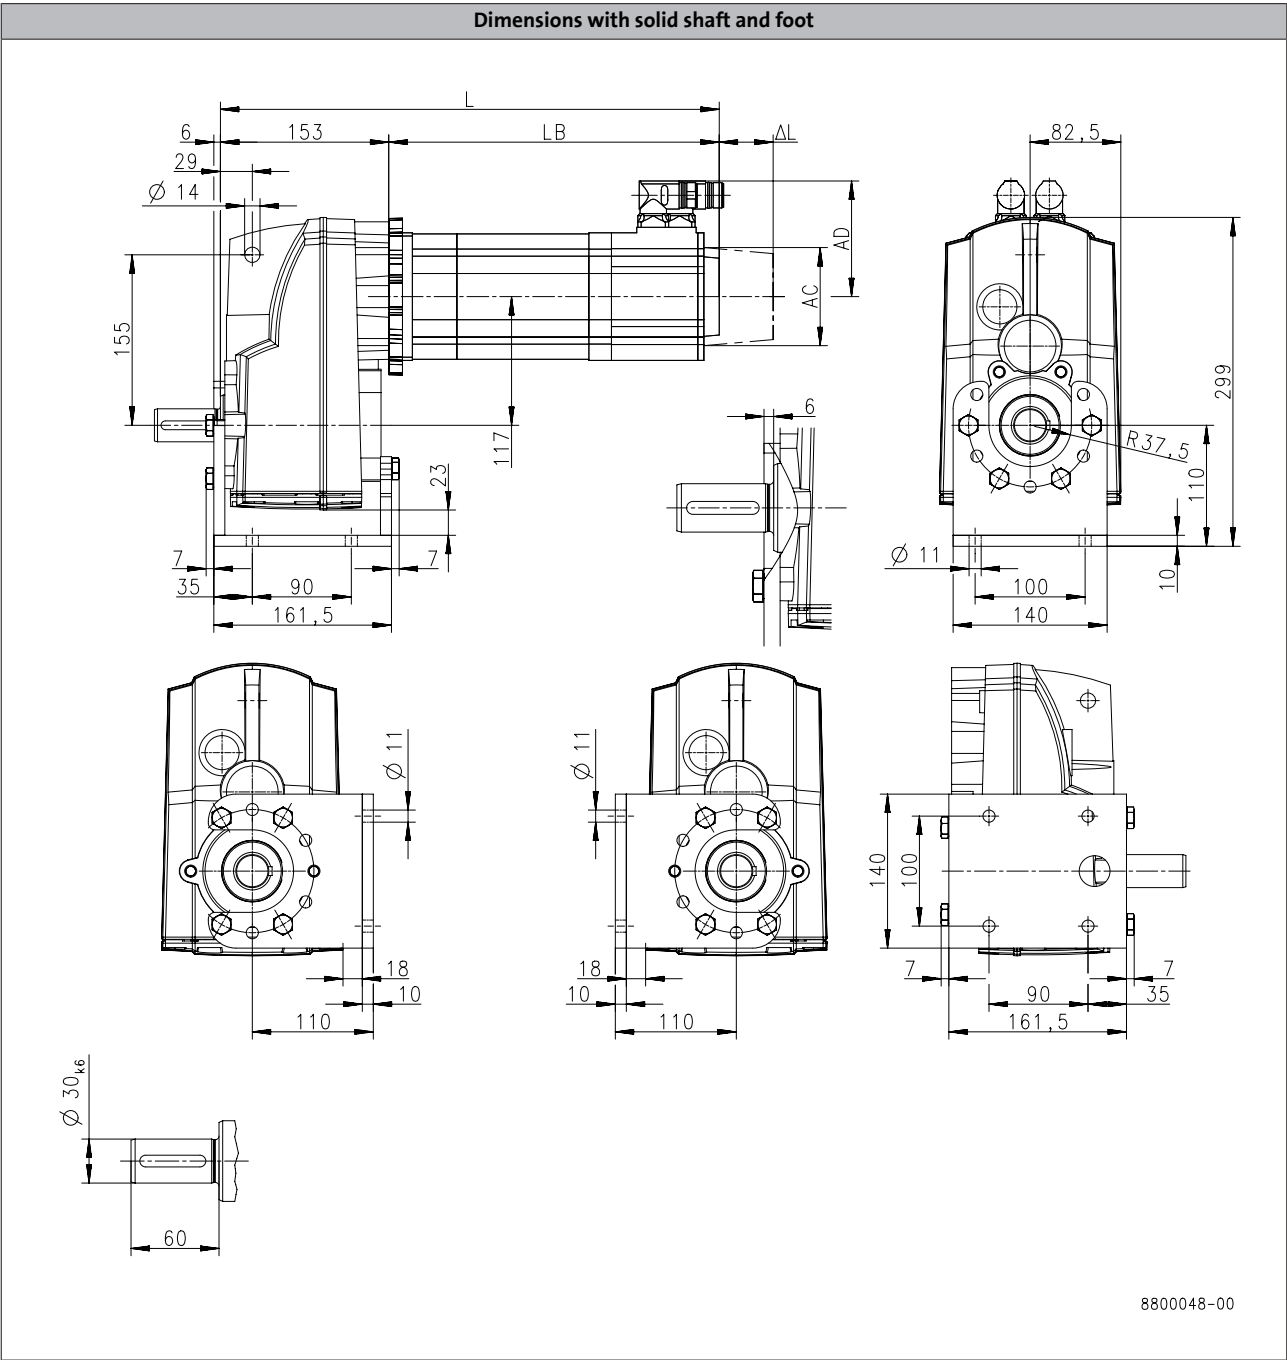

Product			MCS								
			06C41	06F41	06I41	09D41	09F38	09H41	09L41	12D20	12D41
Dimensions											
Total length	L	[mm]	284	314	344	337	357	377	417		354
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9		200.5
Length of motor options	Δ L		100				71				69
Motor diameter	AC	[mm]	86				89				116
Distance motor/connection	AD	[mm]	77				89.7				105


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S400

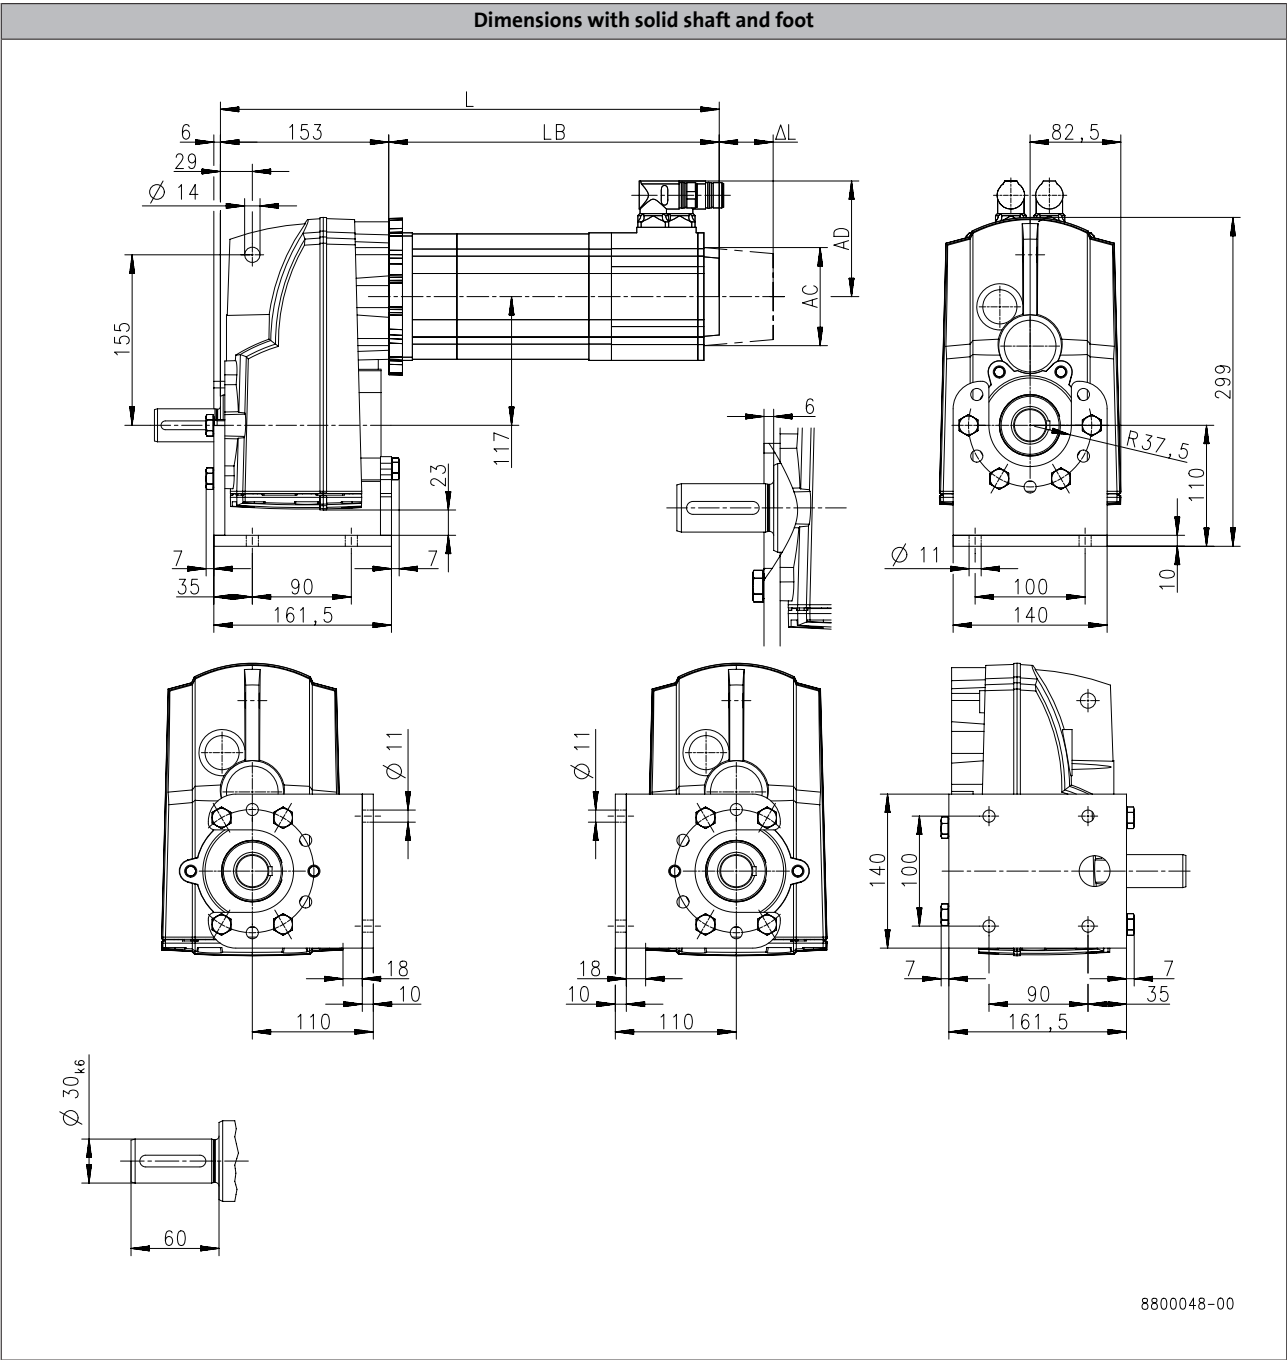

Product			MCS									
			12H15	12H30	12H35	12L20	14D15	14H15	14H32	14L15	14L32	14P14
Dimensions												
Total length	L	[mm]	394			434	369	409		449		489
Motor length	LB	[mm]	240.5			280.5	216	256		296		336
Length of motor options	Δ L	[mm]	69				78					
Motor diameter	AC	[mm]	116				143					
Distance motor/connection	AD	[mm]	105				116.5				146	116.5

Dimensions, self-ventilated motors

g500-S400

Technical drawing of a mechanical component, showing multiple views and dimensions. The drawing includes the following dimensions and features:

- Top View:** Overall length L , width 153 , and a small offset ΔL . A hole with diameter $\phi 14$ is located at a distance of 29 from the left edge. The total width of the main body is 179 .
- Front View:** Total height 155 , a base thickness of 4 , and a central section with a diameter of $\phi 86$ and a length of 117 . The total length is 179 .
- Right View:** Overall height 266 , a base thickness of 77 , and a central section with a diameter of $\phi 112$ and a length of 165 . The top width is 13 . The side view shows a 60° angle.
- Bottom View:** Overall width 153 , a central section with a diameter of $\phi 165$ and a length of 117 . The total width is 179 .
- Left View:** Overall height 200 , a central section with a diameter of $\phi 130_{-17}$ and a length of 117 . The total height is 200 .
- Detail View 1 (Top Left):** A cross-section of a flange with a diameter of $\phi 35_{-1}$ and a thickness of 86 . The overall diameter is $\phi 35$. The length of the flange is 143 , and the total length is 179 .
- Detail View 2 (Bottom Right):** A cross-section of a flange with a diameter of $\phi 35_{h6}$ and a thickness of 35 . The overall diameter is $\phi 35$. The length of the flange is 25 , and the total length is 35 .
- Detail View 3 (Bottom Left):** A cross-section of a flange with a diameter of $\phi 35_{h6}$ and a thickness of 35 . The overall diameter is $\phi 35$. The length of the flange is 25 , and the total length is 35 .
- Detail View 4 (Bottom Right):** A cross-section of a flange with a diameter of $\phi 35_{h6}$ and a thickness of 35 . The overall diameter is $\phi 35$. The length of the flange is 25 , and the total length is 35 .
- Detail View 5 (Bottom Left):** A cross-section of a flange with a diameter of $\phi 35_{h6}$ and a thickness of 35 . The overall diameter is $\phi 35$. The length of the flange is 25 , and the total length is 35 .
- Detail View 6 (Bottom Right):** A cross-section of a flange with a diameter of $\phi 35_{h6}$ and a thickness of 35 . The overall diameter is $\phi 35$. The length of the flange is 25 , and the total length is 35 .
- Detail View 7 (Bottom Left):** A cross-section of a flange with a diameter of $\phi 35_{h6}$ and a thickness of 35 . The overall diameter is $\phi 35$. The length of the flange is 25 , and the total length is 35 .
- Detail View 8 (Bottom Right):** A cross-section of a flange with a diameter of $\phi 35_{h6}$ and a thickness of 35 . The overall diameter is $\phi 35$. The length of the flange is 25 , and the total length is 35 .
- Detail View 9 (Bottom Left):** A cross-section of a flange with a diameter of $\phi 35_{h6}$ and a thickness of 35 . The overall diameter is $\phi 35$. The length of the flange is 25 , and the total length is 35 .
- Detail View 10 (Bottom Right):** A cross-section of a flange with a diameter of $\phi 35_{h6}$ and a thickness of 35 . The overall diameter is $\phi 35$. The length of the flange is 25 , and the total length is 35 .

6.5

6.5 - 54


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S400

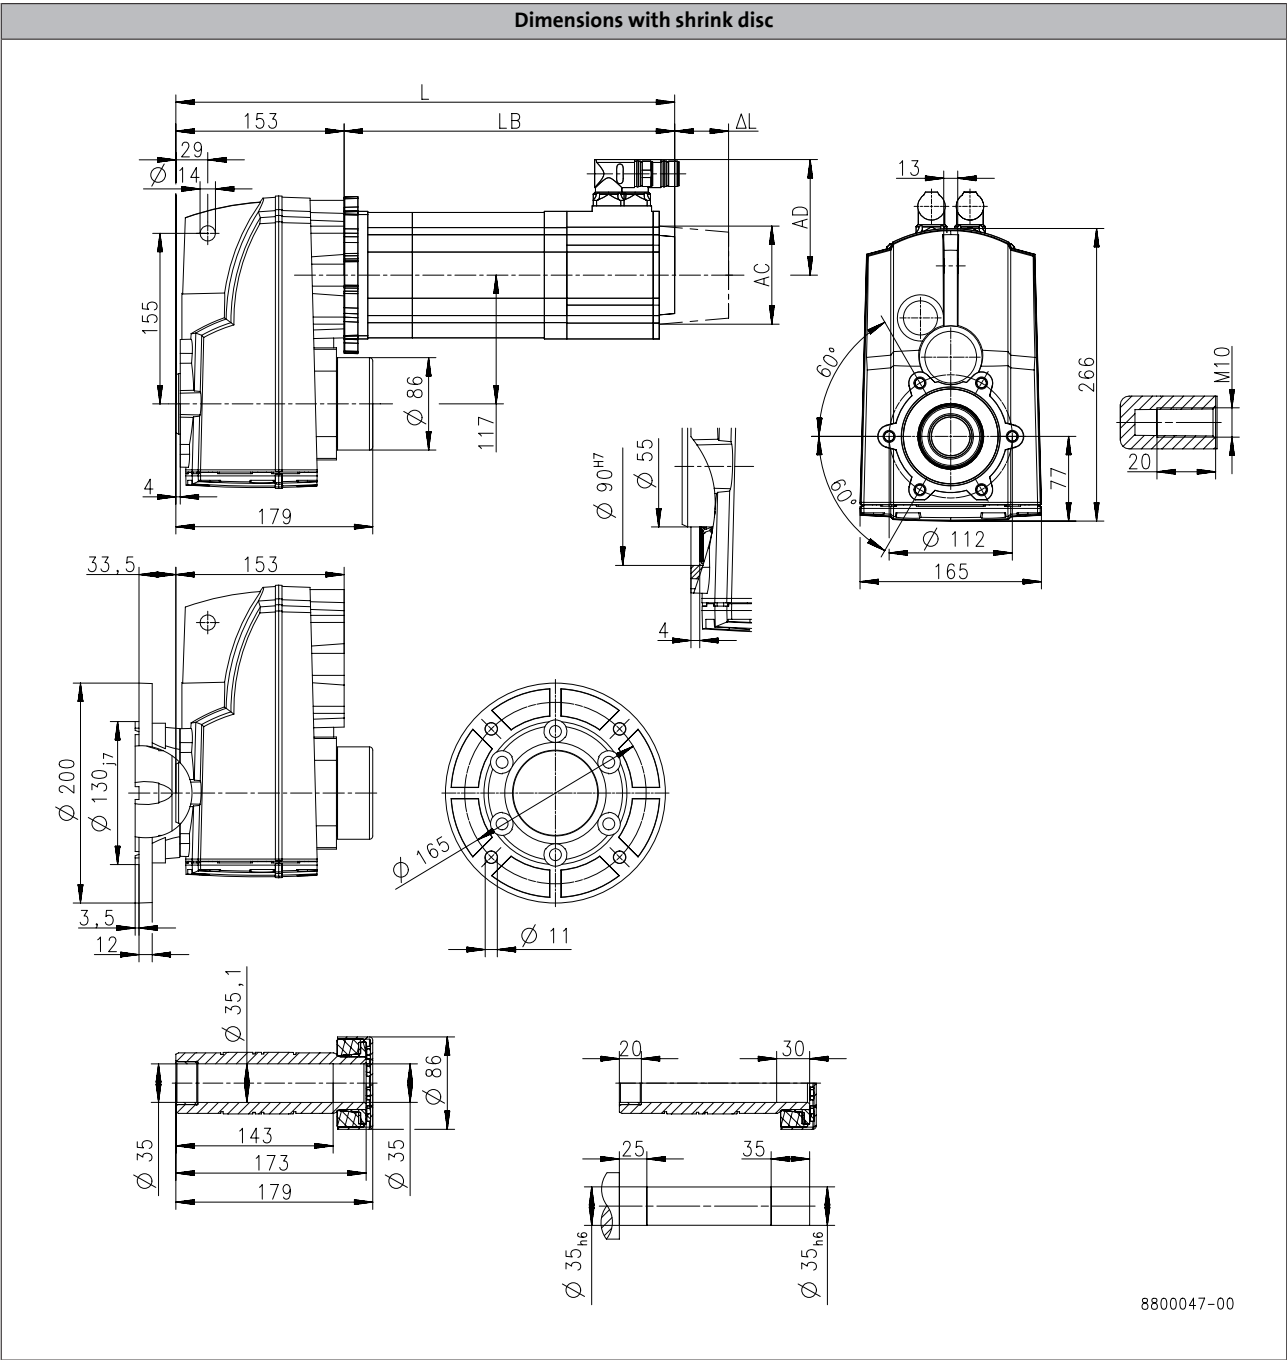

Product			MCS									
			12H15	12H30	12H35	12L20	14D15	14H15	14H32	14L15	14L32	14P14
Dimensions												
Total length	L	[mm]	394			434	369	409		449		489
Motor length	LB	[mm]	240.5			280.5	216	256		296		336
Length of motor options	Δ L	[mm]	69				78					
Motor diameter	AC	[mm]	116				143					
Distance motor/connection	AD	[mm]	105				116.5				146	116.5


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S660

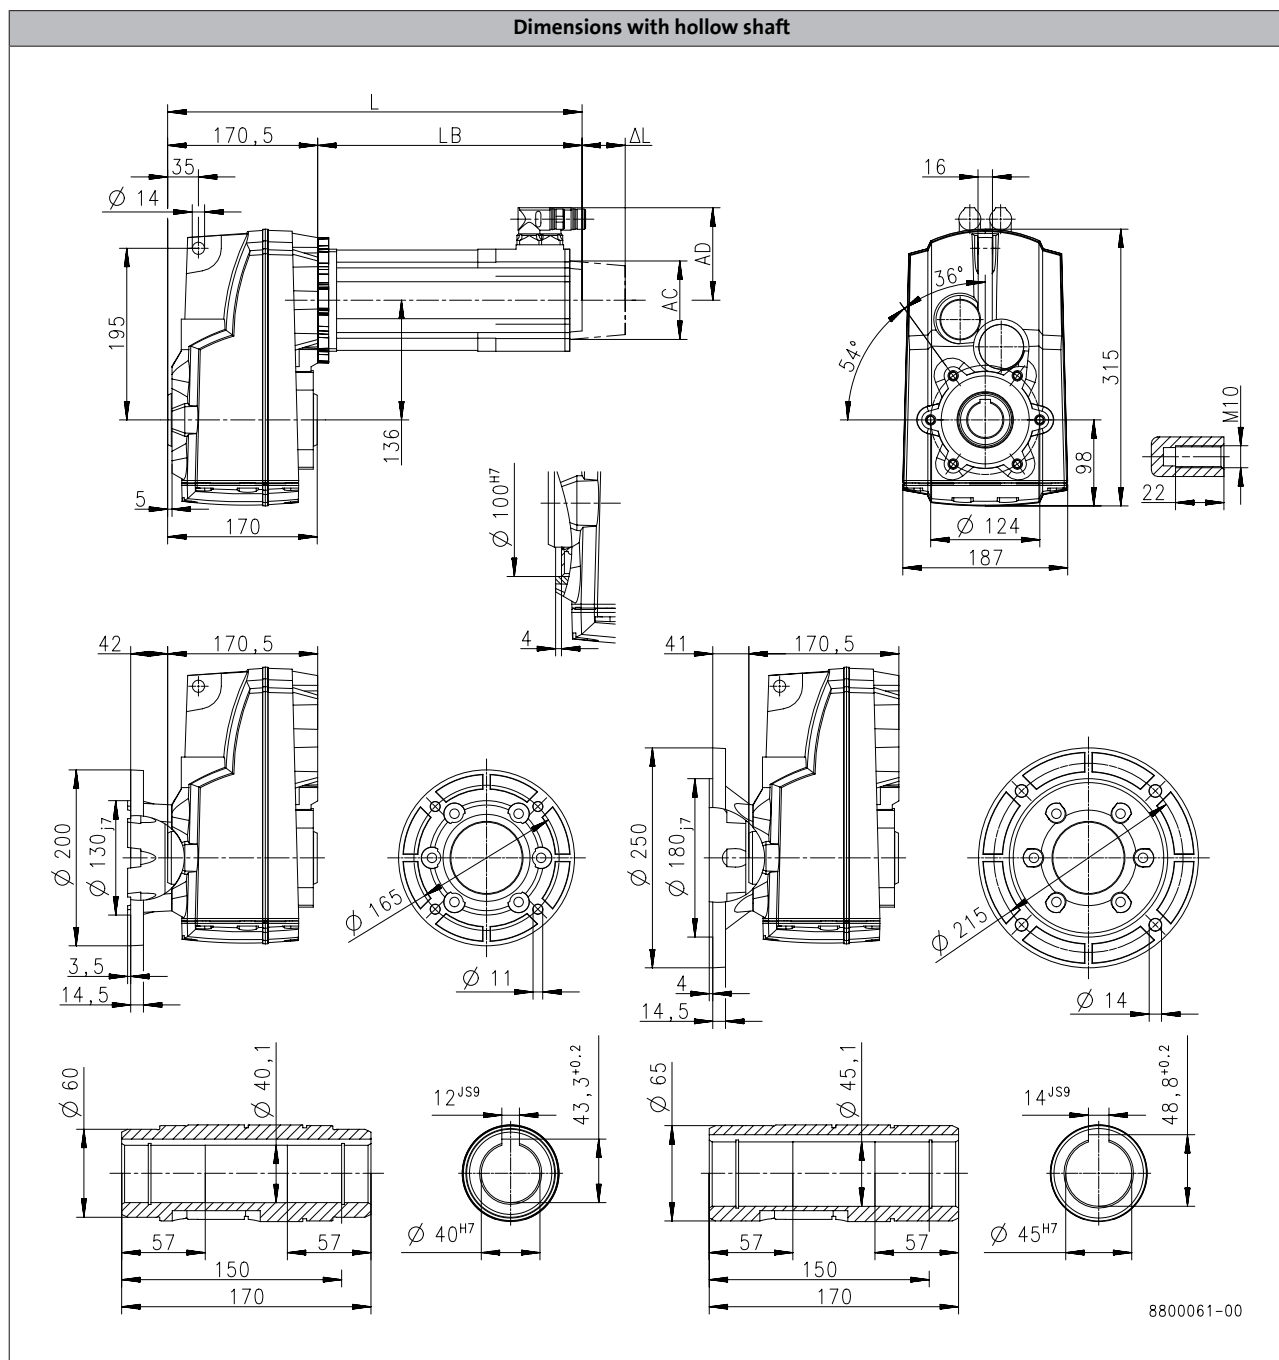

Product			MCS									
			06C41	06F41	06I41	09D41	09F38	09H41	09L41	12D20	12D41	12H15
Dimensions												
Total length	L	[mm]	302	332	362	354	374	394	434	371	411	
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9	200.5	240.5	
Length of motor options	Δ L	[mm]	100				71				69	
Motor diameter	AC	[mm]	86				89				116	
Distance motor/connection	AD	[mm]	77				89.7				105	


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S660

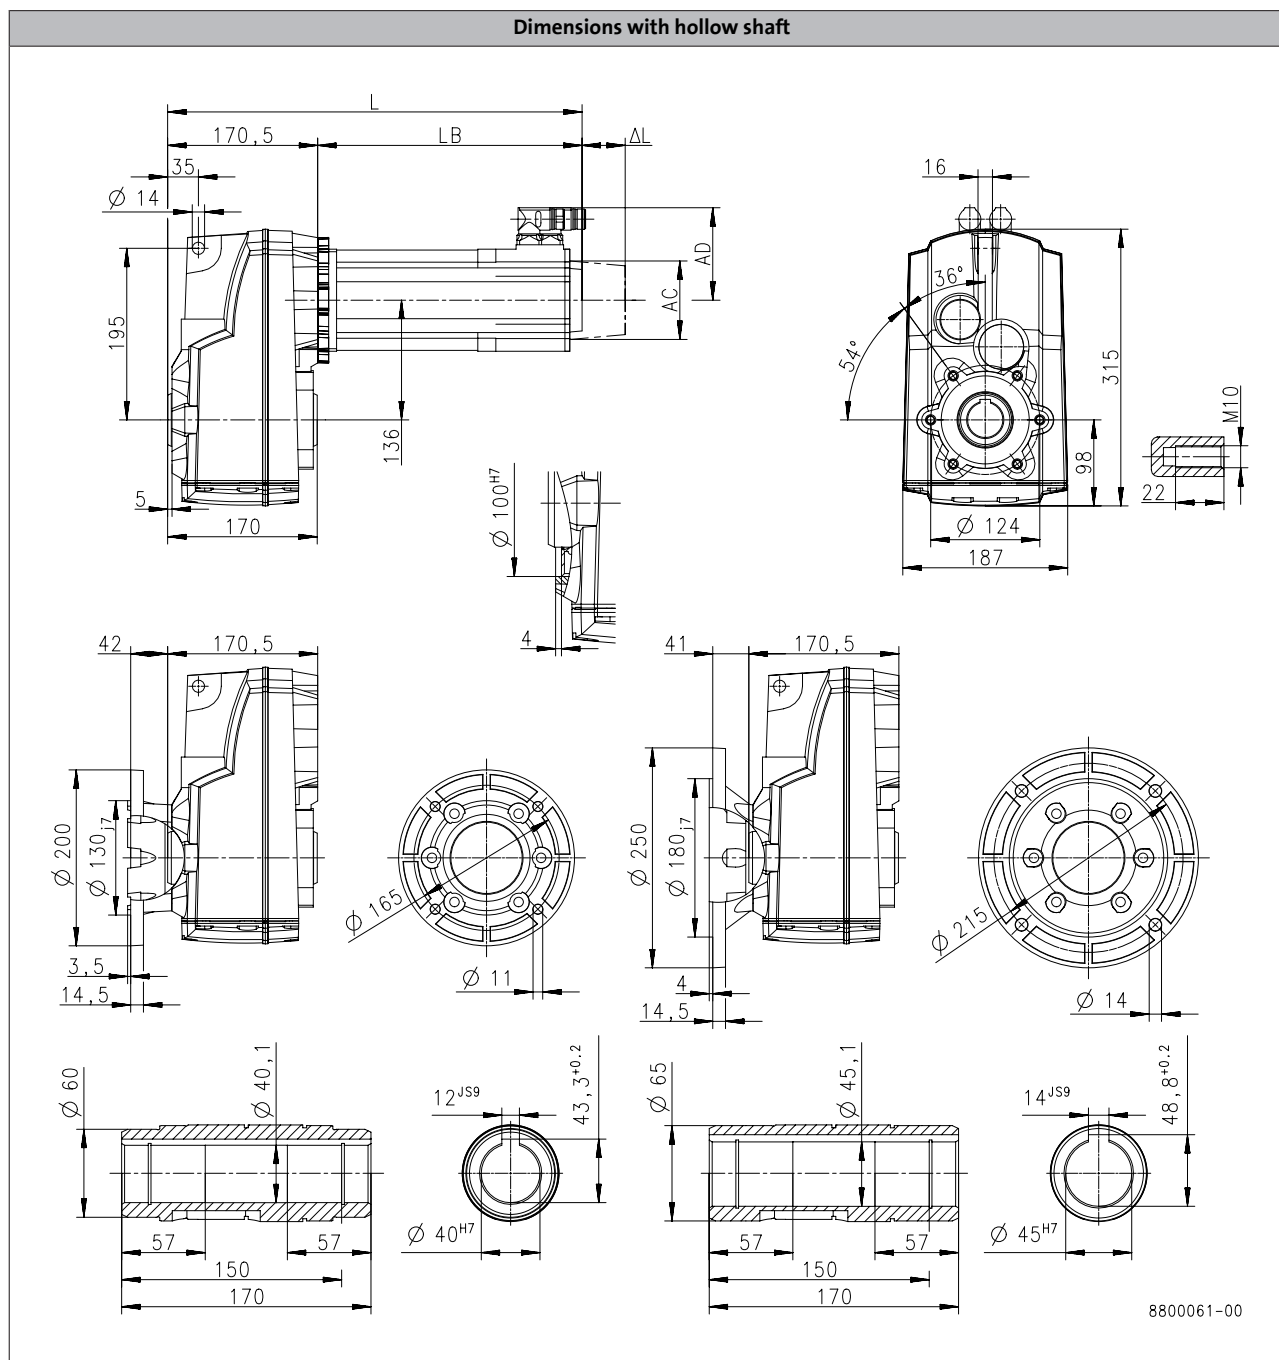

Product			MCS												
			12H30	12H35	12L20	12L41	14D15	14H15	14H32	14L15	14L32	14P14	14P32		
Dimensions															
Total length	L	[mm]	411		451		387	427		467		507			
Motor length	LB	[mm]	240.5		280.5		216	256		296		336			
Length of motor options	Δ L	[mm]	69						78						
Motor diameter	AC	[mm]	116						143						
Distance motor/connection	AD	[mm]	105						116.5				146	116.5	146


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S660

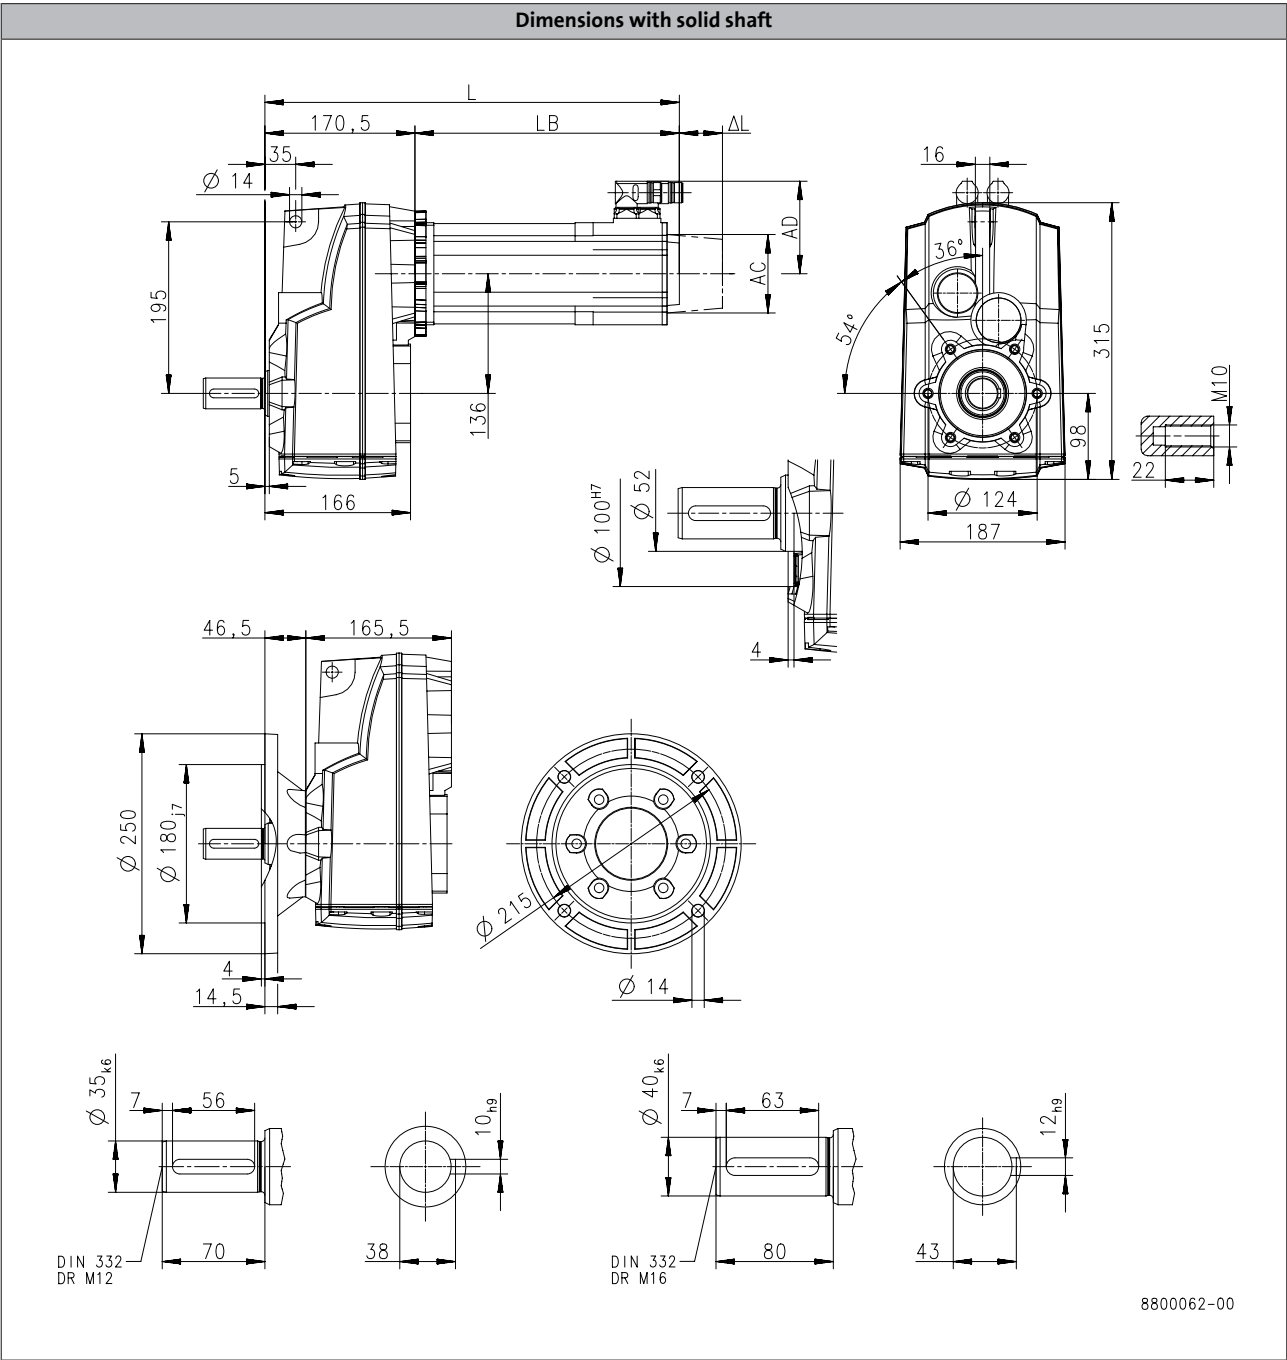

Product			MCS									
			06C41	06F41	06I41	09D41	09F38	09H41	09L41	12D20	12D41	12H15
Dimensions												
Total length	L	[mm]	302	332	362	354	374	394	434	371		411
Motor length	LB	[mm]	131.4	161.4	191.4	183.9	203.9	223.9	263.9	200.5		240.5
Length of motor options	Δ L	[mm]	100				71				69	
Motor diameter	AC	[mm]	86				89				116	
Distance motor/connection	AD	[mm]	77				89.7				105	

Dimensions, self-ventilated motors

g500-S660

Technical drawing of a 100H7 motor with dimensions in mm. The drawing includes a side view, a front view, a top view, and a detail view of the mounting bracket. Dimensions include: side view (170.5, LB, ΔL, 35, 195, 136, 5, 166, 14, 100H7, 52, 4, 165.5, 46.5, 250, 180, 17, 14.5, 4), front view (16, 36°, 54°, 315, 98, 124, 187, 22, M10), top view (215, 14), and detail view (35, 56, 70, 38, 10, 40, 63, 80, 43, 12).

6.5

Lenze | V00-en GB-04/2014

Dimensions, self-ventilated motors

g500-S660

6.5

Lenze | V00-en_GB-04/2014


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S660

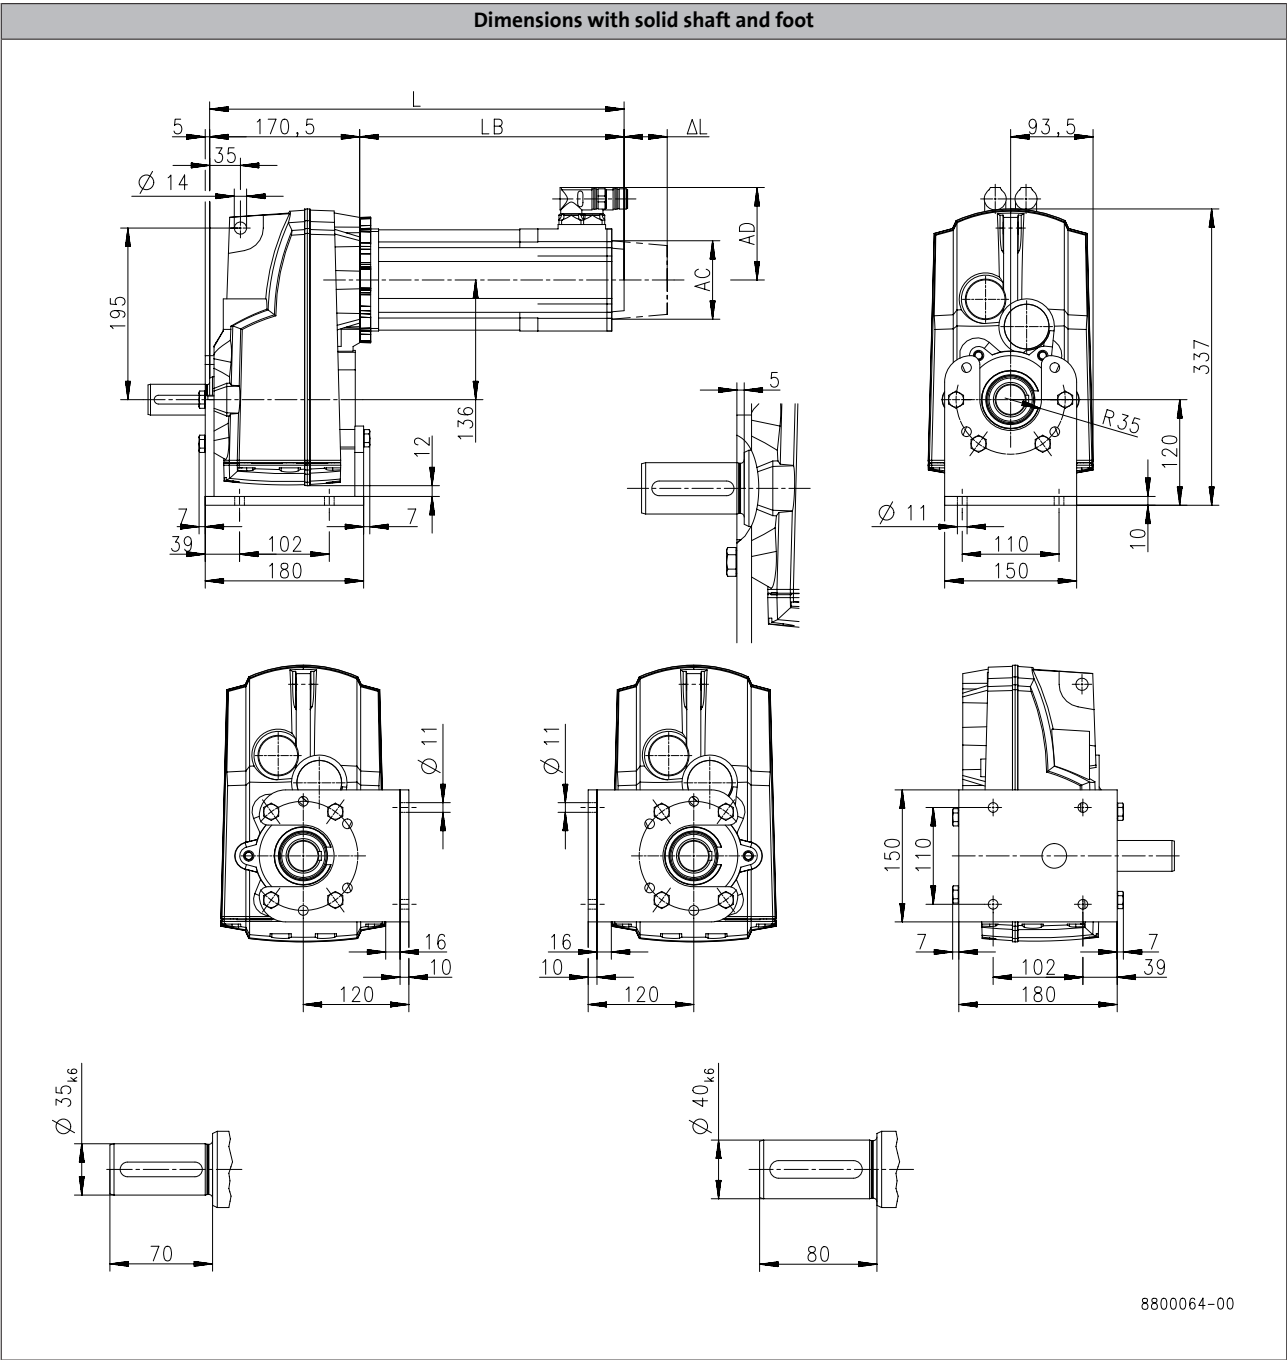

Product			MCS												
			12H30	12H35	12L20	12L41	14D15	14H15	14H32	14L15	14L32	14P14	14P32		
Dimensions															
Total length	L	[mm]	411		451		387	427		467		507			
Motor length	LB	[mm]	240.5		280.5		216	256		296		336			
Length of motor options	Δ L	[mm]	69					78							
Motor diameter	AC	[mm]	116					143							
Distance motor/connection	AD	[mm]	105					116.5					146	116.5	146

Dimensions, self-ventilated motors

g500-S660

[illegible]

8800063-00

6.5 - 62


g500-S shaft-mounted helical geared motors

Technical data



Dimensions, self-ventilated motors

g500-S660

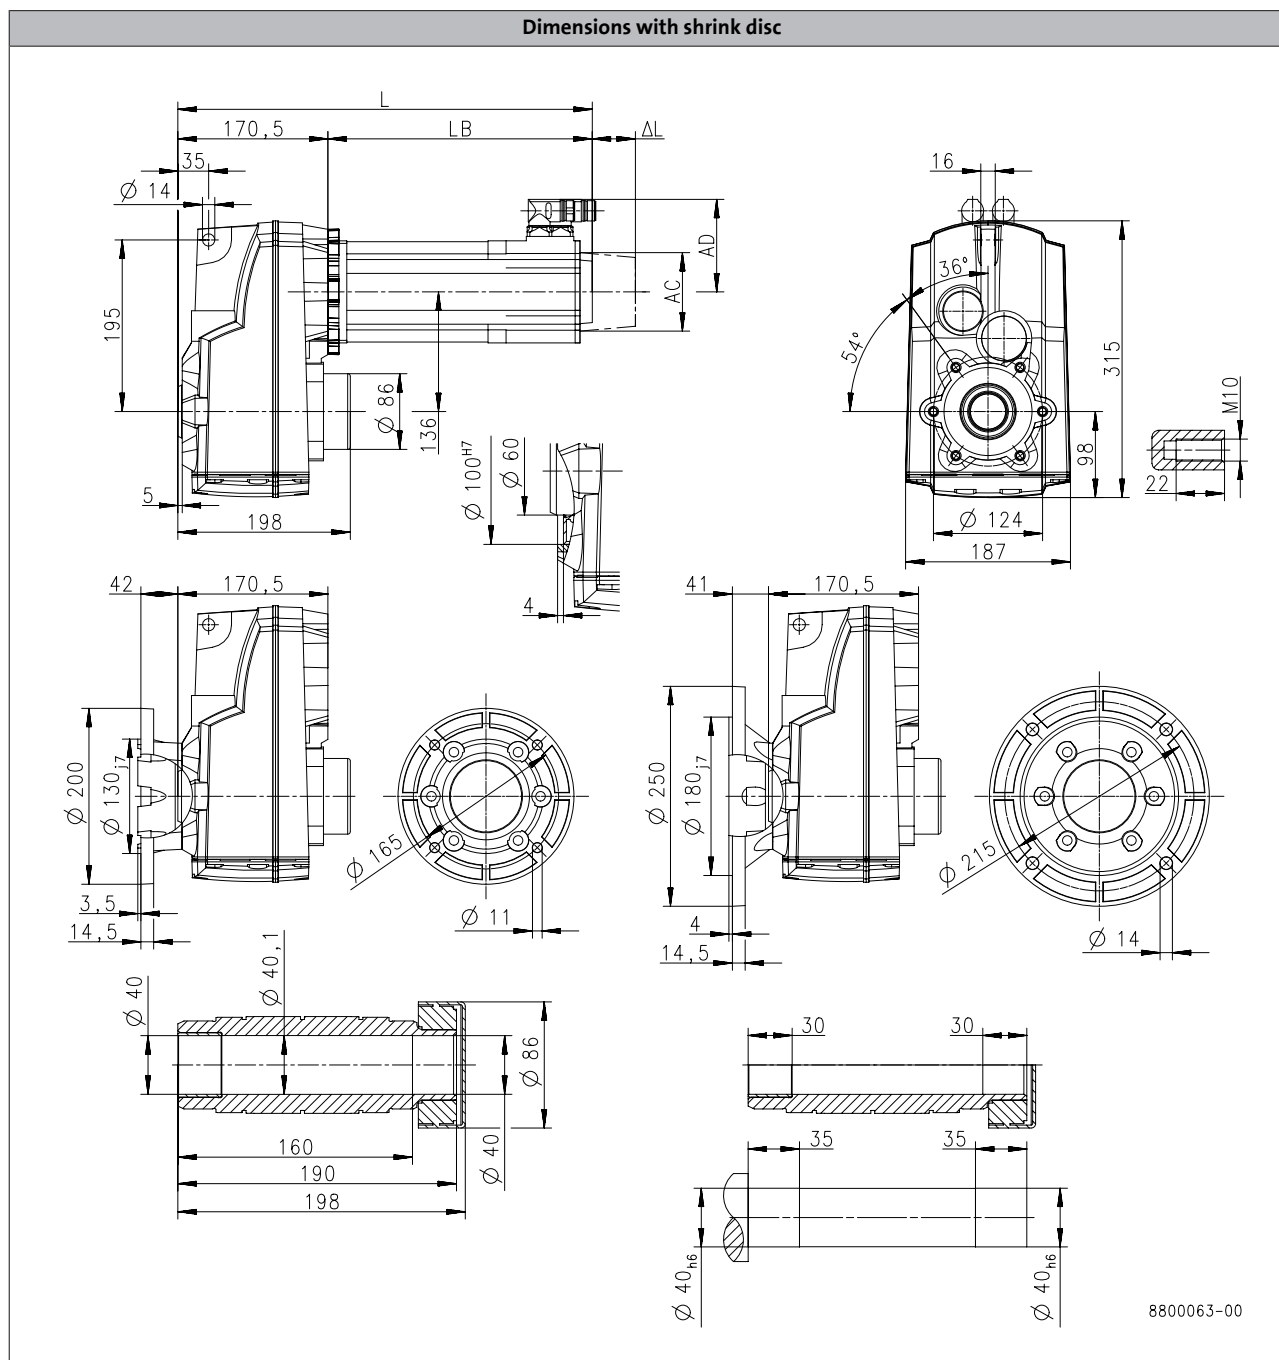

Product			MCS												
			12H30	12H35	12L20	12L41	14D15	14H15	14H32	14L15	14L32	14P14	14P32		
Dimensions															
Total length	L	[mm]	411		451		387	427		467		507			
Motor length	LB	[mm]	240.5		280.5		216	256		296		336			
Length of motor options	Δ L	[mm]	69					78							
Motor diameter	AC	[mm]	116					143							
Distance motor/connection	AD	[mm]	105					116.5					146	116.5	146

g500-S shaft-mounted helical geared motors

Technical data



Weights, self-ventilated motors

2-stage gearboxes

				MCS							
				06C41	06F41	06I41	09D41	09F38	09H41	09L41	12D20 12D41
g500	-S130	m	[kg]	7.2	7.6	8.3	9.6	10	11	13	
	-S220	m	[kg]		9.0	9.7	11	12	13	15	13
	-S400	m	[kg]		12	13	14	15	16	18	16
	-S660	m	[kg]			17	18	19	20	22	21

				MCS							
				12H15 12H30 12H35	12L20	12L41	14D15	14H15 14H32	14L15 14L32	14P14	14P32
g500	-S220	m	[kg]	16	20						
	-S400	m	[kg]	20	23		21	26	30	35	
	-S660	m	[kg]	24	27		25	30	35	39	

3-stage gearboxes

				MCS						
				06C41	06F41	06I41	09D41	09F38	09H41	09L41
g500	-S220	m	[kg]	8.8	9.2	9.9	11	12		
	-S400	m	[kg]	12		13	14	15	16	18
	-S660	m	[kg]	16	17	18	19	20	21	22

g500-S shaft-mounted helical geared motors

Technical data



Surface and corrosion protection

For optimum protection of geared motors against ambient conditions, the surface and corrosion protection system (OKS) offers tailor-made solutions.

Various surface coatings combined with other protective measures ensure that the geared motors operate reliably even at high air humidity, in outdoor installations or in the presence of atmospheric impurities. Any colour from the RAL Classic collection can be chosen for the top coat. The geared motors are also available unpainted (no surface and corrosion protection).

Surface and corrosion protection	Applications	Measures
OKS-G (primed)	Dependent on subsequent top coat applied	2K PUR priming coat (grey) - Zinc-coated screws - Rust-free breather elements Optional measures - Stainless steel nameplate
OKS-S (small)	- Standard applications - Internal installation in heated buildings - Air humidity up to 90%	- Surface coating as per corrosivity category C1 (in line with EN 12944-2) - Zinc-coated screws - Rust-free breather elements Optional measures - Stainless steel nameplate
OKS-M (medium)	- Internal installation in non-heated buildings - Covered, protected external installation - Air humidity up to 95%	- Surface coating as per corrosivity category C2 (in line with EN 12944-2) - Zinc-coated screws - Rust-free breather elements Optional measures - Stainless steel shaft - Stainless steel nameplate - Rust-free shrink disc (on request)
OKS-L (large)	- External installation - Air humidity above 95% - Chemical industry plants - Food industry	- Surface coating as per corrosivity category C3 (in line with EN 12944-2) - Blower cover and B end shield additionally primed - Cable glands with gaskets - Corrosion-resistant brake with cover ring, stainless friction plate, and chrome-plated armature plate (on request) - All screws/screw plugs zinc-coated - Stainless breather elements - Threaded holes that are not used are closed by means of plastic plugs Optional measures - Sealed recesses on motor (on request) - Stainless steel shaft - Stainless steel nameplate - Rust-free shrink disc (on request) - Additional priming coat on cast iron fan - Oil expansion tank and torque plates painted separately and supplied loose

g500-S shaft-mounted helical geared motors

Technical data



Surface and corrosion protection

Structure of surface coating

Surface and corrosion protection	Corrosivity category	Surface coating	Colour
	DIN EN ISO 12944-2	Structure	
Without OKS(uncoated)		Dipping primed gearbox	
OKS-G (primed)		Dipping primed gearbox 2K PUR priming coat	
OKS-S (small)	C1	Dipping primed gearbox 2K-PUR top coat	Standard: RAL 7012 Optional: RAL Classic
OKS-M (medium)	C2	Dipping primed gearbox 2K PUR priming coat	
OKS-L (large)	C3	2K-PUR top coat	

g500-S shaft-mounted helical geared motors

Technical data



g500-S shaft-mounted helical geared motors


Technical data



Gearboxes

g500-S shaft-mounted helical gearbox

130 to 660 Nm

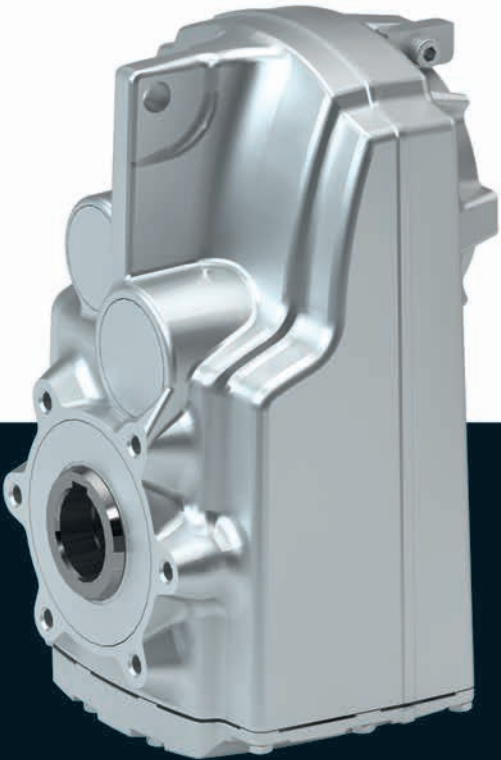

g500-S shaft-mounted helical gearbox

Contents



General information	List of abbreviations	6.5 - 5
	Product information	6.5 - 6
	Equipment	6.5 - 7
	The gearbox kit	6.5 - 8
	Functions and features	6.5 - 10
	Lubricants	6.5 - 11
Technical data	Ventilation	6.5 - 12
	Permissible radial and axial forces at output	6.5 - 15
	Moments of inertia	6.5 - 17
Accessories	Additional weights for gearboxes	6.5 - 19
	Torque plate	6.5 - 21
	Shaft cover	6.5 - 22

g500-S shaft-mounted helical gearbox

Contents



g500-S shaft-mounted helical gearbox

General information



List of abbreviations

$F_{ax,max}$	[N]	Max. axial force
$F_{rad,max}$	[N]	Max. radial force
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass

g500-S shaft-mounted helical gearbox

General information



Product information

The slim shaft-mounted helical gearboxes feature high reliable radial forces, closely stepped gear reductions and a low backlash. They are available in 2-pole and 3-pole design with a torque up to 660 Nm and a ratio of up to $i=495$.

Versions

- Slimline design saves installation space of the machine
- Solid shaft, hollow shaft and shrink disc for direct integration into the machine
- High accuracy with axial output provide for the highest efficiency

The product name

Gearbox type	Product range		Design	Rated torque [Nm]	Product
Shaft-mounted helical gearbox	g500	-	S	130	g500-S130
				220	g500-S220
				400	g500-S400
				660	g500-S660

g500-S shaft-mounted helical gearbox


General information



Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

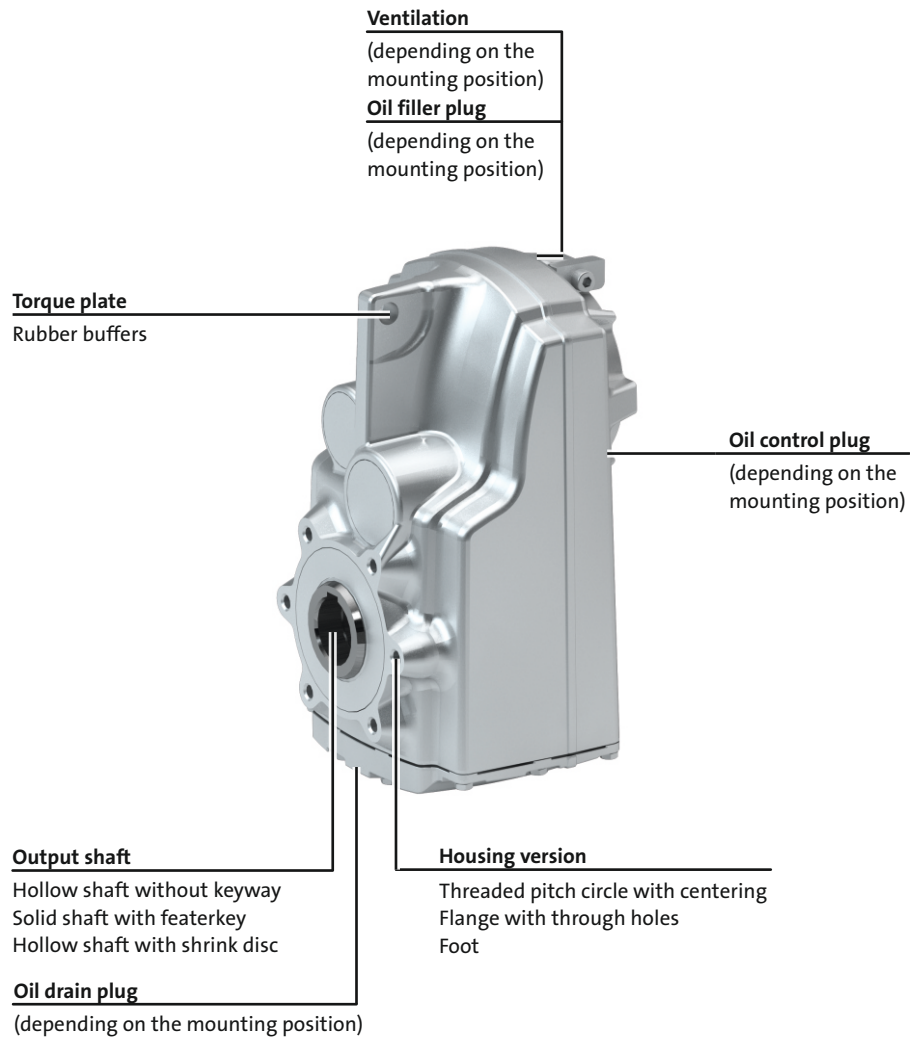

g500-S shaft-mounted helical gearbox

General information



The gearbox kit

Gearbox details

Product				
	g500-S130	g500-S220	g500-S400	g500-S660
Driven shaft				
Solid shaft with featherkey [mm]	25x50		30x60	35x70 40x80
Hollow shaft with keyway [mm]	25	25/30	30/35	40/45
Hollow shaft with shrink disc [mm]	25	25/30	35	40
Design	Standard stainless steel			
Gasket	Standard FPM (Viton)			
Bearing	Standard			
Fitting grease	Not enclosed Enclosed			
Housing				
Housing version	With foot without centring With centering			
Output flange				
flange diameter [mm]	160		200	200/250 ¹⁾
Lubricant				
Type	CLP 460 ²⁾ CLP HC 320 CLP HC 220 CLP HC 220 USDA H1			
Oil-level inspection	Without inspection With inspection			
Breather element	Without		Standard mounting position: Mounted Combined mounting position: loosely enclosed	
Backlash				
Backlash	Standard			
Accessories				
Torque plate	Rubber buffers			
Shaft cover	Shrink disc: Rotating cover Shrink disc: Fixed cover			

¹⁾ 200 mm flange diameter only possible on hollow shaft version.

²⁾ Not suitable for geared servo motors.

- Further information and installation feasibilities can be found in the Gearboxes chapter.




g500-S shaft-mounted helical gearbox

General information



The gearbox kit

Gearbox details

Solid shaft		
		
without centring	With centering	Flange with through holes
Hollow shaft		
		
without centring	With centering	Flange with through holes
Hollow shaft with shrink disc		
		
without centring	With centering	Flange with through holes
Accessories		
		
Foot mounting	With rubber buffer	Shrink disc cover

6.5

g500-S shaft-mounted helical gearbox

General information



Functions and features


Product	g500-S130	g500-S220	g500-S400	g500-S660
Housing				
Design	Cuboid			
Material	Aluminium			
Solid shaft				
Design	with keyway to DIN 6885			
Tolerance	Shaft diameter ≤ 50 mm: k6 Shaft diameter > 50 mm: m6			
Material	Tempered steel C45 Nirosta X46Cr13			
Hollow shaft				
Design	With keyway Without keyway (for shrink disc)			
Tolerance	Bore H7			
Material	Tempered steel C45 Nirosta X46Cr13			
Toothed parts				
Design	Ground tooth flanks Optimised tooth flank geometry			
Material	Case-hardened steel			
Shaft-hub joint				
	1st and 2nd step: Force-fit 3rd step: positive-fit			
Shaft sealing rings				
Design	With dust lip			
Material	NB / FP			
Bearing				
Design	Ball bearing / tapered-roller bearing depending on size and design			
Lubricants				
	Standard: mineral oil Optional: synthetic oil ¹⁾			
Quantities	Corresponding to mounting position (see nameplate)			
Mechanical efficiency				
2-stage gearboxes [$\eta_{c=1}$]	0.96			
3-stage gearboxes [$\eta_{c=1}$]	0.95			

¹⁾ Standard for geared servo motors.


Direction of rotation

6.5

2-stage gearboxes

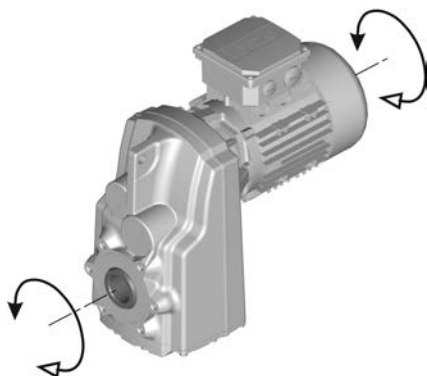

3-stage gearboxes

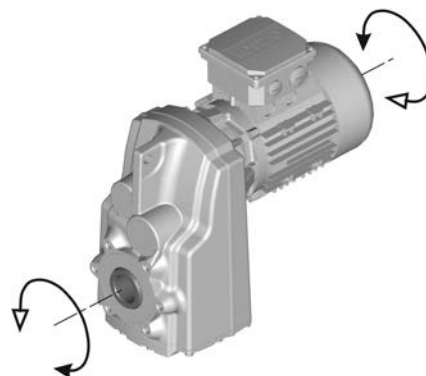

g500-S shaft-mounted helical gearbox

General information



Lubricants

Lenze gearboxes and geared motors are ready for operation on delivery and are filled with lubricants specific to both the drive and the design. The mounting position and design specified in the order are key factors in choosing the volume of lubricant.

The lubricants listed in the lubricant table are approved for use in Lenze drives.

Lubricant table

Mode	CLP 460	CLP HC 320	CLP HC 220 USDA H1
Ambient temperature [°C]	0 ... +40	-25 ... +50	-20 ... +40
Specification	Mineral based oil with additives	Synthetic-based oil (synthetic hydrocarbon / poly-alpha-olefin oil)	
Changing interval	16000 operating hours not later than after three years (oil temperature 70 to 80 °C)	25000 operating hours not later than after three years (oil temperature 70 to 80 °C)	16000 operating hours not later than after three years (oil temperature 70 to 80 °C)
Fuchs	Fuchs Renolin CLP 460	Fuchs Renolin Unisyn CLP 320	bremer & leguil Cassida Fluid GL 220
Klüber	Klüberoil GEM1-460 N	Klübersynth GEM4-320 N	Klüberoil 4 UH1-220 N
Shell	Shell Omala S2 G 460	Shell Omala S4 GX HD 320	

- Please contact your Lenze sales office if you are operating at ambient temperatures in areas up to < -20 °C bzw. > or up to +40°C.

Shaft sealing rings

By default, the gearboxes come with NBR shaft sealing rings at the output end. At high speed and unfavourable ambient conditions as high temperature, reduced circulation of air etc., Lenze recommends the use of Viton shaft sealing rings.

Please consider this in your order.

g500-S shaft-mounted helical gearbox

General information



Ventilation

Non-ventilated gearboxes

No ventilation is required for gearboxes g500-S130 to S220.

Ventilated gearboxes

The g500-S400 S660 gearbox is supplied with a breather element as standard.

Gearboxes in combined mounting position

To reduce the number of different versions, the gearboxes can also be ordered with combined mounting positions.

Depending on the gearbox in question, the following combinations are available:

g500-S130 to S660 in combined mounting position AEF

The breather elements are supplied loose.

g500-S shaft-mounted helical gearbox







General information



Ventilation

Position of ventilation, sealing elements and oil level check

► A ... F mounting position

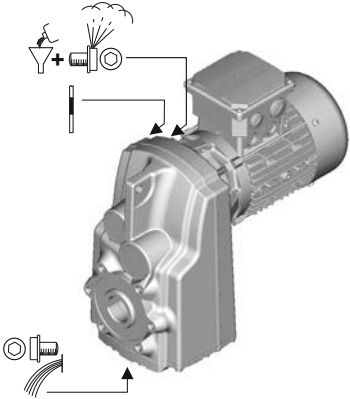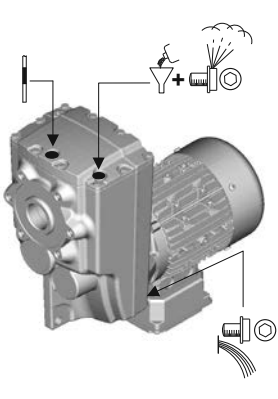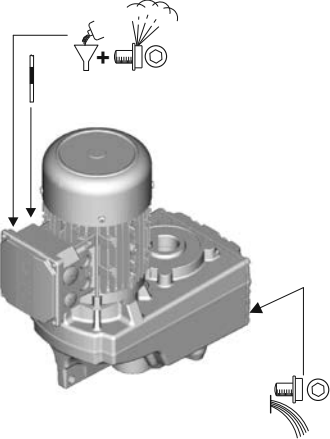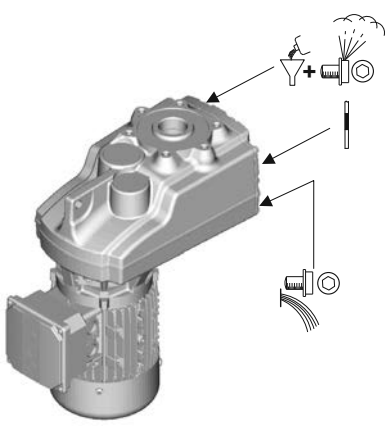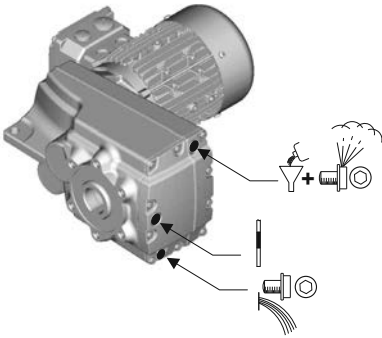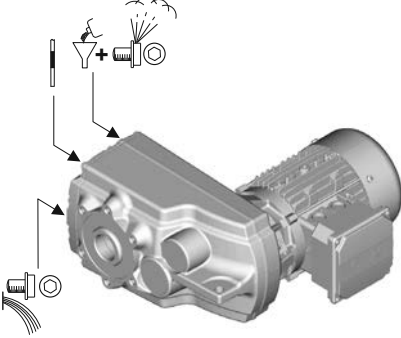A 	B 
C 	D 
E 	F 
 Filling	 Drain
 Ventilation	 Check

g500-S shaft-mounted helical gearbox

General information



g500-S shaft-mounted helical gearbox

Technical data



Permissible radial and axial forces at output

Permissible radial force


$$F_{\text{rad,perm}} = f_w \times F_{\text{rad,max}}$$

► If F_{rad} and $F_{\text{ax}} \neq 0$, please contact Lenze.


Permissible axial force

If there is no radial force, the maximum permissible axial force is 50 % of the table value $F_{\text{rad,max}}$

Application of forces

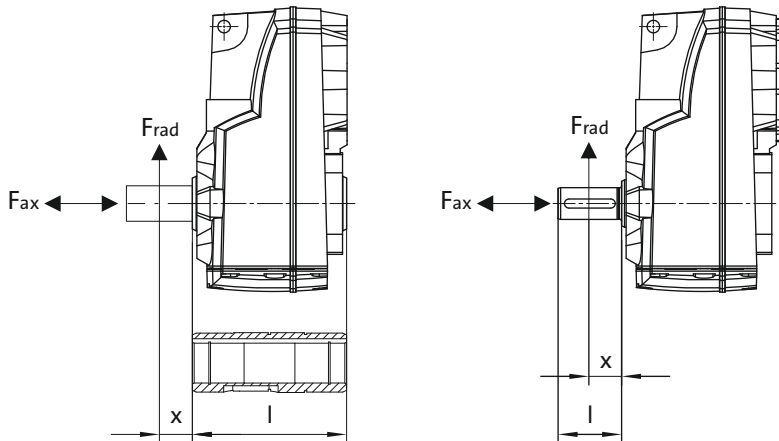

Additional load factor f_w at output shaft

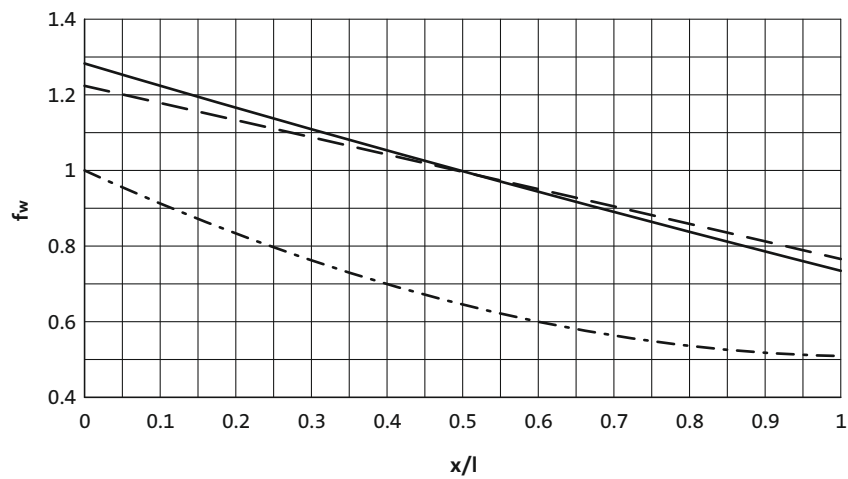

- Solid shaft
- Solid shaft with flange
- · - Hollow shaft
- Unlabeled

g500-S shaft-mounted helical gearbox

Technical data



Permissible radial and axial forces at output

The values given in the table refer to the center shaft end force application point and are minimum values calculated according to the most unfavourable conditions (force application angle, mounting position, direction of rotation). The values were calculated for the motor/gearbox combination with a load capacity of $c = 1.3$ and an input speed of 1400 rpm.

In case of different operating conditions, considerably higher forces can be transmitted. Please contact Lenze.

- If the torque is transmitted via the flange face, max 50 % of the radial force $F_{rad,max}$ are permissible.
- Neither radial nor axial forces are permissible for the hollow shaft with shrink disc.

Product	n_2 [r/min]									
	1000	630	400	250	160	100	63	40	25	≤16

Max. radial force, Hollow shaft										
	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$
	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]
g500-S130	1000	1150	1350	1500	1650	2200	2750	3450	4200	4500
g500-S220	2100	2700	2800	3200	3800	4600	5500	6300	7000	7000
g500-S400	1800	2400	3000	3400	4100	5000	6000	7100	8000	8000
g500-S660	2400	3300	4300	4700	5000	6600	8500	10800	12000	12000

Max. radial force, Solid shaft without flange										
	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$
	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]
g500-S130	1000	1150	1350	1500	1650	2200	2750	3450	4200	4500
g500-S220	1650	2100	2300	2700	3200	3600	3600	3600	3600	3600
g500-S400	1400	1900	2400	2700	3200	4000	4800	5800	6200	6200
g500-S660	1850	2500	3200	3600	3900	5100	6500	8400	9000	9000

Max. radial force, Solid shaft with flange										
	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$	$F_{rad,max}$
	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]
g500-S130	1000	1150	1350	1500	1650	2200	2750	3450	4200	4500
g500-S220	2300	2800	3200	3700	4400	4600	4600	4600	4600	4600
g500-S400	2900	3700	4300	5100	5900	6800	7000	7000	7000	7000
g500-S660	4000	5000	6100	7000	7800	9600	10000	10000	10000	10000

g500-S shaft-mounted helical gearbox

Technical data



Moments of inertia

- The moments of inertia relate to the drive shaft of the gearbox.
- The total moment of inertia is calculated by adding the values of the gearbox, motor and accessories.

2-stage gearboxes

Product	Ratio	Moment of inertia
	i	J
		[kgcm ²]
g500-S130	3.661	1.56
	5.021	0.89
	6.425	0.57
	7.029	0.49
	8.322	0.69
	9.411	1.03
	11.413	0.42
	12.907	0.60
	14.606	0.29
	15.979	0.25
	18.069	0.34
	20.381	0.17
	23.048	0.23
	24.967	0.13
	28.233	0.17
	31.387	0.087
	35.493	0.11
	40.422	0.059
	45.711	0.074
	51.230	0.039
g500-S220	57.933	0.048
	64.200	0.027
	72.600	0.032
	84.581	0.016
	95.648	0.019
	3.840	2.60
	5.267	1.54
	6.767	1.64
	7.667	1.50
	9.280	1.04
	10.514	0.96
	11.876	0.72
	12.992	0.62
	13.456	0.67
	14.720	0.58
	16.571	0.44
	18.776	0.42
	20.300	0.34
	23.000	0.32
	26.422	0.21
	29.937	0.20
	32.867	0.15
	37.238	0.14
	42.533	0.095
	48.190	0.091
	51.620	0.069
	58.486	0.067
	65.975	0.044
	74.750	0.043

Product	Ratio	Moment of inertia
	i	J
		[kgcm ²]
g500-S400	3.339	5.16
	4.579	2.91
	5.860	1.86
	6.411	1.58
	7.467	2.18
	8.436	1.95
	10.240	1.32
	11.569	1.20
	13.105	0.89
	14.336	0.77
	14.806	0.82
	16.197	0.70
	18.286	0.53
	20.659	0.49
	22.400	0.40
	25.308	0.37
	29.156	0.24
	32.940	0.23
	36.267	0.17
	40.974	0.16
g500-S660	46.933	0.11
	53.026	0.10
	56.960	0.079
	64.354	0.074
	3.920	8.80
	5.376	5.26
	6.417	5.48
	6.880	3.48
	7.311	4.90
	8.800	3.50
	10.027	3.19
	11.262	2.41
	12.320	2.12
	12.832	2.22
	14.037	1.96
	15.714	1.51
	17.905	1.42
	19.250	1.15
	21.933	1.09
	25.056	0.65
	28.548	0.61
	31.167	0.47
	35.511	0.44
	40.333	0.29
	45.956	0.28
	48.950	0.21
	55.773	0.20

g500-S shaft-mounted helical gearbox

Technical data



Moments of inertia

3-stage gearboxes

Product	Ratio	Moment of inertia
	i	J
		[kgcm²]
g500-S220	40.012	0.20
	45.333	0.20
	52.587	0.13
	59.581	0.13
	67.298	0.092
	76.249	0.091
	86.079	0.062
	97.528	0.061
	111.747	0.044
	126.610	0.043
	143.205	0.030
	162.252	0.030
	241.022	0.014
	273.079	0.014
	312.233	0.003
	353.762	0.003
	398.508	0.006
	451.512	0.006
g500-S400	58.027	0.14
	65.559	0.14
	74.260	0.098
	83.900	0.095
	94.984	0.066
	107.314	0.064
	123.307	0.046
	139.313	0.045
	158.019	0.032
	178.531	0.031
	204.412	0.021
	230.946	0.021
	265.956	0.014
	300.479	0.014
	344.533	0.004
	389.256	0.004
	439.733	0.006
	496.814	0.006

Product	Ratio	Moment of inertia
	i	J
		[kgcm²]
g500-S660	49.867	0.39
	56.818	0.38
	63.817	0.27
	69.813	0.23
	72.713	0.26
	79.545	0.23
	89.048	0.17
	101.460	0.16
	109.083	0.13
	124.289	0.12
	137.133	0.083
	156.249	0.082
	176.611	0.056
	201.230	0.056
	223.833	0.037
	255.034	0.037
	280.500	0.026
	319.600	0.025
	369.548	0.016
	421.060	0.015

g500-S shaft-mounted helical gearbox

Technical data



Additional weights for gearboxes

Product			g500-S130	g500-S220	g500-S400	g500-S660
Mass						
Solid shaft	m	[kg]	0.5	0.5	1.7	2.5
Shrink disc	m	[kg]	0.2	0.4	0.6	0.6
Foot	m	[kg]	1.7	1.8	3.3	4.3
Flange	m	[kg]	0.4	0.4	0.9	1.7

g500-S shaft-mounted helical gearbox

Technical data



g500-S shaft-mounted helical gearbox


Accessories



Torque plate

The torque is usually supported via the foot or the flange. Another simple option is the integrated torque plate at the housing. Here, the torque is supported only via one point and is, among other things, suitable for shaft-mounted gearboxes. Moreover, the suitable rubber buffers provide for a low-tension installation and absorb slight shocks.

The rubber buffers can be ordered optionally.

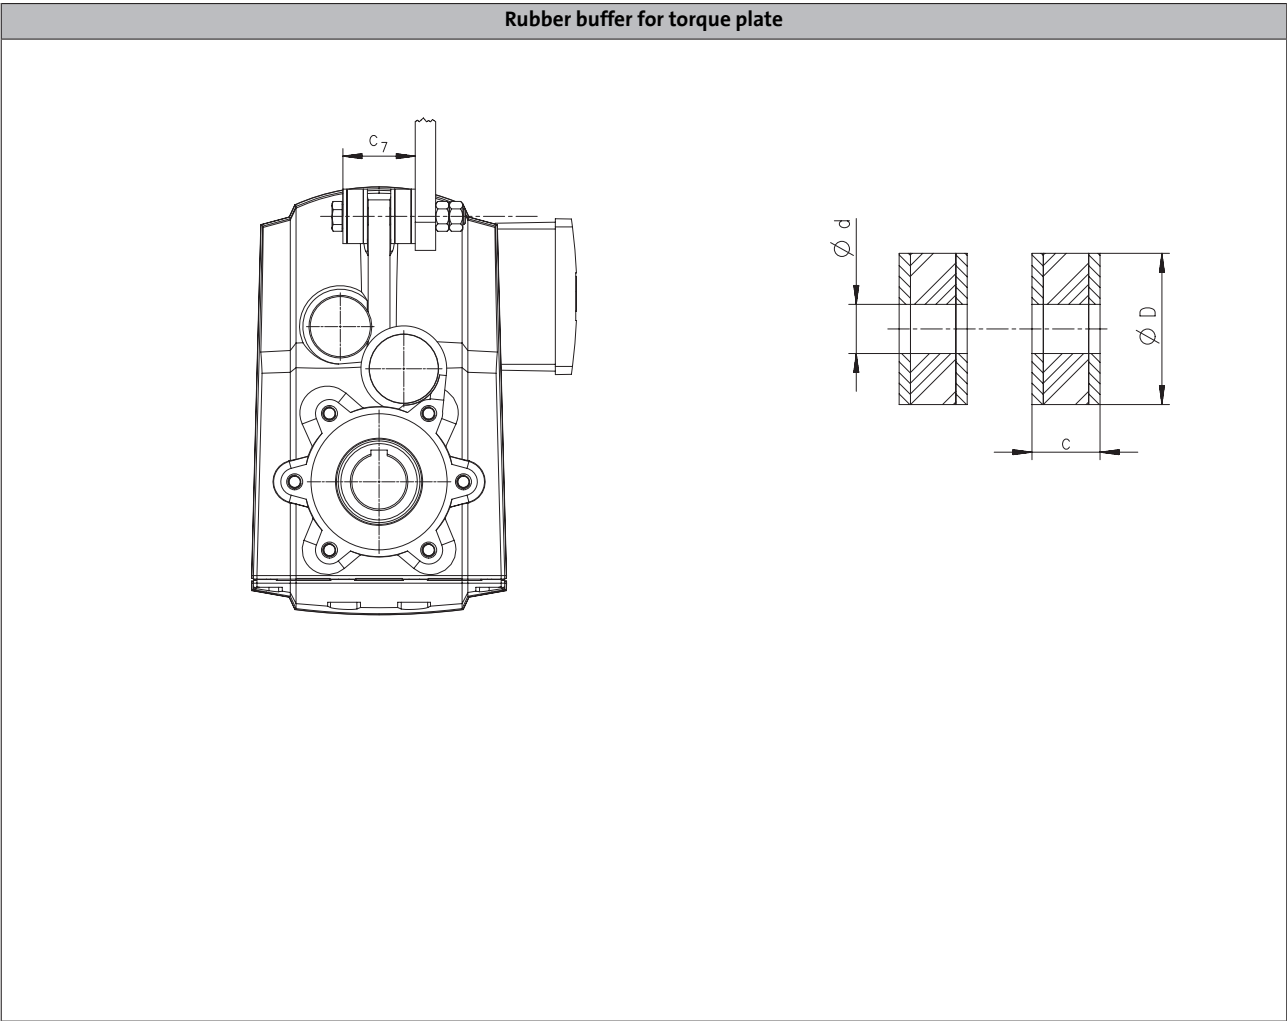

Product	Dimensions				Mass
	d	D	c	c ₇	m
	[mm]	[mm]	[mm]	[mm]	[kg]
g500-S130	11.0	30.0	17.0	45.0	0.050
g500-S220	11.0	30.0	17.0	45.0	0.050
g500-S400	13.0	40.0	18.0	49.0	0.10
g500-S660	13.0	40.0	18.0	52.0	0.10

g500-S shaft-mounted helical gearbox


Accessories



Shaft cover

Shrink disc cover

The cover is provided for the shrink disc to be protected from contact.

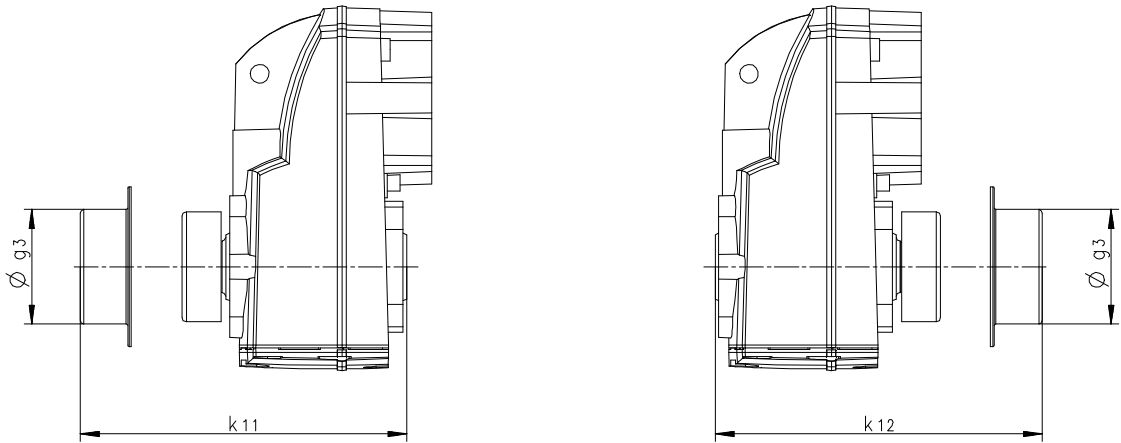

Product	Dimensions			Mass
	g_3 [mm]	k_{11} [mm]	k_{12} [mm]	m [kg]
g500-S130	63.0	132	132	0.050
g500-S220	76.0	152	152	0.050
g500-S400	90.0	182	182	0.050
g500-S660	90.0	200	202	0.050

g500-S shaft-mounted helical gearbox

Accessories



g500-S shaft-mounted helical gearbox

Accessories



Motors

MCS synchronous servo motors

0.25 to 190 Nm



MCS synchronous servo motors

Contents



General information	List of abbreviations	6.11 - 4
	Product key	6.11 - 6
	Product information	6.11 - 8
	Functions and features	6.11 - 9
	Dimensioning	6.11 - 10
Technical data	Standards and operating conditions	6.11 - 17
	Permissible radial and axial forces	6.11 - 18
	Rated data, non-ventilated	6.11 - 19
	Rated data, forced ventilated	6.11 - 24
	Selection tables, Servo Drives 9400 HighLine	6.11 - 26
	Selection tables, Inverter Drives 8400 TopLine	6.11 - 36
	Selection tables, Servo Drives ECS	6.11 - 47
	Selection tables, Servo Inverter 9300	6.11 - 56
	Torque characteristics	6.11 - 63
	Dimensions, self-ventilated	6.11 - 100
	Dimensions, forced ventilated	6.11 - 104
Accessories	Permanent magnet holding brake	6.11 - 107
	Resolver	6.11 - 109
	Incremental encoder and SinCos absolute value encoder	6.11 - 110
	Blowers	6.11 - 112
	Temperature monitoring	6.11 - 113
	Terminal box	6.11 - 114
	ICN connector	6.11 - 116

MCS synchronous servo motors

General information



List of abbreviations

$\eta_{100\%}$	[%]	Efficiency
$\cos \phi$		Power factor
du/dt	[kV/ μ s]	Insulation resistance
$F_{ax,-}$	[N]	Min. axial force
$F_{ax,+}$	[N]	Max. axial force
$f_{in,max}$	[Hz]	Max. input frequency
f_{max}	[kHz]	Limit frequency
f_{max}	[kHz]	Max. switching frequency
f_N	[Hz]	Rated frequency
F_{rad}	[N]	Max. radial force
H_{max}	[m]	Site altitude
I_0	[A]	Standstill current
I_{max}	[A]	Max. short-time DC-bus current
I_{max}	[A]	Max. current
I_{max}	[A]	Max. current consumption
I_{max}	[A]	Max. current
I_{max}	[A]	Max. DC-bus current
I_N	[A]	Rated current
J	[kgcm ²]	Moment of inertia
J_{MB}	[kgcm ²]	Moment of inertia
$KE_{LL\ 150\ ^\circ C}$	[V / 1000 rp]	Voltage constant
$Kt_{0\ 150\ ^\circ C}$	[Nm/A]	Torque constant
L	[mH]	Mutual inductance
$L_{1\sigma}$	[mH]	Stator leakage inductance
$L_{2\sigma}$	[mH]	Rotor leakage inductance
L_N	[mH]	Rated inductance
m	[kg]	Mass
M_0	[Nm]	Stall torque
$M_{0,max}$	[Nm]	Max. standstill torque
M_{av}	[Nm]	Average dynamic torque
M_{max}	[Nm]	Max. torque
M_N	[Nm]	Rated torque
n_{eto}	[r/min]	Transition speed
n_k	[r/min]	Speed
n_{max}	[r/min]	Max. speed

n_N	[r/min]	Rated speed
P_N	[kW]	Rated power
Q_E	[J]	Maximum switching energy
R	[Ω]	Insulation resistance
R	[Ω]	Min. insulation resistance
R_1	[Ω]	Stator impedance
R_2	[Ω]	Charging resistor
R_2	[Ω]	Rotor impedance
$R_{UV\ 150\ ^\circ C}$	[Ω]	Stator impedance
$R_{UV\ 20\ ^\circ C}$	[Ω]	Stator impedance
$S_{h\ddot{u}}$	[1/h]	Transition operating frequency
T	[$^\circ C$]	Operating temperature
T	[$^\circ C$]	Rated temperature
T	[$^\circ C$]	Max. ambient temperature of bearing
T	[$^\circ C$]	Max. surface temperature
T	[$^\circ C$]	Max. ambient temperature for transport
T	[$^\circ C$]	Min. ambient storage temperature
T	[$^\circ C$]	Min. ambient temperature for transport
T	[$^\circ C$]	Ambient temperature
t_1	[ms]	Engagement time
t_2	[ms]	Disengagement time
$T_{opr,max}$	[$^\circ C$]	Max. ambient operating temperature
$T_{opr,min}$	[$^\circ C$]	Min. ambient operating temperature
$U_{in,max}$	[V]	Max. input voltage
$U_{in,min}$	[V]	Min. input voltage
U_{max}	[V]	Max. mains voltage
U_{max}	[V]	Min. input voltage
U_{min}	[V]	Min. mains voltage
$U_{N, AC}$	[V]	Rated voltage
$U_{N, DC}$	[V]	Rated voltage
Z_{ro}	[Ω]	Rotor impedance
Z_{rs}	[Ω]	Impedance
Z_{so}	[Ω]	Stator impedance

MCS synchronous servo motors

General information



List of abbreviations


CE	Communauté Européenne
CSA	Canadian Standards Association
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UkrSEPRO	Certificate for Ukraine
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

MCS synchronous servo motors

General information



Product key

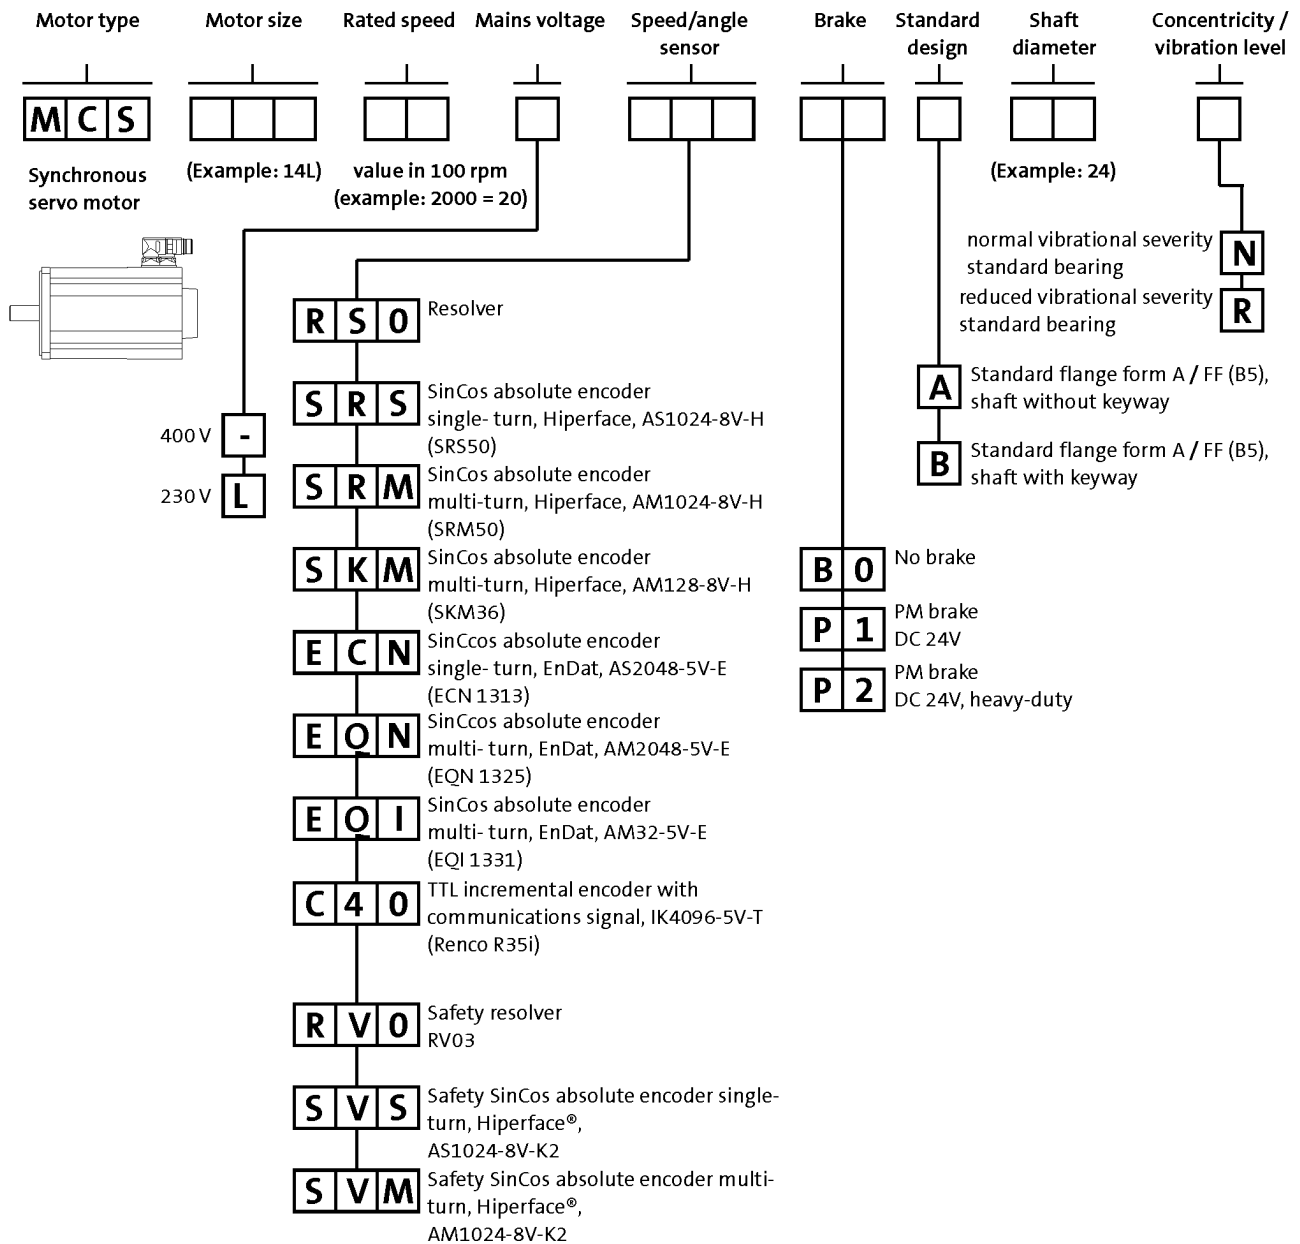


MCS synchronous servo motors

General information



Product key

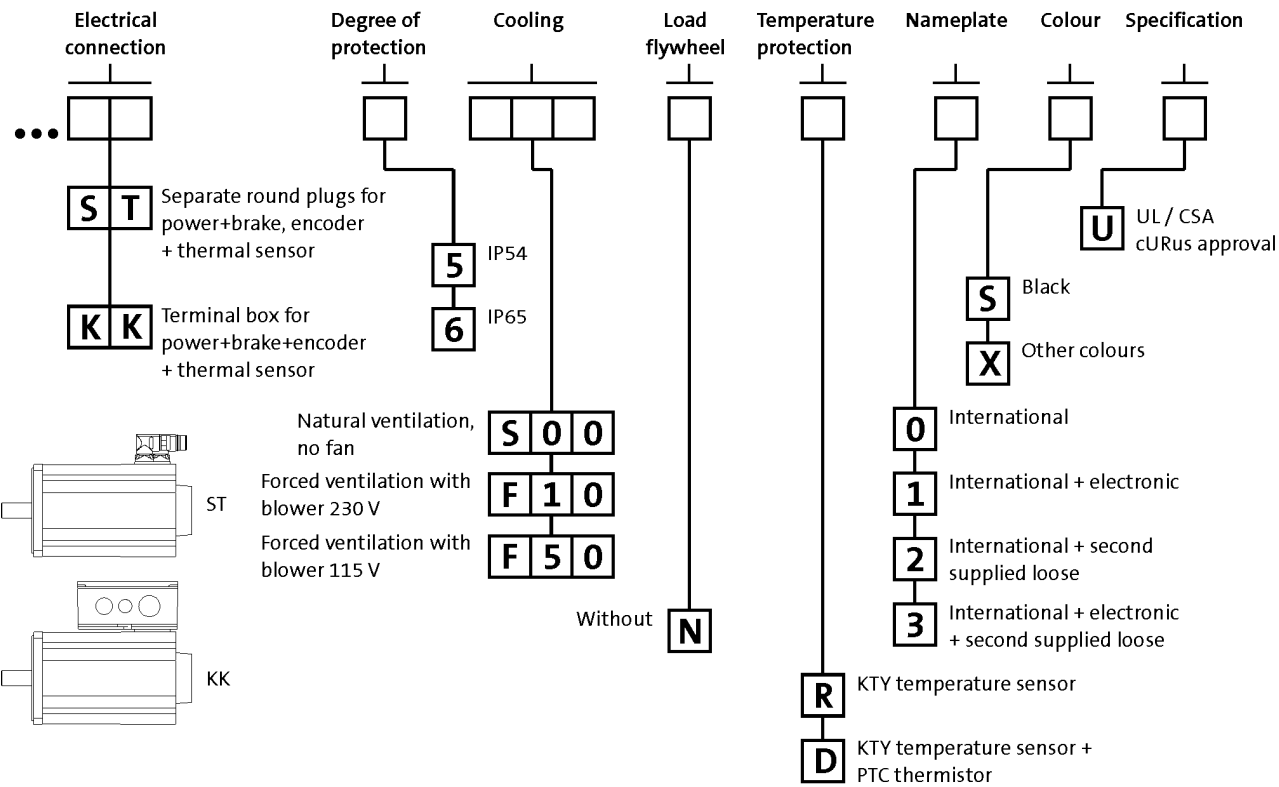

MCS synchronous servo motors

General information



Product information

When space is limited, but strict requirements in terms of dynamics and precision still have to be met, the MCS synchronous servo motors are the right choice.


With a power range from 0.25 kW to 15.8 kW and a rated torque range from 0.5 Nm to 72 Nm and peak torques of up to 190 Nm, these motors leave nothing to be desired in installations requiring compact and dynamic drive technology.

The stator winding of the MCS motors employs innovative Single Element Pole Technology – SEPT – and is made up of individual coils. High-quality magnetic materials and specially developed pole shapes set the conditions for their excellent drive characteristics. This results in a significant increase in power density, while at the same time reducing moments of inertia. The minimum detent torques offer exceptional smooth running characteristics and thereby secure excellent control behaviour.

The robust mechanical structure with reinforced bearings, the high degree of protection and the full stator encapsulation increase operational reliability, even in harsh ambient conditions.

Advantages

- High dynamic performance thanks to low moments of inertia
- Compact size with high power density
- Cooling with or without axial external fan
- Robust regenerative resolver system as standard
- Alternatively sin/cos encoder for the highest precision
- Easy to install and service friendly thanks to use of SpeedTec connectors
- Optional terminal box
- Protection: IP54, IP65 optional
- cURus-approved, GOST-certified, CE, RoHS compliant
- Smooth surface
- Single Element Pole Technology
- Optimum rotation characteristics
- Virtually free of detent torque
- Electronic nameplate

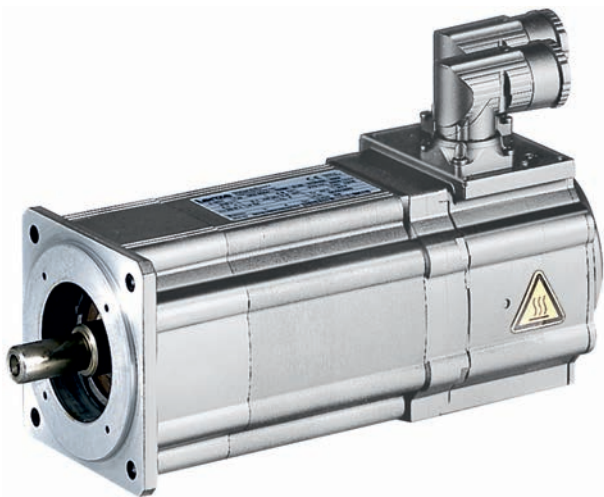

MCS09 synchronous servo motor

MCS synchronous servo motors

General information



Functions and features

	MCS06	MCS09	MCS12	MCS14	MCS19
Design					
	B5-FF75	B5-FF100	B5-FF130	B5-FF165	B5-FF215
Shaft end (with and without keyway)					
	11 x 23	14 x 30	19 x 40	24 x 50	28 x 60
A end shield					
	Not oil-tight				
Brake					
Permanent magnetic brake	DC 24 V	DC 24 V 24 V DC, reinforced			
Speed and angle encoder					
	Resolver SinCos single-turn/multi-turn				
Cooling					
Without blower	Naturally ventilated				
Axial blower, 1 phase			230 V; 50 Hz 115 V; 60 Hz		
Temperature sensor					
Thermal detector	KTY				
PTC thermistor		2x PTC additional (3-phase monitoring)			
Motor connection: plug connector					
	Power + brake Encoder + thermal sensor		Power + brake Encoder + thermal sensor Blower		
Motor connection: terminal box					
		Power + brake + encoder + thermal sensor			
Shaft bearings					
Bearing type	Deep-groove ball bearing with high-temperature resistant grease, sealing disc or cover plate				
Position of the locating bearing	Non-drive end				
Colour					
	RAL9005M				

► Terminal boxes not possible if blower is fitted.

MCS synchronous servo motors

General information



Dimensioning

Speed-dependent safety functions

Single encoder concepts with resolvers

Servo motors can perform speed-dependent safety functions for safe speed and / or safe relative position monitoring in a drive system with the Servo Drives 9400. The SM301 safety module, which can be integrated in the Servo Drives 9400, is used to implement these functions. When planning systems/installations of this kind, the following must always be observed:

When using just one single feedback system in the environment of these safety applications, the applicable safety engineering standard IEC 61800-5-2 [Adjustable speed electrical power drive systems - Part: 5-2: Safety requirements - Functional] stipulates special requirements for the connection between feedback system and motor shaft. This is due to the fact that two-channel safety systems at this point in the mechanical system are actually designed as single-channel systems. If this mechanical connection is designed with considerable overdimensioning, the standard permits exclusion of the fault "encoder-shaft breakage" or "encoder-shaft slip". As such, acceleration limit values must not be exceeded for the individual drive solutions. You can find the limit values in the corresponding feedback data of the individual motor ranges.

Speed-dependent safety functions in connection with the SM301 safety module

For the following speed-dependent safety functions, the motor-feedback system combinations listed in the following table are available:

- Safe stop 1 (SS1)
- Safe operational stop (SOS)
- Safely Limited Speed (SLS)
- Safe Maximum Speed (SMS)

- Safe direction (SDI)
- Operation mode selector (OMS) with confirmation (ES)
- Safe speed monitor (SSM)
- Safely limited increment (SLI).

Encoder type	Encoder type	Product key	Feedback	Safe speed monitoring
			Design	
SinCos absolute value	Single-turn	AS1024-8V-K2		PL d/SIL 2
	Multi-turn	AM1024-8V-K2		
Resolver		RV03		PL e/SIL 3
			2-encoder concept	up to PL e / SIL 3

MCS synchronous servo motors

General information



Dimensioning

Cooling effect of mounting flange

Mounting on a thermally conducting / insulating plate or machine chassis has an influence on heating up the motor, particularly when using naturally ventilated motors.

The motor rating data specified in the catalogue applies when mounting on a steel plate with free convection with the following dimensions:

- MCS06: 270 x 270 mm
- MCS09: 330 x 330 mm
- MCS12 / 14 / 19: 450 x 450 mm

Vibrational severity

		MCS06	MCS09	MCS12	MCS14	MCS19
Vibrational severity						
IEC/EN 60034-14		A				
Maximum r.m.s. value of the vibration velocity ¹⁾	[mm/s]	1.60				


¹⁾ Free suspension

► at n = 600 to 3,600 rpm



Dimensioning

Concentricity and axial run-out of the mounting flanges and smooth running of the shaft ends

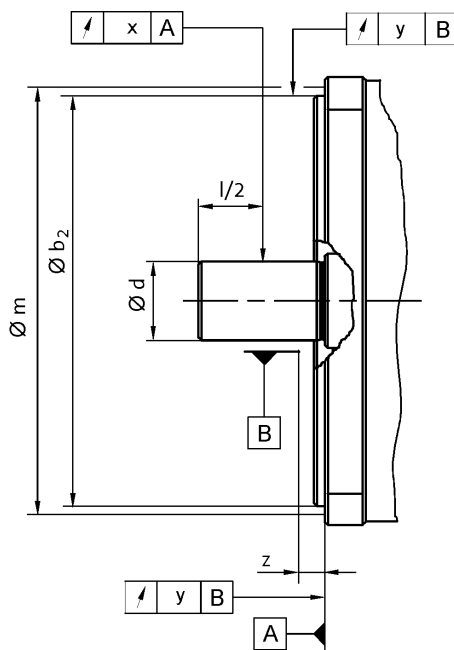

				MCS06	MCS09	MCS12	MCS14	MCS19
Flange size				FF75	FF100	FF130	FF165	FF215
Dimensions								
	b ₂	j6	[mm]	60	80	110	130	180
	d	k6	[mm]	11	14	19	24	28
Distance								
Measuring diameter	m		[mm]	65.0	85.0	115	135	185
Dial gauge holder for flange check	z	+/- 1	[mm]	10.0				
Concentricity								
IEC 60072				Normal class				
Value	y		[mm]	0.080		0.10		
Linear movement								
IEC 60072				Normal class				
Value	y		[mm]	0.080		0.10		
Smooth running								
IEC 60072				Normal class				
Value	x		[mm]	0.035		0.040		

- Limit values for checking the smooth running of the shaft ends as well as the concentricity and axial run-out of the mounting flange to IEC 60072


MCS synchronous servo motors

General information



Dimensioning

Notes on the selection tables

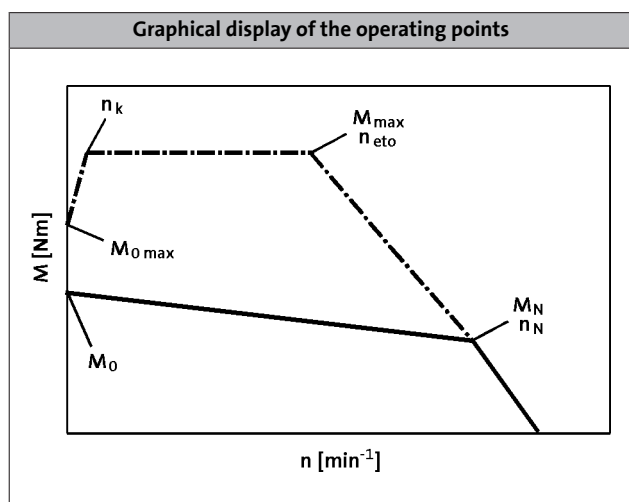

Please note:

- In case of an active load (e.g. vertical drive axes, hoists, test benches, unwinders), $M_{0 \max}$ has to be considered
- In case of a passive load (e.g. horizontal drive axes), $M_{\max}$ can be usually used
- In case of a speed $< n_k$ and inverter-specifically, the achievable torque $M_{0 \max}$ is smaller than $M_{\max}$
- In case of a speed $n = 0$, the standstill torque M_0 and the standstill current I_0 have to be reduced by 30% after 2 seconds. In case of applications which require a longer holding of M_0 , we recommend the drive to be held via the holding brake and reduce the current, e.g. by controller inhibit.
- In case of servo inverters, the switching frequency dependent overload capacity is considered in the default setting. For more information, see the servo inverter catalogue.

	n_k [r/min]
MCS	75.0
MDSKS	100
MDFKS	

Further selection tables with different switching frequencies are available with the following codes:

- DS_ZT_MCS_0001
- DS_ZT_MCA_0001
- DS_ZT_MDSKS_0001
- DS_ZT_MDFKS_0001

Simply enter this code (e.g. DS_ZT_MCS_0001) as a search string at www.lenze.de/dsc and you will be given the information immediately in the form of a PDF format.


MCS synchronous servo motors

General information



Dimensioning

Notes on the torque characteristics

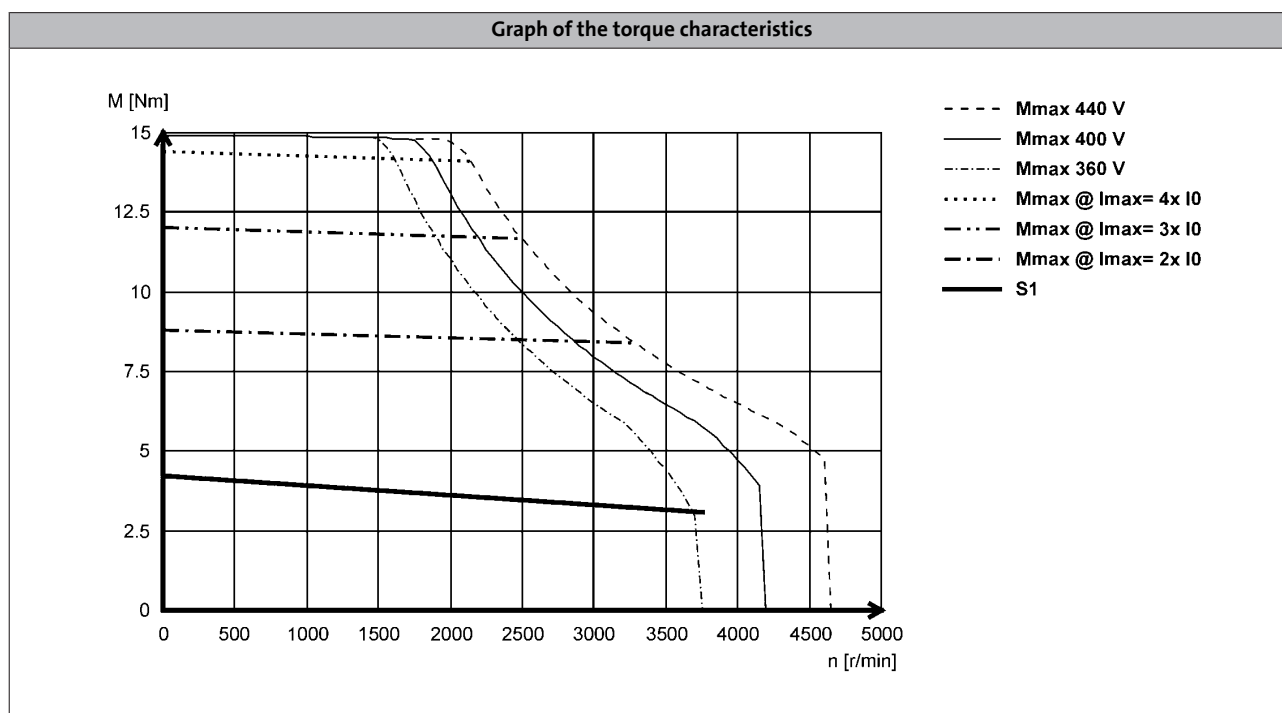

With synchronous servo motors, the limit torque characteristics that result from the selection of servo inverters with maximum currents are also shown alongside the characteristics for continuous operation (S1). These correspond to a multiple of the motor standstill current ($2 \times I_0$ to $4 \times I_0$).

Characteristics in the Internet

You can find the torque characteristic for inverter-motor combinations on the Internet at www.lenze.de/dsc. This lists all useful combinations with the servo inverters 9400, 9300, ECS and Inverter Drives 8400 TopLine. These characteristics are each determined using the factory default settings of the inverters:

- 9400 with variable switching frequency.
This means that up to 6-fold overcurrent can be applied in borderline cases.
- 9300 and ECS with fixed switching frequency.
- 8400 TopLine with variable switching frequency.

The continuous operation characteristics (S1) show the inverter-independent motor rating values

Further information on the terms switching frequency and factory default settings can be found in the operating manual of the respective servo inverter.




Dimensioning

Influence of ambient temperature and site altitude

The information relating to the servo motors in the tables and graphs is valid for a maximum ambient temperature (T_{opr}) of 40 °C and a site altitude (H) up to 1000 m above sea level. The torque correction factor (k_{M1}) shall be applied to the S1 torque characteristic ($M_0...M_N$) in the event of differing installation conditions.

- The maximum permissible ambient temperature (T_{opr}) for servo motors with blowers is 40 °C

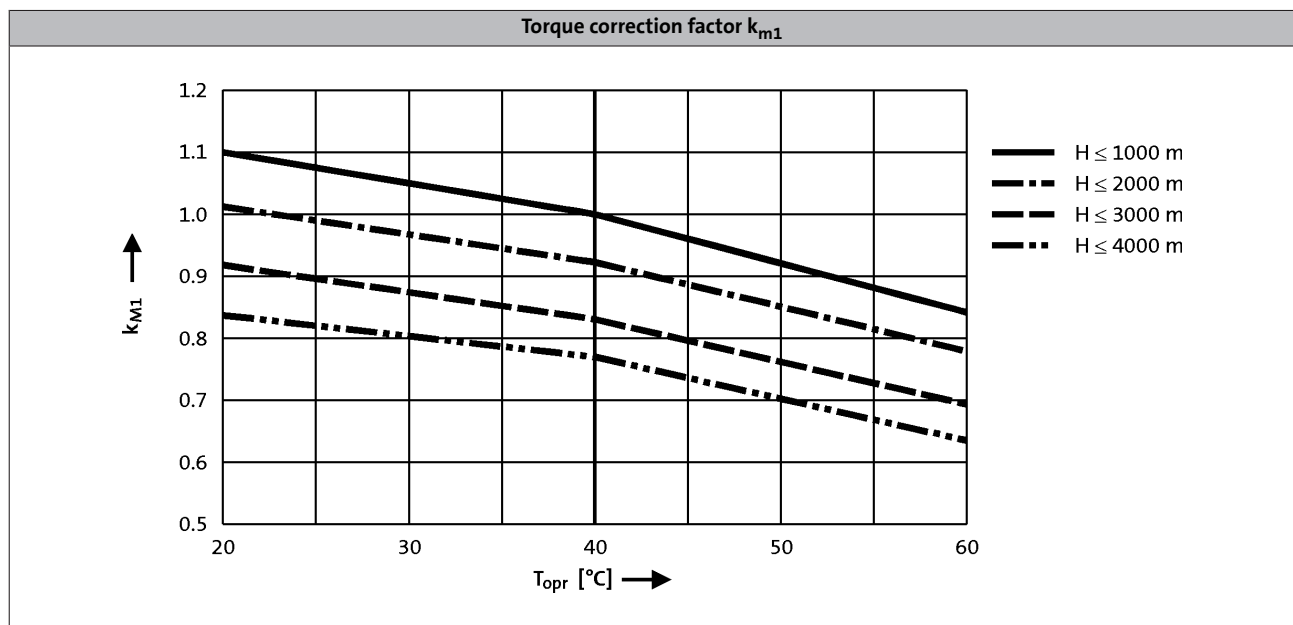

MCS synchronous servo motors

General information



MCS synchronous servo motors

Technical data



Standards and operating conditions

MCS			
Cooling type			Naturally ventilated Blower
Degree of protection			IP54 IP54
EN 60529			IP65
Temperature class			F
IEC/EN 60034-1; utilisation			H
IEC/EN 60034-1; insulation system (enamel-insulated wire)			
Approval			cURus ¹⁾ GOST-R UkrSepro
Class			
Max. voltage load			Pulse voltage limiting curve A
IEC/TS 60034-25			
Smooth running			Normal class
IEC 60072			
Linear movement			Normal class
IEC 60072			
Concentricity			Normal class
IEC 60072			
Mechanical ambient conditions (vibration)			3M6
IEC/EN 60721-3-3			
Min. ambient operating temperature			-20 -15
Without brake	T _{opr,min}	[°C]	
With brake	T _{opr,min}	[°C]	-10
Max. ambient temperature for operation			40
	T _{opr,max}	[°C]	
Max. surface temperature			140 110
	T	[°C]	
Mechanical tolerance			b ₂ ≤ 230 mm = j6 b ₂ > 230 mm = h6
Flange centring diameter			
Shaft diameter			d ≤ 50 mm = k6 d > 50 mm = m6
Site altitude			4000
Amsl	H _{max}	[m]	


¹⁾ Recognized component File No. E 210321.

MCS synchronous servo motors

Technical data



Permissible radial and axial forces

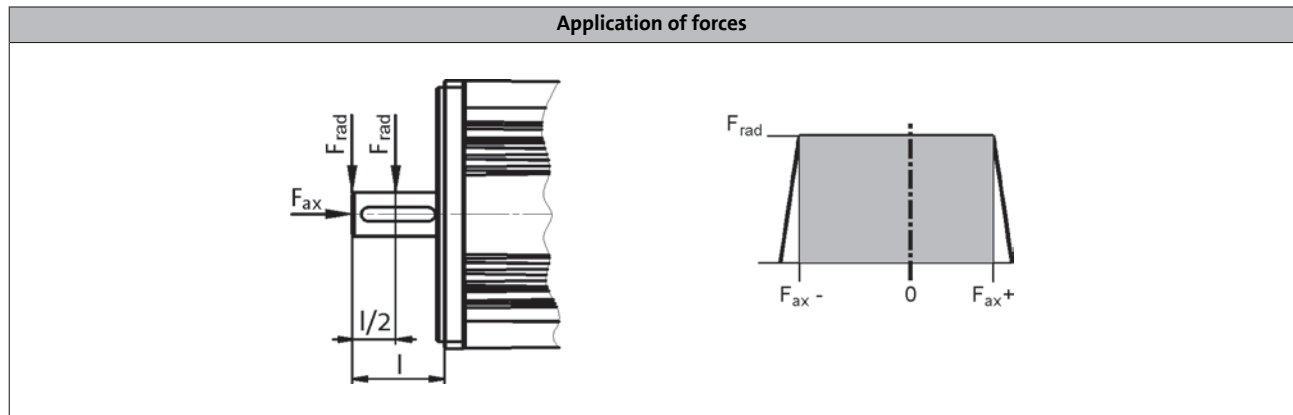

Application of force at $l/2$

Bearing service life L_{10}															
	5000 h			10000 h			20000 h			30000 h			50000 h		
	F_{rad}	$F_{ax,-}$	$F_{ax,+}$	F_{rad}	$F_{ax,-}$	$F_{ax,+}$	F_{rad}	$F_{ax,-}$	$F_{ax,+}$	F_{rad}	$F_{ax,-}$	$F_{ax,+}$	F_{rad}	$F_{ax,-}$	$F_{ax,+}$
	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]
MCS06	740	-260	140	590	-210	80	470	-170	40	410	-150	30	340	-140	10
MCS09	1040	-700	470	830	-550	310	660	-440	200	580	-380	150	490	-330	90
MCS12	1030	-880	560	820	-690	370	650	-550	230	570	-490	160	480	-420	100
MCS14	1830	-1150	720	1450	-900	470	1150	-720	290	1010	-640	200	850	-550	120
MCS19	3840	-1550	950	3050	-1210	620	2430	-960	360	2120	-840	250	1790	-730	130

Application of force at l

Bearing service life L_{10}															
	5000 h			10000 h			20000 h			30000 h			50000 h		
	F_{rad}	$F_{ax,-}$	$F_{ax,+}$	F_{rad}	$F_{ax,-}$	$F_{ax,+}$	F_{rad}	$F_{ax,-}$	$F_{ax,+}$	F_{rad}	$F_{ax,-}$	$F_{ax,+}$	F_{rad}	$F_{ax,-}$	$F_{ax,+}$
	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]	[N]
MCS06	630	-210	90	500	-170	50	400	-140	20	350	-130	0	290	-120	-10
MCS09	900	-630	400	710	-500	260	570	-400	160	500	-350	120	420	-300	70
MCS12	890	-820	490		-640	320	560	-520	190	490	-460	130		-400	
MCS14	1590	-1040	610		-820	390	1000	-660	230	880	-580	150		-510	
MCS19	3330	-1320	730	2650	-1040	450	2100	-830	240	1840	-740	140	1550	-640	40

- The values for the bearing service life L_{10} refer to an average speed of 4000 r/min. Depending on the ambient temperatures, the service life of the bearings is also reduced by the grease life-time.

MCS synchronous servo motors

Technical data



Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS06C41-	4050	0.80	0.60	2.40	0.25	1.30	1.30	5.40	225	270
MCS06C60-	6000	0.80	0.50	2.40	0.31	2.50	2.40	10.8	135	400
MCS06F41-	4050	1.50	1.20	4.40	0.51	1.50	1.50	5.30	320	270
MCS06F60-	6000	1.50	0.90	4.40	0.57	2.90	2.50	10.5	180	400
MCS06I41-	4050	2.00	1.50	6.20	0.64	1.70	1.60	5.90	325	270
MCS06I60-	6000	2.00	1.20	6.20	0.75	3.40	2.90	11.8	190	400
MCS09D41-	4050	3.30	2.30	9.50	1.00	2.60	2.30	10.0	320	270
MCS09D60-	6000	3.30	1.80	9.50	1.10	5.30	3.80	20.0	210	400
MCS09F38-	3750	4.20	3.10	15.0	1.20	3.00	2.50	15.0	330	250
MCS09F60-	6000	4.20	2.40	15.0	1.50	6.00	4.50	30.0	230	400
MCS09H41-	4050	5.50	3.80	20.0	1.60	4.30	3.40	20.0	300	270
MCS09H60-	6000	5.50	3.00	20.0	1.90	8.50	6.00	40.0	190	400
MCS09L41-	4050	7.50	4.50	32.0	1.90	6.20	4.20	32.0	295	270
MCS09L51-	5100	7.50	3.60	32.0	1.90	12.4	6.90	64.0	180	340

	$\eta_{100\%}$	$J^{1)}$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max\ 2)}$	$m^{1)}$
	[%]	[kgcm ²]	[V /1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS06C41-	65.0	0.14	36.6	27.1	36.5	51.0	0.66	8000	1.80
MCS06C60-	70.0	0.14	18.3	6.80	9.10	12.8	0.33	8000	1.80
MCS06F41-	77.0	0.22	60.1	21.9	29.5	63.5	1.05	8000	2.20
MCS06F60-	81.0	0.22	30.0	5.50	7.40	15.9	0.53	8000	2.20
MCS06I41-	81.0	0.30	73.4	18.8	25.4	60.2	1.21	8000	2.90
MCS06I60-	84.0	0.30	36.7	4.70	6.30	15.1	0.60	8000	2.90
MCS09D41-	87.0	1.10	71.2	7.00	9.40	25.1	1.25	7000	4.30
MCS09D60-	87.0	1.10	35.6	1.80	2.40	6.30	0.62	7000	4.30
MCS09F38-	91.0	1.50	79.8	5.20	7.00	24.6	1.40	7000	5.20
MCS09F60-	91.0	1.50	39.9	1.30	1.80	6.20	0.70	7000	5.20
MCS09H41-	91.0	1.90	75.7	3.20	4.30	16.1	1.29	7000	6.10
MCS09H60-	91.0	1.90	37.8	0.80	1.10	4.00	0.65	7000	6.10
MCS09L41-	91.0	2.80	71.7	1.80	2.40	9.90	1.21	7000	7.90
MCS09L51-	91.0	2.80	35.9	0.44	0.59	2.50	0.60	7000	7.90

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS12D20-	1950	6.40	5.50	18.0	1.10	2.70	2.60	10.0	345	130
MCS12D41-	4050	6.40	4.30	18.0	1.80	5.50	4.50	20.0	310	270
MCS12H15-	1500	11.4	10.0	29.0	1.60	4.10	3.80	12.0	300	100
MCS12H35-	3525	11.4	7.50	29.0	2.80	8.20	5.70	24.0	325	235
MCS12L20-	1950	15.0	13.5	56.0	2.80	6.20	5.90	28.0	330	130
MCS12L41-	4050	15.0	11.0	56.0	4.70	12.4	10.2	57.0	300	270
MCS14D15-	1500	11.0	9.20	29.0	1.45	5.00	4.50	17.0	305	100
MCS14D36-	3600	11.0	7.50	29.0	2.80	10.0	7.50	33.0	295	240
MCS14H15-	1500	21.0	16.0	55.0	2.50	8.50	6.60	26.0	325	100
MCS14H32-	3225	21.0	14.0	55.0	4.70	16.9	11.9	52.0	295	215
MCS14L15-	1500	28.0	23.0	77.0	3.60	12.0	9.70	37.0	315	100
MCS14L32-	3225	28.0	17.2	77.0	5.80	24.0	15.0	75.0	275	215
MCS14P14-	1350	37.0	30.0	105	4.20	12.2	10.8	46.0	340	90
MCS14P32-	3225	37.0	21.0	105	7.10	24.3	15.6	92.0	315	215

	$\eta_{100\%}$	$J^{1)}$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max\ 2)}$	$m^{1)}$
	[%]	[kgcm ²]	[V /1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS12D20-	79.0	4.00	137	8.70	11.8	52.2	2.34	6000	6.40
MCS12D41-	84.0	4.00	68.6	2.20	2.90	13.0	1.17	6000	6.40
MCS12H15-	88.0	7.30	173	5.70	7.70	42.1	2.79	6000	9.50
MCS12H35-	91.0	7.30	86.5	1.40	1.90	10.5	1.40	6000	9.50
MCS12L20-	90.0	10.6	149	2.20	3.00	21.8	2.42	6000	12.6
MCS12L41-	91.0	10.6	74.6	0.55	0.75	5.50	1.21	6000	12.6
MCS14D15-	88.0	8.10	129	4.00	5.40	49.8	2.19	6000	10.7
MCS14D36-	92.0	8.10	64.2	1.00	1.35	12.5	1.09	6000	10.7
MCS14H15-	92.0	14.2	153	2.08	2.81	34.1	2.48	6000	15.5
MCS14H32-	93.0	14.2	76.3	0.52	0.70	8.50	1.24	6000	15.5
MCS14L15-	90.0	23.4	152	1.21	1.64	22.0	2.33	6000	20.1
MCS14L32-	93.0	23.4	76.2	0.30	0.41	5.50	1.16	6000	20.1
MCS14P14-	90.0	34.7	179	1.10	1.49	23.9	3.04	6000	24.9
MCS14P32-	93.0	34.7	89.4	0.28	0.37	6.00	1.52	6000	24.9

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS19F14-	1425	32.0	27.0	86.0	4.00	9.90	8.60	31.0	335	95
MCS19F30-	3000	32.0	21.0	86.0	6.60	19.8	14.0	63.0	300	200
MCS19J14-	1425	51.0	40.0	129	6.00	15.2	12.3	45.0	330	95
MCS19J30-	3000	51.0	29.0	129	9.10	30.5	18.5	90.0	300	200
MCS19P14-	1350	64.0	51.0	190	7.20	17.5	14.3	60.0	330	90
MCS19P30-	3000	64.0	32.0	190	10.0	34.9	19.0	120	320	200

	$\eta_{100\%}$	$J^1)$	$KE_{LL 150\text{ °C}}$	$R_{UV 20\text{ °C}}$	$R_{UV 150\text{ °C}}$	L_N	$Kt_{0 150\text{ °C}}$	$n_{max}^2)$	$m^1)$
	[%]	[kgcm ²]	[V / 1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS19F14-	92.0	65.0	195	1.30	1.75	20.8	3.23	4000	23.0
MCS19F30-	93.0	65.0	97.2	0.32	0.44	5.20	1.62	4000	23.0
MCS19J14-	92.0	105	199	0.65	0.88	12.8	3.31	4000	30.0
MCS19J30-	93.0	105	99.5	0.16	0.22	3.20	1.65	4000	30.0
MCS19P14-	92.0	160	216	0.54	0.73	9.60	3.66	4000	40.0
MCS19P30-	93.0	160	108	0.14	0.18	2.40	1.83	4000	40.0

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 230 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS06C41L	4050	0.80	0.60	2.40	0.25	2.50	2.50	10.8	125	270
MCS06C60L	6000	0.80	0.50	2.40	0.31	4.30	4.00	18.5	85	400
MCS06F41L	4050	1.50	1.20	4.40	0.51	2.90	2.90	10.5	165	270
MCS06F60L	6000	1.50	0.90	4.40	0.57	3.80	3.40	16.5	125	400
MCS06I41L	4050	2.00	1.50	6.20	0.64	3.10	2.90	11.8	175	270
MCS06I60L	6000	2.00	1.20	6.20	0.75	4.20	3.60	16.0	150	400
MCS09D41L	4050	3.30	2.30	9.50	1.00	5.30	4.60	20.0	165	270
MCS09D60L	6000	3.30	1.80	9.50	1.10	10.3	7.00	39.0	110	400
MCS09F38L	3750	4.20	3.10	15.0	1.20	6.00	5.00	30.0	160	250
MCS09F60L	6000	4.20	2.40	15.0	1.50	10.5	7.90	53.0	125	400
MCS09H41L	4050	5.50	3.80	20.0	1.60	8.50	6.80	40.0	160	270
MCS09H60L	6000	5.50	3.00	20.0	1.90	12.0	8.00	57.0	145	400
MCS09L41L	4050	7.50	4.50	32.0	1.90	12.4	8.40	64.0	145	270

	$\eta_{100\%}$	$J^{1)}$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max}^{2)}$	$m^{1)}$
	[%]	[kgcm ²]	[V / 1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS06C41L	65.0	0.14	21.5	6.00	8.00	12.8	0.33	8000	1.80
MCS06C60L	70.0	0.14	12.5	2.20	2.90	4.30	0.19	8000	1.80
MCS06F41L	81.0	0.22	34.5	5.50	7.40	15.9	0.62	8000	2.20
MCS06F60L	82.0	0.22	22.2	2.30	3.00	6.90	0.40	8000	2.20
MCS06I41L	81.0	0.30	38.0	4.70	6.20	15.1	0.64	8000	2.90
MCS06I60L	84.0	0.30	28.5	2.50	3.40	9.30	0.48	8000	2.90
MCS09D41L	87.0	1.10	35.6	1.80	2.40	6.30	0.62	7000	4.30
MCS09D60L	87.0	1.10	18.3	0.45	0.61	1.70	0.32	7000	4.30
MCS09F38L	90.0	1.50	39.9	1.30	1.80	6.20	0.70	7000	5.20
MCS09F60L	91.0	1.50	22.8	0.42	0.56	2.00	0.40	7000	5.20
MCS09H41L	91.0	1.90	37.8	0.80	1.10	4.00	0.65	7000	6.10
MCS09H60L	91.0	1.90	26.6	0.36	0.48	2.00	0.46	7000	6.10
MCS09L41L	91.0	2.80	35.9	0.44	0.59	2.50	0.60	7000	7.90

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 230 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS12D20L	1950	6.40	5.50	18.0	1.10	5.50	5.20	20.0	175	130
MCS12D41L	4050	6.40	4.30	18.0	1.80	10.7	8.80	40.0	155	270
MCS12H15L	1500	11.4	10.0	29.0	1.60	8.20	7.80	24.0	158	100
MCS12H30L	3000	11.4	8.00	29.0	2.50	13.5	10.5	39.0	165	200
MCS12L20L	1950	15.0	13.5	56.0	2.80	12.4	11.8	57.0	165	130

	$\eta_{100\%}$	$J^{1)}$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max\ 2)}$	$m^{1)}$
	[%]	[kgcm ²]	[V / 1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS12D20L	79.0	4.00	68.6	2.20	2.90	13.0	1.17	6000	6.40
MCS12D41L	84.0	4.00	35.0	0.55	0.75	3.40	0.60	6000	6.40
MCS12H15L	82.0	7.30	86.5	1.41	1.90	10.5	1.40	6000	9.50
MCS12H30L	87.0	7.30	53.0	0.50	0.67	4.00	0.86	6000	9.50
MCS12L20L	90.0	10.6	76.9	0.55	0.75	5.50	1.21	6000	12.6

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Rated data, forced ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS12D17-	1650	7.50	7.00	17.7	1.20	3.20	3.00	10.0	330	110
MCS12D35-	3525	7.50	6.00	17.7	2.20	6.40	5.60	20.0	300	235
MCS12H14-	1350	12.8	12.0	29.0	1.70	4.30	4.10	12.0	310	90
MCS12H34-	3375	12.8	10.5	29.0	3.70	8.50	7.50	24.0	320	225
MCS12L17-	1650	19.0	17.0	56.4	2.90	7.20	6.70	28.0	300	110
MCS12L39-	3900	19.0	14.0	56.4	5.70	14.4	11.7	57.0	295	260
MCS14D14-	1350	12.5	12.0	29.0	1.70	5.70	5.40	17.0	345	90
MCS14D30-	3000	12.5	10.5	29.0	3.30	11.4	9.70	33.0	325	200
MCS14H12-	1200	25.5	23.5	54.8	3.00	9.30	8.30	26.0	335	80
MCS14H28-	2775	25.5	20.5	54.8	6.00	18.4	15.0	52.0	325	185
MCS14L14-	1350	34.5	30.5	77.1	4.30	13.4	11.8	37.0	335	90
MCS14L30-	3000	34.5	25.5	77.1	8.00	26.7	20.8	75.0	310	200
MCS14P11-	1050	43.5	42.0	105	4.60	14.1	13.4	46.0	330	70
MCS14P26-	2625	43.5	33.0	105	9.10	28.3	21.9	92.0	325	175

	$\eta_{100\%}$	$J^{1)}$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max\ 2)}$	$m^{1)}$
	[%]	[kgcm ²]	[V /1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS12D17-	75.0	4.00	137	8.72	11.8	52.2	2.34	6000	8.50
MCS12D35-	82.0	4.00	68.6	2.18	2.94	13.0	1.17	6000	8.50
MCS12H14-	80.0	7.30	173	5.72	7.72	42.1	2.98	6000	11.6
MCS12H34-	86.0	7.30	86.5	1.39	1.88	10.5	1.51	6000	11.6
MCS12L17-	90.0	10.6	149	2.22	2.99	21.8	2.64	6000	14.7
MCS12L39-	94.0	10.6	74.6	0.55	0.75	5.50	1.32	6000	14.7
MCS14D14-	84.0	8.10	129	4.00	5.40	49.8	2.19	6000	14.5
MCS14D30-	92.0	8.10	64.2	1.00	1.35	12.5	1.09	6000	14.5
MCS14H12-	87.0	14.2	153	2.08	2.81	34.1	2.75	6000	19.5
MCS14H28-	93.0	14.2	76.3	0.52	0.70	8.50	1.39	6000	19.5
MCS14L14-	88.0	23.4	152	1.21	1.64	22.0	2.57	6000	24.0
MCS14L30-	92.0	23.4	76.2	0.30	0.41	5.50	1.29	6000	24.0
MCS14P11-	86.0	34.7	179	1.10	1.49	23.9	3.08	6000	29.0
MCS14P26-	92.0	34.7	89.4	0.28	0.37	6.00	1.54	6000	29.0

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Rated data, forced ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N	M_0	M_N	M_{max}	P_N	I_0	I_N	I_{max}	$U_{N, AC}$	f_N
	[r/min]	[Nm]	[Nm]	[Nm]	[kW]	[A]	[A]	[A]	[V]	[Hz]
MCS19F12-	1200	41.5	38.0	86.0	4.80	12.2	11.3	31.0	320	80
MCS19F29-	2850	41.5	32.5	86.0	9.70	24.5	20.1	63.0	320	190
MCS19J12-	1200	70.5	62.5	129	7.90	20.3	18.3	45.0	320	80
MCS19J29-	2850	70.5	50.5	129	15.1	40.6	31.0	90.0	315	190
MCS19P12-	1200	86.0	72.0	190	9.00	22.4	21.3	60.0	310	80
MCS19P29-	2850	86.0	53.0	190	15.8	44.7	29.5	120	315	190

	$\eta_{100\%}$	$J^1)$	$KE_{LL\ 150\ ^\circ C}$	$R_{UV\ 20\ ^\circ C}$	$R_{UV\ 150\ ^\circ C}$	L_N	$Kt_{0\ 150\ ^\circ C}$	$n_{max}^2)$	$m^1)$
	[%]	[kgcm ²]	[V / 1000 rp]	[Ω]	[Ω]	[mH]	[Nm/A]	[r/min]	[kg]
MCS19F12-	90.4	65.0	195	1.30	1.75	20.8	3.40	4000	29.0
MCS19F29-	94.7	65.0	97.2	0.32	0.44	5.20	1.69	4000	29.0
MCS19J12-	89.3	105	199	0.65	0.88	12.8	3.47	4000	36.0
MCS19J29-	92.8	105	99.5	0.16	0.22	3.20	1.74	4000	36.0
MCS19P12-	90.3	160	216	0.54	0.73	9.60	3.84	4000	46.0
MCS19P29-	93.4	160	108	0.14	0.18	2.40	1.92	4000	46.0

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
06C41-	0.6	4050	1.3	0.25	M ₀	0.8										
					M _N	0.6										
					M _{0,max}	2.4										
					M _{max}	2.4										
					η _{eto}	-										
06C60-	0.5	6000	2.4	0.31	M ₀	0.6	0.8									
					M _N	0.4	0.5									
					M _{0,max}	1.5	2.3									
					M _{max}	1.5	2.3									
					η _{eto}	-	-									
06F41-	1.2	4050	1.5	0.51	M ₀	1.5										
					M _N	1.2										
					M _{0,max}	4.4										
					M _{max}	4.4										
					η _{eto}	-										
06F60-	0.9	6000	2.5	0.57	M ₀	1.0	1.5									
					M _N	0.7	0.9									
					M _{0,max}	3.0	4.3									
					M _{max}	3.0	4.3									
					η _{eto}	-	-									
06I41-	1.5	4050	1.6	0.64	M ₀	2.0										
					M _N	1.5										
					M _{0,max}	6.2										
					M _{max}	6.2										
					η _{eto}	-										
06I60-	1.2	6000	2.9	0.75	M ₀	1.1	1.8	2.0								
					M _N	0.8	1.2	1.2								
					M _{0,max}	3.3	5.5	6.2								
					M _{max}	3.3	5.5	6.2								
					η _{eto}	-	-	-								
09D41-	2.3	4050	2.3	1.00	M ₀	2.4	3.3									
					M _N	1.9	2.3									
					M _{0,max}	6.3	9.5									
					M _{max}	6.3	9.5									
					η _{eto}	-	-									
09D60-	1.8	6000	3.8	1.10	M ₀			3.1	3.3							
					M _N			1.8	1.8							
					M _{0,max}			8.0	9.5							
					M _{max}			8.0	9.5							
					η _{eto}			-	-							
09F38-	3.1	3750	2.5	1.20	M ₀		4.2	4.2								
					M _N		3.1	3.1								
					M _{0,max}		11.6	14.9								
					M _{max}		11.6	14.9								
					η _{eto}		-	-								

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
09F60-	2.4	6000	4.5	1.50	M ₀			3.5	4.2	4.2	4.2					
					M _N			2.4	2.4	2.4	2.4					
					M _{0,max}			9.8	12.0	14.4	14.9					
					M _{max}			9.8	12.0	14.4	14.9					
					η _{eto}			-	-	-	-					
09H41-	3.8	4050	3.4	1.60	M ₀		4.0	5.5	5.5							
					M _N		3.5	3.8	3.8							
					M _{0,max}		12.0	17.5	20.4							
					M _{max}		12.0	17.5	20.4							
					η _{eto}		-	-	-							
09H60-	3.0	6000	6.0	1.90	M ₀				5.5	5.5	5.5	5.5				
					M _N				3.0	3.0	3.0	3.0				
					M _{0,max}				12.5	15.8	20.1	20.4				
					M _{max}				12.5	15.8	20.1	20.4				
					η _{eto}				-	-	-	-				
09L41-	4.5	4050	4.2	1.90	M ₀			6.0	7.5	7.5						
					M _N			4.5	4.5	4.5						
					M _{0,max}			17.4	22.2	28.5						
					M _{max}			17.4	22.2	28.5						
					η _{eto}			-	-	-						
09L51-	3.6	5100	6.9	1.90	M ₀				5.3	7.0	7.5	7.5	7.5			
					M _N				3.6	3.6	3.6	3.6	3.6			
					M _{0,max}				11.9	15.5	20.9	25.8	29.7			
					M _{max}				11.9	15.5	20.9	25.8	29.7			
					η _{eto}				-	-	-	-	-			
12D20-	5.5	1950	2.6	1.10	M ₀	4.4	6.4									
					M _N	4.0	5.5									
					M _{0,max}	11.8	17.7									
					M _{max}	11.8	17.7									
					η _{eto}	-	-									
12D41-	4.3	4050	4.5	1.80	M ₀			5.9	6.4							
					M _N			4.3	4.3							
					M _{0,max}			14.7	17.7							
					M _{max}			14.7	17.7							
					η _{eto}			-	-							
12H15-	10.0	1500	3.8	1.60	M ₀		8.7	11.4								
					M _N		8.2	10.0								
					M _{0,max}		24.6	29.0								
					M _{max}		24.6	29.0								
					η _{eto}		-	-								
12H35-	7.5	3525	5.7	2.80	M ₀			7.0	11.4	11.4	11.4					
					M _N			6.6	7.5	7.5	7.5					
					M _{0,max}			20.1	25.8	29.0	29.0					
					M _{max}			20.1	25.8	29.0	29.0					
					η _{eto}			-	-	-	-					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
12L20-	13.5	1950	5.9	2.80	M ₀			12.1	15.0	15.0	15.0					
					M _N			11.4	13.5	13.5	13.5					
					M _{0,max}			35.5	44.6	55.7	56.4					
					M _{max}			35.5	44.6	55.7	56.4					
					η _{eto}			-	-	-	-					
12L41-	11.0	4050	10.2	4.70	M ₀				10.6	14.0	15.0	15.0	15.0			
					M _N				9.5	11.0	11.0	11.0	11.0			
					M _{0,max}				24.4	31.6	41.9	50.8	56.4			
					M _{max}				24.4	31.6	41.9	50.8	56.4			
					η _{eto}				-	-	-	-	-			
14D15-	9.2	1500	4.5	1.45	M ₀			11.0	11.0							
					M _N			9.2	9.2							
					M _{0,max}			28.3	29.0							
					M _{max}			28.3	29.0							
					η _{eto}			-	-							
14D36-	7.5	3600	7.5	2.80	M ₀				9.6	11.0	11.0					
					M _N				7.5	7.5	7.5					
					M _{0,max}				20.2	25.6	29.0					
					M _{max}				20.2	25.6	29.0					
					η _{eto}				-	-	-					
14H15-	16.0	1500	6.6	2.50	M ₀			12.4	21.0	21.0	21.0					
					M _N			12.1	16.0	16.0	16.0					
					M _{0,max}			37.1	46.6	54.8	54.8					
					M _{max}			37.1	46.6	54.8	54.8					
					η _{eto}			-	-	-	-					
14H32-	14.0	3225	11.9	4.70	M ₀					14.4	20.3	21.0	21.0			
					M _N					13.6	14.0	14.0	14.0			
					M _{0,max}					33.0	43.9	53.2	54.8			
					M _{max}					33.0	43.9	53.2	54.8			
					η _{eto}					-	-	-	-			
14L15-	23.0	1500	9.7	3.60	M ₀				20.5	27.1	28.0					
					M _N				20.9	23.0	23.0					
					M _{0,max}				48.0	61.4	77.1					
					M _{max}				48.0	61.4	77.1					
					η _{eto}				-	-	-					
14L32-	17.2	3225	15.0	5.80	M ₀						19.0	24.0	28.0	28.0	28.0	
					M _N						17.2	17.2	17.2	17.2	17.2	
					M _{0,max}						45.0	55.3	63.9	77.1	77.1	
					M _{max}						45.0	55.3	63.9	77.1	77.1	
					η _{eto}						-	-	-	-	-	
14P14-	30.0	1350	10.8	4.20	M ₀				26.7	35.2	37.0	37.0				
					M _N				24.4	30.0	30.0	30.0				
					M _{0,max}				56.1	71.7	93.3	105.1				
					M _{max}				56.1	71.7	93.3	105.1				
					η _{eto}				-	-	-	-				

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
14P32-	21.0	3225	15.6	7.10	M ₀						24.8	31.4	37.0	37.0	37.0	
					M _N						21.0	21.0	21.0	21.0	21.0	
					M _{0,max}						52.5	64.6	74.7	92.2	105.1	
					M _{max}						52.5	64.6	74.7	92.2	105.1	
					n _{eto}						-	-	-	-	-	
19F14-	27.0	1425	8.6	4.00	M ₀				28.4	32.0	32.0					
					M _N				27.0	27.0	27.0					
					M _{0,max}				62.1	78.9	86.0					
					M _{max}				62.1	78.9	86.0					
					n _{eto}				-	-	-					
19F30-	21.0	3000	14.0	6.60	M ₀						26.3	32.0	32.0	32.0		
					M _N						21.0	21.0	21.0	21.0		
					M _{0,max}						56.6	70.2	81.6	86.0		
					M _{max}						56.6	70.2	81.6	86.0		
					n _{eto}						-	-	-	-		
19J14-	40.0	1425	12.3	6.00	M ₀					38.9	51.0	51.0				
					M _N					37.7	40.0	40.0				
					M _{0,max}					85.0	114.4	129.0				
					M _{max}					85.0	114.4	129.0				
					n _{eto}					-	-	-				
19J30-	29.0	3000	18.5	9.10	M ₀						27.3	34.4	49.2	51.0	51.0	
					M _N						25.6	29.0	29.0	29.0	29.0	
					M _{0,max}						60.8	75.9	88.9	112.9	129.0	
					M _{max}						60.8	75.9	88.9	112.9	129.0	
					n _{eto}						-	-	-	-	-	
19P14-	51.0	1350	14.3	7.20	M ₀						59.6	64.0	64.0	64.0		
					M _N						51.0	51.0	51.0	51.0		
					M _{0,max}						128.4	159.9	186.6	190.0		
					M _{max}						128.4	159.9	186.6	190.0		
					n _{eto}						-	-	-	-		
19P30-	32.0	3000	19.0	10.00	M ₀						29.9	37.8	53.9	64.0	64.0	64.0
					M _N						27.5	32.0	32.0	32.0	32.0	32.0
					M _{0,max}						65.7	83.6	98.5	126.6	152.5	187.2
					M _{max}						65.7	83.6	98.5	126.6	152.5	187.2
					n _{eto}						-	-	-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
06C41L	0.6	4050	2.6	0.25	M ₀	0.6	0.8							
					M _N	0.5	0.6							
					M _{0,max}	1.5	2.3							
					M _{max}	1.5	2.3							
					η _{eto}	-	-							
06C60L	0.5	6000	4.0	0.31	M ₀		0.6	0.8	0.8					
					M _N		0.4	0.5	0.5					
					M _{0,max}		1.5	2.2	2.4					
					M _{max}		1.5	2.2	2.4					
					η _{eto}		-	-	-					
06F41L	1.2	4050	2.9	0.51	M ₀	1.0	1.5	1.5						
					M _N	0.8	1.2	1.2						
					M _{0,max}	2.7	4.2	4.4						
					M _{max}	2.7	4.2	4.4						
					η _{eto}	-	-	-						
06F60L	0.9	6000	3.8	0.57	M ₀		1.2	1.5	1.5					
					M _N		0.8	0.9	0.9					
					M _{0,max}		3.1	4.3	4.4					
					M _{max}		3.1	4.3	4.4					
					η _{eto}		-	-	-					
06I41L	1.5	4050	3.2	0.64	M ₀		2.0	2.0						
					M _N		1.5	1.5						
					M _{0,max}		5.4	6.2						
					M _{max}		5.4	6.2						
					η _{eto}		-	-						
06I60L	1.2	6000	3.8	0.75	M ₀		1.5	2.0						
					M _N		1.0	1.2						
					M _{0,max}		4.4	6.2						
					M _{max}		4.4	6.2						
					η _{eto}		-	-						
09D41L	2.3	4050	4.6	1.00	M ₀			3.1	3.3					
					M _N			2.3	2.3					
					M _{0,max}			8.0	9.5					
					M _{max}			8.0	9.5					
					η _{eto}			-	-					
09D60L	1.8	6000	7.0	1.10	M ₀				2.8	3.3	3.3			
					M _N				1.8	1.8	1.8			
					M _{0,max}				5.7	7.3	9.5			
					M _{max}				5.7	7.3	9.5			
					η _{eto}				-	-	-			
09F38L	3.1	3750	5.0	1.20	M ₀			3.5	4.2	4.2	4.2			
					M _N			3.1	3.1	3.1	3.1			
					M _{0,max}			9.8	12.0	13.8	15.0			
					M _{max}			9.8	12.0	13.8	15.0			
					η _{eto}			-	-	-	-			

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
09F60L	2.4	6000	7.9	1.50	M ₀				3.5	4.2	4.2	4.2	4.2	
					M _N				2.4	2.4	2.4	2.4	2.4	
					M _{0,max}				7.8	9.8	12.6	14.5	15.0	
					M _{max}				7.8	9.8	12.6	14.5	15.0	
					n _{eto}				-	-	-	-	-	
09H41L	3.8	4050	6.8	1.60	M ₀				5.5	5.3	5.5	5.5		
					M _N				3.8	3.0	3.8	3.8		
					M _{0,max}				12.4	11.8	19.7	20.0		
					M _{max}				12.4	11.8	19.7	20.0		
					n _{eto}				-	-	-	-		
09H60L	3.0	6000	8.0	1.90	M ₀				4.0	5.5	5.5	5.5	5.5	
					M _N				3.0	3.8	3.0	3.0	3.0	
					M _{0,max}				9.2	15.6	15.4	18.3	20.0	
					M _{max}				9.2	15.6	15.4	18.3	20.0	
					n _{eto}				-	-	-	-	-	
09L41L	4.5	4050	8.4	1.90	M ₀				5.3	7.0	7.5	7.5	7.5	7.5
					M _N				4.5	4.5	4.5	4.5	4.5	4.5
					M _{0,max}				11.9	15.5	20.9	25.8	29.7	31.9
					M _{max}				11.9	15.5	20.9	25.8	29.7	31.9
					n _{eto}				-	-	-	-	-	-
12D20L	5.5	1950	5.2	1.10	M ₀			5.9	6.4					
					M _N			5.3	5.5					
					M _{0,max}			14.9	17.7					
					M _{max}			14.9	17.7					
					n _{eto}			-	-					
12D41L	4.3	4050	8.8	1.80	M ₀				5.3	6.4	6.4	6.4		
					M _N				4.3	4.3	4.3	4.3		
					M _{0,max}				10.6	13.6	17.7	17.9		
					M _{max}				10.6	13.6	17.7	17.9		
					n _{eto}				-	-	-	-		
12H15L	10.0	1500	7.6	1.60	M ₀				11.4	11.4	10.0			
					M _N				10.0	10.0	11.4			
					M _{0,max}				25.8	29.0	29.0			
					M _{max}				25.8	29.0	29.0			
					n _{eto}				-	-	-			
12H30L	8.0	3000	10.5	2.50	M ₀				7.4	9.8	11.4			
					M _N				6.7	8.0	8.0			
					M _{0,max}				16.4	21.5	29.0			
					M _{max}				16.4	21.5	29.0			
					n _{eto}				-	-	-			
12L20L	13.5	1950	11.8	2.80	M ₀				10.6	14.0	15.0	15.0	15.0	
					M _N				10.1	13.3	13.5	13.5	13.5	
					M _{0,max}				24.4	31.5	41.8	50.5	56.0	
					M _{max}				24.4	31.5	41.8	50.5	56.0	
					n _{eto}				-	-	-	-	-	

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
12D17-	7.0	1650	3.0	1.20	M ₀	4.4	7.3									
					M _N	4.0	7.0									
					M _{0,max}	11.8	17.7									
					M _{max}	11.8	17.7									
					n _{eto}	-	-									
12D35-	6.0	3525	5.6	2.20	M ₀			5.9	7.5							
					M _N			5.4	6.0							
					M _{0,max}			14.7	17.7							
					M _{max}			14.7	17.7							
					n _{eto}			-	-							
12H14-	12.0	1350	4.1	1.70	M ₀		8.7	12.8								
					M _N		8.2	12.0								
					M _{0,max}		24.6	29.0								
					M _{max}		24.6	29.0								
					n _{eto}		-	-								
12H34-	10.5	3375	7.5	3.70	M ₀			7.0	12.8	12.8	12.8					
					M _N			6.6	10.5	10.5	10.5					
					M _{0,max}			20.1	25.8	29.0	29.0					
					M _{max}			20.1	25.8	29.0	29.0					
					n _{eto}			-	-	-	-					
12L17-	17.0	1650	6.7	2.90	M ₀			12.1	19.0	19.0	19.0					
					M _N			11.4	17.0	17.0	17.0					
					M _{0,max}			35.5	44.6	55.7	56.4					
					M _{max}			35.5	44.6	55.7	56.4					
					n _{eto}			-	-	-	-					
12L39-	14.0	3900	11.7	5.70	M ₀				10.6	15.3	19.0	19.0	19.0			
					M _N				9.5	13.9	14.0	14.0	14.0			
					M _{0,max}				24.4	31.6	41.9	50.8	56.4			
					M _{max}				24.4	31.6	41.9	50.8	56.4			
					n _{eto}				-	-	-	-	-			
14D14-	12.0	1350	5.4	1.70	M ₀			11.0	12.5							
					M _N			11.0	12.0							
					M _{0,max}			28.3	29.0							
					M _{max}			28.3	29.0							
					n _{eto}			-	-							
14D30-	10.5	3000	9.7	3.30	M ₀				9.6	12.5	12.5					
					M _N				9.5	10.5	10.5					
					M _{0,max}				20.2	25.6	29.0					
					M _{max}				20.2	25.6	29.0					
					n _{eto}				-	-	-					
14H12-	23.5	1200	8.3	3.00	M ₀			12.4	24.1	25.5	25.5					
					M _N			12.1	23.5	23.5	23.5					
					M _{0,max}			37.1	46.6	54.8	54.8					
					M _{max}			37.1	46.6	54.8	54.8					
					n _{eto}			-	-	-	-					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
14H28-	20.5	2775	15.0	6.00	M ₀					16.1	20.5	25.5	25.5			
					M _N					15.9	20.5	20.5	20.5			
					M _{0,max}					33.0	43.9	53.2	54.8			
					M _{max}					33.0	43.9	53.2	54.8			
					η _{eto}					-	-	-	-			
14L14-	30.5	1350	11.8	4.30	M ₀				20.5	30.0	34.5					
					M _N				20.5	30.0	30.5					
					M _{0,max}				48.0	61.4	77.1					
					M _{max}				48.0	61.4	77.1					
					η _{eto}				-	-	-					
14L30-	25.5	3000	20.8	8.00	M ₀						21.0	26.6	34.5	34.5	34.5	
					M _N						20.0	25.3	25.5	25.5	25.5	
					M _{0,max}						45.0	55.3	63.9	77.1	77.1	
					M _{max}						45.0	55.3	63.9	77.1	77.1	
					η _{eto}						-	-	-	-	-	
14P11-	42.0	1050	13.4	4.60	M ₀				26.7	36.4	43.5	43.5				
					M _N				24.4	36.4	42.0	42.0				
					M _{0,max}				56.1	71.7	93.3	105.1				
					M _{max}				56.1	71.7	93.3	105.1				
					η _{eto}				-	-	-	-				
14P26-	33.0	2625	21.9	9.10	M ₀						24.8	31.4	43.5	43.5	43.5	
					M _N						24.6	31.0	33.0	33.0	33.0	
					M _{0,max}						52.5	64.6	74.7	92.2	105.1	
					M _{max}						52.5	64.6	74.7	92.2	105.1	
					η _{eto}						-	-	-	-	-	
19F12-	38.0	1200	11.3	4.80	M ₀				29.9	39.5	41.5					
					M _N				29.3	38.0	38.0					
					M _{0,max}				62.1	78.9	86.0					
					M _{max}				62.1	78.9	86.0					
					η _{eto}				-	-	-					
19F29-	32.5	2850	20.1	9.70	M ₀						26.3	34.9	41.5	41.5		
					M _N						26.0	32.5	32.5	32.5		
					M _{0,max}						56.6	70.2	81.6	86.0		
					M _{max}						56.6	70.2	81.6	86.0		
					η _{eto}						-	-	-	-		
19J12-	62.5	1200	18.3	7.90	M ₀						56.6	70.5				
					M _N						55.7	62.5				
					M _{0,max}						114.4	129.0				
					M _{max}						114.4	129.0				
					η _{eto}						-	-				
19J29-	50.5	2850	31.0	15.10	M ₀								49.2	66.7	70.5	
					M _N								47.9	50.5	50.5	
					M _{0,max}								88.9	112.9	129.0	
					M _{max}								88.9	112.9	129.0	
					η _{eto}								-	-	-	

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
					I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
MCS	M _N	n _N	I _N	P _N	I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
19P12-	72.0	1200	21.3	9.00	M ₀							79.1	86.0	86.0		
					M _N							69.6	72.0	72.0		
					M _{0,max}							159.9	186.6	190.0		
					M _{max}							159.9	186.6	190.0		
					n _{eto}							-	-	-		
19P29-	53.0	2850	29.5	15.80	M ₀								56.5	73.9	86.0	86.0
					M _N								52.8	53.0	53.0	53.0
					M _{0,max}								98.5	126.6	152.5	187.2
					M _{max}								98.5	126.6	152.5	187.2
					n _{eto}								-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
					I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
06C41-	0.6	4050	1.3	0.25	M ₀	0.8	0.8	0.8	0.8	0.8		
					M _N	0.6	0.6	0.6	0.6	0.6		
					M _{0,max}	1.4	1.7	2.3	2.4	2.4		
					M _{max}	1.4	1.7	2.3	2.4	2.4		
					η _{eto}	-	-	-	-	-		
06C60-	0.5	6000	2.4	0.31	M ₀			0.8	0.8	0.8	0.8	0.8
					M _N			0.5	0.5	0.5	0.5	0.5
					M _{0,max}			1.3	1.6	2.0	2.4	2.4
					M _{max}			1.3	1.6	2.0	2.4	2.4
					η _{eto}			-	-	-	-	-
06F41-	1.2	4050	1.5	0.51	M ₀	1.3	1.5	1.5	1.5	1.5		
					M _N	1.0	1.2	1.2	1.2	1.2		
					M _{0,max}	2.3	3.2	4.3	4.4	4.4		
					M _{max}	2.3	3.2	4.3	4.4	4.4		
					η _{eto}	-	-	-	-	-		
06F60-	0.9	6000	2.5	0.57	M ₀			1.2	1.5	1.5	1.5	1.5
					M _N			0.9	0.9	0.9	0.9	0.9
					M _{0,max}			2.1	3.3	4.0	4.4	4.4
					M _{max}			2.1	3.3	4.0	4.4	4.4
					η _{eto}			-	-	-	-	-
06I41-	1.5	4050	1.6	0.64	M ₀	1.6	2.0	2.0	2.0	2.0		
					M _N	1.2	1.5	1.5	1.5	1.5		
					M _{0,max}	2.9	4.0	5.3	6.2	6.2		
					M _{max}	2.9	4.0	5.3	6.2	6.2		
					η _{eto}	-	-	-	-	-		
06I60-	1.2	6000	2.9	0.75	M ₀				2.0	2.0	2.0	2.0
					M _N				1.2	1.2	1.2	1.2
					M _{0,max}				3.6	4.4	5.7	5.7
					M _{max}				3.6	4.4	5.7	5.7
					η _{eto}				-	-	-	-
09D41-	2.3	4050	2.3	1.00	M ₀		2.2	3.1	3.3	3.3	3.3	3.3
					M _N		1.7	2.3	2.3	2.3	2.3	2.3
					M _{0,max}		4.0	5.3	6.7	8.2	9.4	9.4
					M _{max}		4.0	5.3	6.7	8.2	9.4	9.4
					η _{eto}		-	-	-	-	-	-
09D60-	1.8	6000	3.8	1.10	M ₀				2.0	2.4	3.3	3.3
					M _N				1.5	1.8	1.8	1.8
					M _{0,max}				3.5	4.2	6.3	7.8
					M _{max}				3.5	4.2	6.3	7.8
					η _{eto}				-	-	-	-
09F38-	3.1	3750	2.5	1.20	M ₀			3.4	4.2	4.2	4.2	4.2
					M _N			3.0	3.1	3.1	3.1	3.1
					M _{0,max}			6.6	8.4	10.2	12.0	12.0
					M _{max}			6.6	8.4	10.2	12.0	12.0
					η _{eto}			-	-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC					
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I _N					
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I _{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I _{max}	P _N	I _N	n _N	M _N	MCS
								M ₀					
								M _N	0.25	1.3	4050	0.6	06C41-
								M _{0,max}					
								M _{max}					
								n _{eto}					
								M ₀	0.31	2.4	6000	0.5	06C60-
								M _N					
								M _{0,max}					
								M _{max}					
								n _{eto}	0.51	1.5	4050	1.2	06F41-
								M ₀					
								M _N					
								M _{0,max}					
								M _{max}	0.57	2.5	6000	0.9	06F60-
								n _{eto}					
								M ₀					
								M _N					
								M _{0,max}	0.64	1.6	4050	1.5	06I41-
								M _{max}					
								n _{eto}					
								M ₀					
								M _N	0.75	2.9	6000	1.2	06I60-
								M _{0,max}					
								M _{max}					
								n _{eto}					
								M ₀	1.00	2.3	4050	2.3	09D41-
								M _N					
								M _{0,max}					
								M _{max}					
								n _{eto}	1.10	3.8	6000	1.8	09D60-
3.3	3.3							M ₀					
1.8	1.8							M _N					
9.1	9.3							M _{0,max}					
9.1	9.3							M _{max}	1.20	2.5	3750	3.1	09F38-
-	-							n _{eto}					
								M ₀					
								M _N					
								M _{0,max}					
								M _{max}					
								n _{eto}					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
					I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
09F60-	2.4	6000	4.5	1.50	M ₀						4.2	4.2
					M _N						2.4	2.4
					M _{0,max}						7.8	9.6
					M _{max}						7.8	9.6
					η _{eto}						-	-
09H41-	3.8	4050	3.4	1.60	M ₀				4.7	5.0	5.5	5.5
					M _N				3.6	3.8	3.8	3.8
					M _{0,max}				8.1	9.9	14.0	17.4
					M _{max}				8.1	9.9	14.0	17.4
					η _{eto}				-	-	-	-
09H60-	3.0	6000	6.0	1.90	M ₀						4.4	4.5
					M _N						3.0	3.0
					M _{0,max}						7.5	9.3
					M _{max}						7.5	9.3
					η _{eto}						-	-
09L41-	4.5	4050	4.2	1.90	M ₀				3.9	4.7	7.5	7.5
					M _N				3.4	4.2	4.5	4.5
					M _{0,max}				7.3	8.9	13.1	16.3
					M _{max}				7.3	8.9	13.1	16.3
					η _{eto}				-	-	-	-
09L51-	3.6	5100	6.9	1.90	M ₀							4.2
					M _N							3.6
					M _{0,max}							8.3
					M _{max}							8.3
					η _{eto}							-
12D20-	5.5	1950	2.6	1.10	M ₀			5.7	6.4	6.4	6.4	6.4
					M _N			5.1	5.5	5.5	5.5	5.5
					M _{0,max}			9.6	12.6	15.3	17.7	17.7
					M _{max}			9.6	12.6	15.3	17.7	17.7
					η _{eto}			-	-	-	-	-
12D41-	4.3	4050	4.5	1.80	M ₀				3.8	4.6	6.4	6.4
					M _N				3.0	3.7	4.3	4.3
					M _{0,max}				6.4	7.8	11.4	14.0
					M _{max}				6.4	7.8	11.4	14.0
					η _{eto}				-	-	-	-
12H15-	10.0	1500	3.8	1.60	M ₀				9.2	10.9	11.4	11.4
					M _N				8.4	10.0	10.0	10.0
					M _{0,max}				16.4	20.0	29.0	29.0
					M _{max}				16.4	20.0	29.0	29.0
					η _{eto}				-	-	-	-
12H35-	7.5	3525	5.7	2.80	M ₀						9.8	9.8
					M _N						7.5	7.5
					M _{0,max}						15.2	18.8
					M _{max}						15.2	18.8
					η _{eto}						-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC					
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I _N					
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I _{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I _{max}	P _N	I _N	n _N	M _N	MCS
4.2	4.2							M ₀					
2.4	2.4							M _N	1.50	4.5	6000	2.4	09F60-
11.1	11.4							M _{0,max}					
11.1	11.4							M _{max}					
-	-							n _{eto}					
5.5	5.5							M ₀	1.60	3.4	4050	3.8	09H41-
3.8	3.8							M _N					
19.6	20.1							M _{0,max}					
19.6	20.1							M _{max}					
-	-							n _{eto}	1.90	6.0	6000	3.0	09H60-
5.5	5.5							M ₀					
3.0	3.0							M _N					
11.4	11.7							M _{0,max}					
11.4	11.7							M _{max}	1.90	4.2	4050	4.5	09L41-
-	-							n _{eto}					
7.5	7.5							M ₀					
4.5	4.5							M _N					
20.3	20.8							M _{0,max}	1.90	6.9	5100	3.6	09L51-
20.3	20.8							M _{max}					
-	-							n _{eto}					
7.5	7.5	7.5	7.5					M ₀					
3.6	3.6	3.6	3.6					M _N	1.10	2.6	1950	5.5	12D20-
10.8	19.1	19.1	19.1					M _{0,max}					
10.8	19.1	19.1	19.1					M _{max}					
-	-	-	-					n _{eto}					
								M ₀	1.80	4.5	4050	4.3	12D41-
								M _N					
								M _{0,max}					
								M _{max}					
								n _{eto}	1.60	3.8	1500	10.0	12H15-
6.4	6.4							M ₀					
4.3	4.3							M _N					
16.9	17.3							M _{0,max}					
16.9	17.3							M _{max}	2.80	5.7	3525	7.5	12H35-
-	-							n _{eto}					
11.4	11.4							M ₀					
10.0	10.0							M _N					
28.3	29.0							M _{0,max}	2.80	5.7	3525	7.5	12H35-
28.3	29.0							M _{max}					
-	-							n _{eto}					
11.4	11.4							M ₀					
7.5	7.5							M _N	2.80	5.7	3525	7.5	12H35-
23.5	24.1							M _{0,max}					
23.5	24.1							M _{max}					
-	-							n _{eto}					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
					I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
12L20-	13.5	1950	5.9	2.80	M ₀						15.0	15.0
					M _N						13.5	13.5
					M _{0,max}						27.4	33.9
					M _{max}						27.4	33.9
					n _{eto}						-	-
12L41-	11.0	4050	10.2	4.70	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14D15-	9.2	1500	4.5	1.45	M ₀				7.0	8.5	11.0	11.0
					M _N				6.6	8.0	9.2	9.2
					M _{0,max}				13.1	16.0	22.7	28.1
					M _{max}				13.1	16.0	22.7	28.1
					n _{eto}				-	-	-	-
14D36-	7.5	3600	7.5	2.80	M ₀							8.0
					M _N							7.3
					M _{0,max}							15.2
					M _{max}							15.2
					n _{eto}							-
14H15-	16.0	1500	6.6	2.50	M ₀							17.3
					M _N							16.0
					M _{0,max}							35.3
					M _{max}							35.3
					n _{eto}							-
14H32-	14.0	3225	11.9	4.70	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14L15-	23.0	1500	9.7	3.60	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14L32-	17.2	3225	15.0	5.80	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14P14-	30.0	1350	10.8	4.20	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC					
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I _N					
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I _{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I _{max}	P _N	I _N	n _N	M _N	MCS
15.0	15.0							M ₀					
13.5	13.5							M _N	2.80	5.9	1950	13.5	12L20-
40.8	41.9							M _{0,max}					
40.8	41.9							M _{max}					
-	-							n _{eto}					
14.0	15.0	15.0	15.0	15.0				M ₀	4.70	10.2	4050	11.0	12L41-
10.2	11.0	11.0	11.0	11.0				M _N					
22.2	30.4	35.5	35.5	35.5				M _{0,max}					
22.2	30.4	49.6	49.6	49.6				M _{max}					
-	-	-	-	-				n _{eto}	1.45	4.5	1500	9.2	14D15-
11.0	11.0							M ₀					
9.2	9.2							M _N					
28.3	29.0							M _{0,max}					
28.3	29.0							M _{max}	2.80	7.5	3600	7.5	14D36-
-	-							n _{eto}					
11.0	11.0	11.0	11.0					M ₀					
7.5	7.5	7.5	7.5					M _N					
18.5	25.3	29.0	29.0					M _{0,max}	2.50	6.6	1500	16.0	14H15-
18.5	22.2	22.2	22.2					M _{max}					
-	-	-	-					n _{eto}					
21.0	21.0							M ₀					
16.0	16.0							M _N	4.70	11.9	3225	14.0	14H32-
42.8	43.9							M _{0,max}					
42.8	43.9							M _{max}					
-	-							n _{eto}					
12.9	16.2	21.0	21.0	21.0				M ₀	3.60	9.7	1500	23.0	14L15-
11.2	14.0	14.0	14.0	14.0				M _N					
23.2	31.7	37.1	37.1	37.1				M _{0,max}					
23.2	31.7	51.9	51.9	51.9				M _{max}					
-	-	-	-	-				n _{eto}	5.80	15.0	3225	17.2	14L32-
27.4	28.0	28.0	28.0					M ₀					
22.5	23.0	23.0	23.0					M _N					
43.8	52.9	52.9	52.9					M _{0,max}					
43.8	60.0	73.8	73.8					M _{max}	4.20	10.8	1350	30.0	14P14-
-	-	-	-					n _{eto}					
	15.2	27.4	27.4	28.0	28.0	28.0		M ₀					
	14.9	17.2	17.2	17.2	17.2	17.2		M _N					
	31.3	39.7	52.9	52.9	52.9	52.9		M _{0,max}	4.20	10.8	1350	30.0	14P14-
	31.3	57.6	73.9	73.9	73.9	73.9		M _{max}					
-	-	-	-	-	-	-		n _{eto}					
32.5	37.0	37.0	37.0	37.0				M ₀					
26.4	30.0	30.0	30.0	30.0				M _N					
51.2	70.0	80.0	80.0	80.0				M _{0,max}					
51.2	70.0	105.1	105.1	105.1				M _{max}					
-	-	-	-	-				n _{eto}					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
					I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
14P32-	21.0	3225	15.6	7.10	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19F14-	27.0	1425	8.6	4.00	M ₀							23.6
					M _N							22.9
					M _{0,max}							45.9
					M _{max}							45.9
					n _{eto}							-
19F30-	21.0	3000	14.0	6.60	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19J14-	40.0	1425	12.3	6.00	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19J30-	29.0	3000	18.5	9.10	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19P14-	51.0	1350	14.3	7.20	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19P30-	32.0	3000	19.0	10.00	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC					
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I _N					
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I _{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I _{max}					
	19.8	35.8	35.8	37.0	37.0	37.0		M ₀					
	17.5	21.0	21.0	21.0	21.0	21.0		M _N					
	36.5	46.3	61.8	61.8	61.8	61.8		M _{0,max}					
	36.5	67.3	86.4	86.4	86.4	86.4		M _{max}					
	-	-	-	-	-	-		n _{eto}					
32.0	32.0	32.0	32.0					M ₀					
27.0	27.0	27.0	27.0					M _N					
56.7	68.3	68.3	68.3					M _{0,max}					
56.7	77.6	86.0	86.0					M _{max}					
-	-	-	-					n _{eto}					
	21.0	32.0	32.0	32.0				M ₀					
	19.5	21.0	21.0	21.0				M _N					
	47.2	47.2	47.2	47.2				M _{0,max}					
	38.9	68.3	68.3	68.3				M _{max}					
	-	-	-	-				n _{eto}					
	43.6	51.0	51.0	51.0				M ₀					
	40.0	40.0	40.0	40.0				M _N					
	81.1	96.0	96.0	96.0				M _{0,max}					
	81.1	129.0	129.0	129.0				M _{max}					
	-	-	-	-				n _{eto}					
			39.3	51.0	51.0	51.0	51.0	M ₀					
			29.0	29.0	29.0	29.0	29.0	M _N					
			73.6	79.5	79.5	79.5	79.5	M _{0,max}					
			110.4	127.6	127.6	127.6	127.6	M _{max}					
			-	-	-	-	-	n _{eto}					
	47.5	64.0	64.0	64.0				M ₀					
	46.4	51.0	51.0	51.0				M _N					
	92.7	106.7	106.7	106.7				M _{0,max}					
	92.7	155.5	155.5	155.5				M _{max}					
	-	-	-	-				n _{eto}					
			43.1	58.7	64.0	64.0	64.0	M ₀					
			32.0	32.0	32.0	32.0	32.0	M _N					
			79.2	87.6	87.6	87.6	87.6	M _{0,max}					
			118.6	144.3	144.3	144.3	144.3	M _{max}					
			-	-	-	-	-	n _{eto}					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□1124	□1524	□2224	□3024	□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034
					I _N	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0
					I _{0,max}	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5
MCS	M _N	n _N	I _N	P _N	I _{max}	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0
12D17-	7.0	1650	3.0	1.20	M ₀	7.5	7.5	7.5	7.5								
					M _N	7.0	7.0	7.0	7.0								
					M _{0,max}	12.6	15.3	17.7	17.7								
					M _{max}	12.6	15.3	17.7	17.7								
					η _{eto}	-	-	-	-								
12D35-	6.0	3525	5.6	2.20	M ₀		4.6	7.5	7.5	7.5	7.5						
					M _N		3.7	6.0	6.0	6.0	6.0						
					M _{0,max}		7.8	11.4	14.0	16.9	17.3						
					M _{max}		7.8	11.4	14.0	16.9	17.3						
					η _{eto}		-	-	-	-	-						
12H14-	12.0	1350	4.1	1.70	M ₀	8.9	10.9	12.8	12.8	12.8	12.8						
					M _N	8.5	10.3	12.0	12.0	12.0	12.0						
					M _{0,max}	16.4	20.0	29.0	29.0	28.3	29.0						
					M _{max}	16.4	20.0	29.0	29.0	28.3	29.0						
					η _{eto}	-	-	-	-	-	-						
12H34-	10.5	3375	7.5	3.70	M ₀				10.2	12.8	12.8						
					M _N				10.0	10.5	10.5						
					M _{0,max}				18.8	23.5	24.1						
					M _{max}				18.8	23.5	24.1						
					η _{eto}				-	-	-						
12L17-	17.0	1650	6.7	2.90	M ₀				18.5	19.0	19.0						
					M _N				17.0	17.0	17.0						
					M _{0,max}				33.9	40.8	41.9						
					M _{max}				33.9	40.8	41.9						
					η _{eto}				-	-	-						
12L39-	14.0	3900	11.7	5.70	M ₀					17.2	17.2	19.0	19.0	19.0			
					M _N					14.0	14.0	14.0	14.0	14.0			
					M _{0,max}					22.2	30.4	35.5	35.5	35.5			
					M _{max}					22.2	30.4	49.6	49.6	49.6			
					η _{eto}					-	-	-	-	-			
14D14-	12.0	1350	5.4	1.70	M ₀		8.5	12.5	12.5	12.5	12.5						
					M _N		8.0	12.0	12.0	12.0	12.0						
					M _{0,max}		16.0	22.7	28.1	28.3	29.0						
					M _{max}		16.0	22.7	28.1	28.3	29.0						
					η _{eto}		-	-	-	-	-						
14D30-	10.5	3000	9.7	3.30	M ₀				7.7	12.2	12.5	12.5	12.5				
					M _N				7.0	9.8	10.0	10.0	10.0				
					M _{0,max}				15.2	18.5	25.3	29.0	29.0				
					M _{max}				15.2	18.5	22.2	22.2	22.2				
					η _{eto}				-	-	-	-	-				
14H12-	23.5	1200	8.3	3.00	M ₀				18.0	25.5	25.5						
					M _N				17.9	23.5	23.5						
					M _{0,max}				35.3	42.8	43.9						
					M _{max}				35.3	42.8	43.9						
					η _{eto}				-	-	-						

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□1124	□1524	□2224	□3024	□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034
					I _N	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0
					I _{0,max}	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5
MCS	M _N	n _N	I _N	P _N	I _{max}	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0
14H28-	20.5	2775	15.0	6.00	M ₀						16.2	25.5	25.5	25.5			
					M _N						16.1	20.5	20.5	20.5			
					M _{0,max}						31.7	37.1	37.1	37.1			
					M _{max}						31.7	51.9	51.9	51.9			
					η _{eto}						-	-	-	-			
14L14-	30.5	1350	11.8	4.30	M ₀					26.9	33.4	34.5	34.5				
					M _N					24.6	30.5	30.5	30.5				
					M _{0,max}					43.8	52.9	52.9	52.9				
					M _{max}					43.8	60.0	73.8	73.8				
					η _{eto}					-	-	-	-				
14L30-	25.5	3000	20.8	8.00	M ₀								27.4	34.5	34.5	34.5	
					M _N								25.5	25.5	25.5	25.5	
					M _{0,max}								52.9	52.9	52.9	52.9	
					M _{max}								73.9	73.9	73.9	73.9	
					η _{eto}								-	-	-	-	
14P11-	42.0	1050	13.4	4.60	M ₀						38.9	43.5	43.5	43.5			
					M _N						38.8	42.0	42.0	42.0			
					M _{0,max}						70.0	80.0	80.0	80.0			
					M _{max}						70.0	105.1	105.1	105.1			
					η _{eto}						-	-	-	-			
14P26-	33.0	2625	21.9	9.10	M ₀								35.8	43.5	43.5	43.5	
					M _N								33.0	33.0	33.0	33.0	
					M _{0,max}								66.0	86.4	86.4	86.4	
					M _{max}								86.4	86.4	86.4	86.4	
					η _{eto}								-	-	-	-	
19F12-	38.0	1200	11.3	4.80	M ₀				23.6	34.9	41.5	41.5	41.5				
					M _N				22.9	31.9	38.0	38.0	38.0				
					M _{0,max}				45.9	56.7	68.3	68.3	68.3				
					M _{max}				45.9	56.7	77.6	86.0	86.0				
					η _{eto}				-	-	-	-	-				
19F29-	32.5	2850	20.1	9.70	M ₀								39.9	41.5			
					M _N								32.5	32.5			
					M _{0,max}								47.2	47.2			
					M _{max}								68.3	68.3			
					η _{eto}								-	-			
19J12-	62.5	1200	18.3	7.90	M ₀						43.6		70.5	70.5			
					M _N						43.4		62.5	62.5			
					M _{0,max}						81.1		96.0	96.0			
					M _{max}						81.1		129.0	129.0			
					η _{eto}						-		-	-			
19J29-	50.5	2850	31.0	15.10	M ₀									55.5	70.5	70.5	70.5
					M _N									50.5	50.5	50.5	50.5
					M _{0,max}									87.6	87.6	87.6	87.6
					M _{max}									127.6	127.6	127.6	127.6
					η _{eto}									-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□1124	□1524	□2224	□3024	□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034
					I _N	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0
					I _{0,max}	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5
MCS	M _N	n _N	I _N	P _N	I _{max}	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0
19P12-	72.0	1200	21.3	9.00	M ₀						47.5		86.0	86.0			
					M _N						46.4		72.0	72.0			
					M _{0,max}						92.7		106.7	106.7			
					M _{max}						92.7		155.5	155.5			
					n _{eto}						-		-	-			
19P29-	53.0	2850	29.5	15.80	M ₀									58.7	86.0	86.0	86.0
					M _N									53.0	53.0	53.0	53.0
					M _{0,max}									87.6	87.6	87.6	87.6
					M _{max}									144.3	144.3	144.3	144.3
					n _{eto}									-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
06C41-	0.6	4050	1.3	0.25	M ₀	0.8					
					M _N	0.6					
					M _{0,max}	1.2					
					M _{max}	1.9					
					n _{eto}	2747					
06C60-	0.5	6000	2.4	0.31	M ₀	0.6	0.8				
					M _N	0.4	0.5				
					M _{0,max}	0.6	1.2				
					M _{max}	1.0	1.9				
					n _{eto}	7000	6814				
06F41-	1.2	4050	1.5	0.51	M ₀	1.5					
					M _N	1.2					
					M _{0,max}	2.0					
					M _{max}	3.6					
					n _{eto}	1902					
06F60-	0.9	6000	2.5	0.57	M ₀	1.0	1.5				
					M _N	0.7	0.9				
					M _{0,max}	1.0	2.0				
					M _{max}	1.8	3.7				
					n _{eto}	7000	4602				
06I41-	1.5	4050	1.6	0.64	M ₀	2.0	2.0				
					M _N	1.5	1.5				
					M _{0,max}	2.6	5.0				
					M _{max}	4.4	6.2				
					n _{eto}	1898	1384				
06I60-	1.2	6000	2.9	0.75	M ₀	1.2	2.0	2.0			
					M _N	0.8	1.2	1.2			
					M _{0,max}	1.3	2.6	5.2			
					M _{max}	2.2	4.7	6.2			
					n _{eto}	6407	4200	3157			
09D41-	2.3	4050	2.3	1.00	M ₀		3.3	3.3			
					M _N		2.3	2.3			
					M _{0,max}		5.0	8.8			
					M _{max}		8.0	9.4			
					n _{eto}		2361	2008			
09D60-	1.8	6000	3.8	1.10	M ₀		2.5	3.3			
					M _N		1.8	1.8			
					M _{0,max}		2.5	4.9			
					M _{max}		4.4	8.0			
					n _{eto}		7000	5217			
09F38-	3.1	3750	2.5	1.20	M ₀		4.2	4.2			
					M _N		3.1	3.1			
					M _{0,max}		6.2	10.8			
					M _{max}		9.8	14.9			
					n _{eto}		2589	1737			

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
09F60-	2.4	6000	4.5	1.50	M ₀		2.8	4.2	4.2		
					M _N		2.1	2.4	2.4		
					M _{0,max}		3.2	6.1	10.8		
					M _{max}		5.4	9.8	14.9		
					n _{eto}		7000	5906	3715		
09H41-	3.8	4050	3.4	1.60	M ₀		5.2	5.5			
					M _N		3.8	3.8			
					M _{0,max}		5.9	11.1			
					M _{max}		9.9	17.5			
					n _{eto}		3675	2231			
09H60-	3.0	6000	6.0	1.90	M ₀			5.2	5.5	5.5	
					M _N			3.0	3.0	3.0	
					M _{0,max}			5.9	11.0	15.5	
					M _{max}			9.9	17.5	20.4	
					n _{eto}			7000	5061	4375	
09L41-	4.5	4050	4.2	1.90	M ₀		4.8	7.5	7.5		
					M _N		4.3	4.5	4.5		
					M _{0,max}		5.2	10.3	19.5		
					M _{max}		9.1	17.4	31.9		
					n _{eto}		4450	3188	1878		
09L51-	3.6	5100	6.9	1.90	M ₀			4.8	7.5	7.5	7.5
					M _N			3.6	3.6	3.6	3.6
					M _{0,max}			5.2	10.3	15.1	19.6
					M _{max}			9.1	17.5	25.1	31.9
					n _{eto}			7000	7000	5647	4076
12D20-	5.5	1950	2.6	1.10	M ₀	4.7	6.4	6.4			
					M _N	4.2	5.5	5.5			
					M _{0,max}	4.6	9.1	17.0			
					M _{max}	8.0	15.3	17.7			
					n _{eto}	1730	1089	919			
12D41-	4.3	4050	4.5	1.80	M ₀		4.7	6.4			
					M _N		3.8	4.3			
					M _{0,max}		4.6	8.8			
					M _{max}		7.8	14.7			
					n _{eto}		3902	2433			
12H15-	10.0	1500	3.8	1.60	M ₀		11.2	11.4			
					M _N		10.0	10.0			
					M _{0,max}		11.9	22.6			
					M _{max}		20.1	29.0			
					n _{eto}		1220	918			
12H35-	7.5	3525	5.7	2.80	M ₀		5.6	11.2	11.4		
					M _N		5.3	7.5	7.5		
					M _{0,max}		6.0	11.8	22.5		
					M _{max}		10.4	20.1	29.0		
					n _{eto}		3850	2838	2092		

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
12L20-	13.5	1950	5.9	2.80	M ₀			15.0	15.0		
					M _N			13.5	13.5		
					M _{0,max}			21.4	39.4		
					M _{max}			35.5	56.4		
					n _{eto}			1324	863		
12L41-	11.0	4050	10.2	4.70	M ₀			9.7	15.0	15.0	15.0
					M _N			8.6	11.0	11.0	11.0
					M _{0,max}			10.8	21.3	30.8	39.5
					M _{max}			19.0	35.5	49.6	56.4
					n _{eto}			4450	3013	2236	1907
14D15-	9.2	1500	4.5	1.45	M ₀		8.8	11.0			
					M _N		8.2	9.2			
					M _{0,max}		9.6	17.9			
					M _{max}		15.9	28.3			
					n _{eto}		1141	689			
14D36-	7.5	3600	7.5	2.80	M ₀			8.8	11.0		
					M _N			7.5	7.5		
					M _{0,max}			9.5	17.8		
					M _{max}			15.9	28.3		
					n _{eto}			2496	1614		
14H15-	16.0	1500	6.6	2.50	M ₀			19.8	21.0		
					M _N			16.0	16.0		
					M _{0,max}			22.3	41.2		
					M _{max}			37.1	54.8		
					n _{eto}			920	667		
14H32-	14.0	3225	11.9	4.70	M ₀				15.8	21.0	21.0
					M _N				14.0	14.0	14.0
					M _{0,max}				22.2	32.1	41.3
					M _{max}				37.1	51.9	54.8
					n _{eto}				1953	1471	1409
14L15-	23.0	1500	9.7	3.60	M ₀			18.7	28.0	28.0	
					M _N			19.0	23.0	23.0	
					M _{0,max}			21.9	42.1	59.9	
					M _{max}			37.6	68.5	77.1	
					n _{eto}			1284	828	767	
14L32-	17.2	3225	15.0	5.80	M ₀				14.8	19.8	23.3
					M _N				14.6	17.2	17.2
					M _{0,max}				21.8	32.4	42.2
					M _{max}				37.6	53.9	68.5
					n _{eto}				2801	2096	1757
14P14-	30.0	1350	10.8	4.20	M ₀				37.0	37.0	37.0
					M _N				30.0	30.0	30.0
					M _{0,max}				49.1	70.0	88.4
					M _{max}				80.0	105.1	105.1
					n _{eto}				710	573	573

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
14P32-	21.0	3225	15.6	7.10	M ₀				19.3	25.9	30.5
					M _N				17.1	21.0	21.0
					M _{0,max}				25.4	37.9	49.3
					M _{max}				43.9	63.0	80.0
					n _{eto}				2469	1829	1495
19F14-	27.0	1425	8.6	4.00	M ₀			25.9	32.0		
					M _N			25.1	27.0		
					M _{0,max}			28.6	54.6		
					M _{max}			48.9	86.0		
					n _{eto}			1204	746		
19F30-	21.0	3000	14.0	6.60	M ₀				20.5	27.5	32.0
					M _N				19.0	21.0	21.0
					M _{0,max}				27.2	40.5	53.0
					M _{max}				47.2	68.3	86.0
					n _{eto}				2774	2033	1653
19J14-	40.0	1425	12.3	6.00	M ₀				42.6	51.0	
					M _N				40.0	40.0	
					M _{0,max}				58.9	82.8	
					M _{max}				96.0	129.0	
					n _{eto}				1063	839	
19J30-	29.0	3000	18.5	9.10	M ₀					28.4	33.4
					M _N					26.6	29.0
					M _{0,max}					42.6	56.9
					M _{max}					73.8	96.0
					n _{eto}					2850	2323
19P14-	51.0	1350	14.3	7.20	M ₀				46.4	62.2	64.0
					M _N				45.3	51.0	51.0
					M _{0,max}				64.6	91.5	120.1
					M _{max}				106.7	155.5	190.0
					n _{eto}				1227	996	870
19P30-	32.0	3000	19.0	10.00	M ₀					31.2	36.7
					M _N					28.6	32.0
					M _{0,max}					45.8	61.1
					M _{max}					81.2	106.7
					n _{eto}					2938	2715

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
06C41L	0.6	4050	2.6	0.25	M ₀	0.6	0.8				
					M _N	0.5	0.6				
					M _{0,max}	0.6	1.1				
					M _{max}	1.0	1.9				
					n _{eto}	6298	2835				
06C60L	0.5	6000	4.0	0.31	M ₀		0.7	0.8			
					M _N		0.5	0.5			
					M _{0,max}		0.7	1.3			
					M _{max}		1.2	2.2			
					n _{eto}		7000	1149			
06F41L	1.2	4050	2.9	0.51	M ₀	1.0	1.5	1.5			
					M _N	0.8	1.2	1.2			
					M _{0,max}	1.2	2.1	3.9			
					M _{max}	1.9	3.5	4.4			
					n _{eto}	3838	2118	2831			
06F60L	0.9	6000	3.8	0.57	M ₀		1.5	1.5			
					M _N		0.9	0.9			
					M _{0,max}		1.5	2.9			
					M _{max}		2.6	4.3			
					n _{eto}		6138	3182			
06I41L	1.5	4050	3.2	0.64	M ₀	1.3	2.0	2.0			
					M _N	1.0	1.5	1.5			
					M _{0,max}	1.4	2.8	5.0			
					M _{max}	2.4	4.4	6.2			
					n _{eto}	3549	1947	2831			
06I60L	1.2	6000	3.8	0.75	M ₀		1.9	2.0			
					M _N		1.2	1.2			
					M _{0,max}		2.1	4.1			
					M _{max}		3.6	6.2			
					n _{eto}		3417	1149			
09D41L	2.3	4050	4.6	1.00	M ₀		2.5	3.3	3.3		
					M _N		2.0	2.3	2.3		
					M _{0,max}		2.5	4.9	8.8		
					M _{max}		4.4	8.0	9.5		
					n _{eto}		4091	2547	2170		
09D60L	1.8	6000	7.0	1.10	M ₀			2.6	3.3	3.3	
					M _N			1.8	1.8	1.8	
					M _{0,max}			2.6	5.0	7.1	
					M _{max}			4.5	8.1	9.5	
					n _{eto}			7000	5373	4626	
09F38L	3.1	3750	5.0	1.20	M ₀			4.2	4.2		
					M _N			3.1	3.1		
					M _{0,max}			6.1	10.8		
					M _{max}			9.8	15.0		
					n _{eto}			1149	1951		

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
09F60L	2.4	6000	7.9	1.50	M ₀			3.2	4.2	4.2	4.2
					M _N			2.4	2.4	2.4	2.4
					M _{0,max}			3.6	6.8	9.6	11.9
					M _{max}			6.1	10.9	14.3	15.0
					n _{eto}			6985	3448	2612	2397
09H41L	3.8	4050	6.8	1.60	M ₀			5.2	5.5	5.5	
					M _N			3.8	3.8	3.8	
					M _{0,max}			5.9	11.0	15.3	
					M _{max}			9.9	17.2	20.0	
					n _{eto}			1149	2138	1852	
09H60L	3.0	6000	8.0	1.90	M ₀			3.7	5.5	5.5	5.5
					M _N			3.0	3.0	3.0	3.0
					M _{0,max}			4.1	8.0	11.5	14.5
					M _{max}			7.2	13.2	17.9	20.0
					n _{eto}			1149	4081	2984	2695
09L41L	4.5	4050	8.4	1.90	M ₀			4.8	7.5	7.5	7.5
					M _N			4.3	4.5	4.5	4.5
					M _{0,max}			5.2	10.3	15.1	19.6
					M _{max}			9.1	17.5	25.1	31.9
					n _{eto}			4562	3243	2497	1909
12D20L	5.5	1950	5.2	1.10	M ₀		4.7	6.4			
					M _N		4.2	5.5			
					M _{0,max}		4.6	9.0			
					M _{max}		8.0	14.9			
					n _{eto}		1878	1181			
12D41L	4.3	4050	8.8	1.80	M ₀			4.8	6.4	6.4	
					M _N			3.9	4.3	4.3	
					M _{0,max}			4.6	9.2	13.3	
					M _{max}			8.1	15.2	17.9	
					n _{eto}			4102	2535	2187	
12H15L	10.0	1500	7.6	1.60	M ₀			11.2	11.4		
					M _N			10.0	10.0		
					M _{0,max}			11.8	22.5		
					M _{max}			20.1	29.0		
					n _{eto}			1098	827		
12H30L	8.0	3000	10.5	2.50	M ₀			6.8	10.7	11.4	
					M _N			6.1	8.0	8.0	
					M _{0,max}			7.2	14.3	20.9	
					M _{max}			12.7	24.3	29.0	
					n _{eto}			2831	1849	1591	
12L20L	13.5	1950	11.8	2.80	M ₀				15.0	15.0	15.0
					M _N				13.5	13.5	13.5
					M _{0,max}				21.3	30.7	39.4
					M _{max}				35.4	49.3	56.0
					n _{eto}				1307	1004	866

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
12D17-	7.0	1650	3.0	1.20	M ₀	4.7	7.5	7.5			
					M _N	4.2	7.0	7.0			
					M _{0,max}	4.6	9.1	17.0			
					M _{max}	8.0	15.3	17.7			
					n _{eto}	1730	1089	919			
12D35-	6.0	3525	5.6	2.20	M ₀		4.7	7.5			
					M _N		3.8	6.0			
					M _{0,max}		4.6	8.8			
					M _{max}		7.8	14.7			
					n _{eto}		3902	2433			
12H14-	12.0	1350	4.1	1.70	M ₀		11.2	12.8			
					M _N		10.6	12.0			
					M _{0,max}		11.9	22.6			
					M _{max}		20.1	29.0			
					n _{eto}		1220	918			
12H34-	10.5	3375	7.5	3.70	M ₀		5.6	11.2	12.8		
					M _N		5.3	10.0	7.5		
					M _{0,max}		6.0	11.8	22.5		
					M _{max}		10.4	20.1	29.0		
					n _{eto}		3850	2838	2092		
12L17-	17.0	1650	6.7	2.90	M ₀			19.0	19.0		
					M _N			17.0	17.0		
					M _{0,max}			21.4	39.4		
					M _{max}			35.5	56.4		
					n _{eto}			1324	863		
12L39-	14.0	3900	11.7	5.70	M ₀			9.7	16.7	19.0	19.0
					M _N			8.6	14.0	14.0	14.0
					M _{0,max}			10.8	21.3	30.8	39.5
					M _{max}			19.0	35.5	49.6	56.4
					n _{eto}			4450	3013	2236	1907
14D14-	12.0	1350	5.4	1.70	M ₀		8.8	12.5			
					M _N		8.2	12.0			
					M _{0,max}		9.6	17.9			
					M _{max}		15.9	28.3			
					n _{eto}		1141	689			
14D30-	10.5	3000	9.7	3.30	M ₀			8.8	11.4		
					M _N			8.6	9.7		
					M _{0,max}			9.5	17.8		
					M _{max}			15.9	28.3		
					n _{eto}			2496	1614		
14H12-	23.5	1200	8.3	3.00	M ₀			19.8	25.5		
					M _N			19.6	23.5		
					M _{0,max}			22.3	41.2		
					M _{max}			37.1	54.8		
					n _{eto}			920	667		

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
14H28-	20.5	2775	15.0	6.00	M ₀				15.8	23.5	25.5
					M _N				15.6	20.5	20.5
					M _{0,max}				22.2	32.1	41.3
					M _{max}				37.1	51.9	54.8
					n _{eto}				1953	1471	1409
14L14-	30.5	1350	11.8	4.30	M ₀			18.7	32.7	34.5	
					M _N			19.0	30.5	30.5	
					M _{0,max}			21.9	42.1	59.9	
					M _{max}			37.6	68.5	77.1	
					n _{eto}			1284	828	767	
14L30-	25.5	3000	20.8	8.00	M ₀					19.8	23.3
					M _N					19.7	23.3
					M _{0,max}					32.4	42.2
					M _{max}					53.9	68.5
					n _{eto}					2096	1757
14P11-	42.0	1050	13.4	4.60	M ₀				39.1	43.5	43.5
					M _N				38.9	42.0	42.0
					M _{0,max}				49.1	70.0	88.4
					M _{max}				80.0	105.1	105.1
					n _{eto}				710	573	573
14P26-	33.0	2625	21.9	9.10	M ₀					25.9	30.5
					M _N					25.6	30.1
					M _{0,max}					37.9	49.3
					M _{max}					63.0	80.0
					n _{eto}					1829	1495
19F12-	38.0	1200	11.3	4.80	M ₀			25.9	41.5		
					M _N			25.1	38.0		
					M _{0,max}			28.6	54.6		
					M _{max}			48.9	86.0		
					n _{eto}			1204	746		
19F29-	32.5	2850	20.1	9.70	M ₀					27.5	33.9
					M _N					27.4	32.5
					M _{0,max}					40.5	53.0
					M _{max}					68.3	86.0
					n _{eto}					2033	1653
19J12-	62.5	1200	18.3	7.90	M ₀					59.0	69.4
					M _N					58.1	62.5
					M _{0,max}					82.8	82.8
					M _{max}					129.0	129.0
					n _{eto}					839	839
19J29-	50.5	2850	31.0	15.10	M ₀						34.3
					M _N						32.6
					M _{0,max}						56.9
					M _{max}						96.0
					n _{eto}						2323

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
					I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
MCS	M _N	n _N	I _N	P _N	I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
19P12-	72.0	1200	21.3	9.00	M ₀					62.2	76.8
					M _N					57.5	67.6
					M _{0,max}					91.5	120.1
					M _{max}					155.5	190.0
					n _{eto}					996	870
19P29-	53.0	2850	29.5	15.80	M ₀						36.7
					M _N						35.9
					M _{0,max}						61.1
					M _{max}						106.7
					n _{eto}						2715

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321- E□	9322- E□	9323- E□	9324- E□	9325- E□	9326- E□	9327- E□	9328- E□	9329- E□
					I _N	1.5	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	2.3	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
06C41-	0.6	4050	1.3	0.25	M ₀	0.8	0.8	0.8						
					M _N	0.6	0.6	0.6						
					M _{0,max}	1.2	1.8	2.4						
					M _{max}	1.2	1.8	2.4						
					n _{eto}	4635	2871	2019						
06C60-	0.5	6000	2.4	0.31	M ₀		0.8	0.8	0.8					
					M _N		0.5	0.5	0.5					
					M _{0,max}		1.0	1.5	2.4					
					M _{max}		1.0	1.5	2.4					
					n _{eto}		7000	7000	5368					
06F41-	1.2	4050	1.5	0.51	M ₀	1.5	1.5	1.5						
					M _N	1.2	1.2	1.2						
					M _{0,max}	2.0	3.4	4.4						
					M _{max}	2.0	3.4	4.4						
					n _{eto}	2819	1973	1562						
06F60-	0.9	6000	2.5	0.57	M ₀		1.3	1.5	1.5					
					M _N		0.9	0.9	0.9					
					M _{0,max}		1.7	3.0	4.4					
					M _{max}		1.7	3.0	4.4					
					n _{eto}		7000	5714	3773					
06I41-	1.5	4050	1.6	0.64	M ₀	1.8	2.0	2.0						
					M _N	1.4	1.5	1.5						
					M _{0,max}	2.6	4.2	6.2						
					M _{max}	2.6	4.2	6.2						
					n _{eto}	2994	1980	1384						
06I60-	1.2	6000	2.9	0.75	M ₀		1.5	2.0	2.0					
					M _N		1.0	1.2	1.2					
					M _{0,max}		2.1	3.3	5.7					
					M _{max}		2.1	3.3	5.7					
					n _{eto}		7000	5486	3414					
09D41-	2.3	4050	2.3	1.00	M ₀		3.1	3.3	3.3					
					M _N		2.3	2.3	2.3					
					M _{0,max}		4.2	6.2	9.4					
					M _{max}		4.2	6.2	9.4					
					n _{eto}		4895	2937	2008					
09D60-	1.8	6000	3.8	1.10	M ₀			2.4	3.3	3.3				
					M _N			1.8	1.8	1.8				
					M _{0,max}			3.2	5.6	9.3				
					M _{max}			3.2	5.6	9.3				
					n _{eto}			7000	7000	4492				
09F38-	3.1	3750	2.5	1.20	M ₀		3.5	4.2	4.2					
					M _N		3.1	3.1	3.1					
					M _{0,max}		5.2	7.7	12.0					
					M _{max}		5.2	7.7	12.0					
					n _{eto}		4000	3250	2173					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321- E□	9322- E□	9323- E□	9324- E□	9325- E□	9326- E□	9327- E□	9328- E□	9329- E□
					I _N	1.5	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	2.3	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
09F60-	2.4	6000	4.5	1.50	M ₀				4.2	4.2				
					M _N				2.4	2.4				
					M _{0,max}				6.9	11.4				
					M _{max}				6.9	11.4				
					n _{eto}				7000	5035				
09H41-	3.8	4050	3.4	1.60	M ₀			5.0	5.5	5.5				
					M _N			3.8	3.8	3.8				
					M _{0,max}			7.5	12.5	20.1				
					M _{max}			7.5	12.5	20.1				
					n _{eto}			4250	2977	1988				
09H60-	3.0	6000	6.0	1.90	M ₀				4.5	5.5				
					M _N				3.0	3.0				
					M _{0,max}				6.7	11.7				
					M _{max}				6.7	11.7				
					n _{eto}				7000	7000				
09L41-	4.5	4050	4.2	1.90	M ₀			4.7	7.5	7.5				
					M _N			4.2	4.5	4.5				
					M _{0,max}			6.7	11.7	20.8				
					M _{max}			6.7	11.7	20.8				
					n _{eto}			4450	4154	2796				
09L51-	3.6	5100	6.9	1.90	M ₀				4.2	7.5	7.5			
					M _N				3.6	3.6	3.6			
					M _{0,max}				6.0	11.1	13.2			
					M _{max}				6.0	11.1	19.1			
					n _{eto}				7000	7000	7000			
12D20-	5.5	1950	2.6	1.10	M ₀		5.9	6.4	6.4					
					M _N		5.3	5.5	5.5					
					M _{0,max}		7.6	11.6	17.7					
					M _{max}		7.6	11.6	17.7					
					n _{eto}		1790	1358	919					
12D41-	4.3	4050	4.5	1.80	M ₀			4.6	6.4	6.4				
					M _N			3.7	4.3	4.3				
					M _{0,max}			5.9	10.1	17.3				
					M _{max}			5.9	10.1	17.3				
					n _{eto}			4344	3275	2116				
12H15-	10.0	1500	3.8	1.60	M ₀			10.9	11.4	11.4				
					M _N			10.0	10.0	10.0				
					M _{0,max}			15.1	25.8	29.0				
					M _{max}			15.1	25.8	29.0				
					n _{eto}			1676	1013	918				
12H35-	7.5	3525	5.7	2.80	M ₀				9.8	11.4				
					M _N				7.5	7.5				
					M _{0,max}				13.5	24.1				
					M _{max}				13.5	24.1				
					n _{eto}				3618	2447				

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321- E□	9322- E□	9323- E□	9324- E□	9325- E□	9326- E□	9327- E□	9328- E□	9329- E□
					I _N	1.5	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	2.3	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
12L20-	13.5	1950	5.9	2.80	M ₀				15.0	15.0				
					M _N				13.5	13.5				
					M _{0,max}				24.4	41.9				
					M _{max}				24.4	41.9				
					n _{eto}				1718	1158				
12L41-	11.0	4050	10.2	4.70	M ₀					15.0	15.0	15.0		
					M _N					11.0	11.0	11.0		
					M _{0,max}					22.8	27.0	35.5		
					M _{max}					22.8	38.5	49.6		
					n _{eto}					4287	2799	2236		
14D15-	9.2	1500	4.5	1.45	M ₀			8.5	11.0	11.0				
					M _N			8.0	9.2	9.2				
					M _{0,max}			12.1	20.2	29.0				
					M _{max}			12.1	20.2	29.0				
					n _{eto}			1437	928	676				
14D36-	7.5	3600	7.5	2.80	M ₀				7.7	11.0	11.0			
					M _N				7.0	7.5	7.5			
					M _{0,max}				10.9	19.0	22.2			
					M _{max}				10.9	19.0	29.0			
					n _{eto}				3479	2159	1593			
14H15-	16.0	1500	6.6	2.50	M ₀				17.3	21.0				
					M _N				16.0	16.0				
					M _{0,max}				25.4	43.9				
					M _{max}				25.4	43.9				
					n _{eto}				1247	800				
14H32-	14.0	3225	11.9	4.70	M ₀					16.2	21.0	21.0		
					M _N					14.0	14.0	14.0		
					M _{0,max}					23.8	28.2	37.1		
					M _{max}					23.8	40.2	51.9		
					n _{eto}					2875	1817	1471		
14L15-	23.0	1500	9.7	3.60	M ₀					28.0	28.0			
					M _N					23.0	23.0			
					M _{0,max}					45.0	52.9			
					M _{max}					45.0	73.8			
					n _{eto}					1126	788			
14L32-	17.2	3225	15.0	5.80	M ₀					15.2	27.4	28.0	28.0	
					M _N					14.9	17.2	17.2	17.2	
					M _{0,max}					23.5	28.3	37.6	52.9	
					M _{max}					23.5	41.0	53.9	73.9	
					n _{eto}					3953	2608	2096	1672	
14P14-	30.0	1350	10.8	4.20	M ₀					37.0	37.0	37.0		
					M _N					30.0	30.0	30.0		
					M _{0,max}					52.5	61.8	80.0		
					M _{max}					52.5	86.3	105.1		
					n _{eto}					998	668	573		

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321- E□	9322- E□	9323- E□	9324- E□	9325- E□	9326- E□	9327- E□	9328- E□	9329- E□
					I _N	1.5	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	2.3	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
14P32-	21.0	3225	15.6	7.10	M ₀					19.8	35.8	37.0	37.0	
					M _N					17.5	21.0	21.0	21.0	
					M _{0,max}					27.4	33.0	43.9	61.8	
					M _{max}					27.4	47.9	63.0	86.4	
					n _{eto}					3300	2299	1829	1404	
19F14-	27.0	1425	8.6	4.00	M ₀				22.6	32.0	32.0			
					M _N				22.0	27.0	27.0			
					M _{0,max}				33.0	58.2	68.3			
					M _{max}				33.0	58.2	86.0			
					n _{eto}				1459	1056	746			
19F30-	21.0	3000	14.0	6.60	M ₀					21.0	32.0	32.0		
					M _N					19.5	21.0	21.0		
					M _{0,max}					29.2	35.2	47.2		
					M _{max}					29.2	51.5	68.3		
					n _{eto}					3352	2573	2033		
19J14-	40.0	1425	12.3	6.00	M ₀					43.6	51.0	51.0		
					M _N					40.0	40.0	40.0		
					M _{0,max}					60.8	72.4	96.0		
					M _{max}					60.8	104.5	129.0		
					n _{eto}					1376	996	839		
19J30-	29.0	3000	18.5	9.10	M ₀						39.3	51.0	51.0	51.0
					M _N						29.0	29.0	29.0	29.0
					M _{0,max}						36.8	50.2	72.4	79.5
					M _{max}						55.2	73.8	104.7	127.6
					n _{eto}						3150	2850	2162	1817
19P14-	51.0	1350	14.3	7.20	M ₀					47.5	64.0	64.0		
					M _N					46.4	51.0	51.0		
					M _{0,max}					69.5	79.6	106.7		
					M _{max}					69.5	116.7	155.5		
					n _{eto}					1400	1187	996		
19P30-	32.0	3000	19.0	10.00	M ₀						43.1	58.7	64.0	64.0
					M _N						32.0	32.0	32.0	32.0
					M _{0,max}						39.6	53.9	79.6	87.6
					M _{max}						59.3	81.2	116.9	144.3
					n _{eto}						3000	2938	2638	2298

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E□	9323-E□	9324-E□	9325-E□	9326-E□	9327-E□	9328-E□	9329-E□
					I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
12D17-	7.0	1650	3.0	1.20	M ₀	5.9	7.5	7.5					
					M _N	5.3	7.0	7.0					
					M _{0,max}	7.6	11.6	17.7					
					M _{max}	7.6	11.6	17.7					
					n _{eto}	1790	1358	919					
12D35-	6.0	3525	5.6	2.20	M ₀		4.6	7.5	7.5				
					M _N		3.7	6.0	6.0				
					M _{0,max}		5.9	10.1	17.3				
					M _{max}		5.9	10.1	17.3				
					n _{eto}		4344	3275	2116				
12H14-	12.0	1350	4.1	1.70	M ₀		10.9	12.8	12.8				
					M _N		10.3	12.0	12.0				
					M _{0,max}		15.1	25.8	29.0				
					M _{max}		15.1	25.8	29.0				
					n _{eto}		1676	1013	918				
12H34-	10.5	3375	7.5	3.70	M ₀			9.8	12.8				
					M _N			9.6	10.5				
					M _{0,max}			13.5	24.1				
					M _{max}			13.5	24.1				
					n _{eto}			3618	2447				
12L17-	17.0	1650	6.7	2.90	M ₀			18.5	19.0				
					M _N			17.0	17.0				
					M _{0,max}			24.4	41.9				
					M _{max}			24.4	41.9				
					n _{eto}			1718	1158				
12L39-	14.0	3900	11.7	5.70	M ₀				17.2	19.0	19.0		
					M _N				14.0	14.0	14.0		
					M _{0,max}				22.8	27.0	35.5		
					M _{max}				22.8	38.5	49.6		
					n _{eto}				4287	2799	2236		
14D14-	12.0	1350	5.4	1.70	M ₀		8.5	12.5	12.5				
					M _N		8.0	12.0	12.0				
					M _{0,max}		12.1	20.2	29.0				
					M _{max}		12.1	20.2	29.0				
					n _{eto}		1437	928	676				
14D30-	10.5	3000	9.7	3.30	M ₀			7.7	12.5	12.5			
					M _N			7.0	10.0	10.0			
					M _{0,max}			10.9	19.0	22.2			
					M _{max}			10.9	19.0	29.0			
					n _{eto}			3479	2159	1593			
14H12-	23.5	1200	8.3	3.00	M ₀			17.3	25.5				
					M _N			17.2	23.5				
					M _{0,max}			25.4	43.9				
					M _{max}			25.4	43.9				
					n _{eto}			1247	800				

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E□	9323-E□	9324-E□	9325-E□	9326-E□	9327-E□	9328-E□	9329-E□
					I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
14H28-	20.5	2775	15.0	6.00	M ₀				16.2	25.5	25.5		
					M _N				16.1	20.5	20.5		
					M _{0,max}				23.8	28.2	37.1		
					M _{max}				23.8	40.2	51.9		
					n _{eto}				2875	1817	1471		
14L14-	30.5	1350	11.8	4.30	M ₀				33.4	34.5			
					M _N				30.5	30.5			
					M _{0,max}				45.0	52.9			
					M _{max}				45.0	73.8			
					n _{eto}				1126	788			
14L30-	25.5	3000	20.8	8.00	M ₀					27.4	34.5	34.5	
					M _N					25.5	25.5	25.5	
					M _{0,max}					28.3	37.6	52.9	
					M _{max}					41.0	53.9	73.9	
					n _{eto}					2608	2096	1672	
14P11-	42.0	1050	13.4	4.60	M ₀				40.1	43.5	43.5		
					M _N				40.0	42.0	42.0		
					M _{0,max}				52.5	61.8	80.0		
					M _{max}				52.5	86.3	105.1		
					n _{eto}				998	668	573		
14P26-	33.0	2625	21.9	9.10	M ₀					35.8	43.5	43.5	
					M _N					33.0	33.0	33.0	
					M _{0,max}					33.0	43.9	61.8	
					M _{max}					47.9	63.0	86.4	
					n _{eto}					2299	1829	1404	
19F12-	38.0	1200	11.3	4.80	M ₀			22.6	41.5	41.5			
					M _N			22.0	38.0	38.0			
					M _{0,max}			33.0	58.2	68.3			
					M _{max}			33.0	58.2	86.0			
					n _{eto}			1459	1056	746			
19F29-	32.5	2850	20.1	9.70	M ₀					39.9	41.5		
					M _N					32.5	32.5		
					M _{0,max}					35.2	47.2		
					M _{max}					51.5	68.3		
					n _{eto}					2573	2033		
19J12-	62.5	1200	18.3	7.90	M ₀				43.6	70.5	70.5		
					M _N				43.4	62.5	62.5		
					M _{0,max}				60.8	72.4	96.0		
					M _{max}				60.8	104.5	129.0		
					n _{eto}				1376	996	839		
19J29-	50.5	2850	31.0	15.10	M ₀						55.5	70.5	70.5
					M _N						50.5	50.5	50.5
					M _{0,max}						50.2	72.4	79.5
					M _{max}						73.8	104.7	127.6
					n _{eto}						2850	2162	1817

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E□	9323-E□	9324-E□	9325-E□	9326-E□	9327-E□	9328-E□	9329-E□
					I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
MCS	M _N	n _N	I _N	P _N	I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
19P12-	72.0	1200	21.3	9.00	M ₀				47.5	86.0	86.0		
					M _N				46.4	72.0	72.0		
					M _{0,max}				69.5	79.6	106.7		
					M _{max}				69.5	116.7	155.5		
					n _{eto}				1400	1187	996		
19P29-	53.0	2850	29.5	15.80	M ₀						58.7	86.0	86.0
					M _N						53.0	53.0	53.0
					M _{0,max}						53.9	79.6	87.6
					M _{max}						81.2	116.9	144.3
					n _{eto}						2938	2638	2298

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06C41- (non-ventilated)

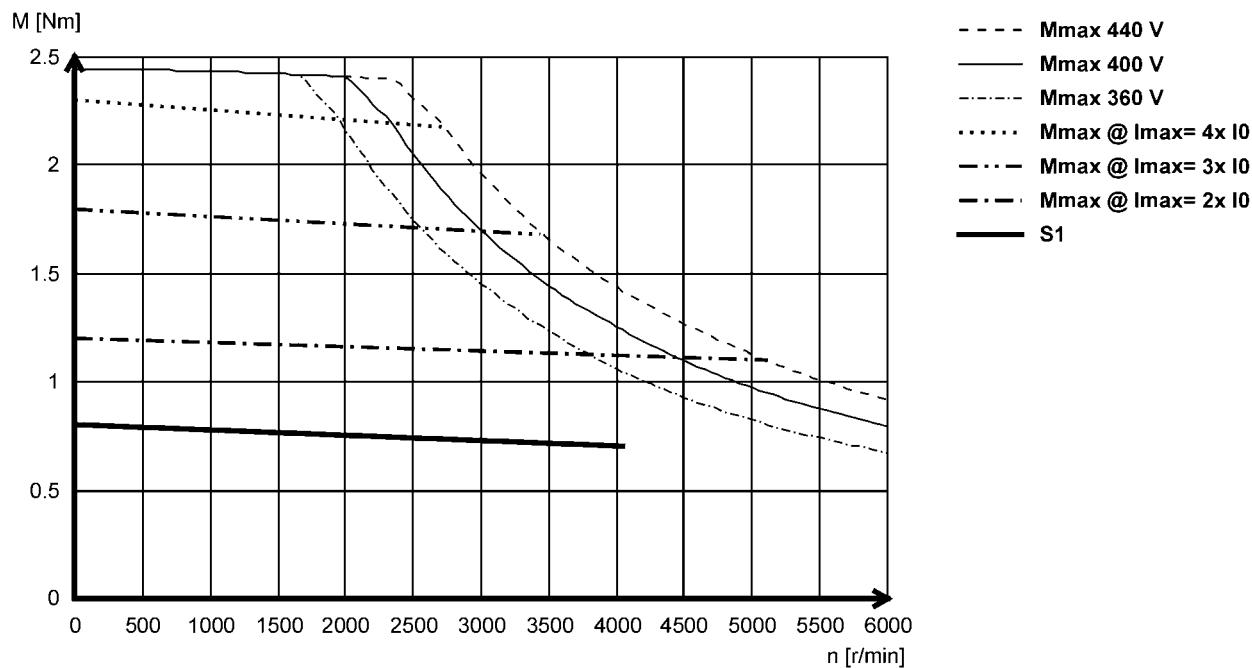

MCS06C60- (non-ventilated)

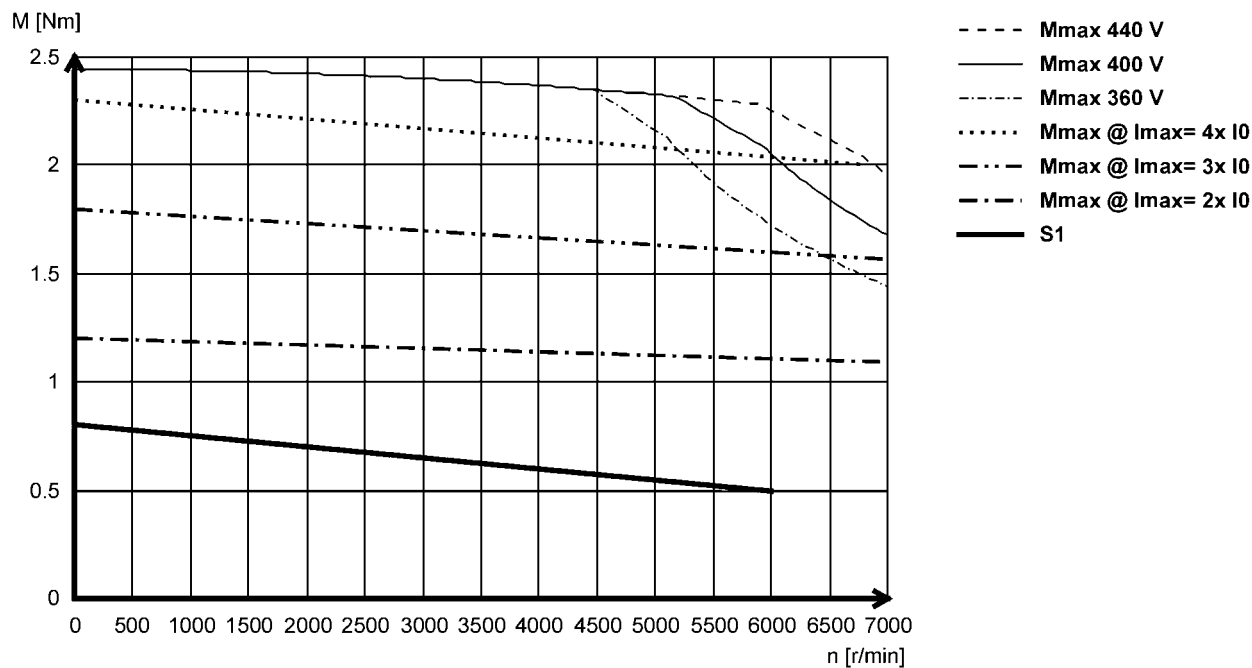

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06F41- (non-ventilated)

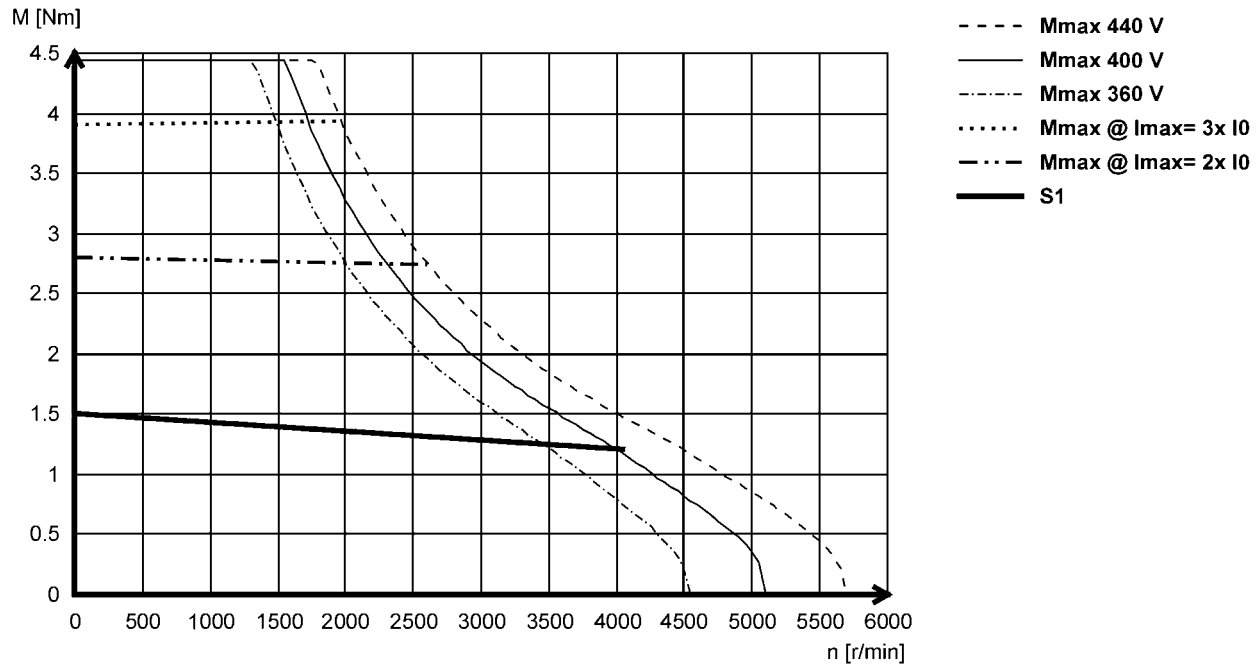

MCS06F60- (non-ventilated)

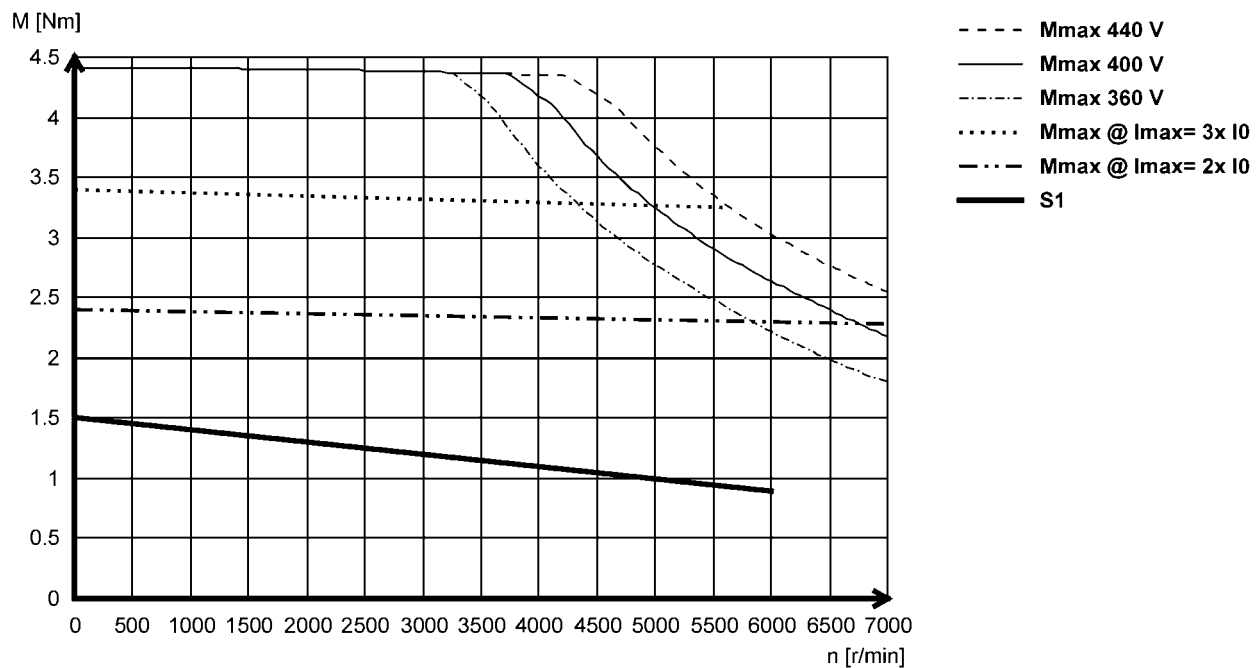

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06I41- (non-ventilated)

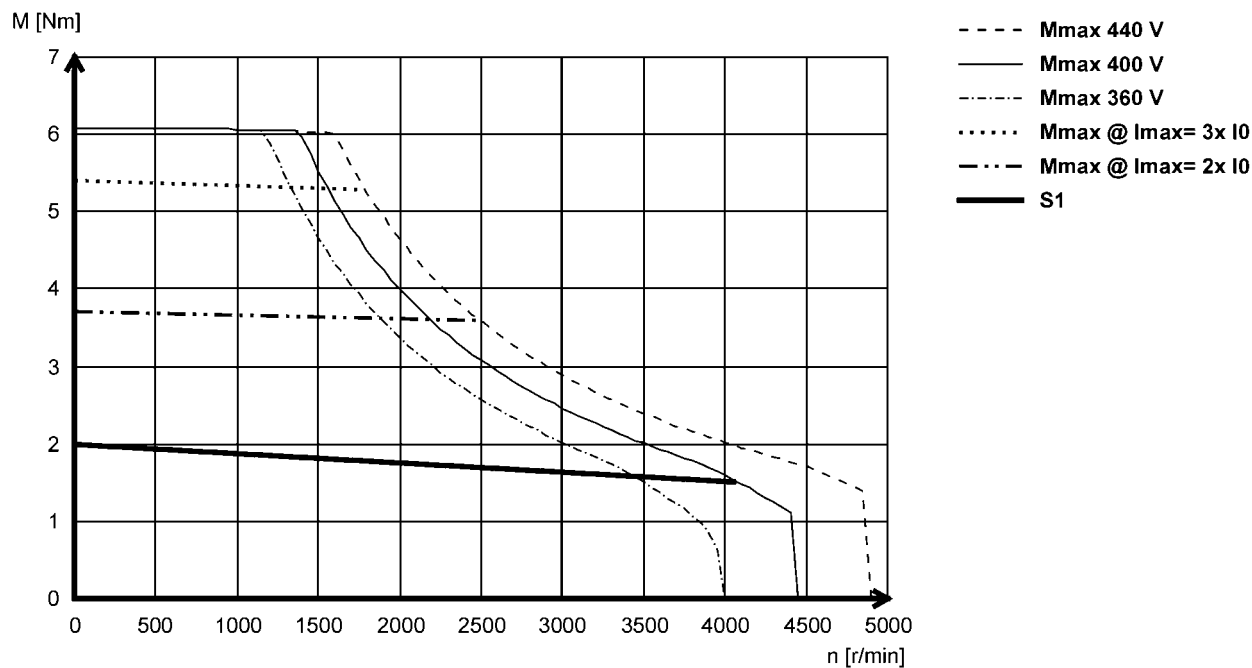

MCS06I60- (non-ventilated)

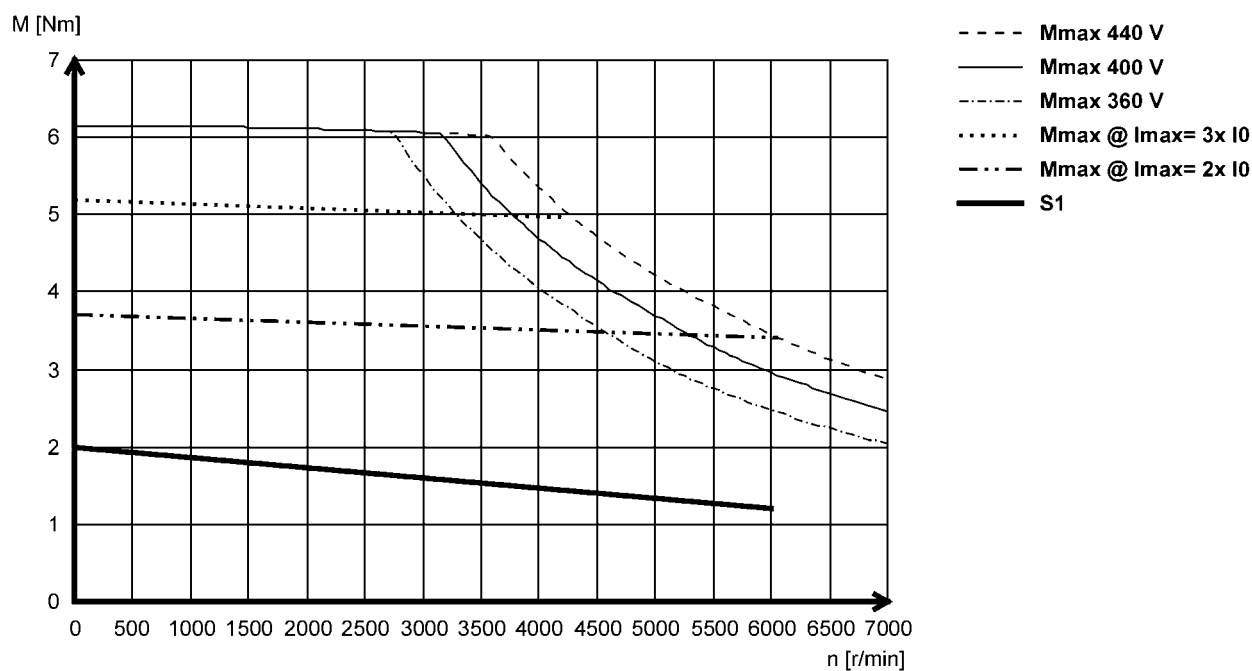

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09D41- (non-ventilated)

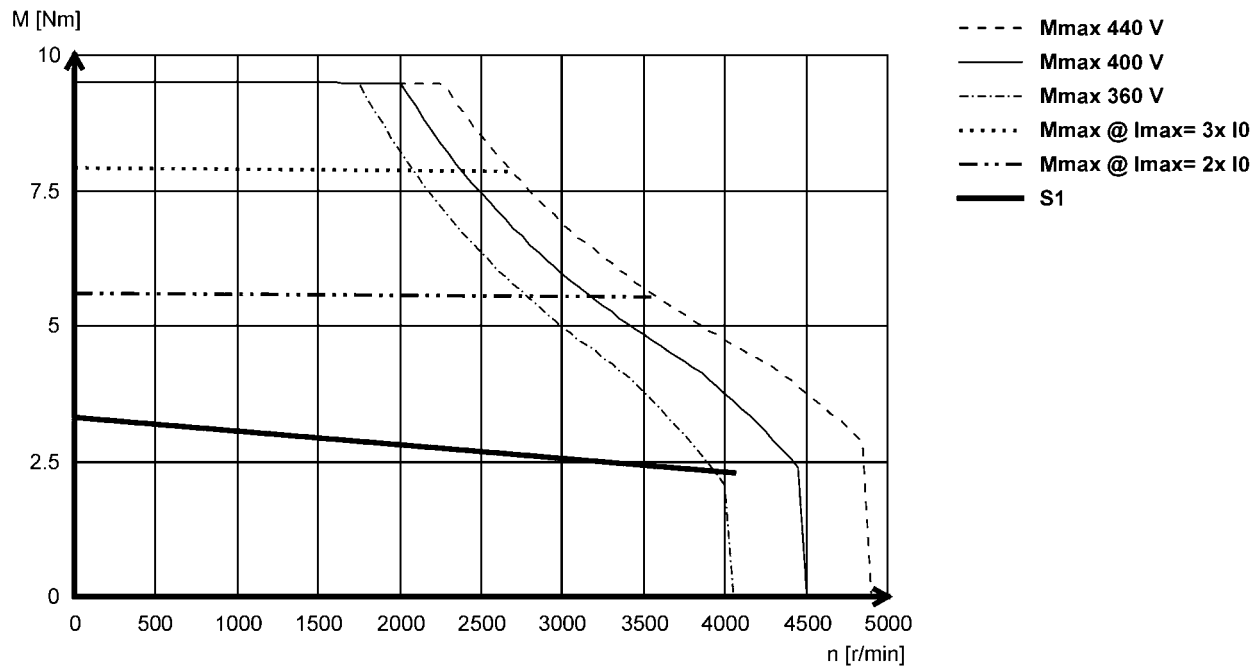

MCS09D60- (non-ventilated)

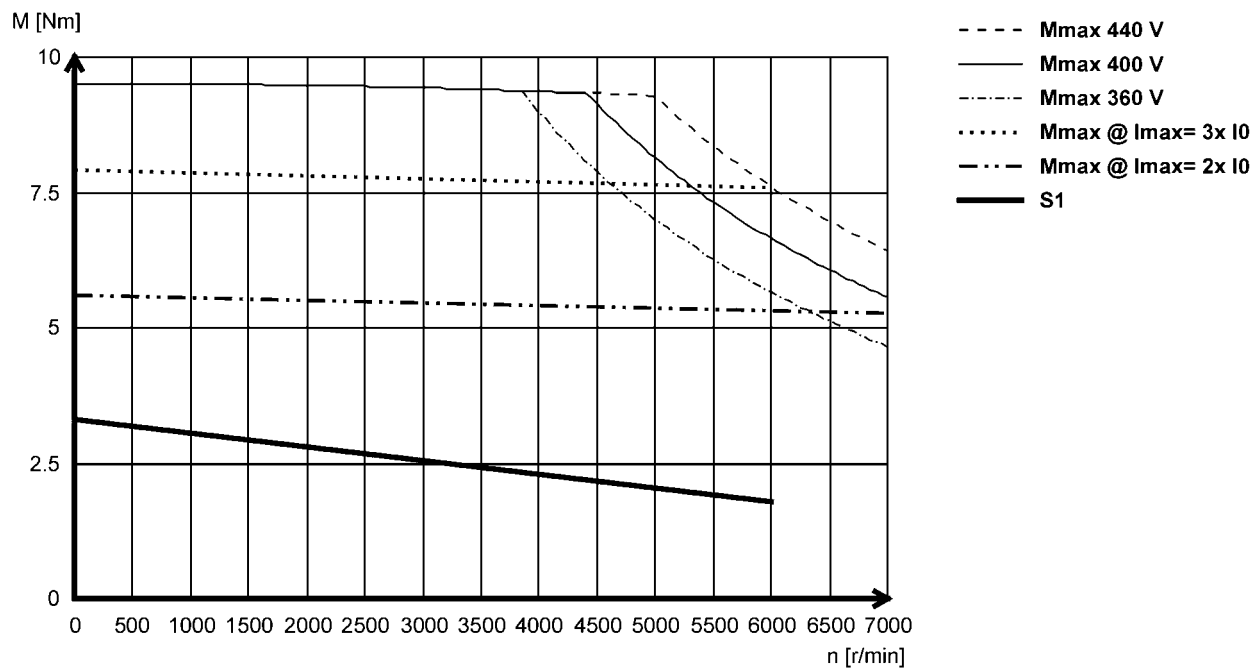

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09F38- (non-ventilated)

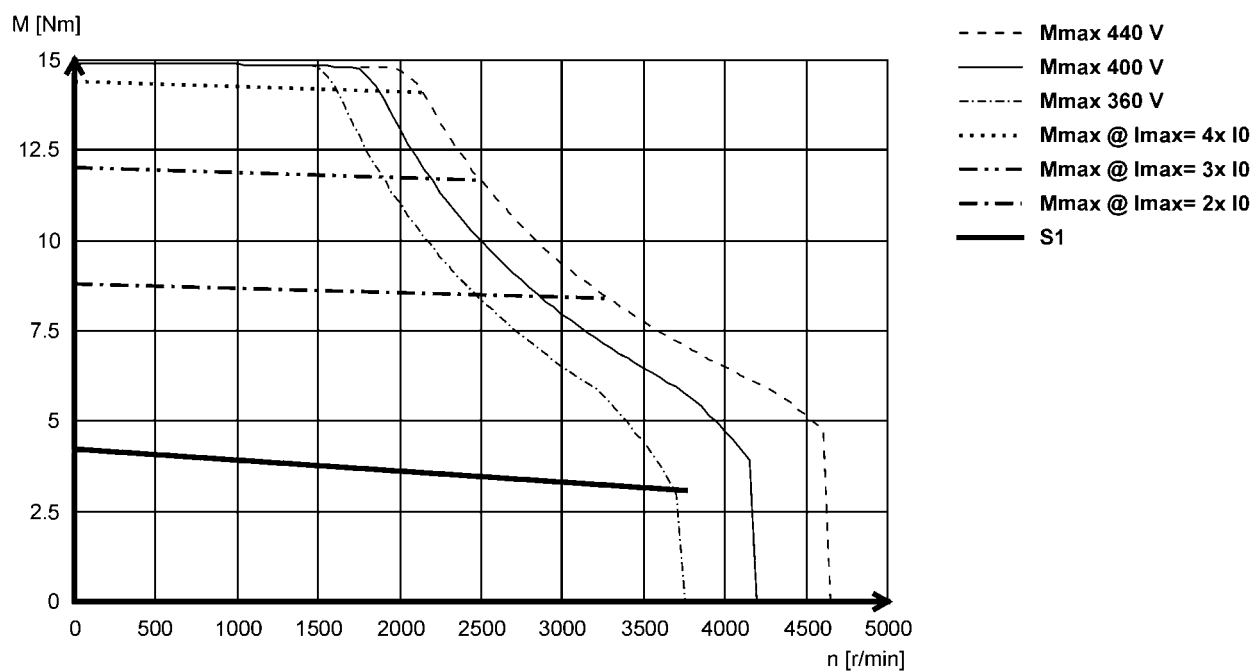

MCS09F60- (non-ventilated)

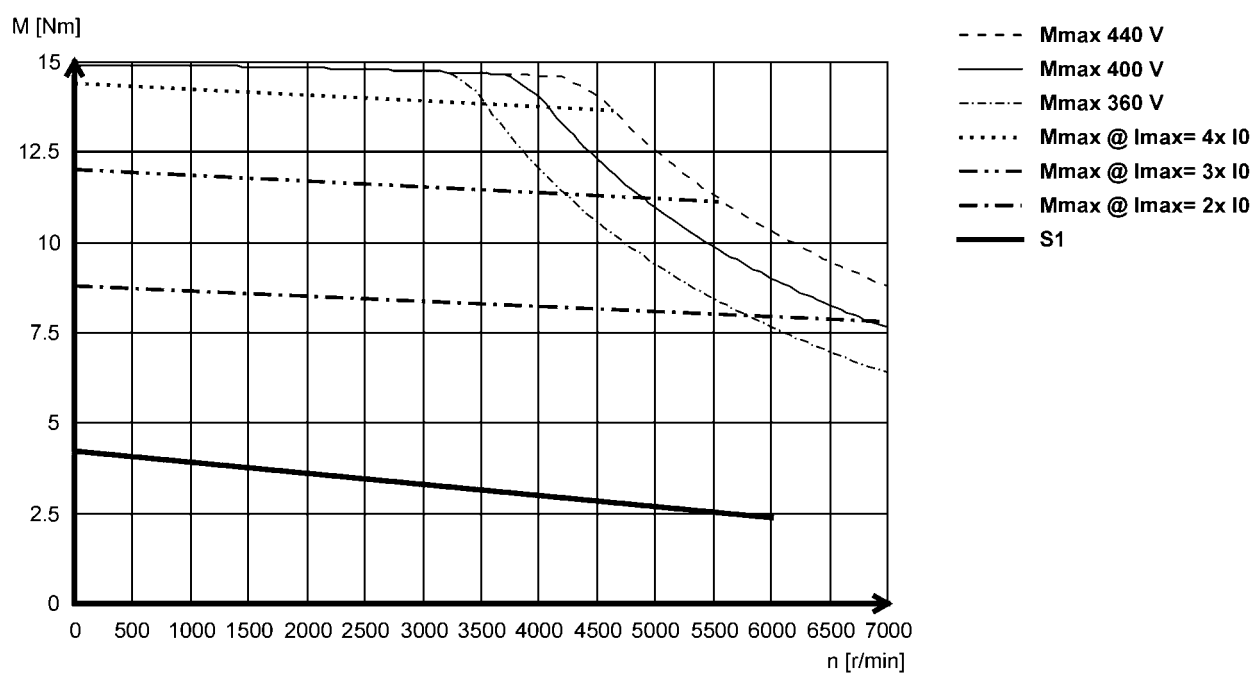

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09H41- (non-ventilated)

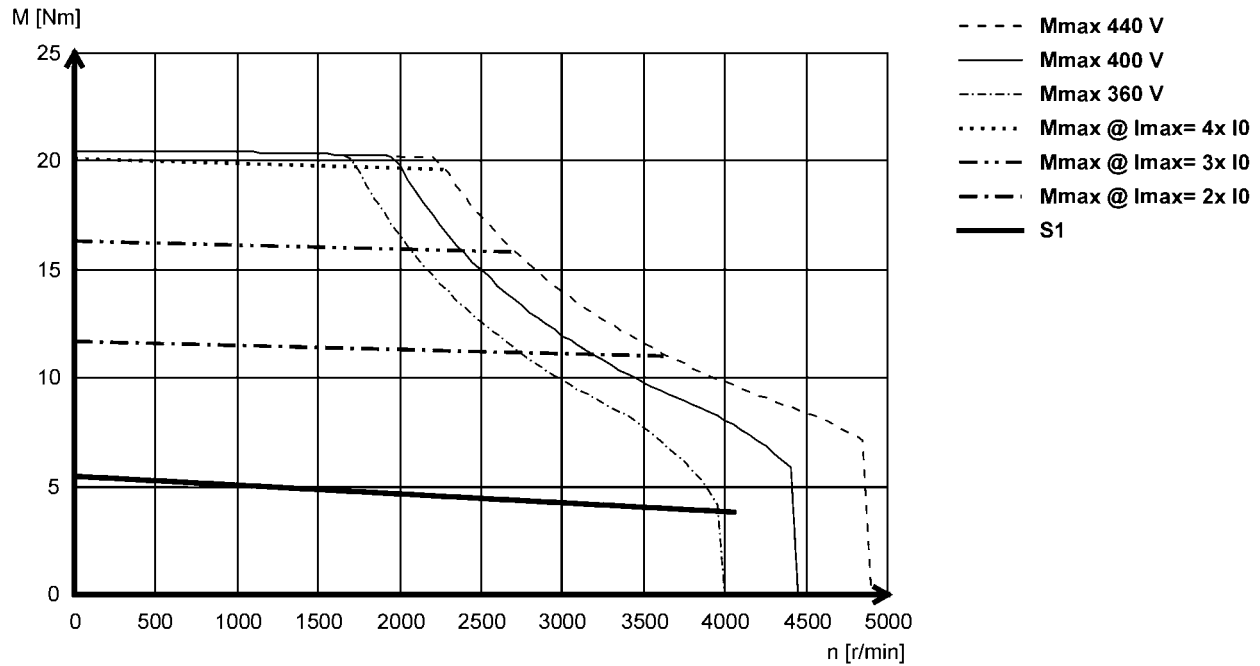

MCS09H60- (non-ventilated)

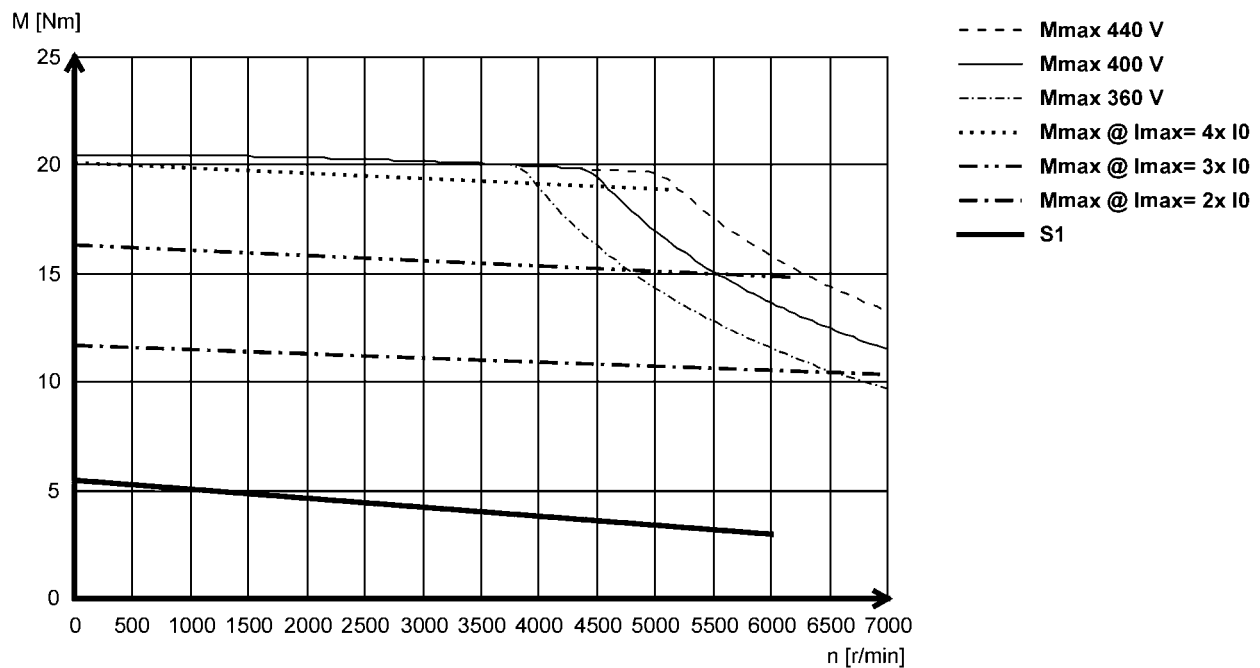

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09L41- (non-ventilated)

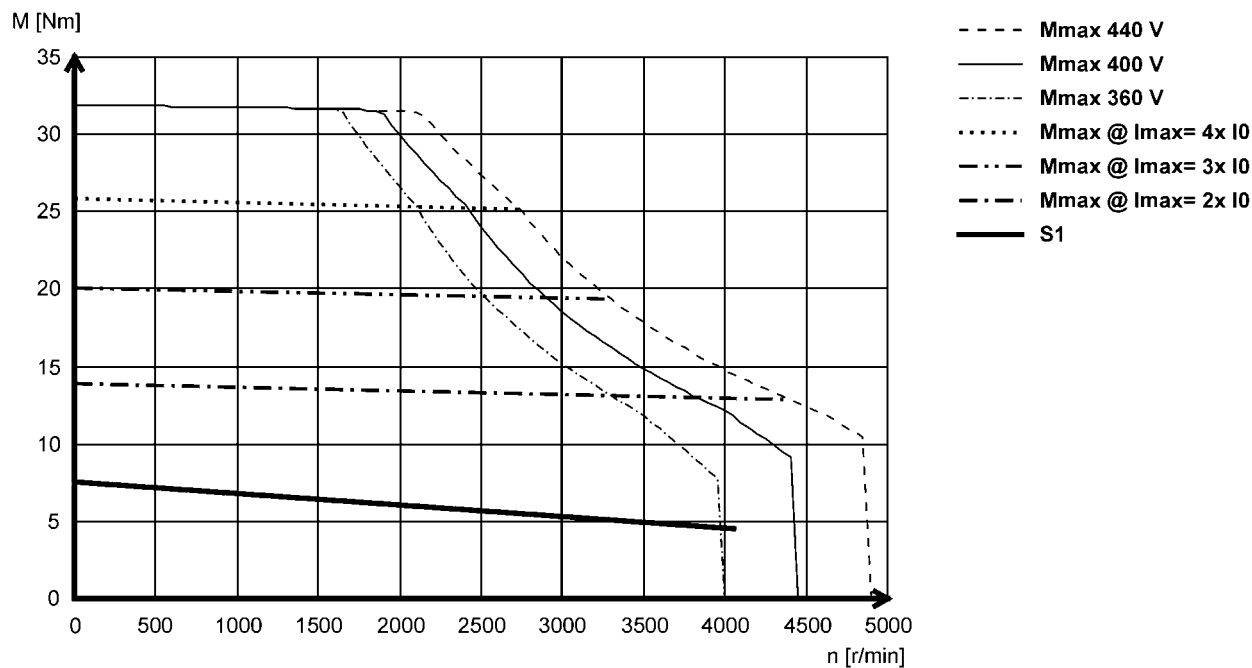

MCS09L51- (non-ventilated)

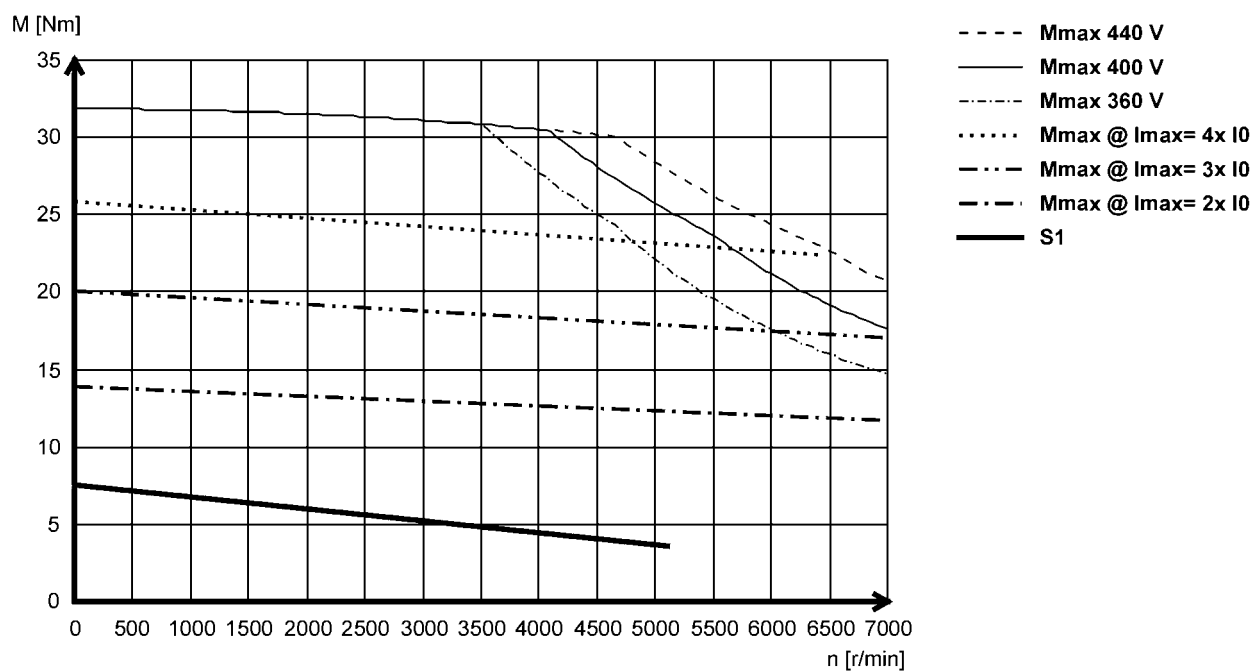

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12D17 (forced ventilated)

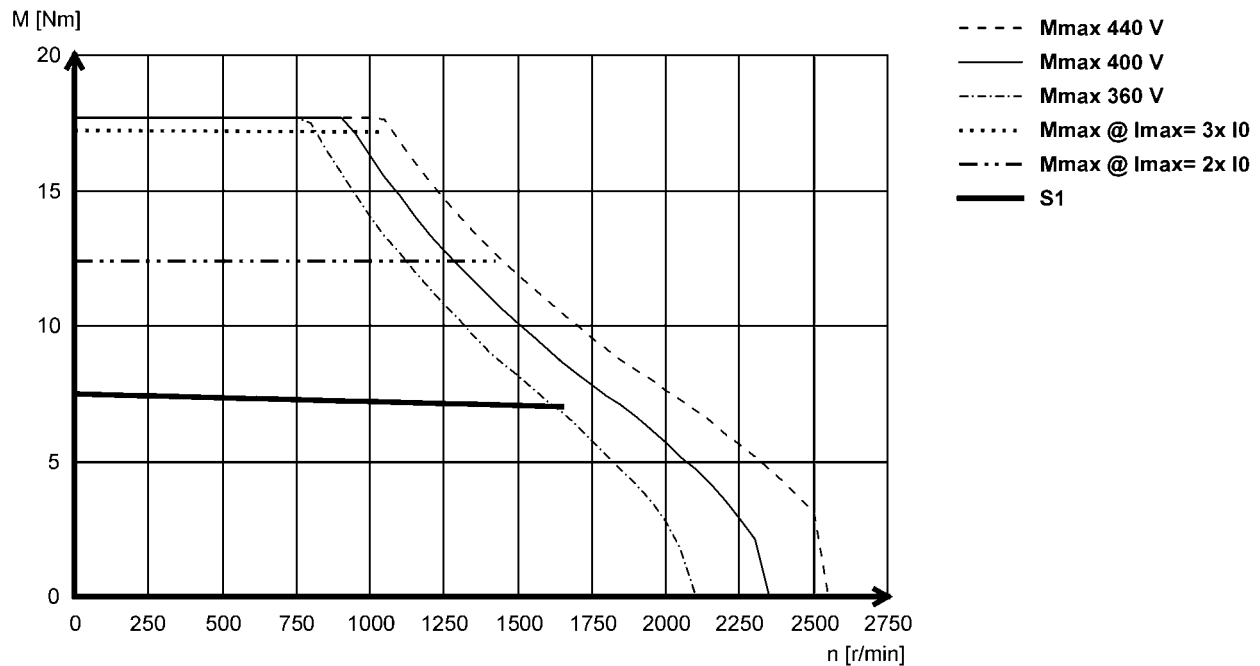

MCS12D20- (non-ventilated)

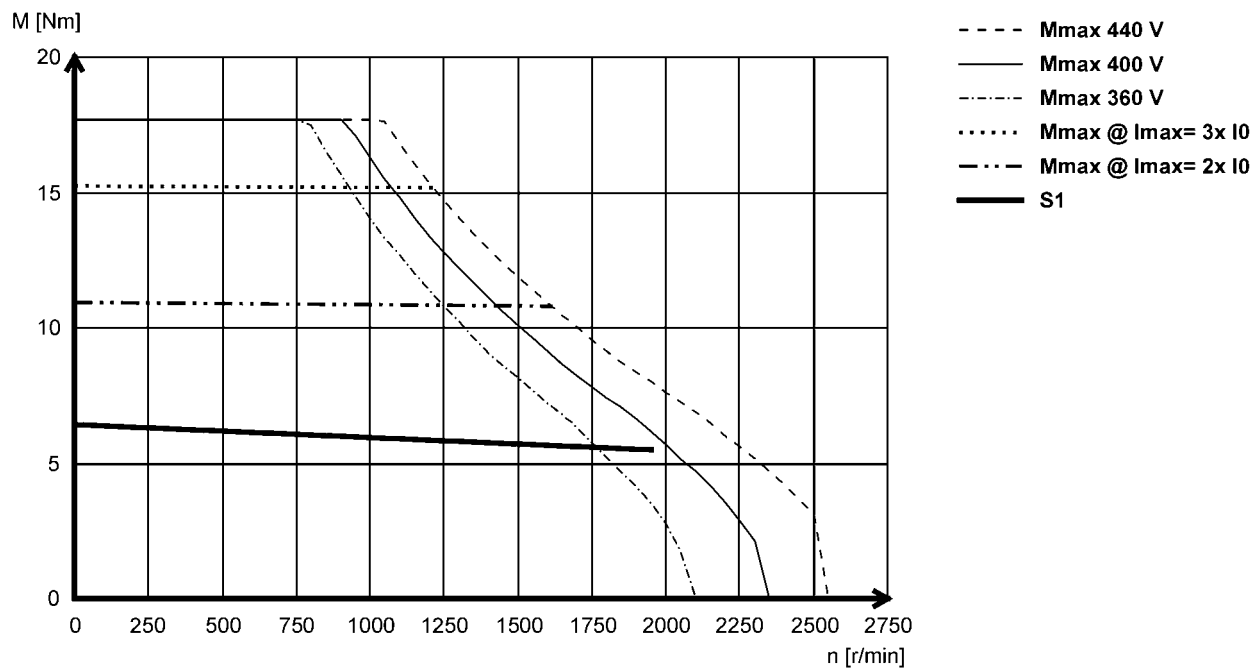

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12D35- (forced ventilated)

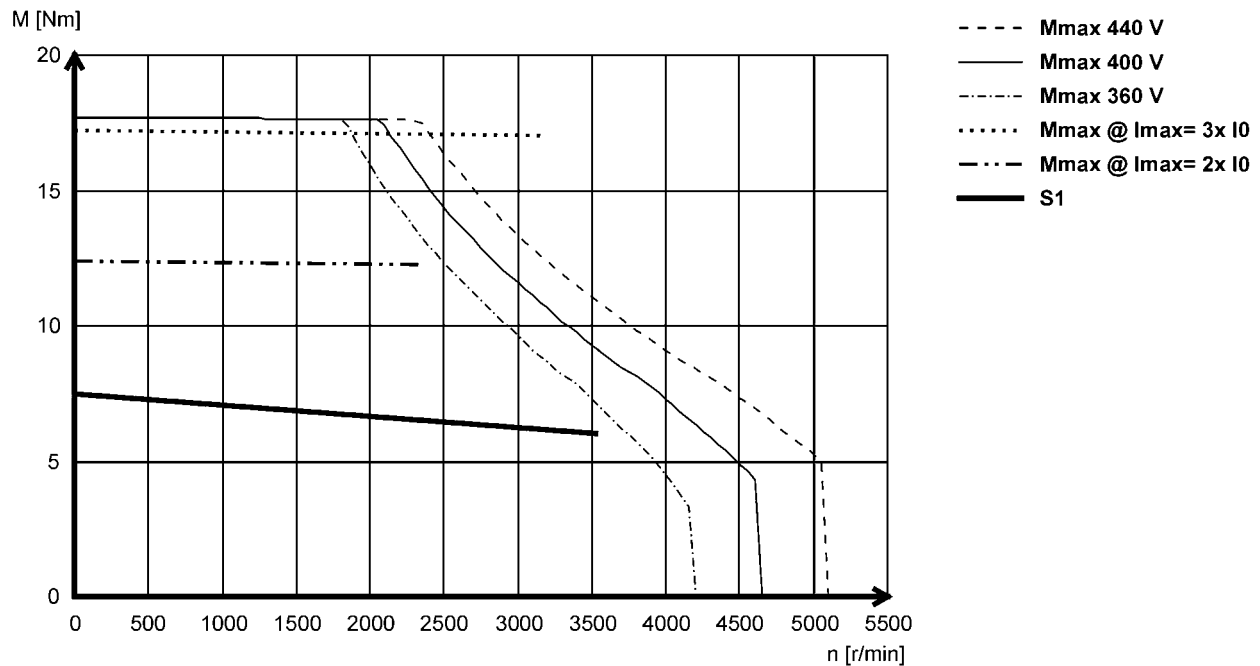

MCS12D41- (non-ventilated)

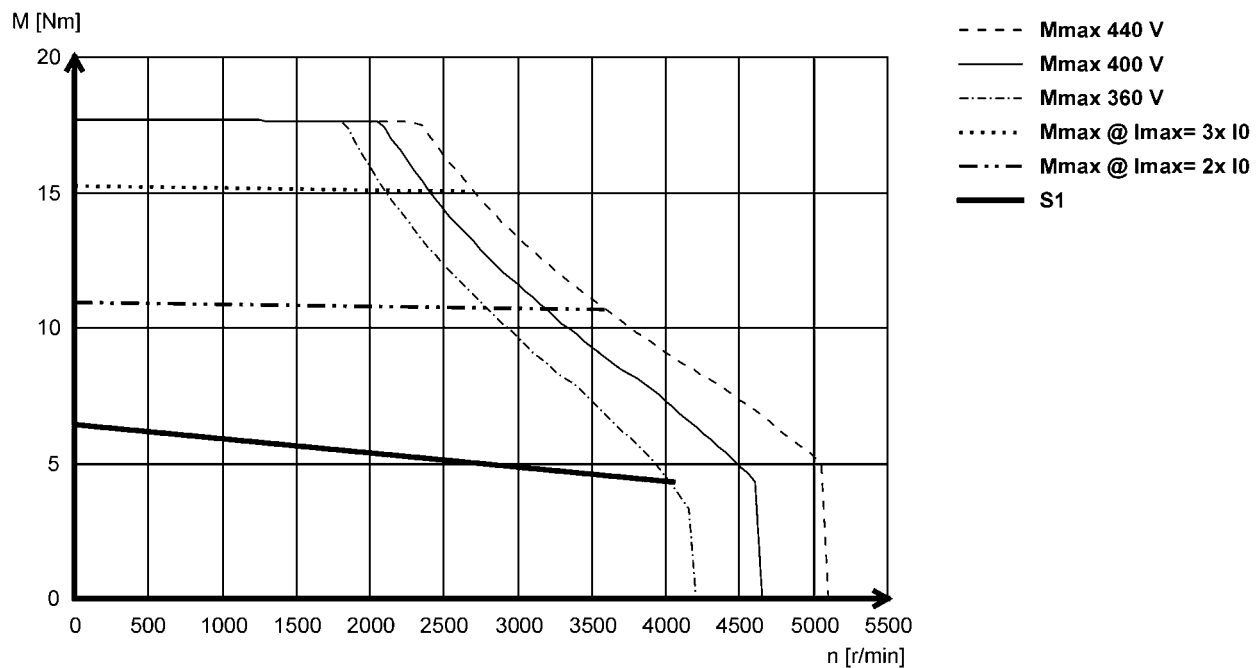

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12H14- (forced ventilated)

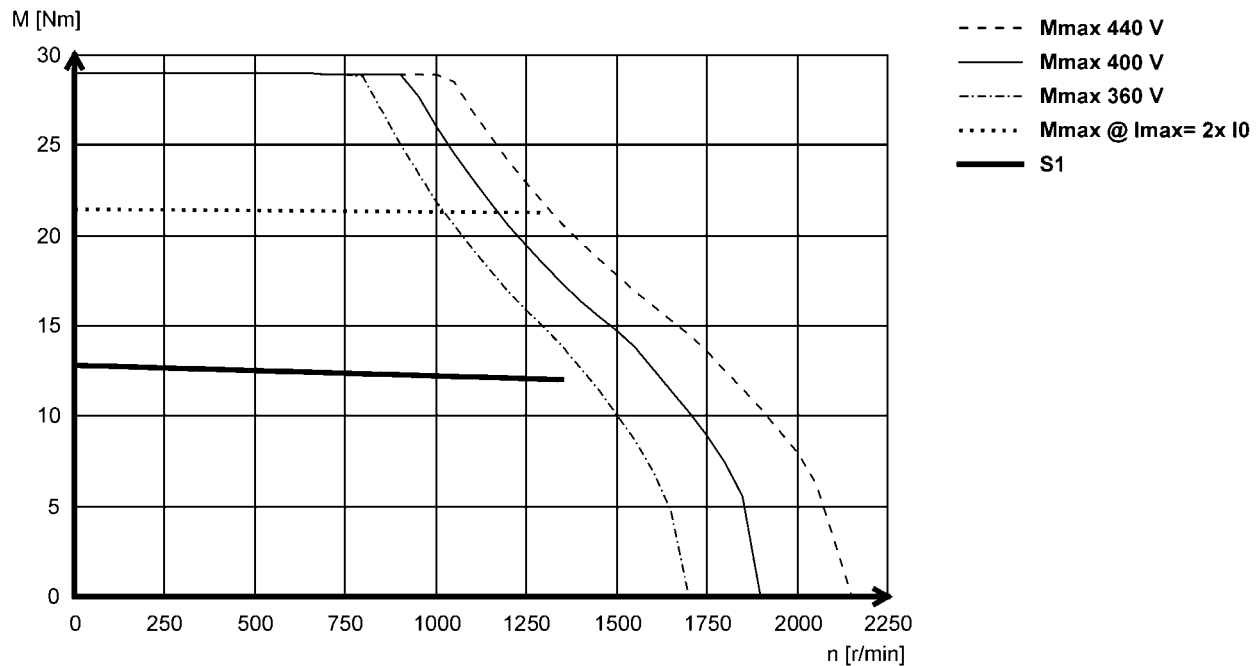

MCS12H15- (non-ventilated)

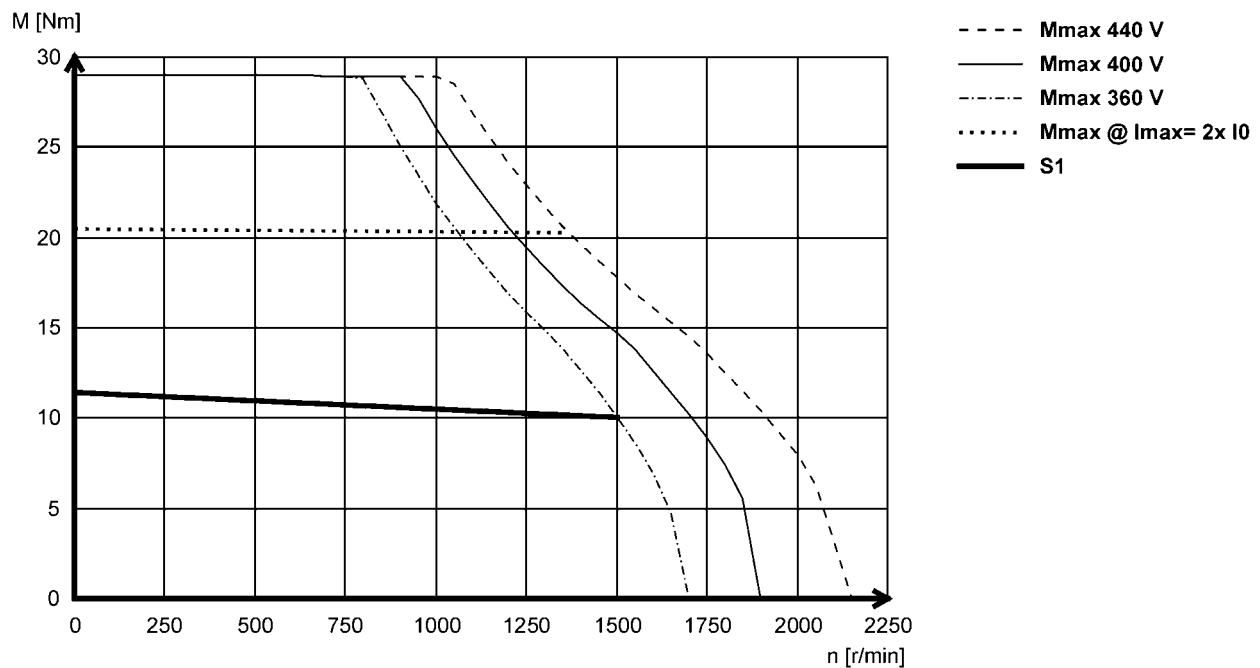

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12H34- (forced ventilated)

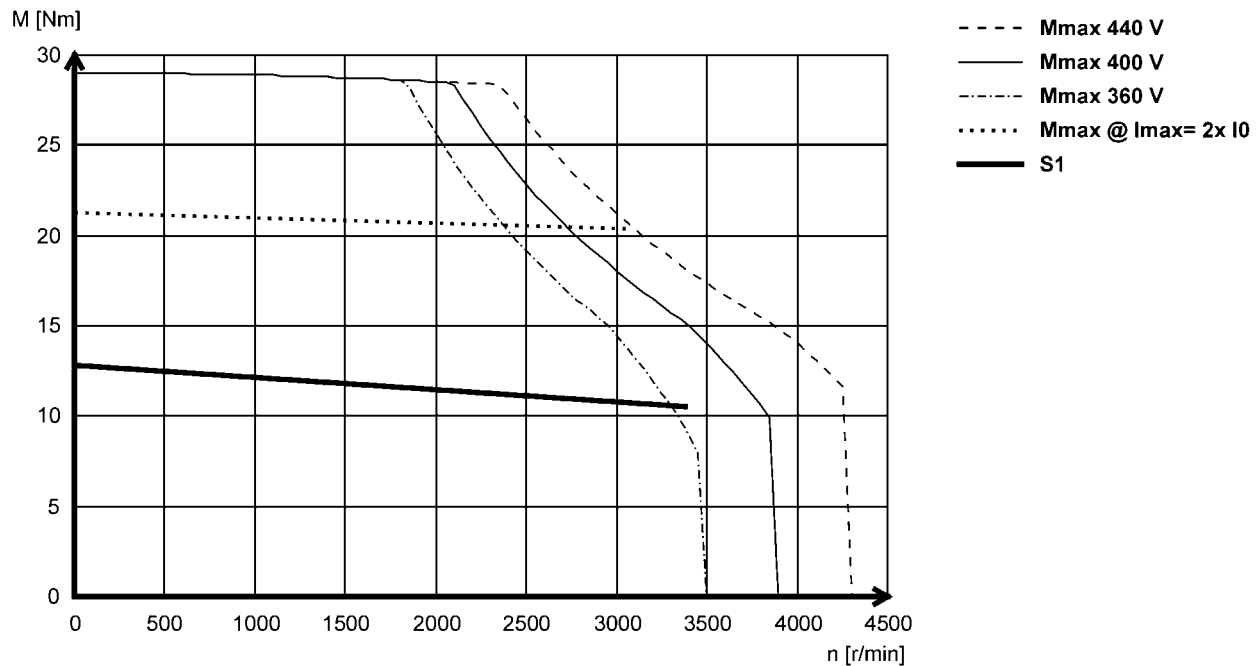

MCS12H35- (non-ventilated)

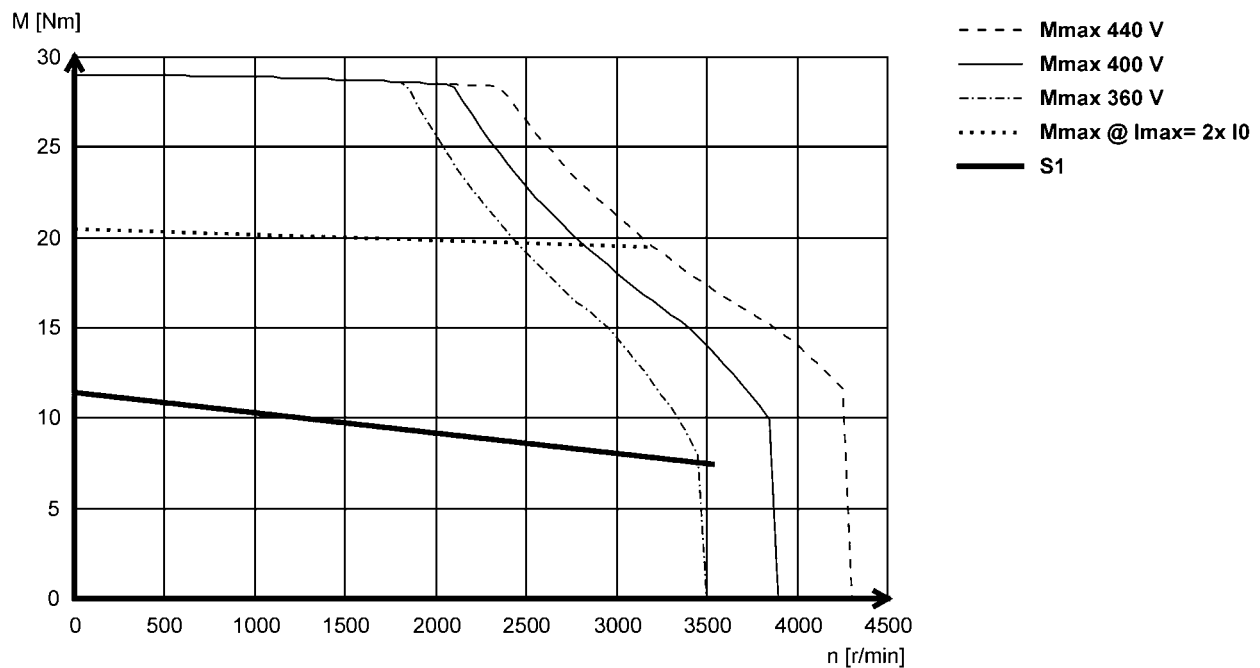

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12L17- (forced ventilated)

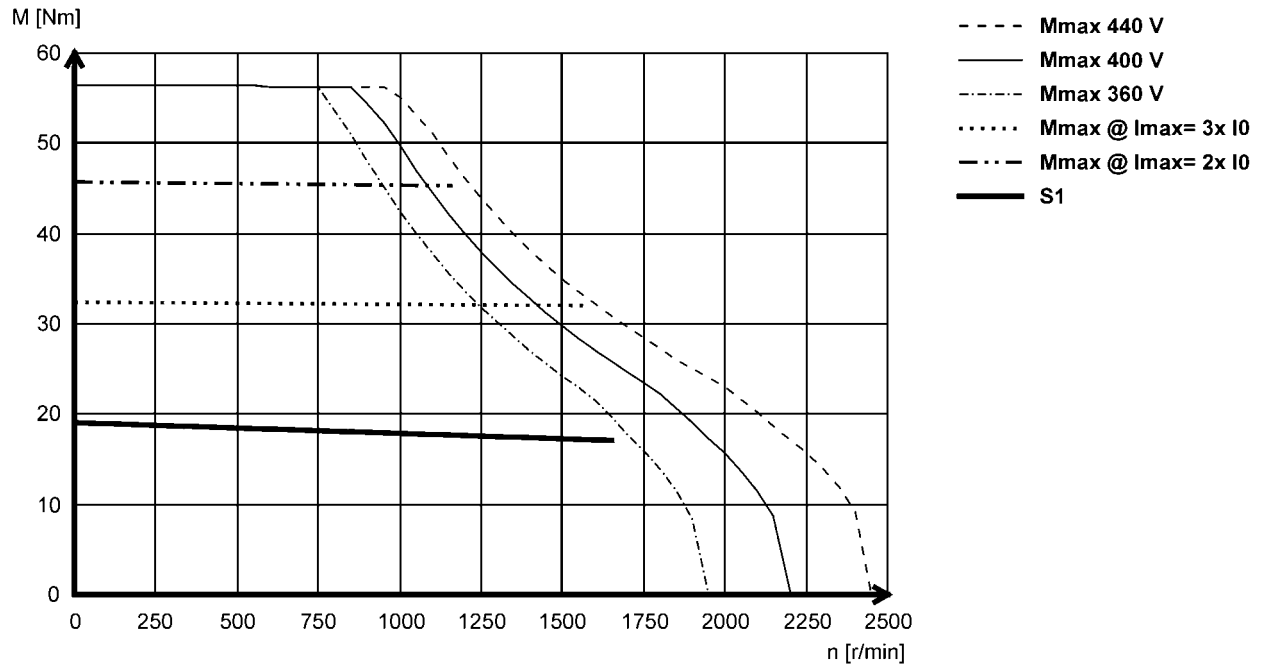

MCS12L20- (non-ventilated)

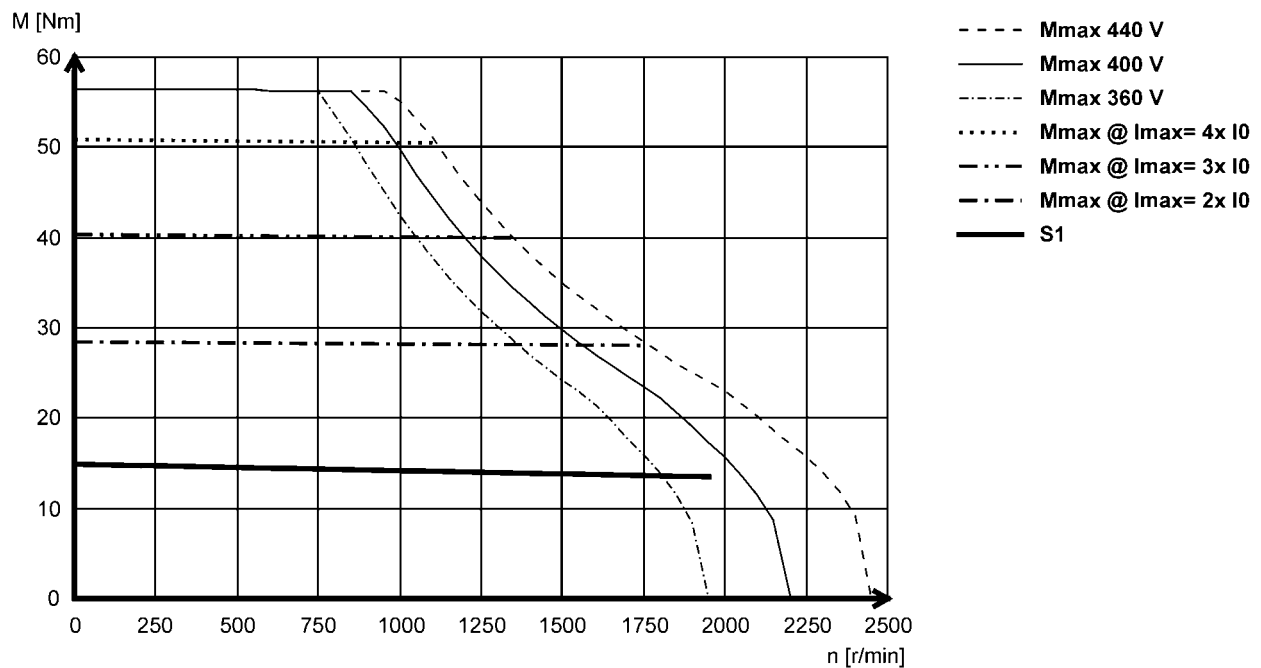

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12L39- (forced ventilated)

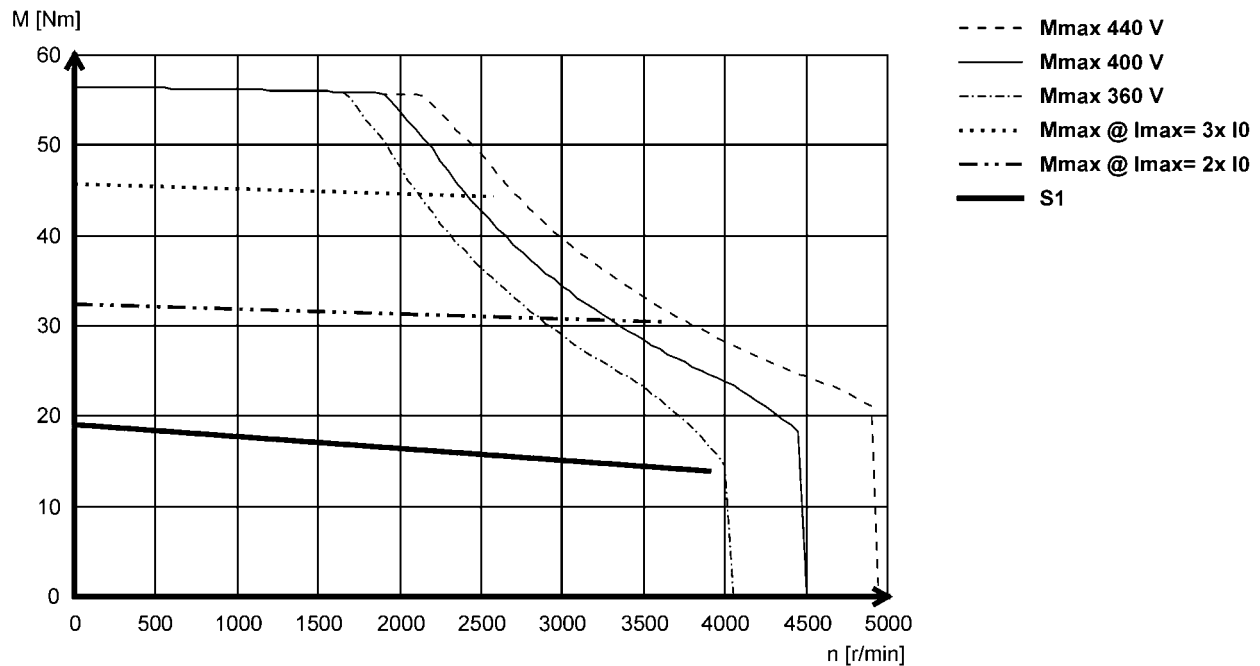

MCS12L41- (non-ventilated)

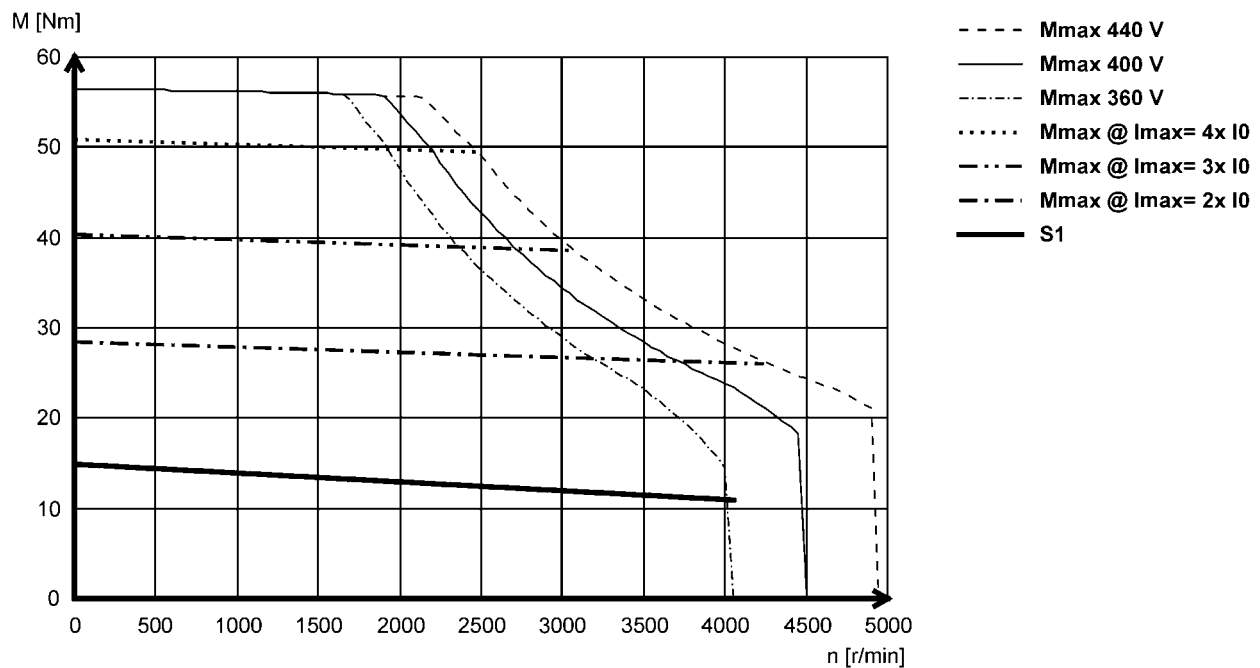

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14D14- (forced ventilated)

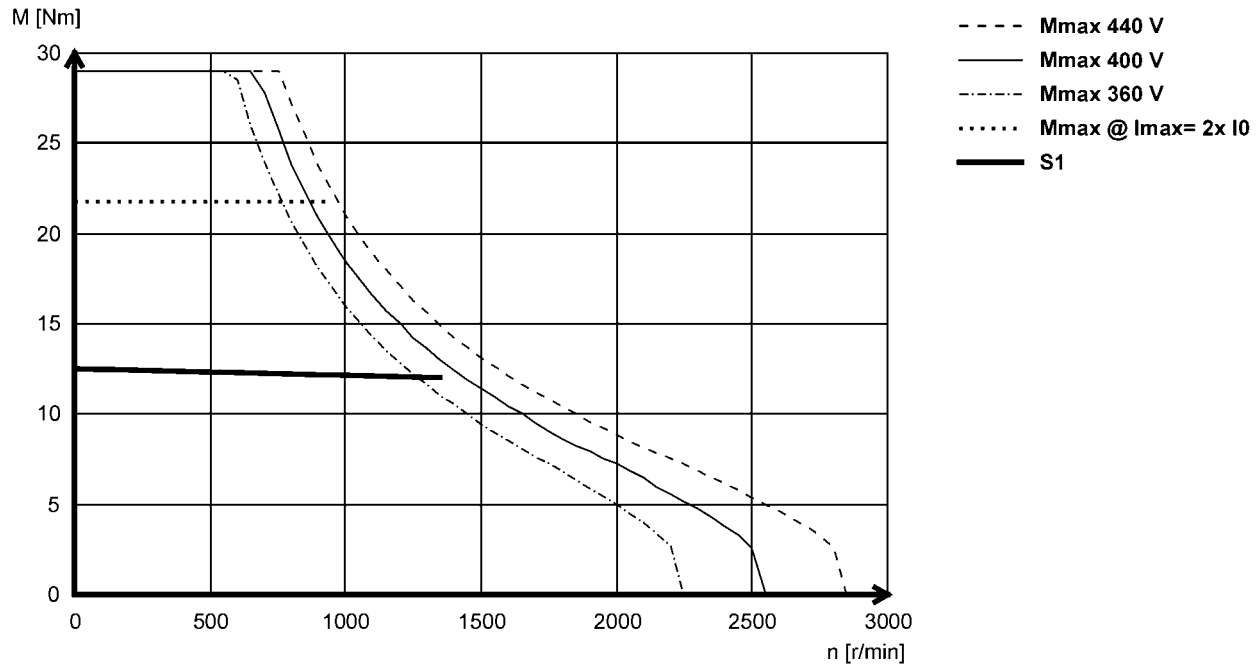

MCS14D15- (non-ventilated)

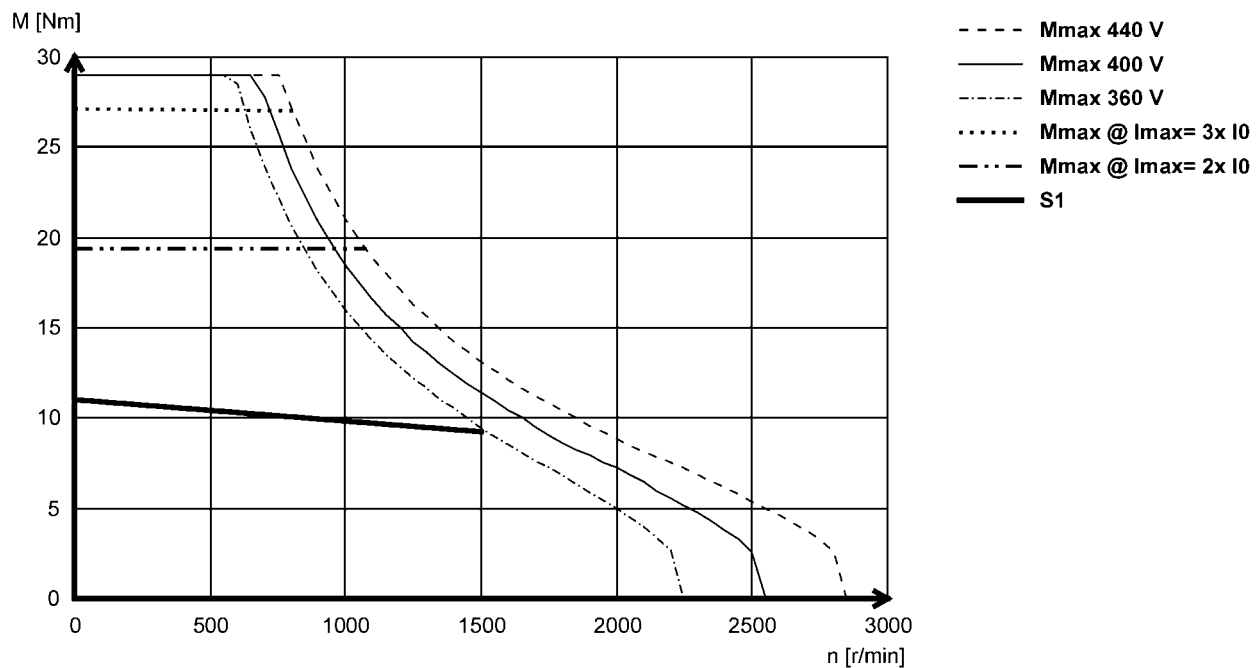

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14D30 (forced ventilated)

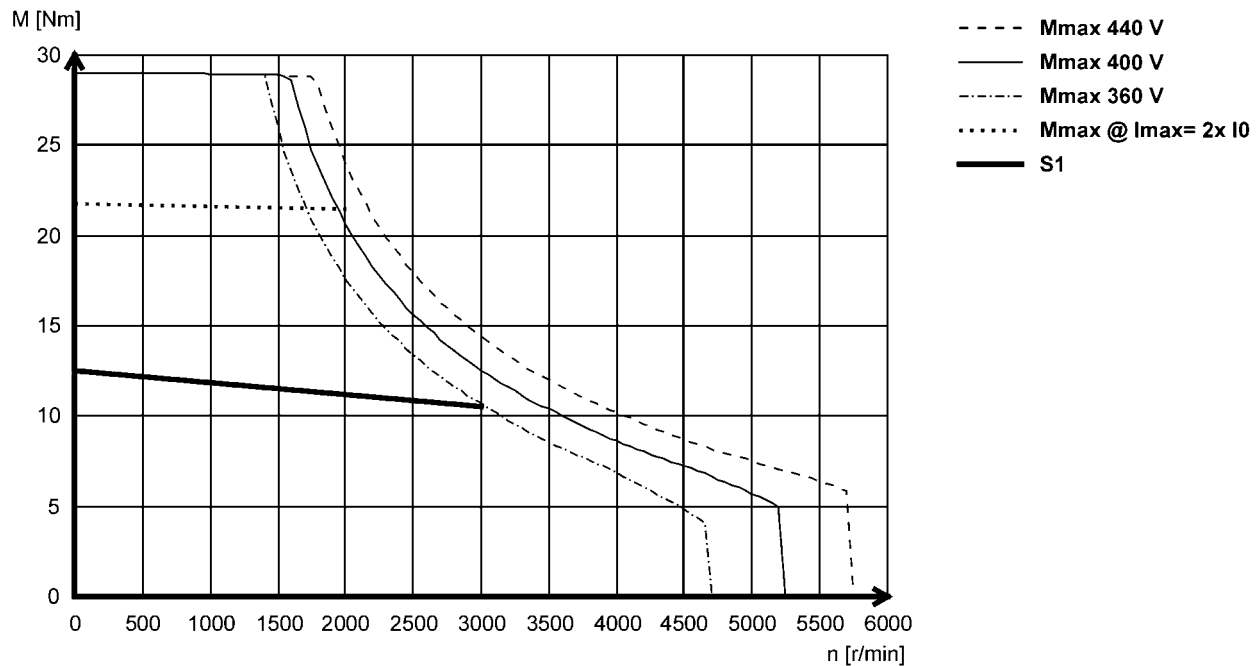

MCS14D36- (non-ventilated)

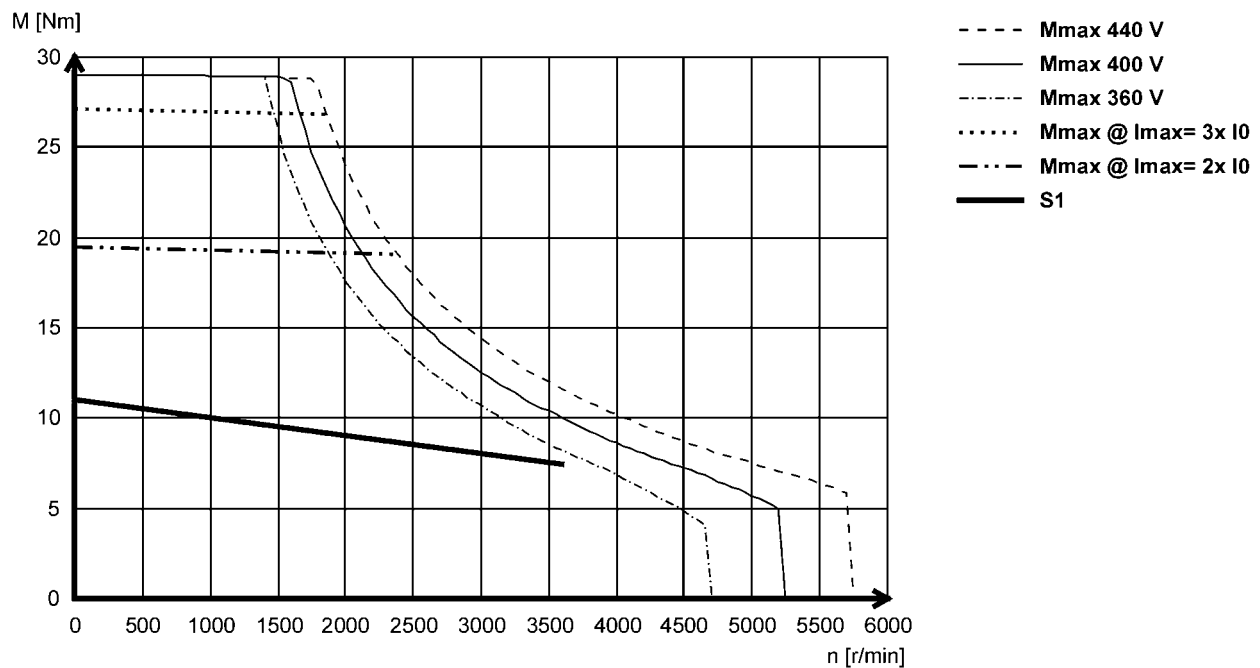

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14H12- (forced ventilated)

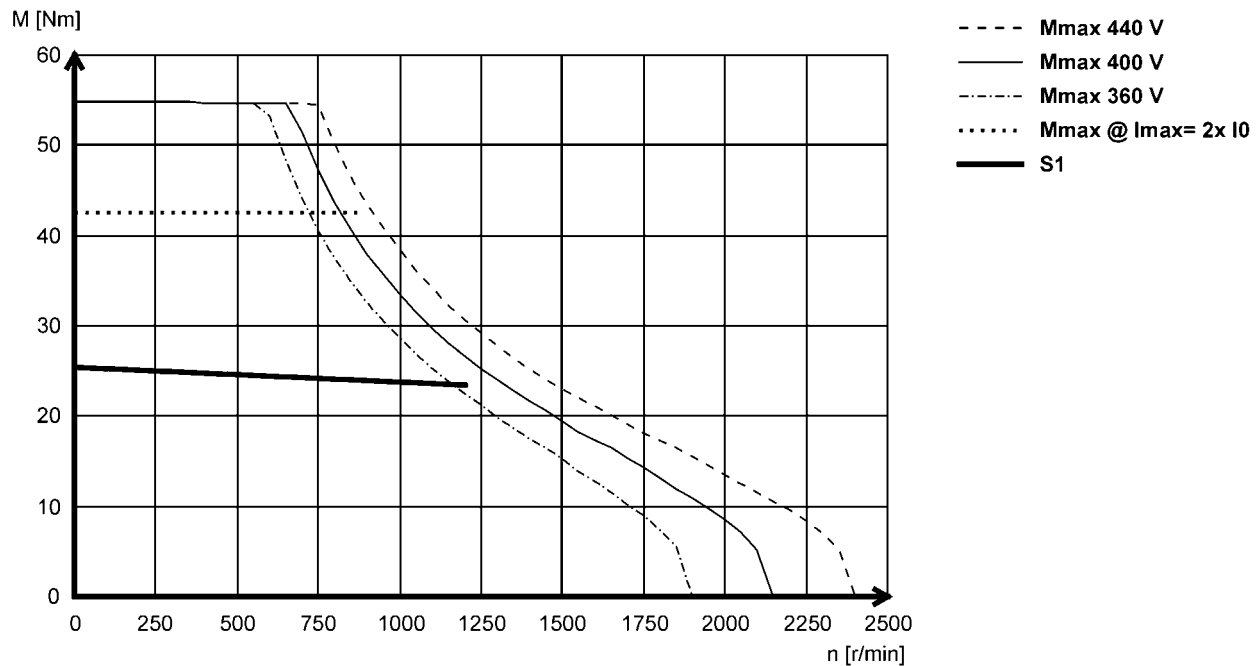

MCS14H15- (non-ventilated)

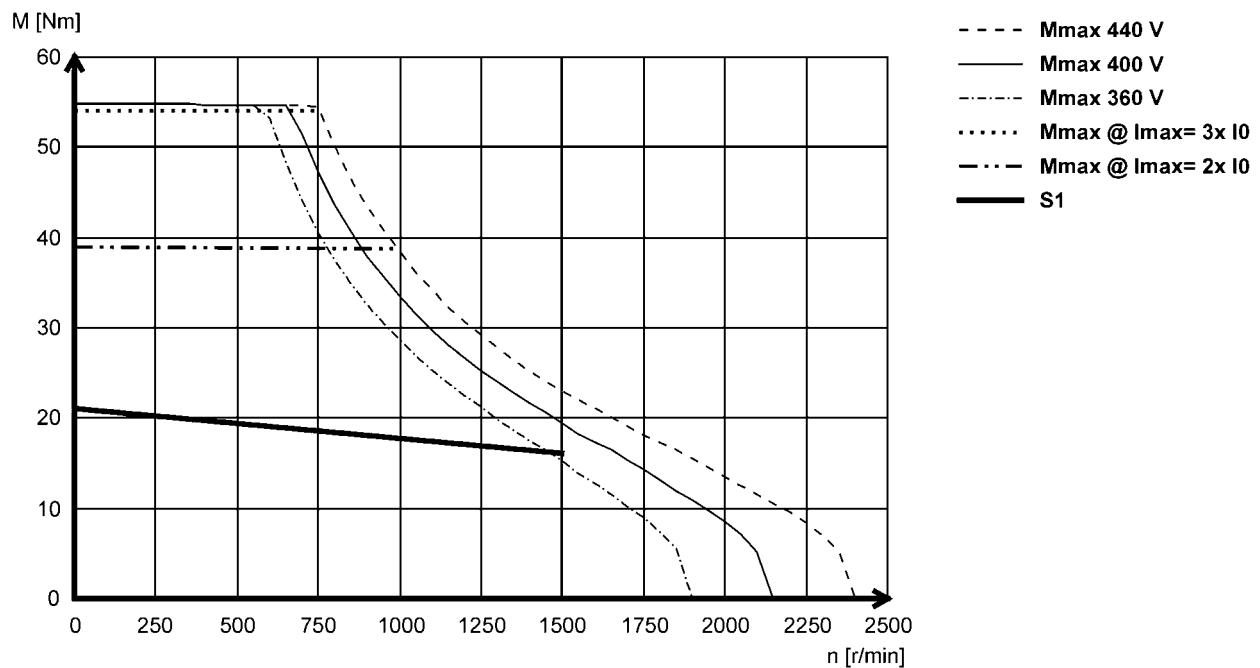

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14H28- (forced ventilated)

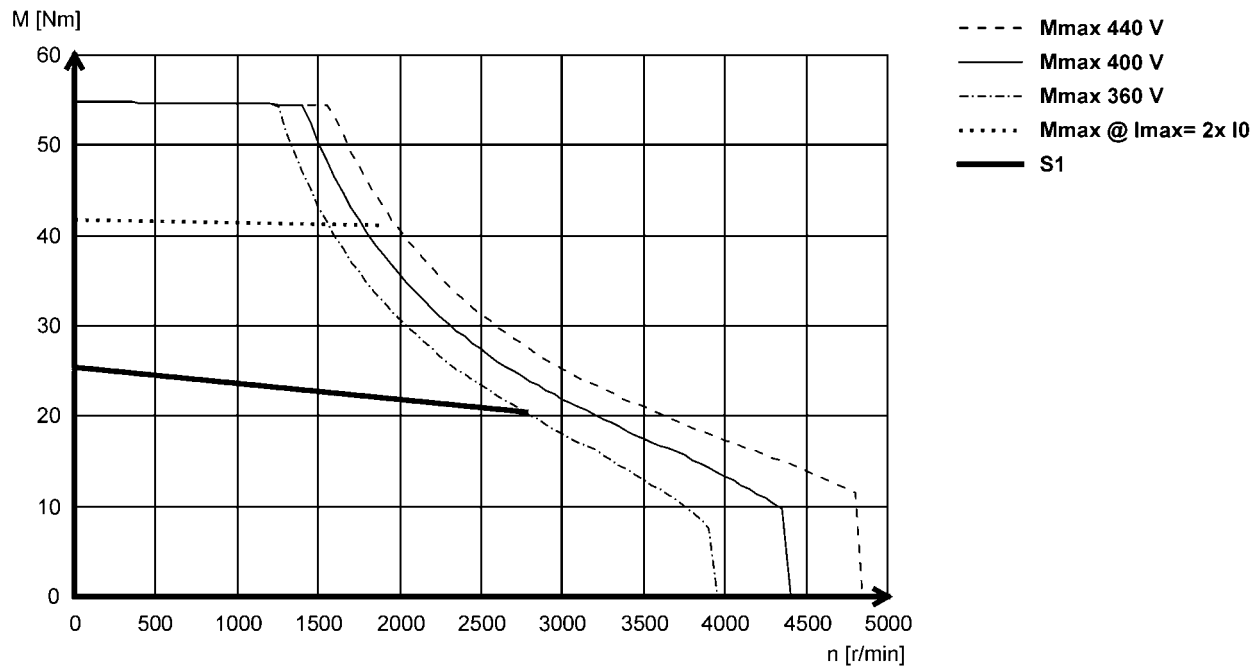

MCS14H32- (non-ventilated)

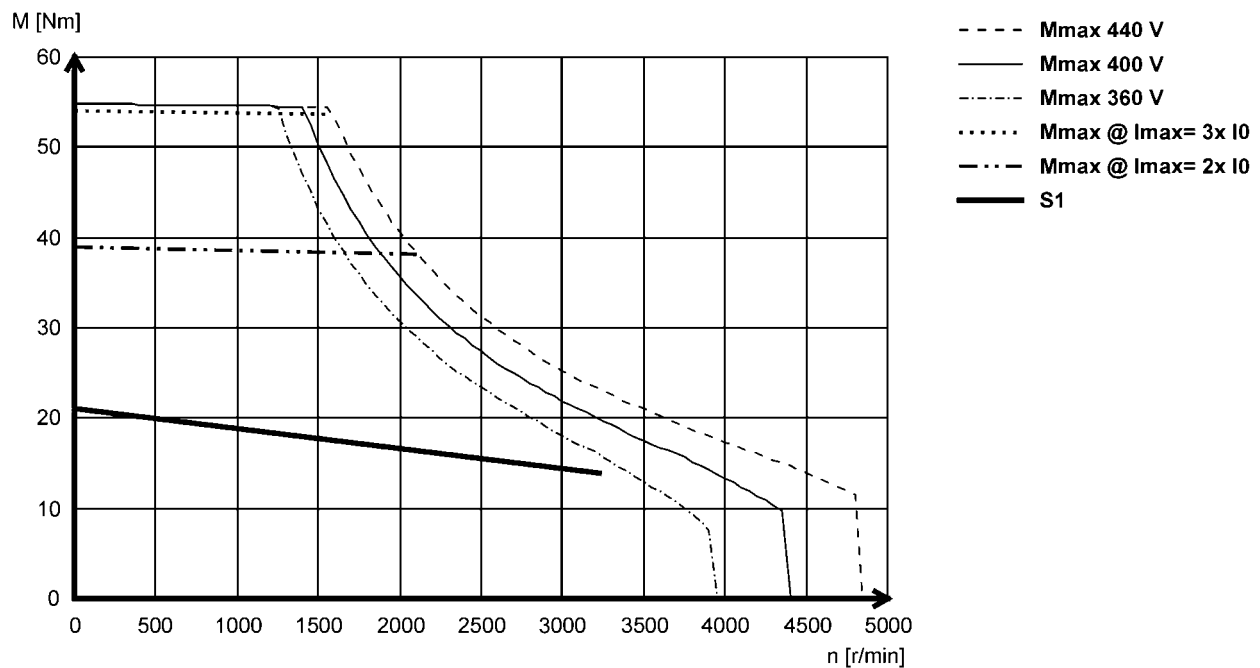

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14L14- (forced ventilated)

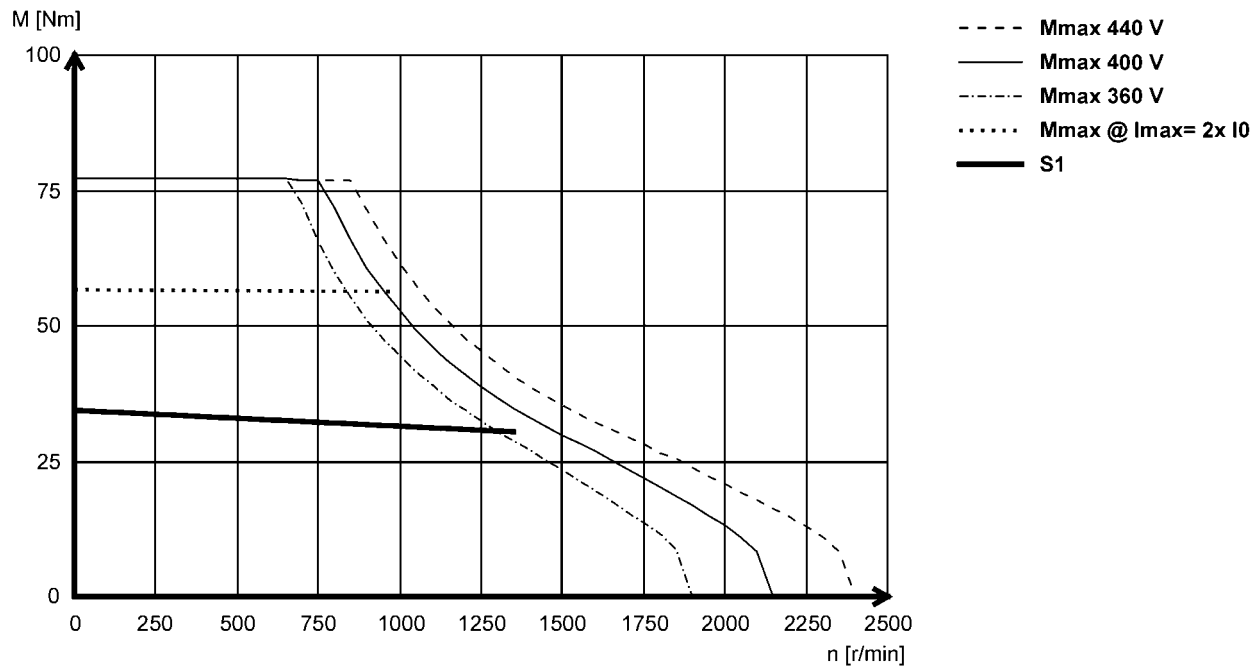

MCS14L15- (non-ventilated)

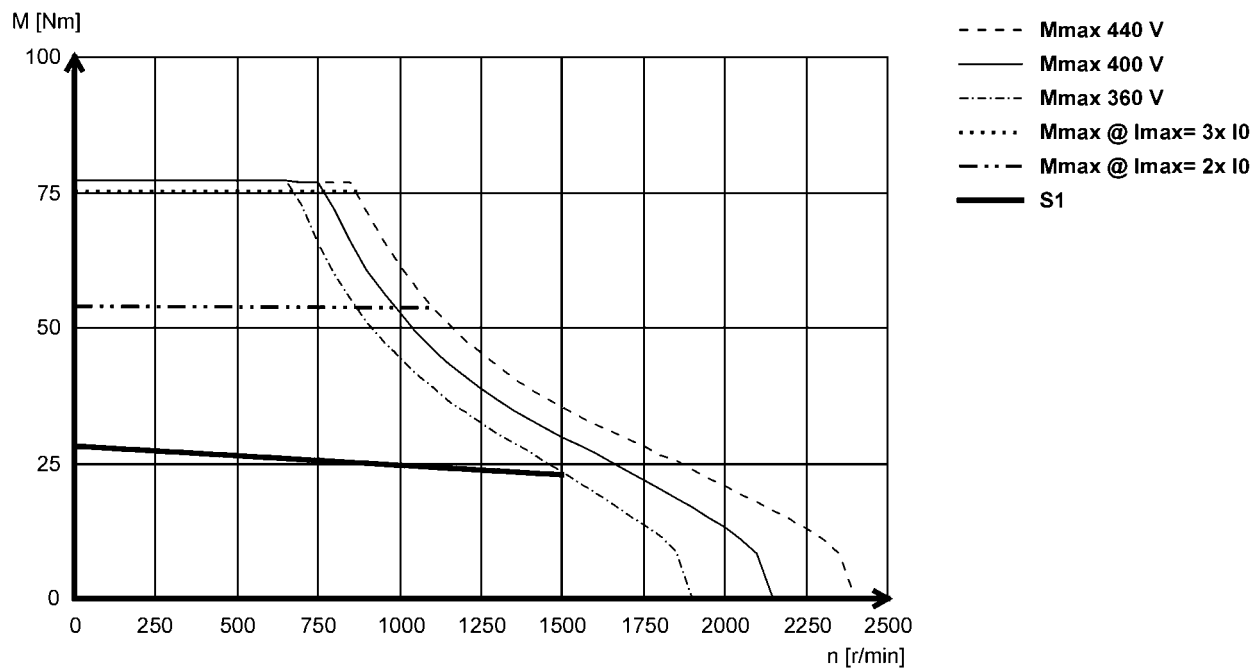

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14L30- (forced ventilated)

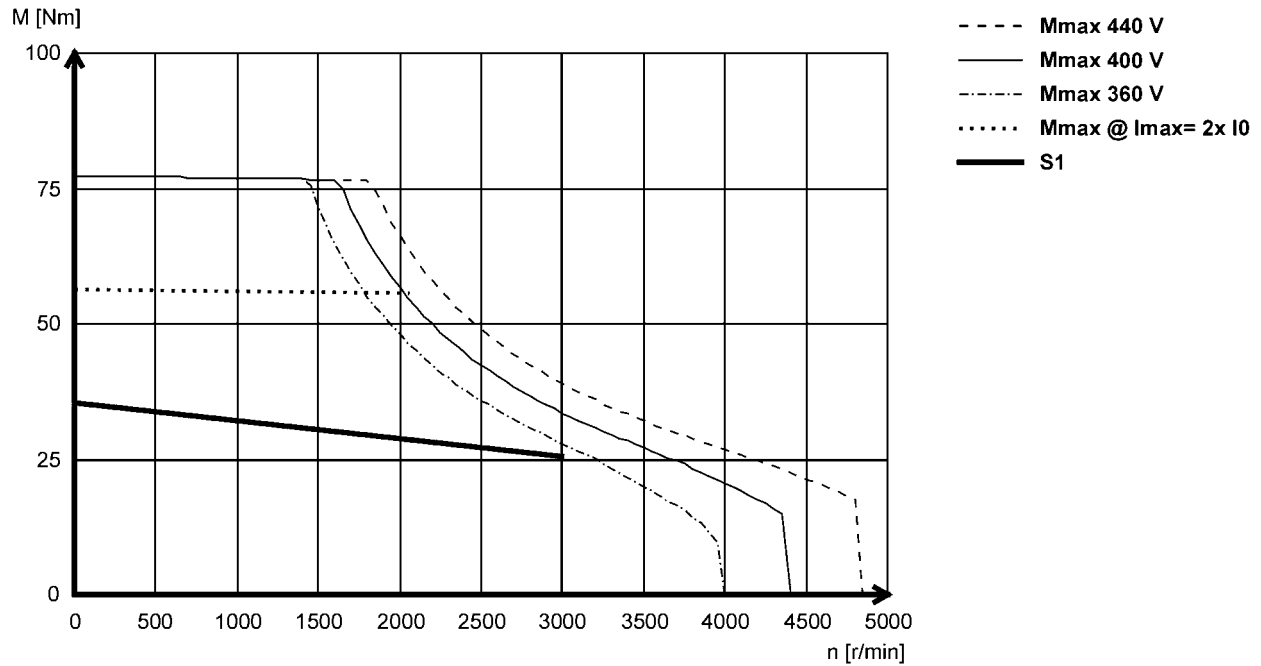

MCS14L32- (non-ventilated)

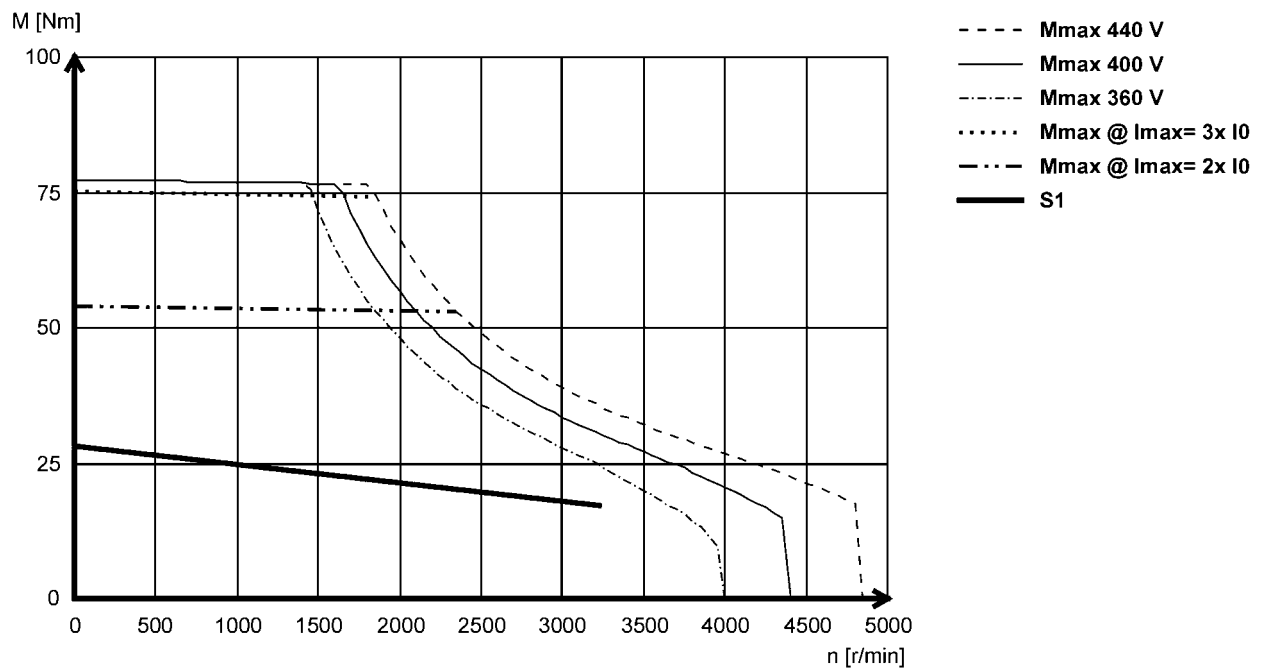

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14P11- (forced ventilated)

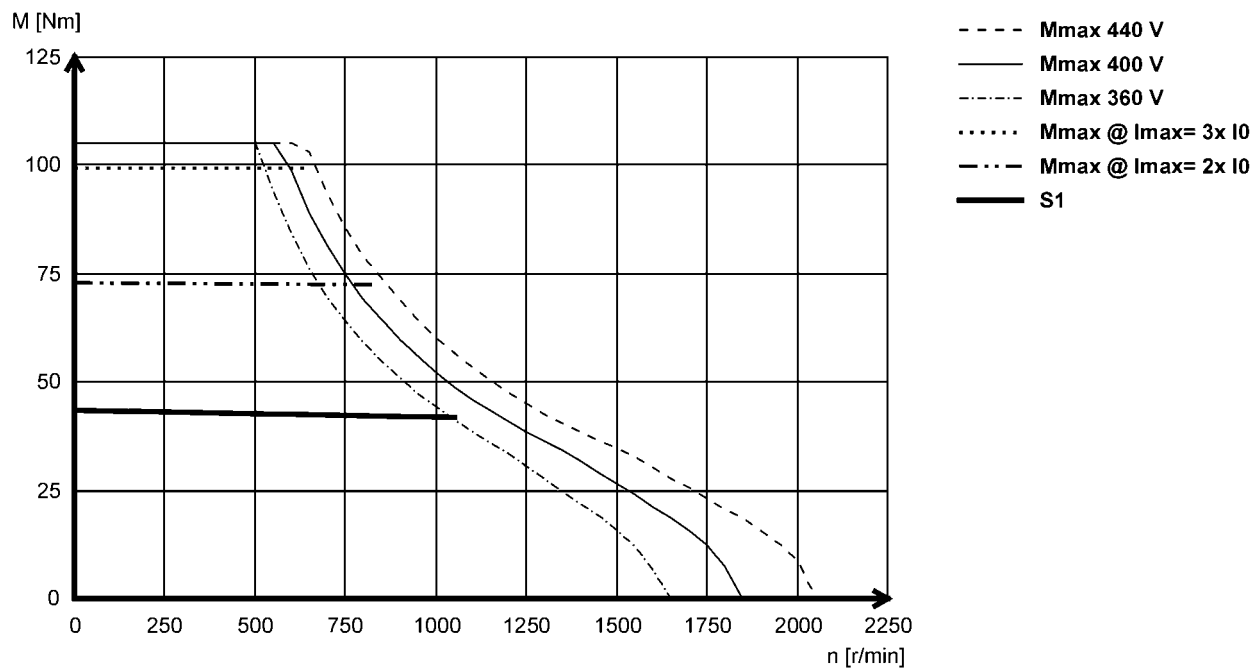

MCS14P14- (non-ventilated)

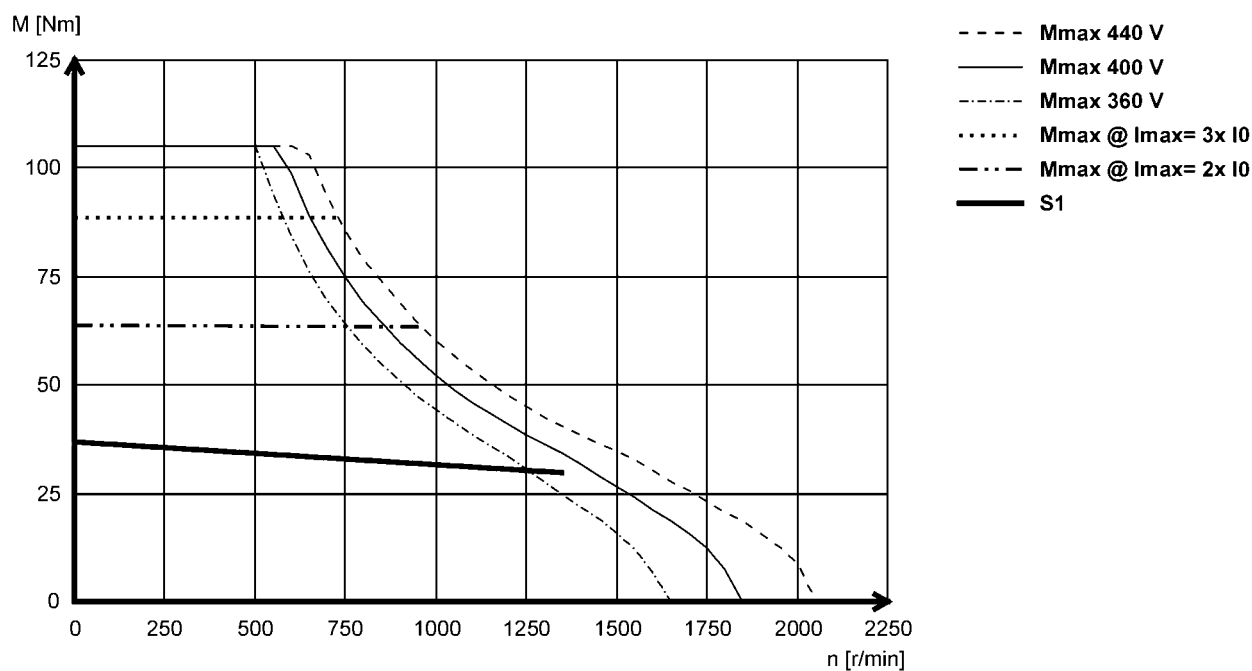

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14P26- (forced ventilated)

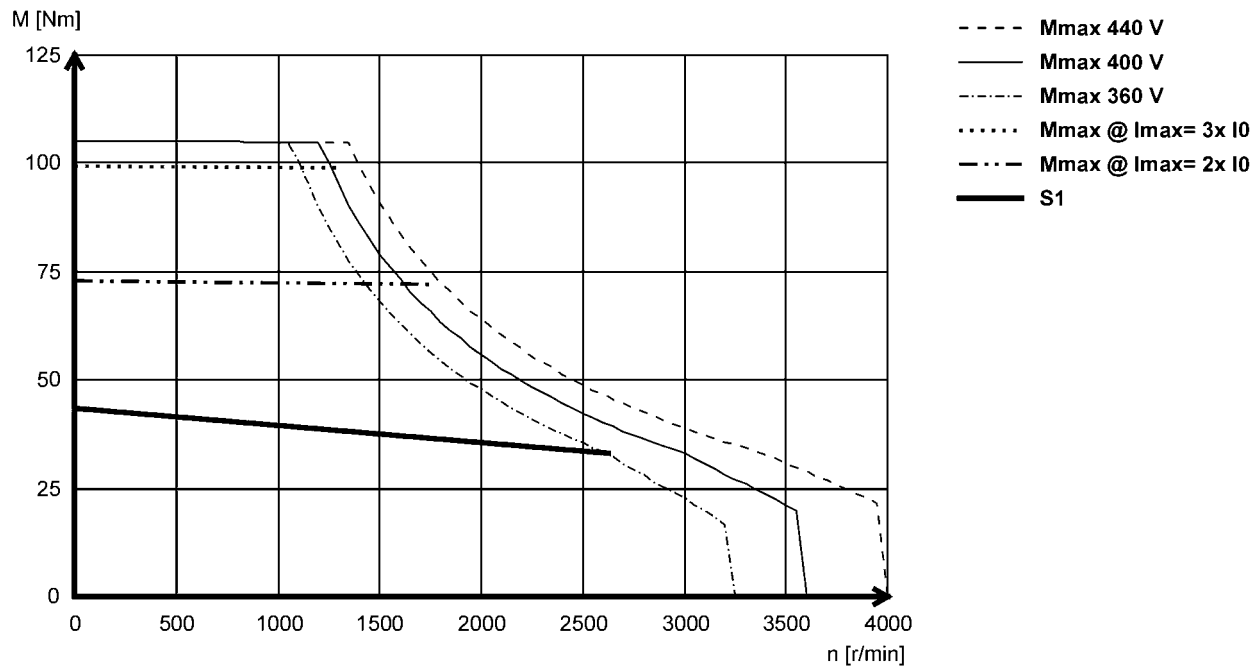

MCS14P32- (non-ventilated)

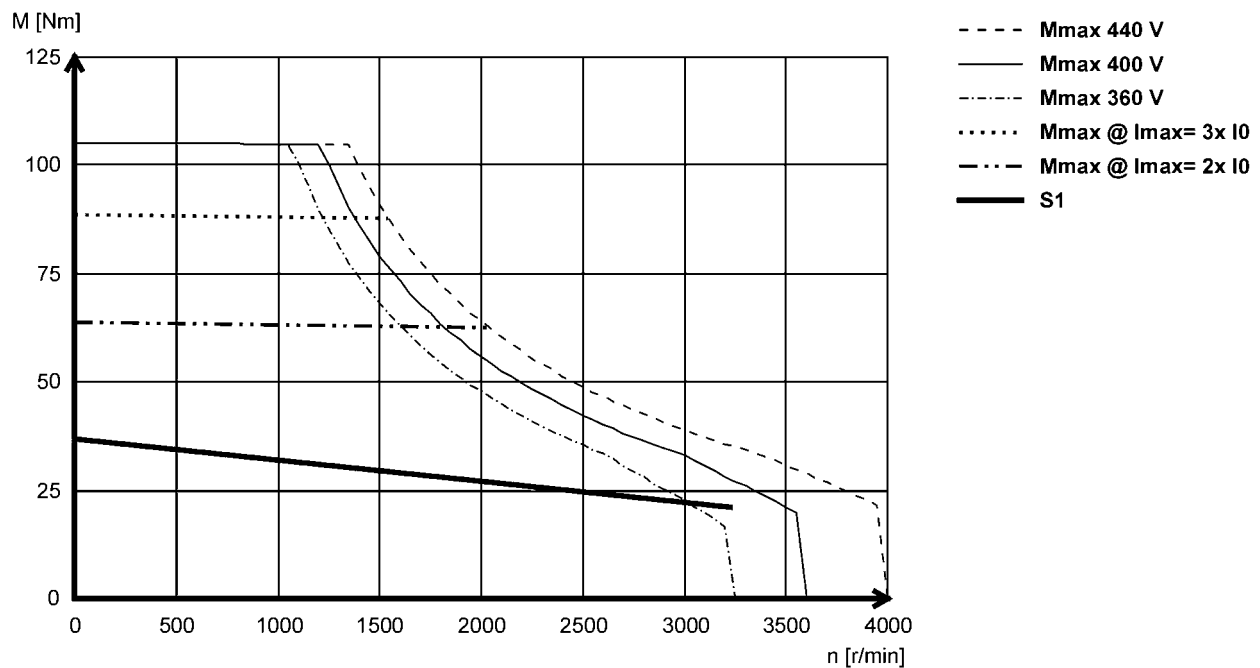





Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19F12- (forced ventilated)

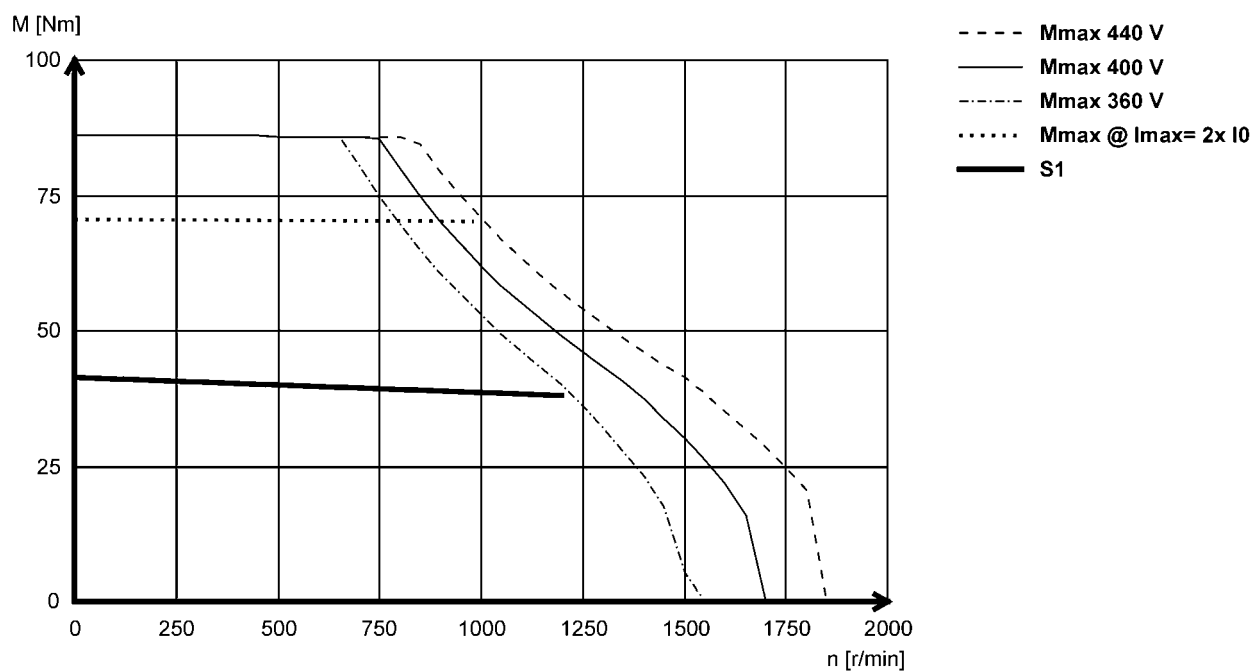

MCS19F14- (non-ventilated)

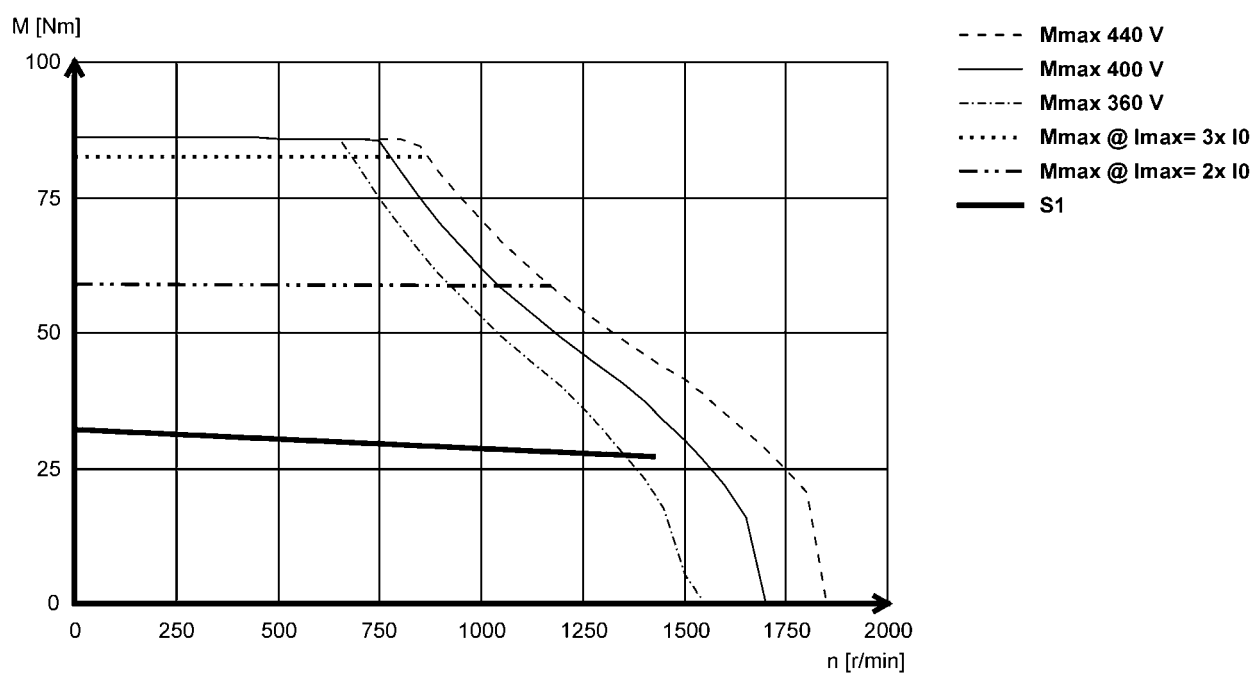

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19F29- (forced ventilated)

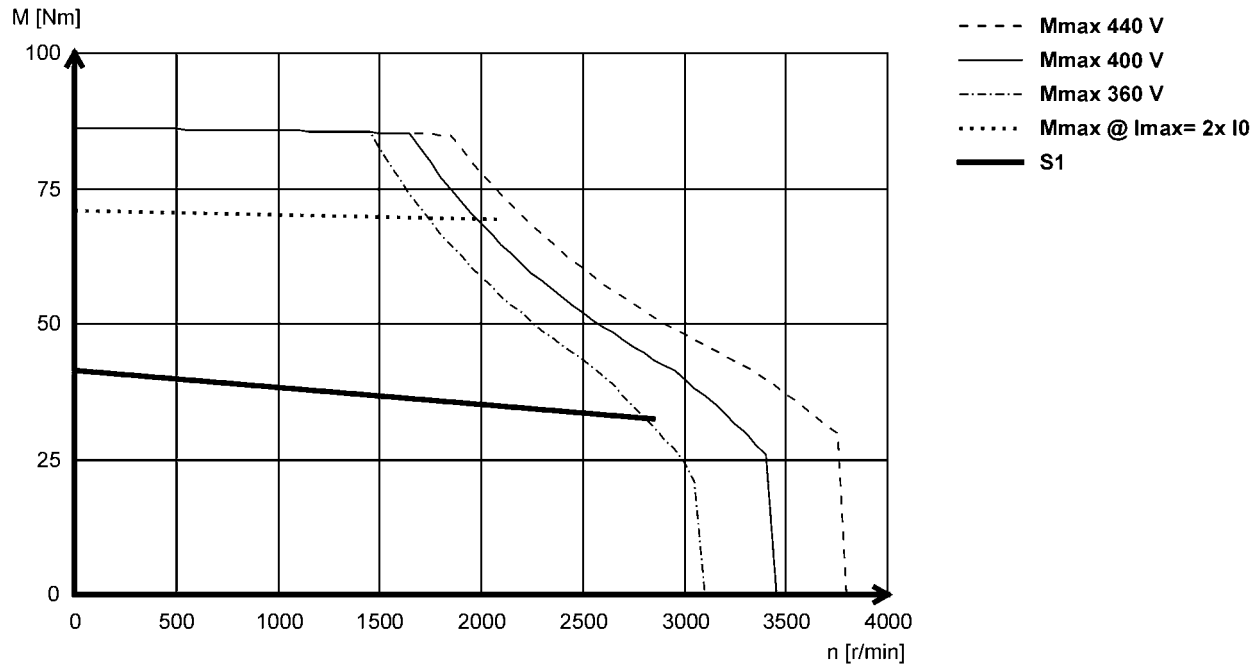

MCS19F30- (non-ventilated)

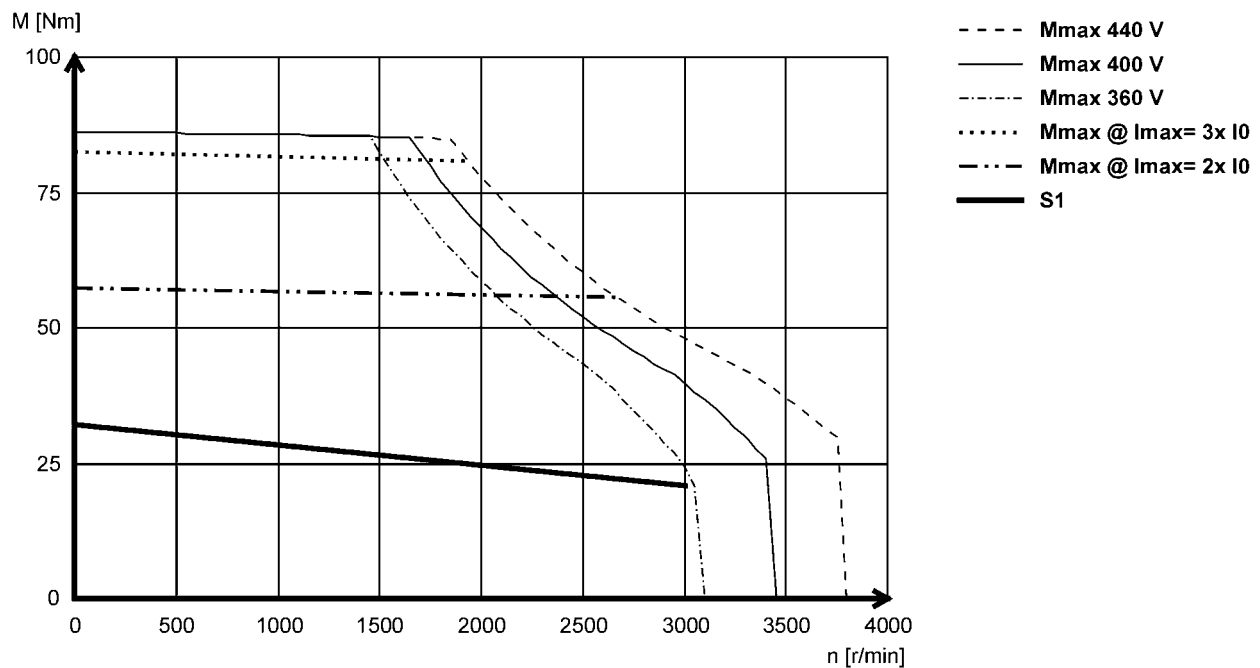

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19J12- (forced ventilated)

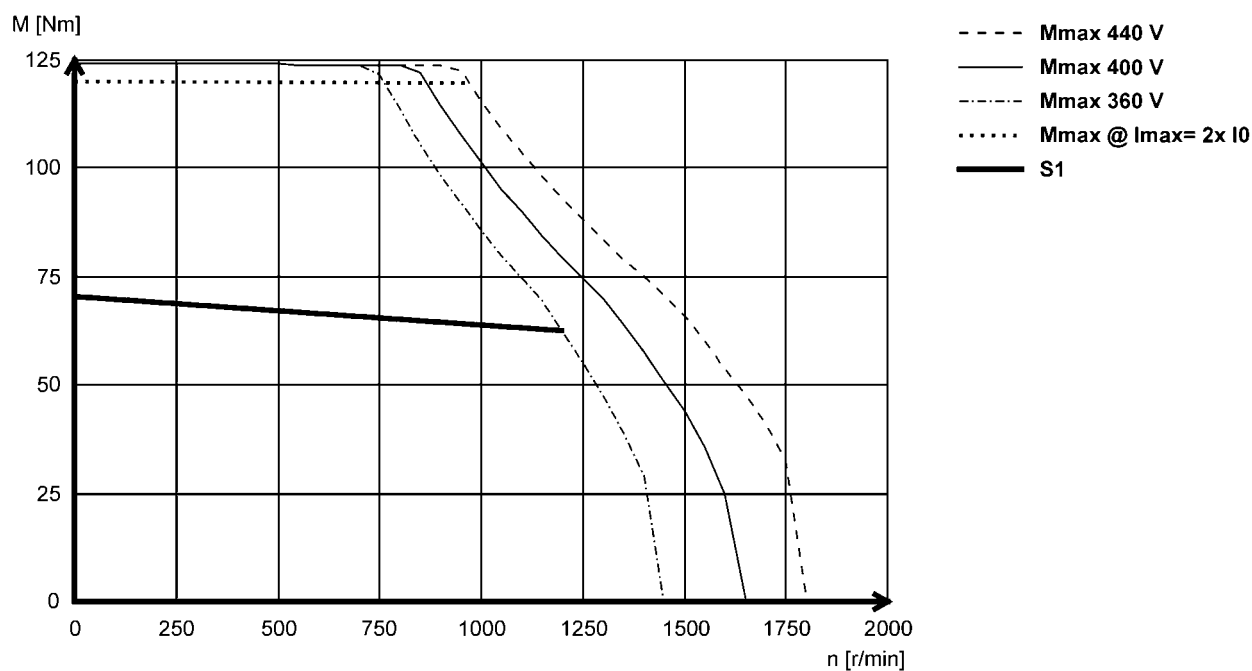

MCS19J14- (non-ventilated)

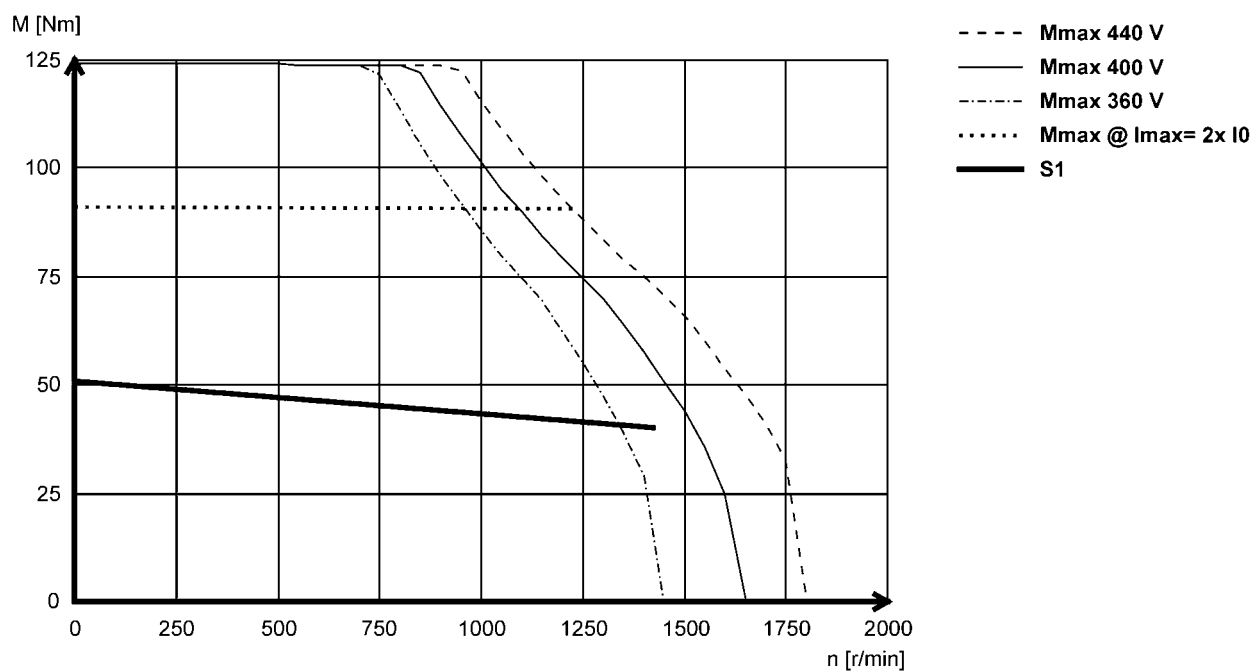

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19J29- (forced ventilated)

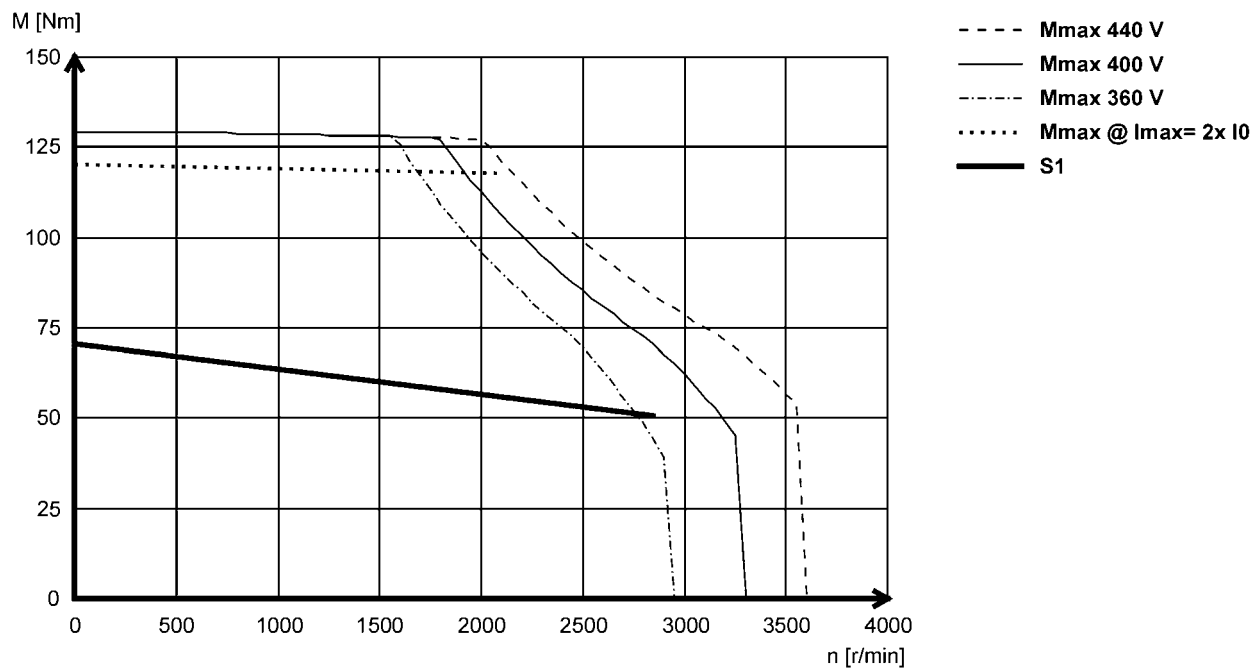

MCS19J30- (non-ventilated)

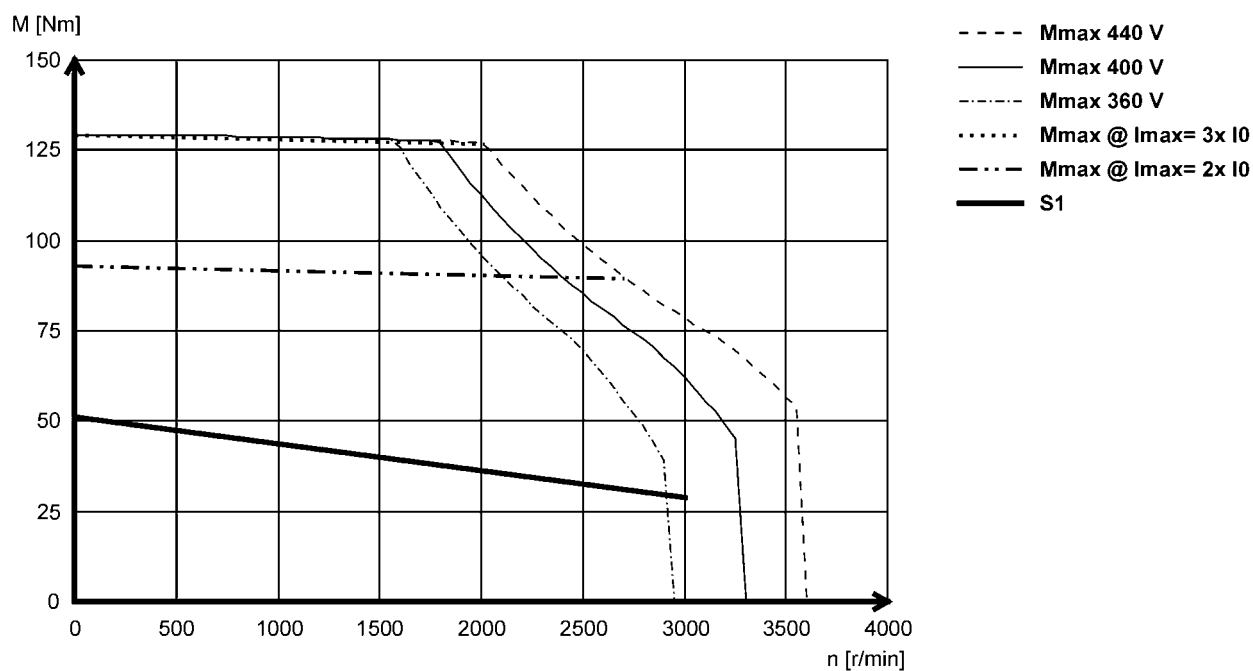

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19P12 (forced ventilated)

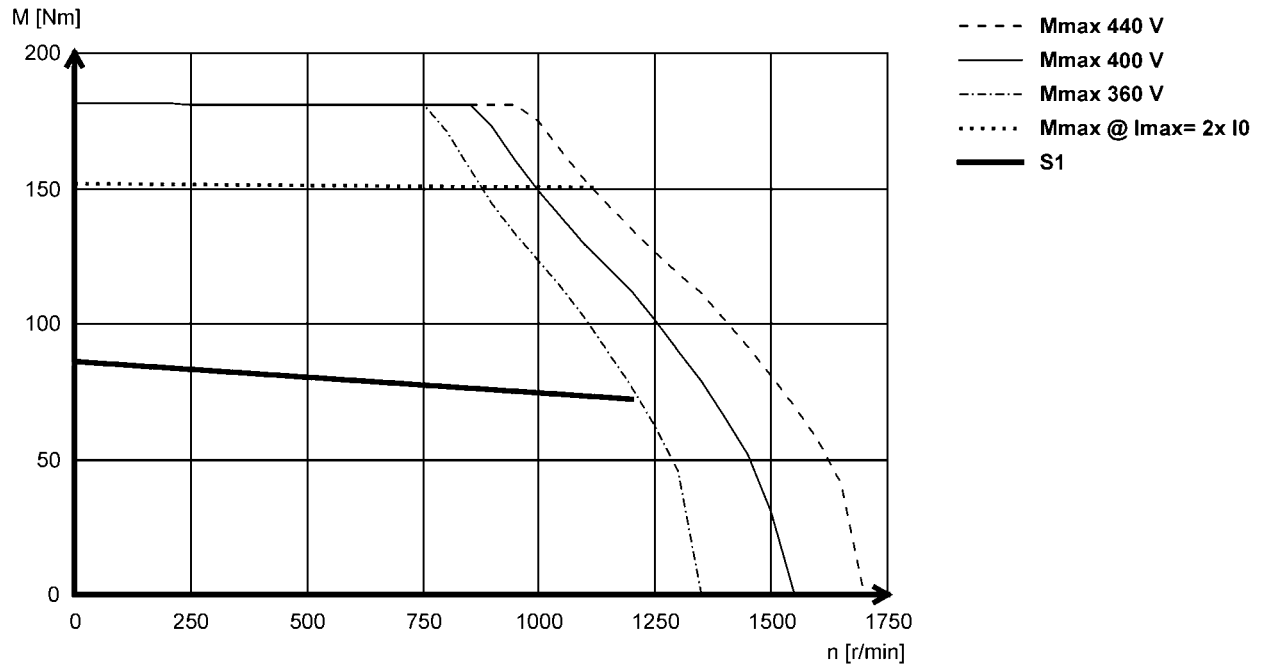

MCS19P14- (non-ventilated)

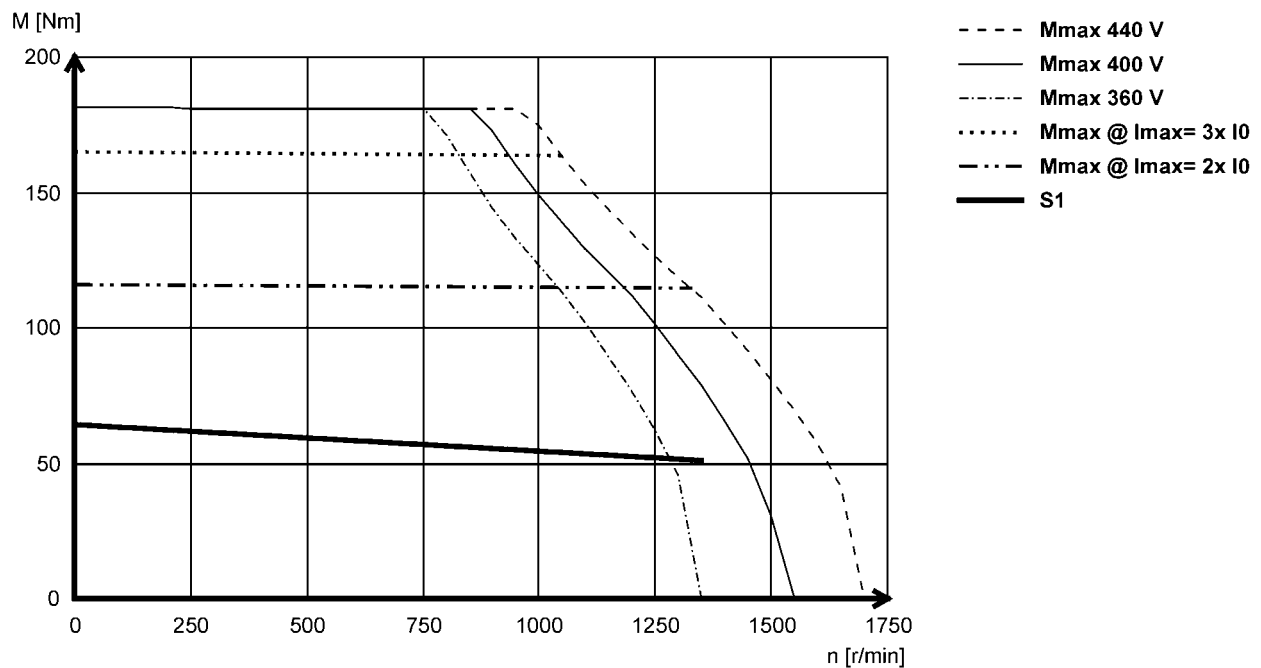

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19P29- (forced ventilated)

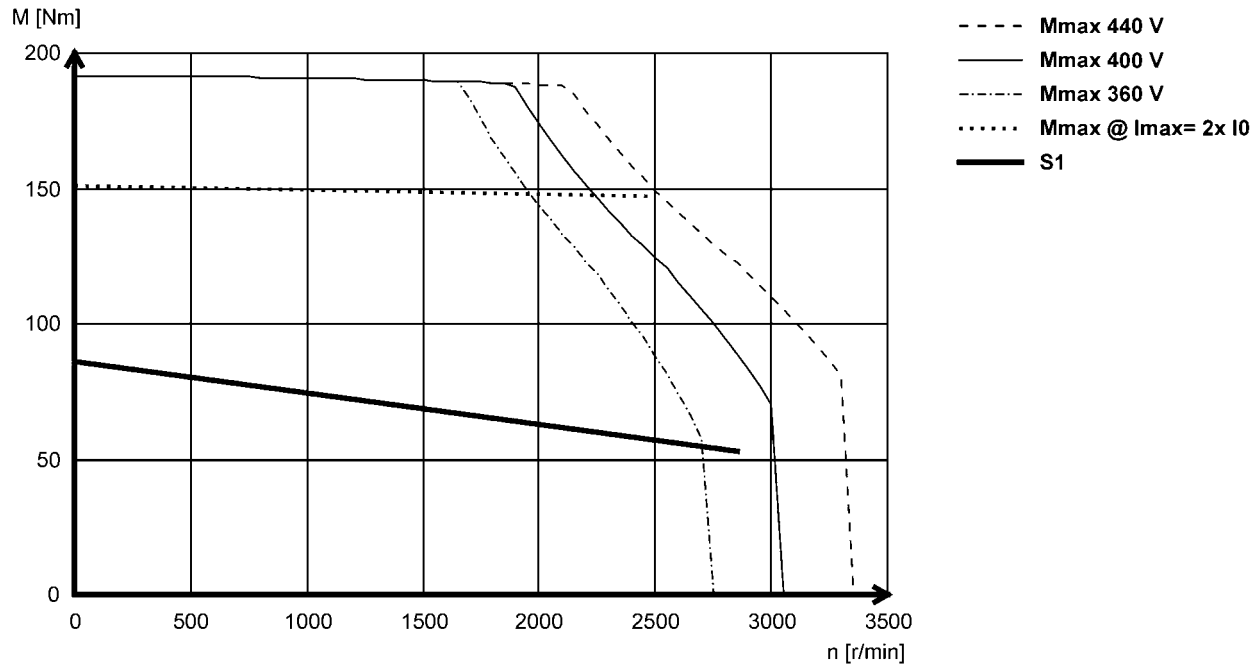

MCS19P30- (non-ventilated)

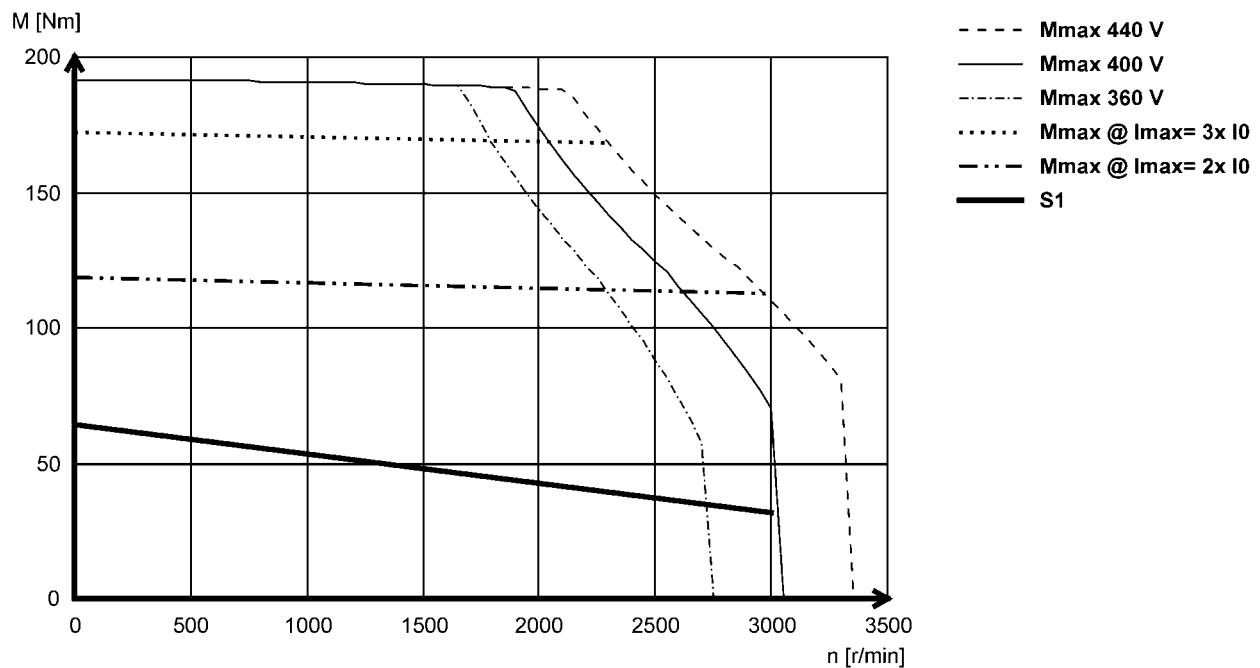

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06C41L (non-ventilated)

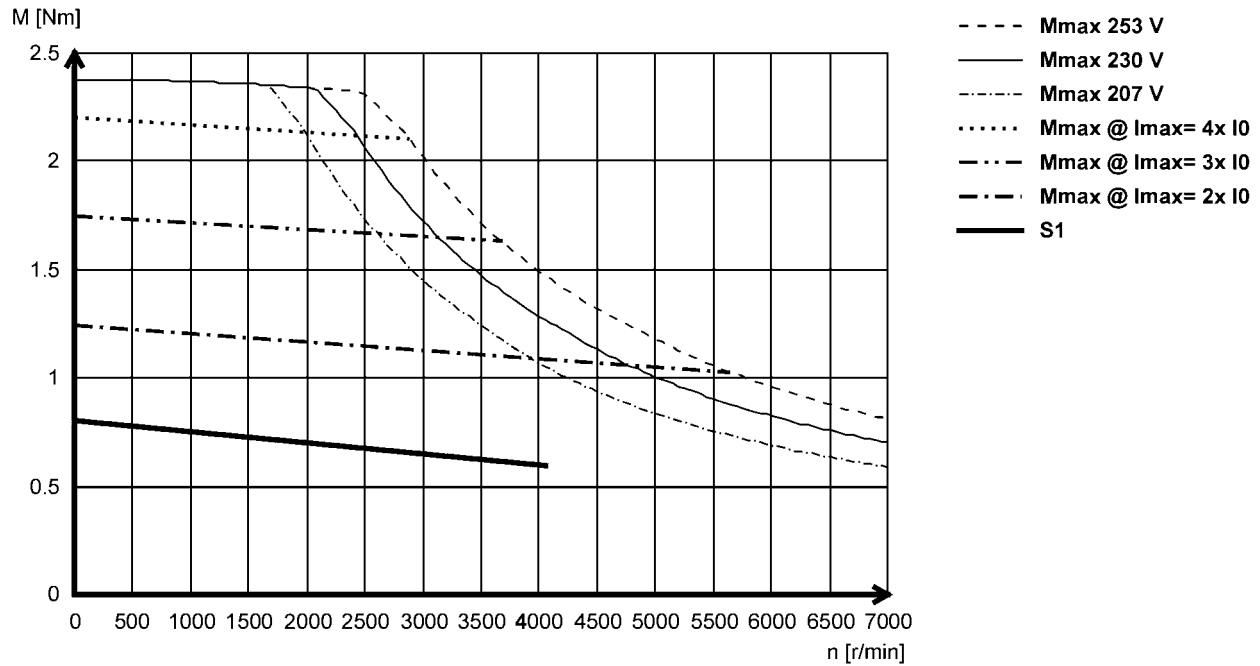

MCS06C60L (non-ventilated)

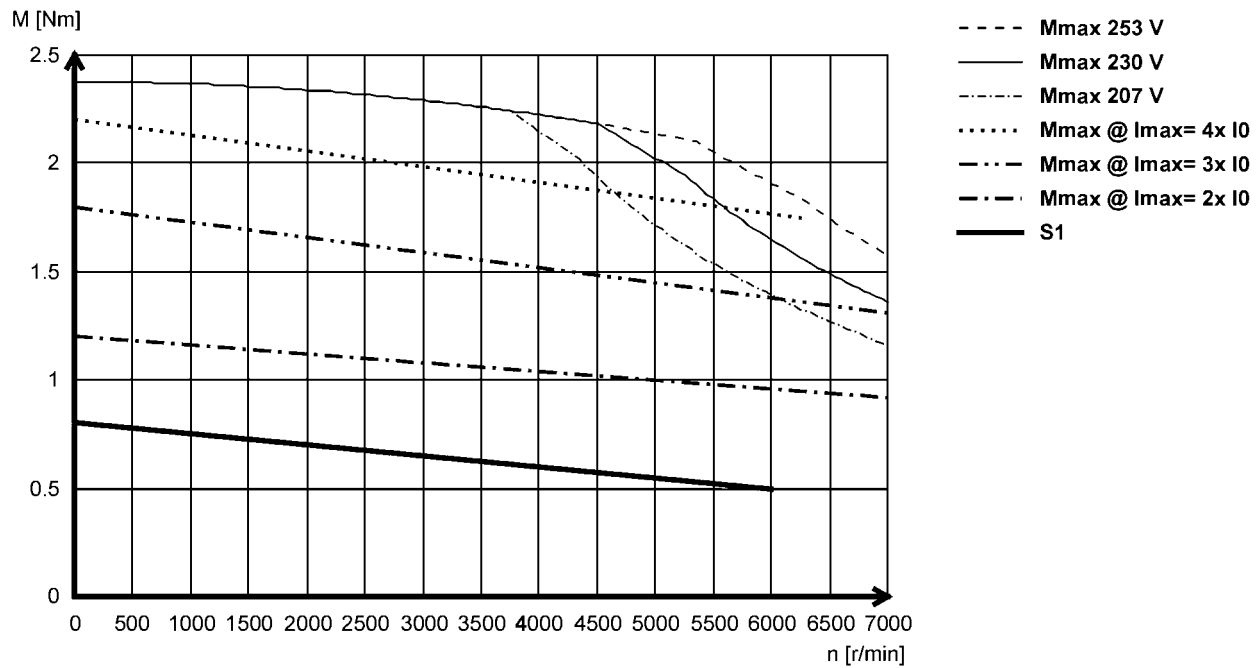

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06F41L (non-ventilated)

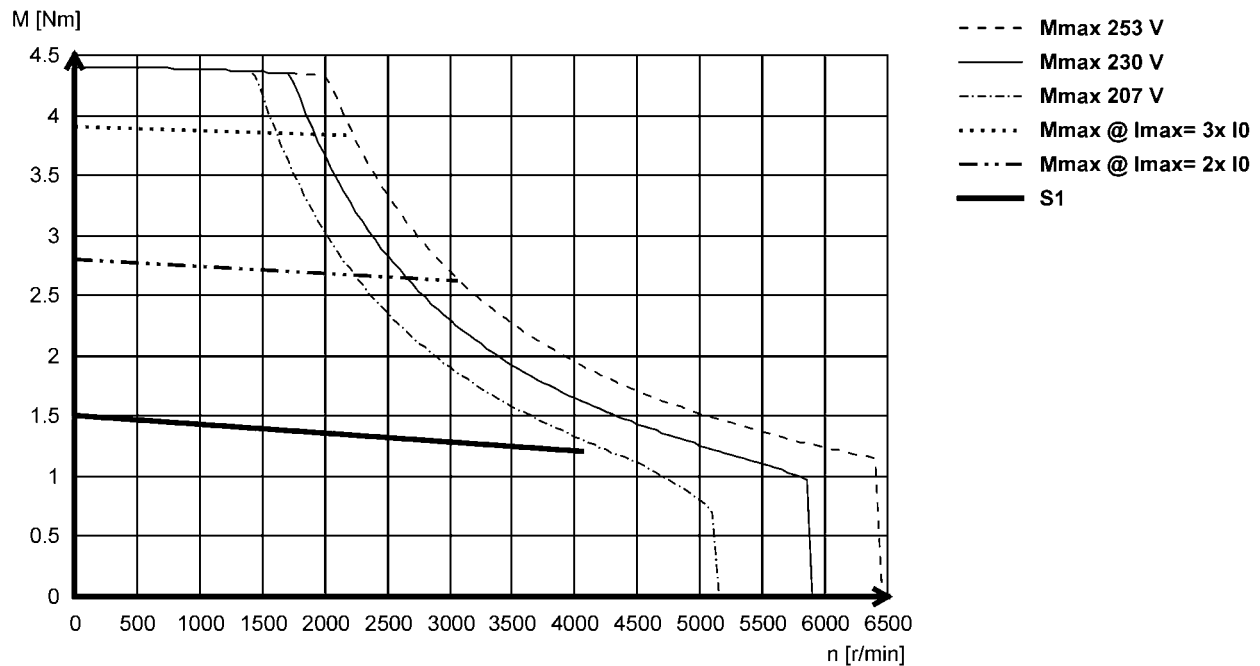

MCS06F60L (non-ventilated)

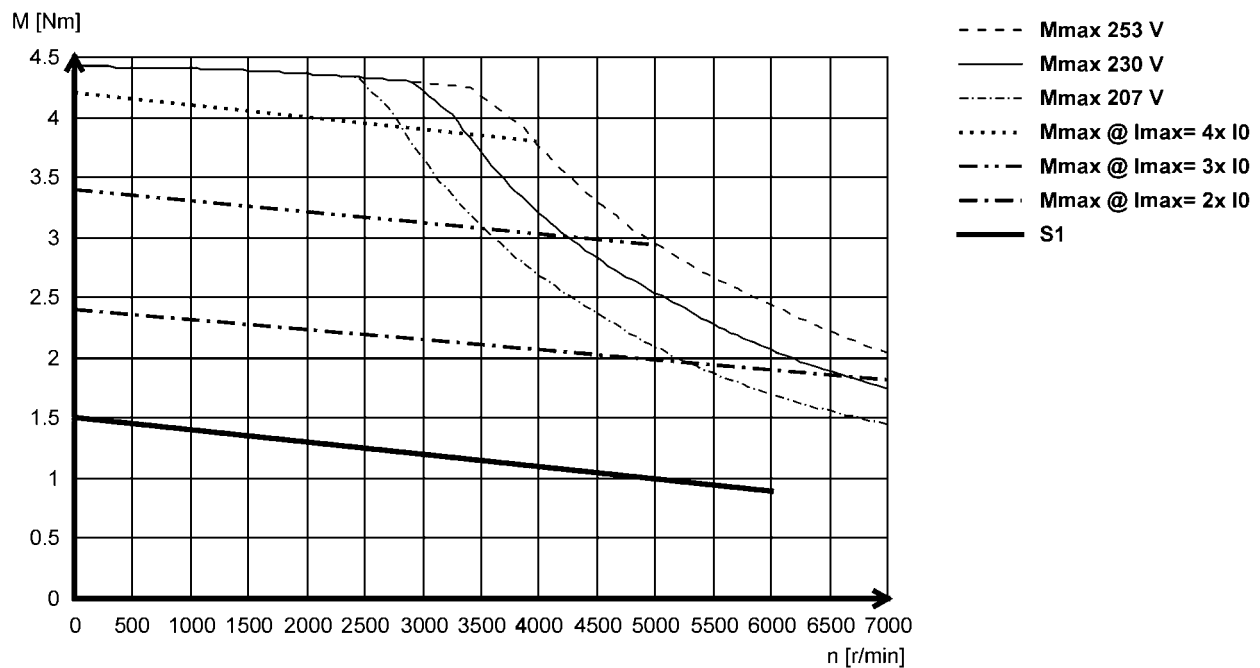

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06I41L (non-ventilated)

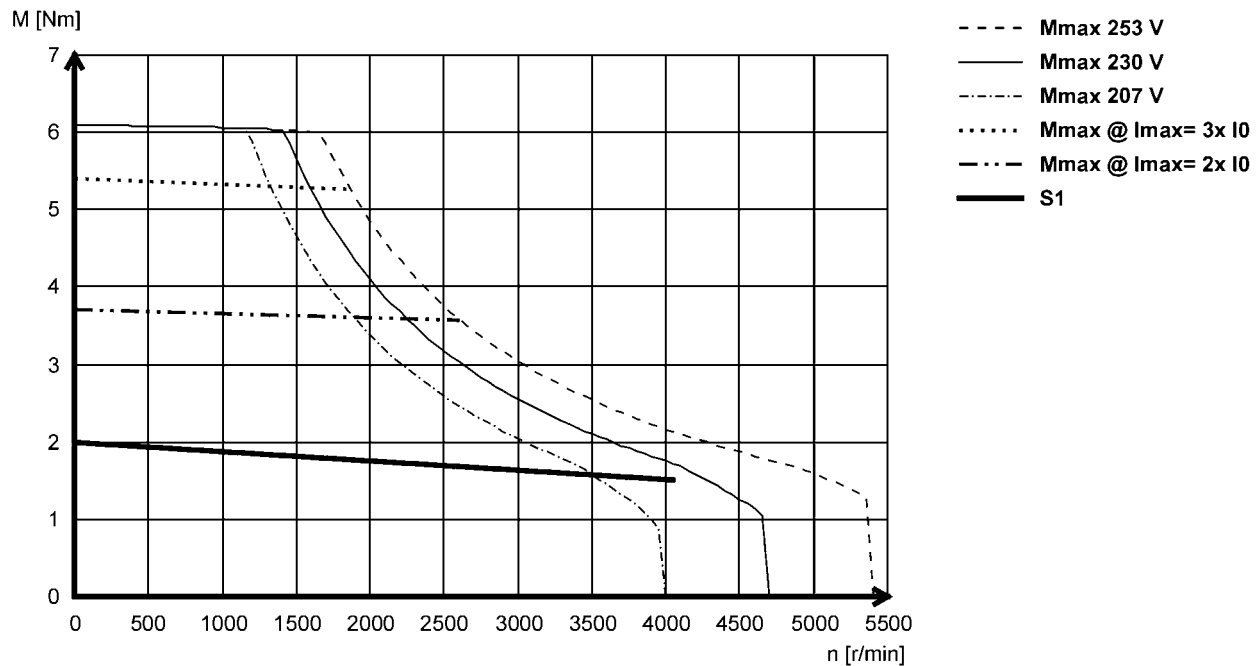

MCS06I60L (non-ventilated)

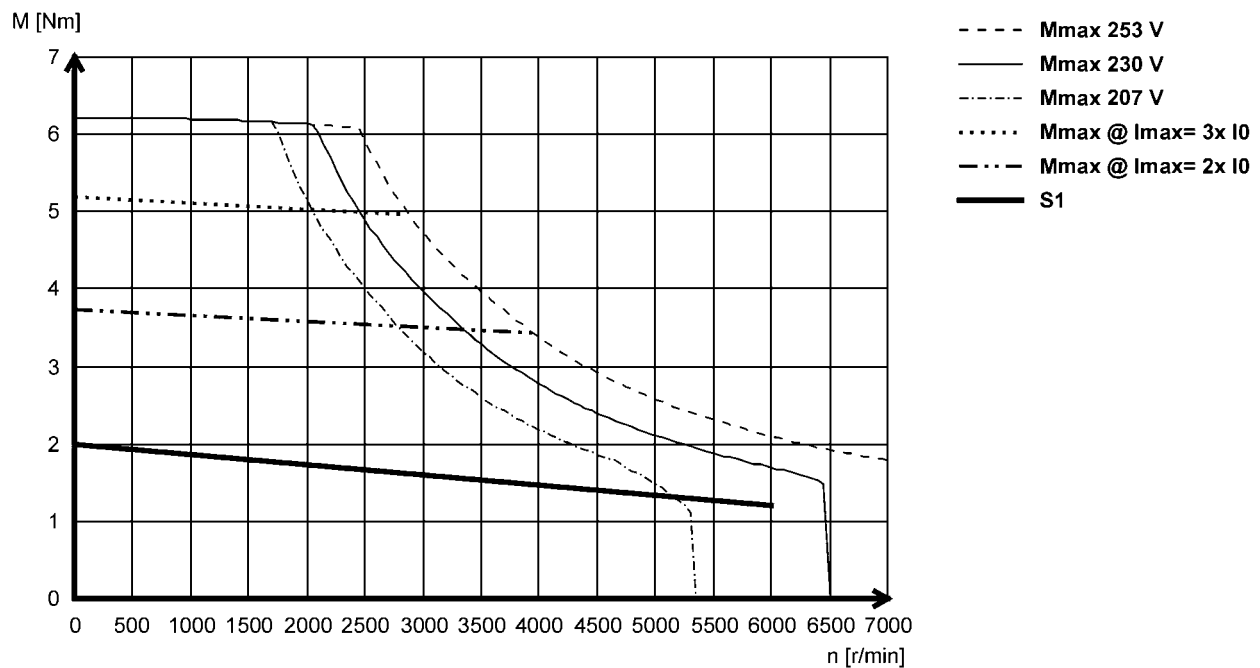

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09D41L (non-ventilated)

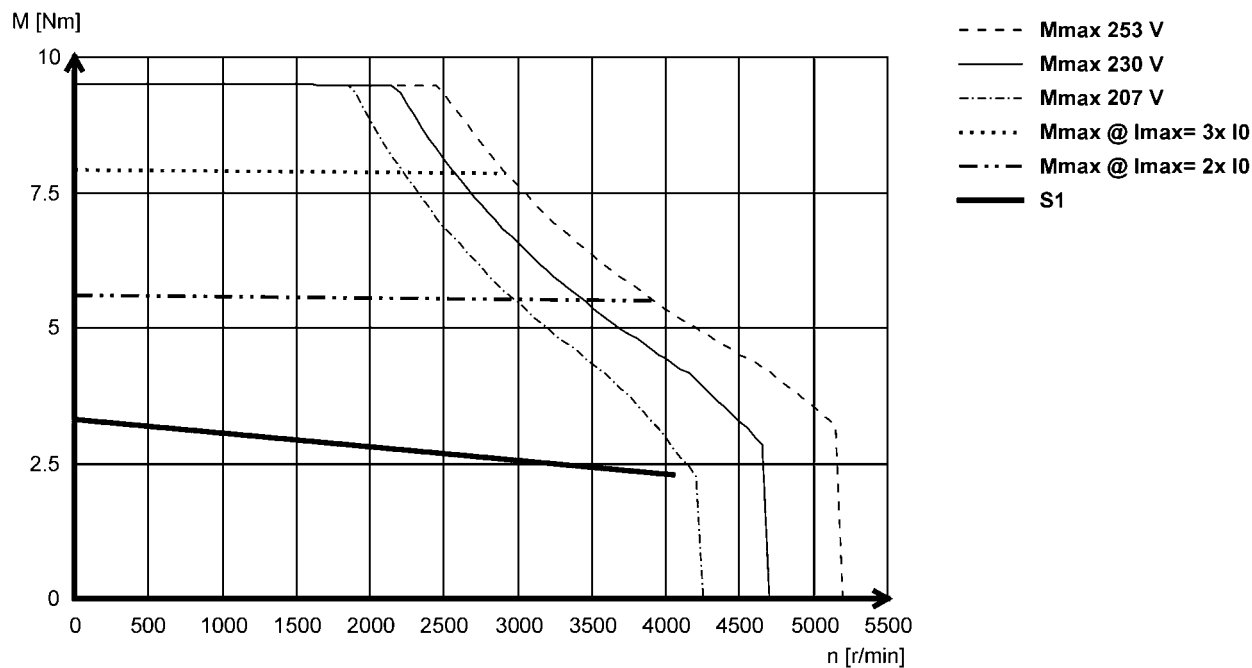

MCS09D60L (non-ventilated)

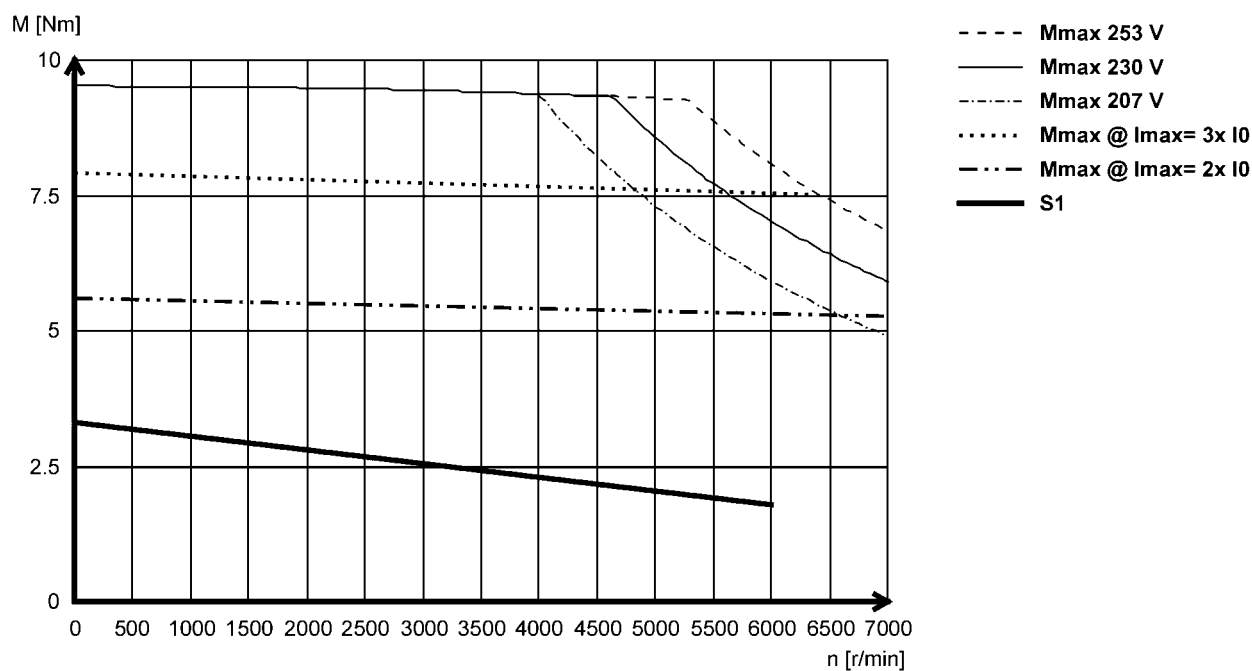

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09F38L (non-ventilated)

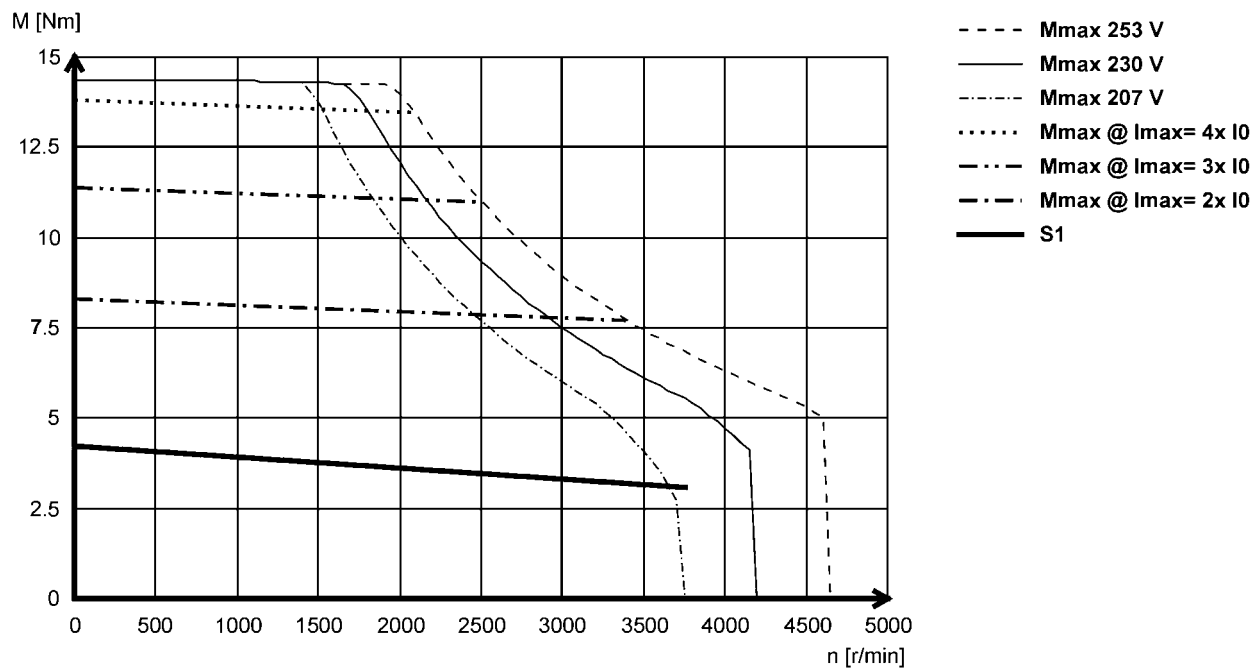

MCS09F60L (non-ventilated)

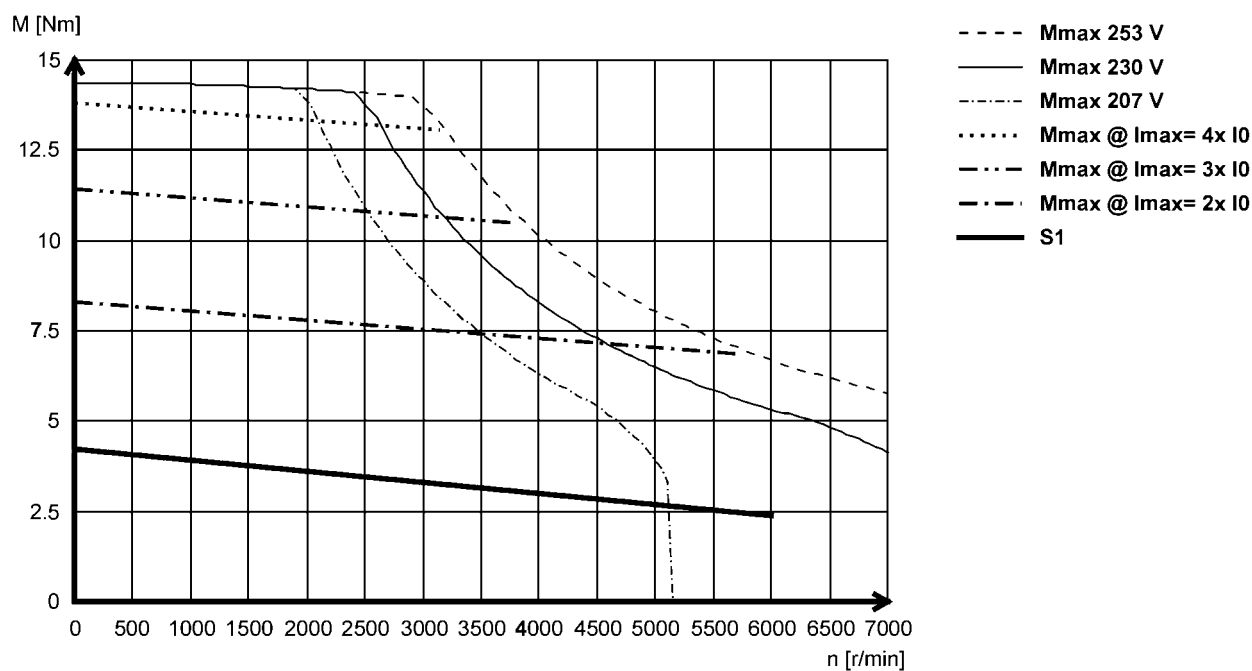

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09H41L (non-ventilated)

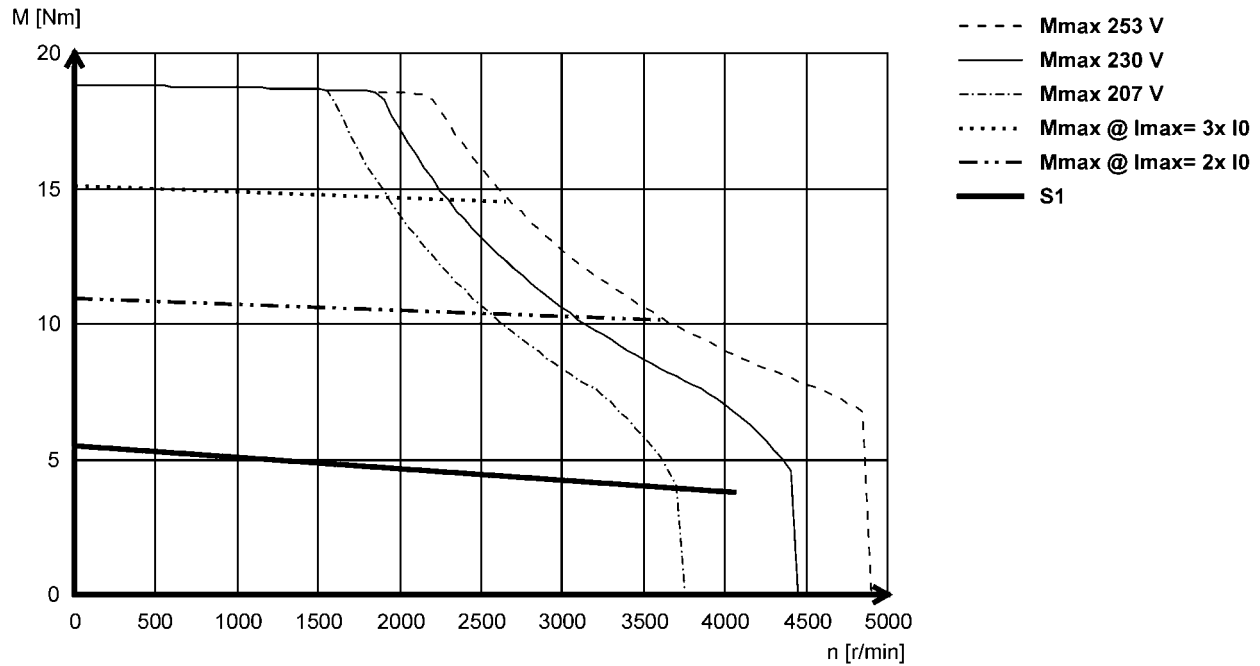

MCS09H60L (non-ventilated)

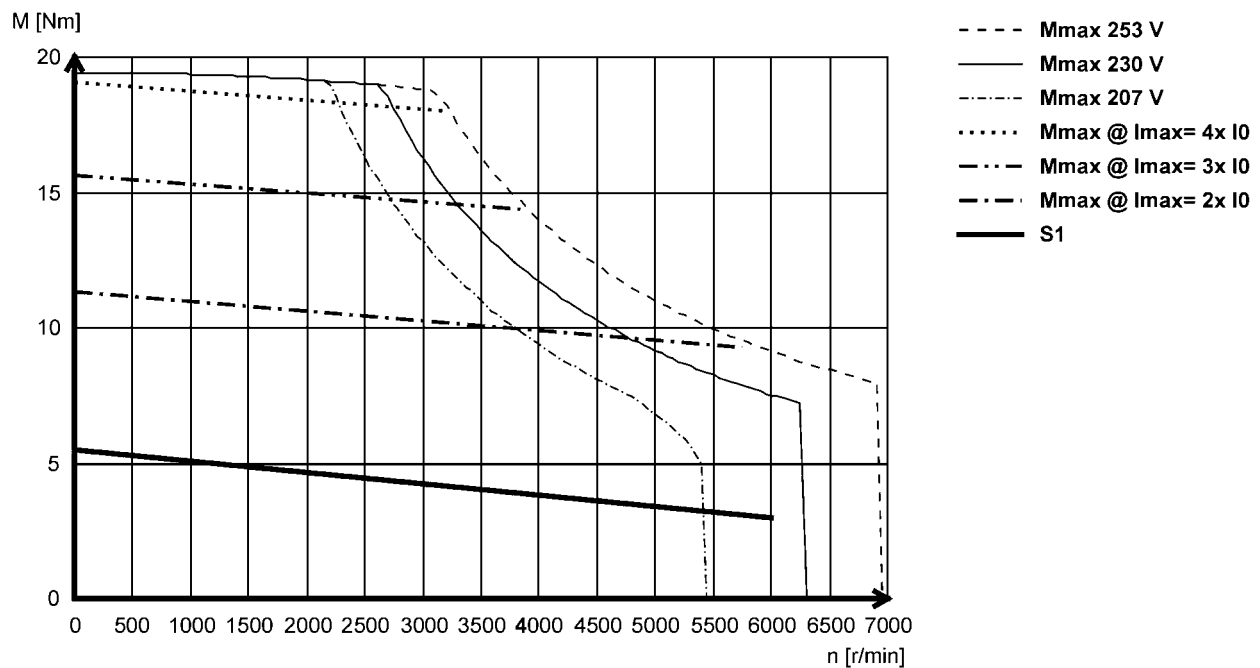

MCS synchronous servo motors


Technical data



Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09L41L (non-ventilated)

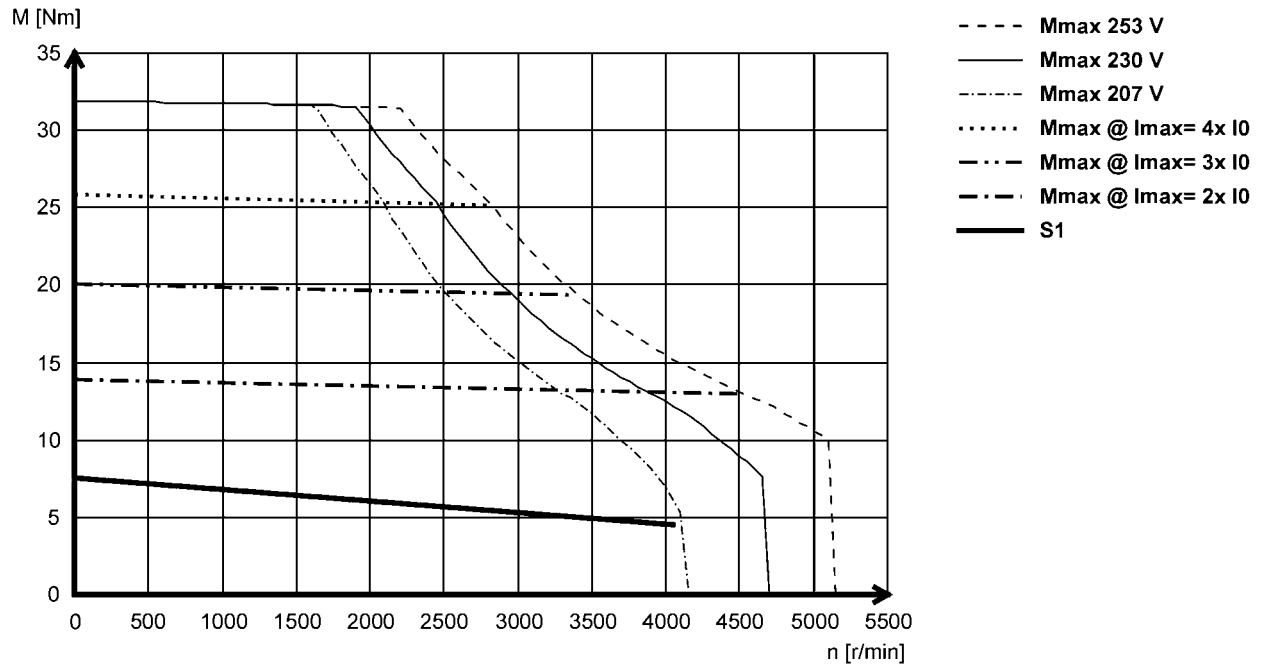

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12D20L (non-ventilated)

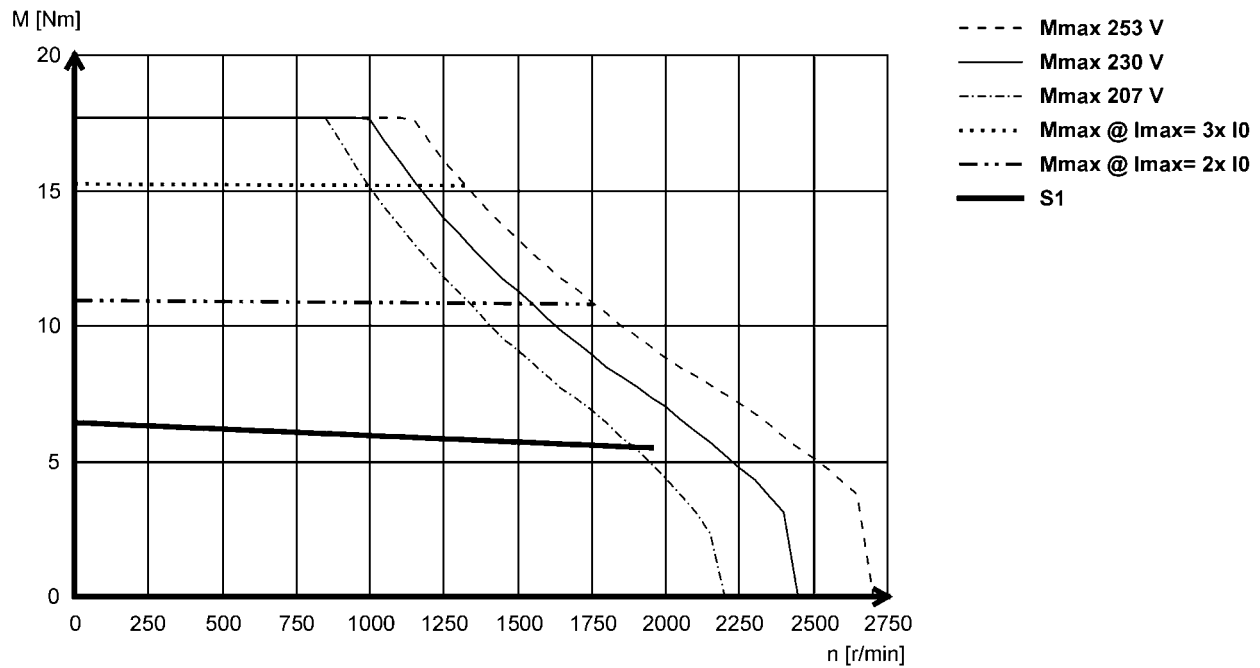

MCS12D41L (non-ventilated)

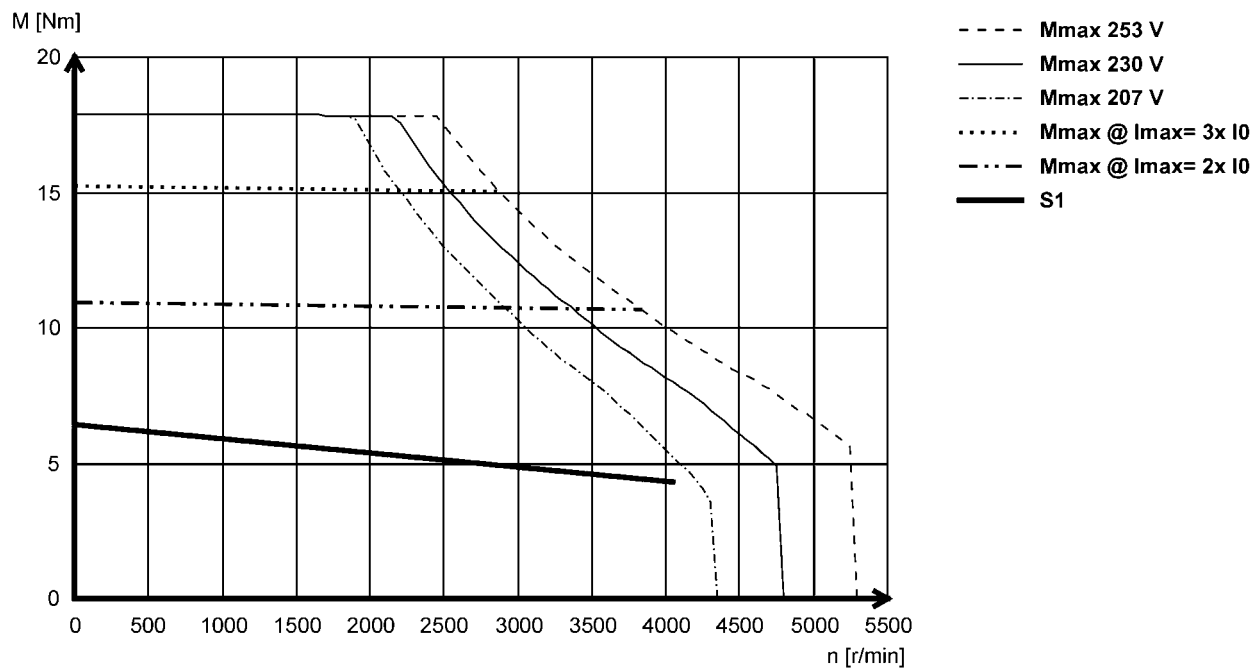

MCS synchronous servo motors


Technical data




Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12H15L (non-ventilated)

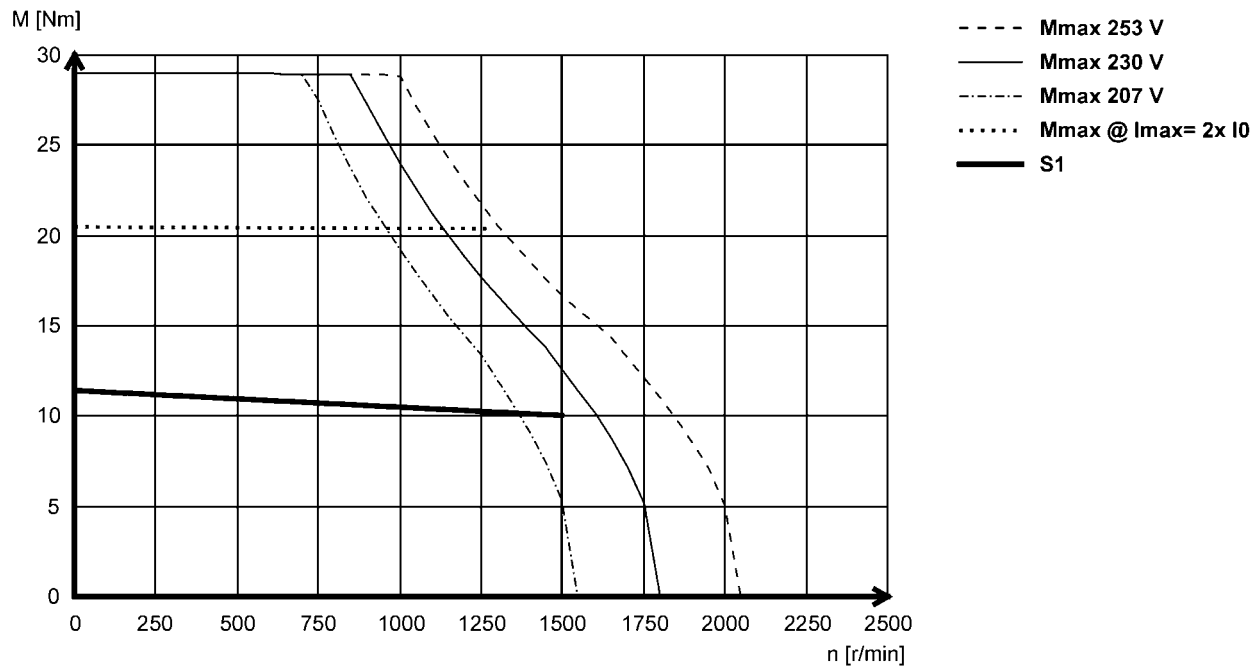

MCS12H30L- (non-ventilated)

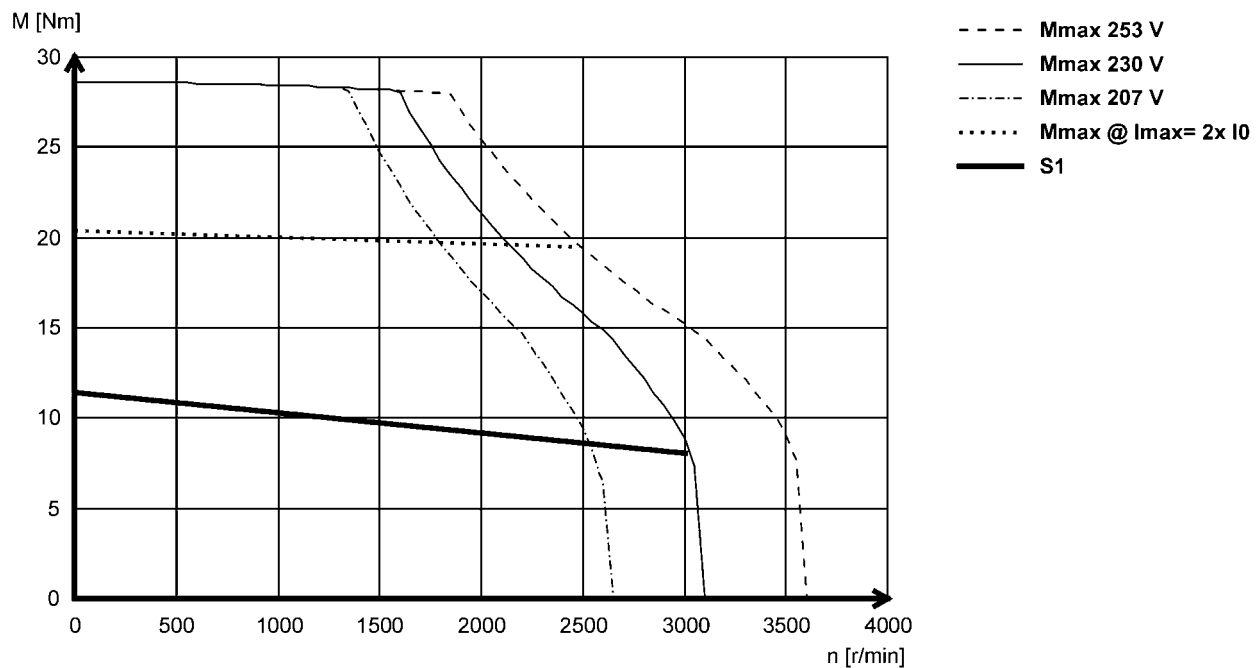

MCS synchronous servo motors


Technical data



Torque characteristics


- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12L20L (non-ventilated)

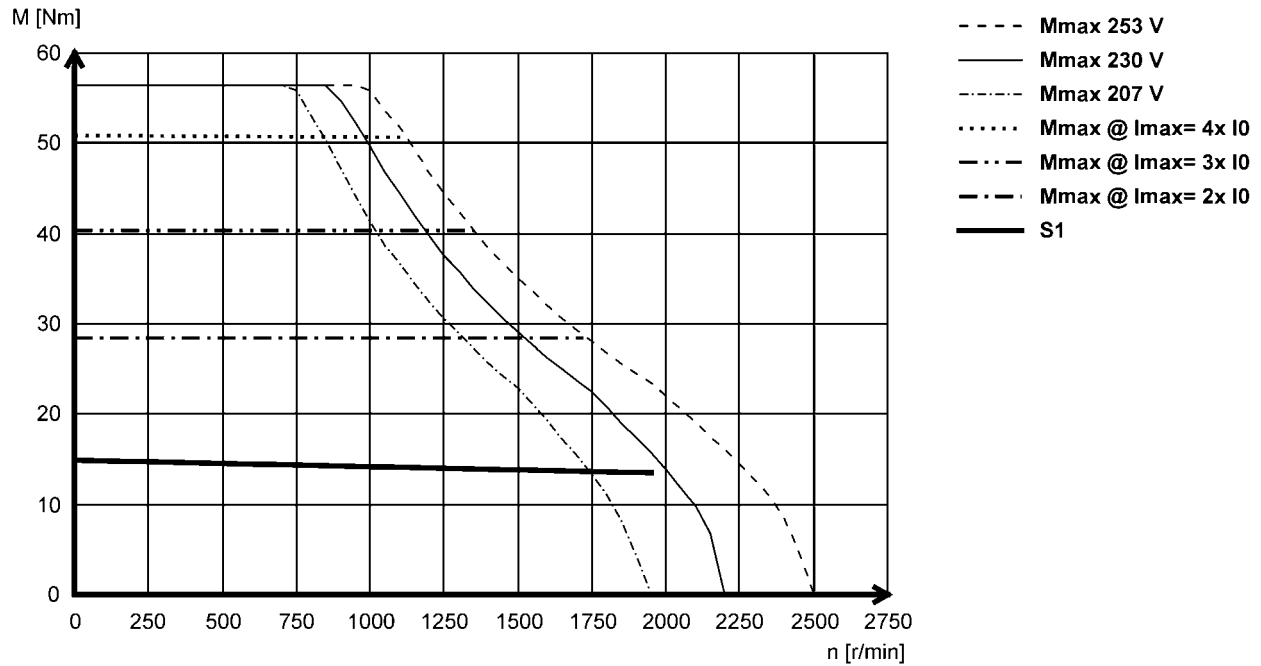



Dimensions, self-ventilated

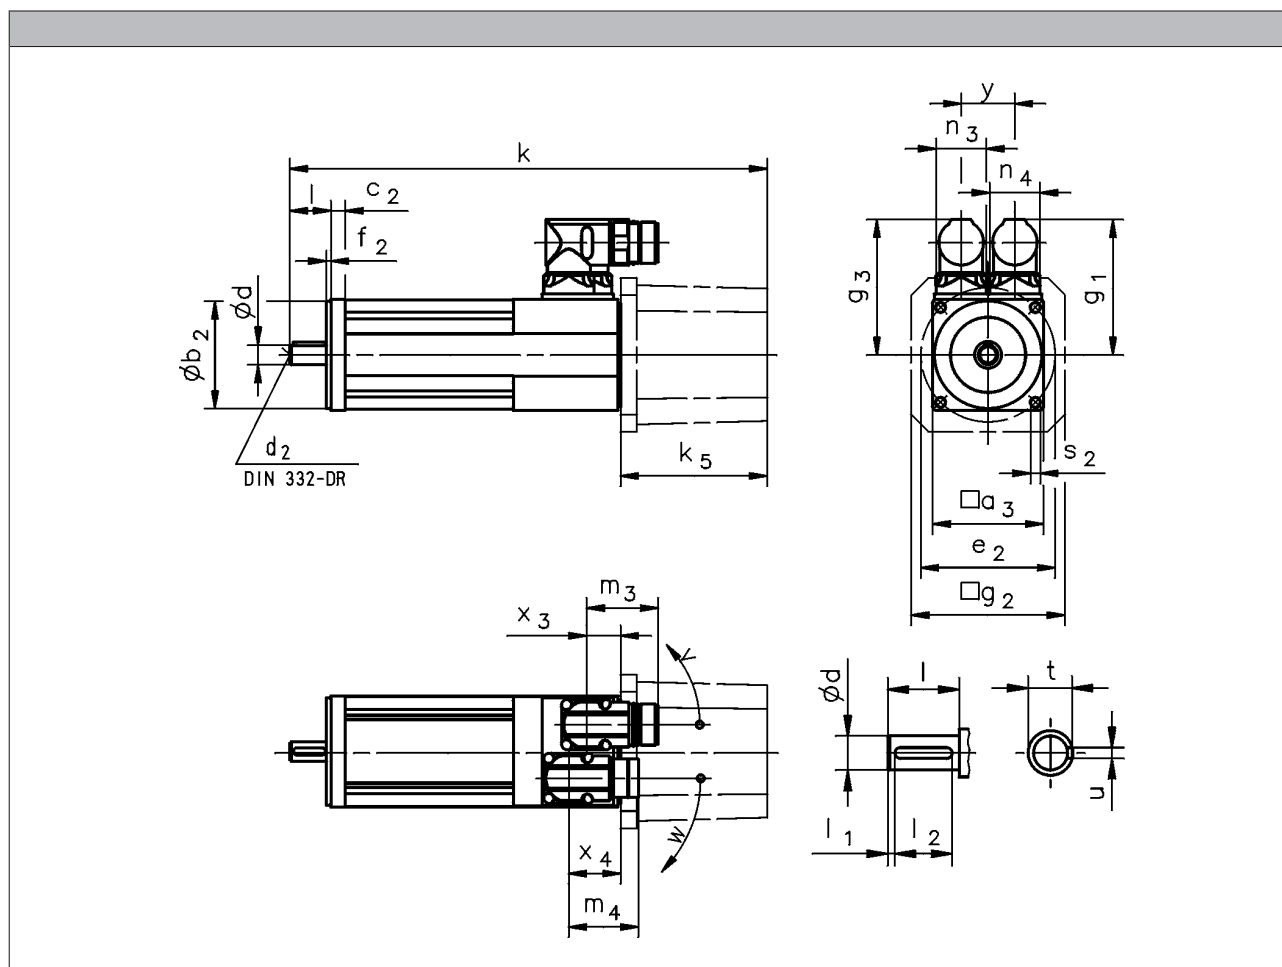

			MCS06C	MCS06F	MCS06I
R□□ / C40 B0	k	[mm]	155	185	215
R□□ / C40 P□	k	[mm]	174	204	233
SR□ / SV□ / E□□ B0	k	[mm]	237	266	297
SR□ / SV□ / E□□ P□	k	[mm]	255	285	315
SR□ / SV□ / E□□	k ₅	[mm]	82.0		
	g ₂	[mm]	86.0		
SKM B0	k	[mm]	190	220	250
SKM P□	k	[mm]	209	239	268
SKM	k ₅	[mm]	35.0		
	g ₂	[mm]	62.0		

- Speed / angle sensor: R□□ / C□□ / S□□ / E□□
- Brake: B0 / P□

MCS synchronous servo motors

Technical data



Dimensions, self-ventilated


	g ₁	g ₃	x ₃	x ₄	m ₃	m ₄	n ₃	n ₄	y	v	w
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[°]	[°]
MCS06	77	77	19	29	40	40	28	28	30	190	230

	d	d ₂	l	l ₁	l ₂	u	t
	k6		-0.7 ... 0.3				
	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]
MCS06	11	M4	23	2.0	18	4.0	12.5

	a ₃	b ₂	c ₂	e ₂	f ₂	s ₂
		j6				
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
MCS06	62	60	8	75	2.5	5.5



Dimensions, self-ventilated

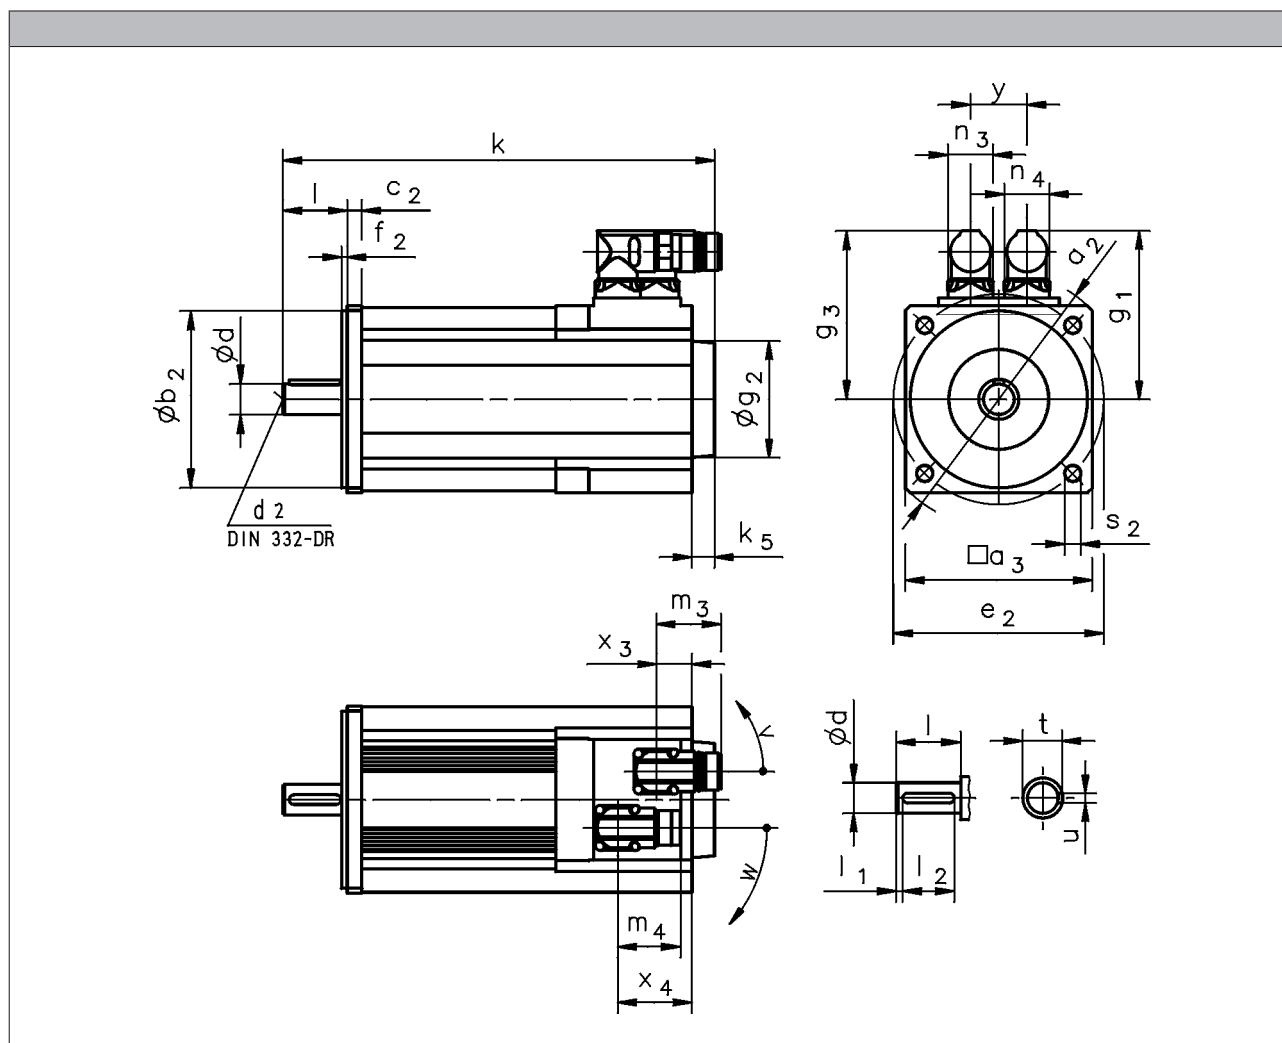

			MCS09D	MCS09F	MCS09H	MCS09L	MCS12D	MCS12H	MCS12L
R□□ / C40 B0	k	[mm]	213	233	253	293	228	268	308
R□□ / C40 P□	k	[mm]	233	253	273	313	248	288	328
R□□ / C40	k_5	[mm]	13				14		
	g_2	[mm]	67				72		
S□□ / E□□ B0	k	[mm]	264	284	304	344	277	317	357
S□□ / E□□ P□	k	[mm]	284	304	324	364	297	337	377
S□□ / E□□	k_5	[mm]	64				63		
	g_2	[mm]	81				89		

			MCS14D	MCS14H	MCS14L	MCS14P	MCS19F	MCS19J	MCS19P
R□□ / C40 B0	k	[mm]	251	291	331	371	280	320	380
R□□ / C40 P□	k	[mm]	279	319	359	399	314	364	424
R□□ / C40	k_5	[mm]	24				15		
	g_2	[mm]	78						
S□□ / E□□ B0	k	[mm]	301	341	381	421	329	369	429
S□□ / E□□ P□	k	[mm]	329	369	409	449	363	413	473
S□□ / E□□	k_5	[mm]	74				64		
	g_2	[mm]	101						

- Speed / angle sensor: R□□ / C□□ / S□□ / E□□
- Brake: B0 / P□

MCS synchronous servo motors

Technical data



Dimensions, self-ventilated

	g ₁	g ₃	x ₃	x ₄	m ₃	m ₄	n ₃	n ₄	y	v	w
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[°]	[°]
MCS09	90	90	20	44	40	40	28	28	35	195	260
MCS12	105	105	22	46							

	g ₁	g ₃	x ₃	x ₄	m ₃	m ₄	n ₃	n ₄	y	v	w
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[°]	[°]
MCS14D15-	117	117	24	48	40	40	28	28	35	195	260
MCS14D36-											
MCS14H15-											
MCS14H32-											
MCS14L15-											
MCS14L32-	146	126	29	36		75		45		180	205
MCS14P14-	117	117	24	48		40		28		195	260
MCS14P32-	146	126	29	36		75		45		180	205
MCS19F14-	142	142	24 51 ¹⁾	48 75 ¹⁾		40		28		195	260
MCS19F30-	171	151	29 56 ¹⁾	36 63 ¹⁾		75		45		180	205
MCS19J14-	142	142	24 51 ¹⁾	48 75 ¹⁾		40		28		195	260
MCS19J30-	171	151	29 56 ¹⁾	36 63 ¹⁾		75		45		180	205
MCS19P14-	142	142	24 51 ¹⁾	48 75 ¹⁾		40		28		195	260
MCS19P30-	171	151	29 56 ¹⁾	36 63 ¹⁾		75		45		180	205

	d	d ₂	l	l ₁	l ₂	u	t
	k6		-0.7 ... 0.3				
	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]
MCS09	14	M5	30	2.5	25	5.0	16.0
MCS12	19	M6	40	4.0	32	6.0	21.5
MCS14	24	M8	50	5.0	40	8.0	27.0
MCS19	28	M10	60		50		31.0

	a ₂	a ₃	b ₂	c ₂	e ₂	f ₂	s ₂
			j6				
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
MCS09	120	89	80	8	100	3.0	7.0
MCS12	160	116	110	9	130	3.5	10.0
MCS14	188	143	130	13	165		12.0
MCS19	250	192	180	11	215	4.0	14.0


¹⁾ On version with brake (P□)

MCS synchronous servo motors

Technical data



Dimensions, forced ventilated

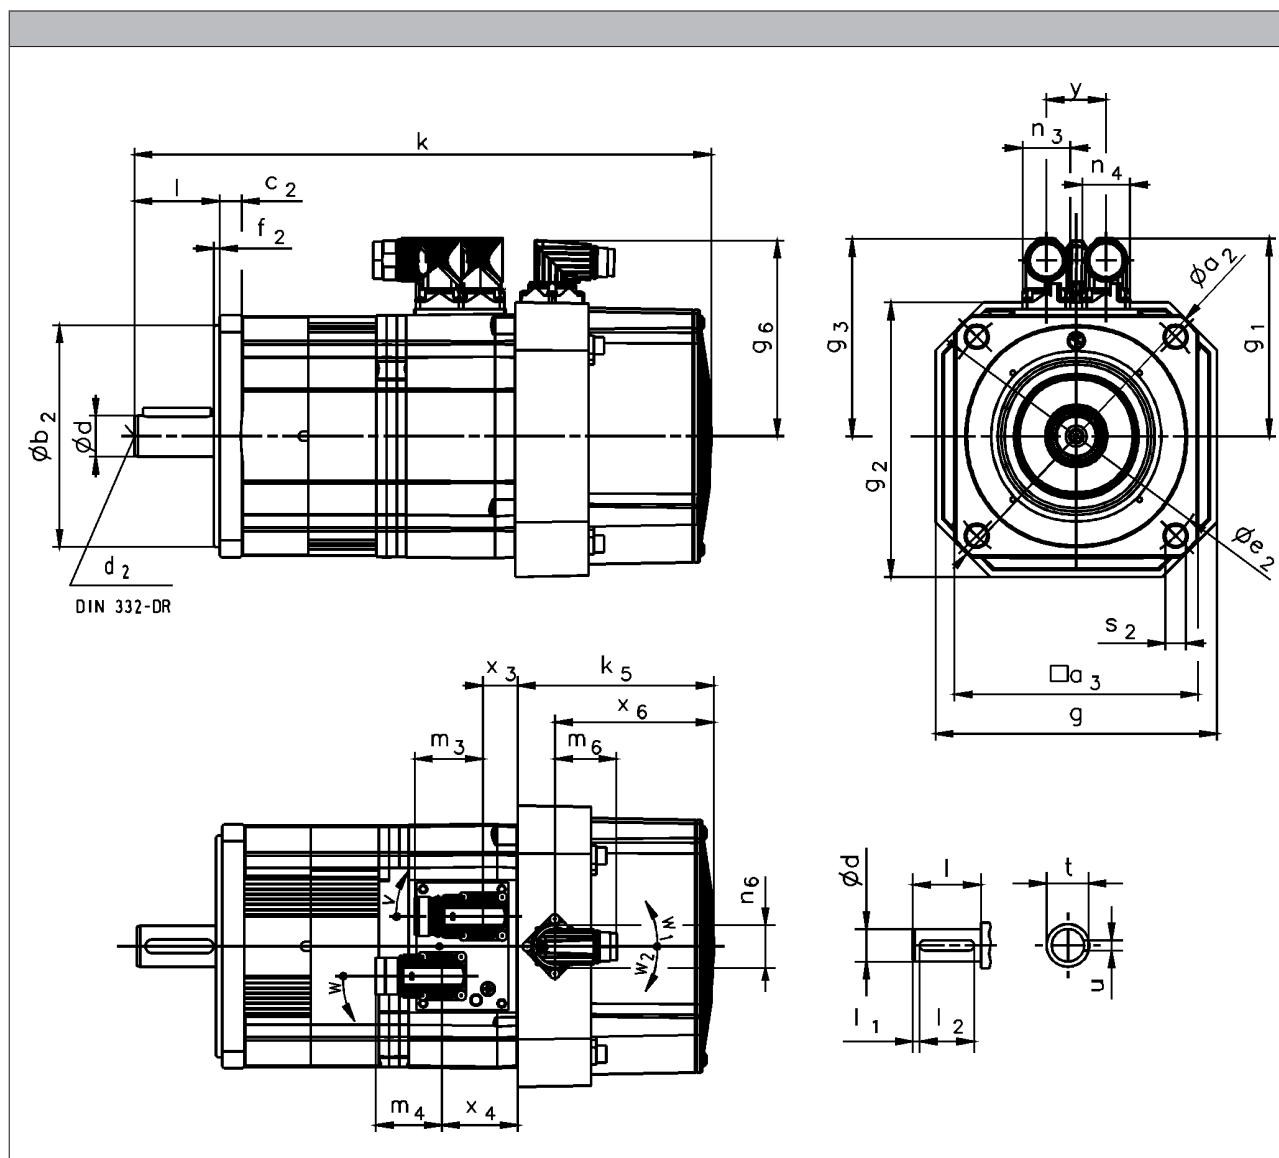

			MCS12D	MCS12H	MCS12L	MCS14D	MCS14H	MCS14L	MCS14P	MCS19F	MCS19J	MCS19P
R□□ / C40 B□	k	[mm]	301	341	381	339	379	419	459	387	427	487
R□□ / C40 P□	k	[mm]	321	361	401	368	408	448	488	421	471	531
R□□ / C40	k ₅	[mm]	92								126	
S□□ / E□□ B□	k	[mm]	344	384	424	392	432	472	512	425	465	525
S□□ / E□□ P□	k	[mm]	364	404	444	421	461	501	541	459	509	569
S□□ / E□□	k ₅	[mm]	135								165	
	g	[mm]	140								212	
	g ₂	[mm]	140								210	

- Speed / angle sensor: R□□ / C□□ / S□□ / E□□
- Brake: B□ / P□

MCS synchronous servo motors

Technical data



Dimensions, forced ventilated

	g ₁	g ₃	g ₆	x ₃	x ₄	x ₆	m ₃	m ₄	m ₆	n ₃	n ₄	n ₆	y	v	w	w ₁	w ₂	
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[°]	[°]	[°]	[°]	
MCS12D17	105	105	107	16	40	67		40			28							
MCS12D35																		
MCS12H14																		
MCS12H34																		
MCS12L17																		
MCS12L39																		
MCS14D14	117	117	115	20	44	93	40	37	28	45	28	35	160	160	120	130		
MCS14D30																		
MCS14H12																		
MCS14H28	146	126		24	31												75	28
MCS14L14	117	117		20	44												40	28
MCS14L30	146	126		24	31												75	45
MCS14P11	117	117		20	44												40	28
MCS14P26	146	126		24	31												75	45
MCS19F12	142	142	142	19 46 ¹⁾	43 70 ¹⁾	96		40		28	45							
MCS19F29	171	151		24 51 ¹⁾	31 58 ¹⁾			75										
MCS19J12																		
MCS19J29																		
MCS19P12																		
MCS19P29																		

	d	d ₂	l	l ₁	l ₂	u	t
	k6		-0.7 ... 0.3				
	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]
MCS12	19	M6	40	4.0	32	6.0	21.5
MCS14	24	M8	50	5.0	40	8.0	27.0
MCS19	28	M10	60		50		31.0

	a ₂	a ₃	b ₂	c ₂	e ₂	f ₂	s ₂
	j6						
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
MCS12	160	116	110	9	130	3.5	10.0
MCS14	188	143	130	13	165		12.0
MCS19	250	192	180	11	215	4.0	14.0

¹⁾ On version with brake (P□)

MCS synchronous servo motors

Technical data





Permanent magnet holding brake

The synchronous servo motor can be fitted with integral permanent magnet holding brakes.

In the case of permanent magnet brakes, the rated torque applies solely as holding torque at standstill. This is due to the nature of their design. During braking from full motor speed, e.g. in the event of emergency stops, the braking torque is significantly reduced.

As such, they may not be used as safety elements (particularly with lifting axes) without additional measures being implemented.

The brakes are activated when the supply voltage is disconnected (closed-circuit principle). When using the brakes purely as holding brakes, virtually no wear occurs on the friction surfaces.

For traversing axes, adherence to the permissible load/brake motor (J_L / J_{MB}) moment of inertia ensures that the permissible maximum switching rate of the brake will not be exceeded and at least 2,000 emergency stop functions can be performed from a speed of 3,000 rpm.

For lifting axes, the load torque resulting from the weight acts additionally. In this case the specifications for J_L / J_{MB} do not apply.

Caution:

The brakes used are not safety brakes in the sense that a reduction in torque may arise as a result of disruptive factors that cannot be influenced, e.g. oil ingress.

The ohmic voltage drop along the cable must be taken into consideration in long motor supply cables and must be compensated for by a higher voltage at the line input.

The following applies for Lenze system cables:

$$U[V] = U_B[V] + 0.08 \frac{[V]}{[A] \cdot [m]} \cdot I_{Lg}[m] \cdot I_B[A]$$

If no suitable voltage (incorrect value, incorrect polarity) is applied to the brake, the brake will be applied and can be overheated and destroyed by the motor continuing to rotate.

The shortest switching times of the brakes are achieved by DC switching of the voltage. A spark suppressor is required to suppress interference and to increase the service life of the relay contacts here.



Permanent magnet holding brake



Permanent magnet holding brake

Rated data with standard braking torque

	$U_{N, DC}^{3, 5)}$	M_N 20 °C	M_N 120 °C	M_{av} 120 °C	$I_N^{2)}$	J	$t_1^{1)}$	$t_2^{1)}$	$Q_E^{4)}$	m	J_{MB}	J_L/J_{MB}
	[V]	[Nm]	[Nm]	[Nm]	[A]	[kgcm ²]	[ms]	[ms]	[J]	[kg]	[kgcm ²]	
MCS06C	24	2.20	2.00	0.60	0.34	0.12	15.0	30.0	30.0	0.30	0.26	22.1
MCS06F											0.34	16.6
MCS06I											0.42	13.3
MCS09D		8.00	6.00	4.50	0.65	1.07	20.0	40.0	400	0.80	2.17	36.4
MCS09F											2.57	30.5
MCS09H											2.97	26.3
MCS09L											3.87	19.9
MCS12D		12.0	10.0	7.00			13.0	43.0		0.90	5.07	15.0
MCS12H											8.40	8.70
MCS12L											11.7	5.90
MCS14D		22.0	18.0	8.00	0.88	3.20	15.0	150	640	1.90	11.3	10.5
MCS14H											17.4	6.50
MCS14L											26.6	3.90
MCS14P											37.9	2.40
MCS19F		37.0	32.0	15.0	0.93	12.4	96.0	113	2350	3.10	77.4	5.20

Rated data with increased braking torque

	$U_{N, DC}^{3, 5)}$	M_N 20 °C	M_N 120 °C	M_{av} 120 °C	$I_N^{2)}$	J	$t_1^{1)}$	$t_2^{1)}$	$Q_E^{4)}$	m	J_{MB}	J_L/J_{MB}
	[V]	[Nm]	[Nm]	[Nm]	[A]	[kgcm ²]	[ms]	[ms]	[J]	[kg]	[kgcm ²]	
MCS09D	24	12.0	10.0	7.00	0.65	1.07	20.0	40.0	400	0.80	2.17	36.4
MCS09F											2.57	30.5
MCS09H											2.97	26.3
MCS09L											3.87	19.9
MCS12D		24.0	19.0	12.0	0.71	3.13	16.0	90.0	890	1.20	7.10	24.3
MCS12H											10.4	16.3
MCS12L											13.7	12.1
MCS14D		37.0	32.0	15.0	0.93	12.4	96.0	113	2350	3.10	20.5	22.2
MCS14H											26.6	16.9
MCS14L											35.8	12.3
MCS14P											47.1	9.10
MCS19J		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	135	2.20
MCS19P											190	1.20

1) Engagement and disengagement times are valid for rated voltage ($\pm 0\%$) and protective circuit for brakes with varistor for DC switching. The times may increase without a protective circuit.

2) The currents are the maximum values when the brake is cold (value used for dimensioning the current supply). The values for a motor at operating temperature are considerably lower.

3) With 24V DC brake: smoothed DC voltage, ripple $\leq 1\%$.

4) Maximum switching energy per emergency stop at $n = 3000$ r/min for at least 2000 emergency stops.

5) Voltage tolerance: -10% to $+5\%$



Resolver

Stator-fed resolver with two stator windings offset by 90° and one rotor winding with transformer winding.

Speed/angle sensor				RS0	RV0
	1)			RS0	RV0
Product key				RS0	RV03
				RS0	RV03
Resolution				0.80	
Angle			[°]	0.80	
Accuracy				-10 ... 10	
			[°]	-10 ... 10	
Absolute positioning				1 revolution	
				1 revolution	
Max. speed				8000	
	$n_{\max}$		[r/min]	8000	
Max. input voltage				10.0	
DC	$U_{\text{in,max}}$		[V]	10.0	
Max. input frequency				4.00	
	$f_{\text{in,max}}$		[Hz]	4.00	
Ratio				0.30	
Stator / rotor		$\pm 5 \%$		0.30	
Rotor impedance				51 + j90	
	Z_{ro}		[Ω]	51 + j90	
Stator impedance				102 + j150	
	Z_{so}		[Ω]	102 + j150	
Impedance				44 + j76	
	Z_{rs}		[Ω]	44 + j76	
Min. insulation resistance				10.0	
At DC 500 V	R		[Ω]	10.0	
Number of pole pairs				1	
				1	
Max. angle error				-10 ... 10	
			[°]	-10 ... 10	
Inverter assignment				E84AVTC E94A ECS EVS93	
				E84AVTC E94A ECS EVS93	

1) 6 - Product key > speed/angle sensor

Speed-dependent safety functions

Suitable for safety function				No	Yes
				No	Yes
Max. permissible angular acceleration					
MCS06	α		[rad/s ²]		56 000
MCS09 ... MCS19 2)	α		[rad/s ²]		19 000
Functional safety					
IEC 61508					SIL3
EN 13849-1					Up to Performance Level e

2) 10 - Single encoder concepts with resolvers



Incremental encoder and SinCos absolute value encoder

Encoder type			TTL incremental	SinCos absolute value		
Speed/angle sensor						
	1)		C40	EQI	SRS	SVS
Product key						
			IK4096-5V-T	AM32-5V-E	AS1024-8V-H	AS1024-8V-K2
Encoder type						
			Single-turn	Multi-turn	Single-turn	
Pulses						
			4096	32	1024	
Output signals						
			TTL	1 Vss		
Interfaces						
				EnDat	HiPerface	
Absolute revolutions						
			0	4096	1	
Resolution						
Angle 2)		[°]	1.30	0.40		
Accuracy						
		[°]	-1 ... 1	-5 ... 5	-0.8 ... 0.8	
Min. input voltage						
DC	U _{in,min}	[V]	4.50	4.75	7.00	
Max. input voltage						
DC	U _{in,max}	[V]	5.50	5.25	12.0	
Max. speed						
	n _{max}	[r/min]	7324	12000	6000	
Max. current consumption						
	I _{max}	[A]	0.075	0.17	0.080	
Limit frequency						
	f _{max}	[kHz]	500	6.00	200	
Inverter assignment						
			E94P	E94A	E84AVTC E94A ECS EVS93	

1)  6 - Product key > speed/angle sensor

2) Inverter-dependent.

Speed-dependent safety functions

Suitable for safety function			No	No	No	Yes
Max. permissible angular acceleration						
MCS06	α	[rad/s ²]				970000
MCS09 ... MCS19	α	[rad/s ²]				240000
Functional safety						
IEC 61508						SIL2
EN 13849-1						Up to Performance Level d

MCS synchronous servo motors

Accessories



Incremental encoder and SinCos absolute value encoder

Encoder type			SinCos absolute value				
Speed/angle sensor							
			SKM	SRM	SVM	ECN	EQN
Product key							
			AM128-8V-H	AM1024-8V-H	AM1024-8V-K2	AS2048-5V-E	AM2048-5V-E
Encoder type							
			Multi-turn			Single-turn	Multi-turn
Pulses							
			128	1024		2048	
Output signals							
			1 Vss				
Interfaces							
			Hiperface			EnDat	
Absolute revolutions							
			4096			1	4096
Resolution							
Angle		[°]	0.40				
Accuracy							
		[°]	-1.3 ... 1.3	-0.8 ... 0.8		-0.6 ... 0.6	
Min. input voltage							
DC	U _{in,min}	[V]	7.00			4.75	
Max. input voltage							
DC	U _{in,max}	[V]	12.0			5.25	
Max. speed							
	n _{max}	[r/min]	9000	6000		12000	
Max. current consumption							
	I _{max}	[A]	0.060	0.080		0.15	0.25
Limit frequency							
	f _{max}	[kHz]	200				
Inverter assignment							
			E84AVTC E94A ECS EVS93			E94A	

¹⁾ Inverter-dependent.

Speed-dependent safety functions

Suitable for safety function			No	No	Yes	No	No
Max. permissible angular acceleration							
MCS06	α	[rad/s ²]			970000		
MCS09 ... MCS19	α	[rad/s ²]			240000		
Functional safety							
IEC 61508					SIL2		
EN 13849-1					Up to Performance Level d		

6.11

MCS synchronous servo motors

Accessories



Blowers

Rated data for 50 Hz

		Degree of protection	Number of phases	$U_{\min}$	$U_{\max}$	$U_{N, AC}$	P_N	I_N
				[V]	[V]	[V]	[kW]	[A]
MCS12	F10	IP54	1	210	240	230	0.019	0.12
	F50			104	122	115	0.018	0.22
MCS14	F10			210	240	230	0.040	0.25
	F50			104	122	115		0.53
MCS19	F10			210	240	230	0.060	0.26
	F50			104	122	115	0.047	0.45

Rated data for 60 Hz

		Degree of protection	Number of phases	$U_{\min}$	$U_{\max}$	$U_{N, AC}$	P_N	I_N
				[V]	[V]	[V]	[kW]	[A]
MCS12	F10	IP54	1	210	240	230	0.019	0.12
	F50			104	122	115	0.018	0.22
MCS14	F10			210	240	230	0.040	0.25
	F50			104	122	115		0.53
MCS19	F10			210	240	230	0.060	0.26
	F50			104	122	115	0.047	0.45



Temperature monitoring


The thermal sensors used in the MCS motors continuously monitor the motor temperature. The temperature signal is transmitted over the system cable of the feedback system to the servo controller. Because of the different physical conditions, there are two temperature monitoring mechanisms on the MCS motors (there is no complete motor protection in either case)

MCS06

on this motor, the winding temperature of one winding phase is monitored with a KTY 83-110 type thermal sensor.

MCS09 to 19

These motors are monitored by three thermal sensors (1x KTY 83-110 + 2x PTC 150 °C) connected in series. This means that the temperature of the motor is determined with great accuracy in the permitted operating range and at the same time the overtemperature response configured in the controller is executed in the event of overtemperature in one of the winding phases.

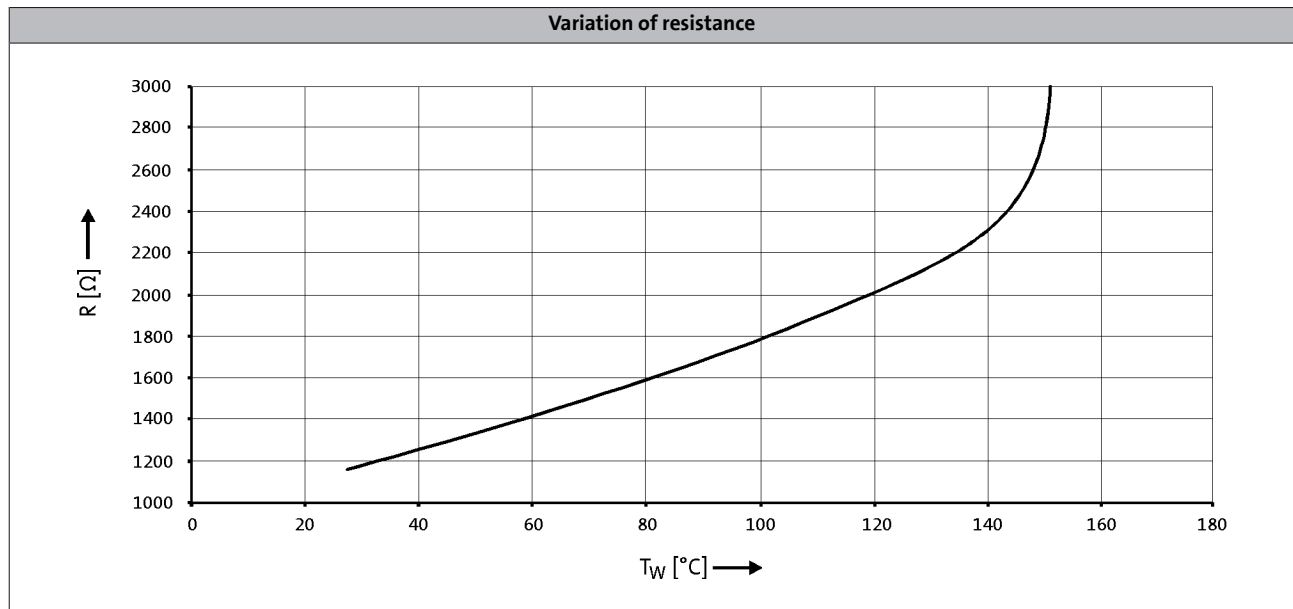

- If the detector is supplied with a measured current of 1 mA, the above relationship between the temperature and the resistance applies.

MCS synchronous servo motors

Accessories



Terminal box


If a servo motor is to be connected to an existing cable or plug connectors are not to be used for other reasons, the connection can also be made via a terminal box.

The terminals are designed as tension spring terminals to ensure here the long-term vibration resistance of the cable contacts with adequate contact pressure required.

The terminal boxes have generously dimensioned space for the customer's own wiring and large surface shield connection areas to ensure a secure EMC-compliant connection. The cable outlet may be to the left or to the right, depending on requirements.

It is not possible to attach a terminal box to the MCS06 or to models with the blower.

Connections

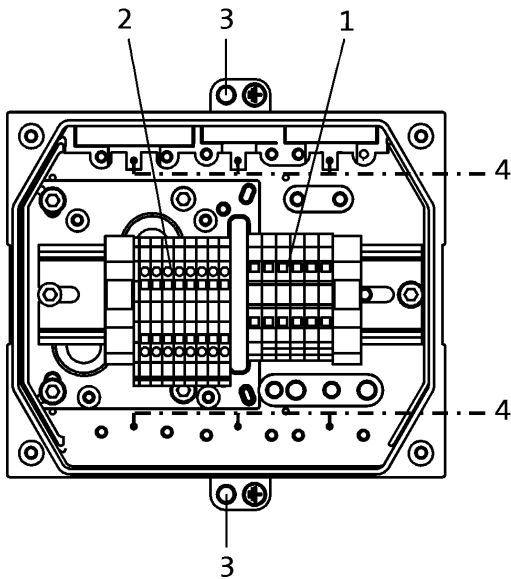



1: Power connection (terminals loadable up to 65 A) + brake connection.

2: Angle/speed sensor connection + thermal sensor connection.

3: PE connection.

4: Large area shield contact.


5: Openings for 2x M32, 2x M25, 2x M20 fittings. The openings are plugged and can be opened up as required by the customer.

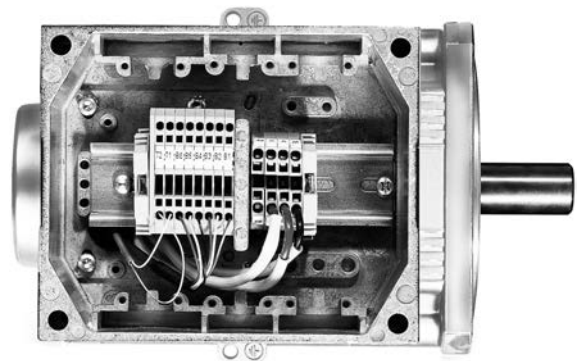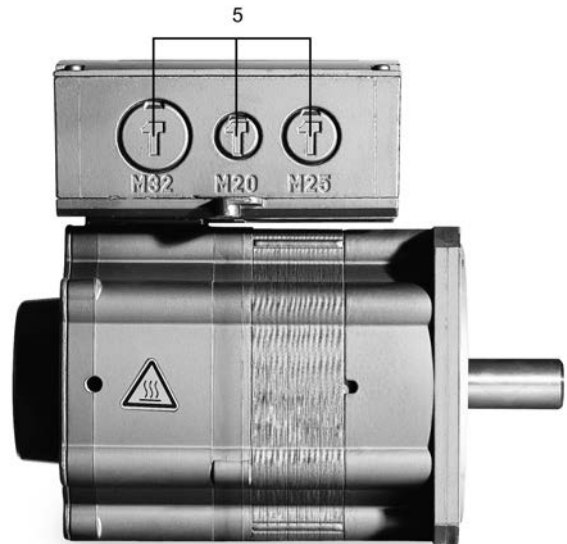



Terminal box

Dimensions

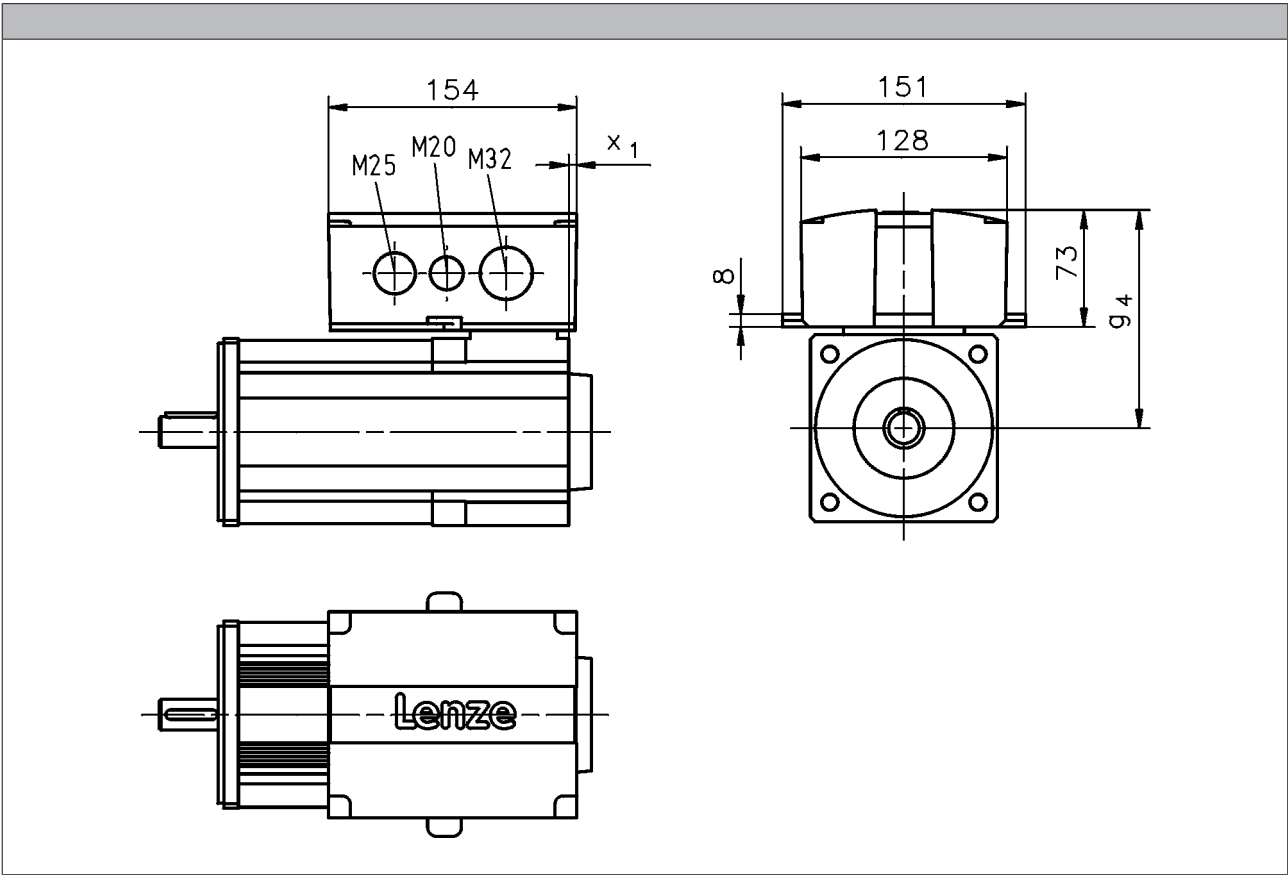

	g ₄ [mm]	x ₁ [mm]
MCS09	121	8
MCS12	136	5
MCS14	147	3
MCS19	172	

MCS synchronous servo motors

Accessories



ICN connector

An ICN connector is used as standard for the electrical connection to the servo motors.

A connector is used for the connection of motor and brake. The connections to the feedback system/temperature monitoring and the blower each employ a separate connector.


The connectors can be rotated through 270° and are fitted with a bayonet catch for SpeedTec connectors. As the connector fixing is also compatible with conventional union nuts. Existing mating connectors can therefore still be used without difficulty.

Connection for power and brake

► MCS06 to 12


Pin assignment			
Contact	Designation	Meaning	
1	BD1	Holding brake +	
2	BD2	Holding brake -	
PE	PE	PE conductor	
4	U	Phase U power	
5	V	Phase V power	
6	W	Phase W power	

► MCS14 to 19

Pin assignment			
Contact	Designation	Meaning	
1		Not assigned	
2			
+	BD1	Holding brake +	
-	BD2	Holding brake -	
PE	PE	PE conductor	
U	U	Phase U power	
V	V	Phase V power	
W	W	Phase W power	

MCS synchronous servo motors

Accessories



ICN connector

Feedback connection

► Resolver

Pin assignment			
Contact	Designation	Meaning	
1	+Ref	Transformer windings	
2	-Ref		
3	+VCC ETS	Supply: Electronic nameplate	
4	+COS	Cosine stator windings	
5	-COS		
6	+SIN	Sine stator windings	
7	-SIN		
8		Not assigned	
9			
10			
11	+KTY	KTY temperature sensor	
12	-KTY		

► Hiperface incremental encoder and SinCos absolute value encoder

Pin assignment		
Contact	Designation	Meaning
1	B	Track B /+SIN
2	A ⁻	Track A inverse/-COS
3	A	Track A /+COS
4	+U _B	Supply +
5	GND	Mass
6	Z ⁻	Zero track inverse/-RS485
7	Z	Zero track /+RS485
8		Not assigned
9	B ⁻	Track B inverse/-SIN
10		Not assigned
11	+KTY	KTY temperature sensor
12	-KTY	

Code 20°

MCS synchronous servo motors

Accessories



ICN connector

Feedback connection

- SinCos absolute value encoder with EnDat interface

Pin assignment		
Contact	Designation	Meaning
1	U _p sensor	Supply: UP sensor
2		Not assigned
3		
4	0 V sensor	Supply: 0 V sensor
5	+KTY	KTY temperature sensor
6	-KTY	
7	+U _B	Supply +
8	Cycle	EnDat interface cycle
9	Cycle ⁻	EnDat interface inverse cycle
10	GND	Mass
11	Shield	Encoder housing screen
12	B	Track B
13	B ⁻	Track B inverse/-SIN
14	Data	EnDat interface data
15	A	Track A
16	A ⁻	Track A inverse
17	Data ⁻	EnDat interface inverse data

Code 0°

Blower connection

Pin assignment			
Contact	Designation	Meaning	
PE	PE	PE conductor	
1	U1	Fan	
2	U2		
3		Not assigned	
4			
5			
6			

MCS synchronous servo motors

Accessories



MCS synchronous servo motors

Accessories



Internet version

Lenze SE
Hans-Lenze-Straße 1
D-31855 Aersen
Phone: +49 (0)5154 82-0
Telefax: +49 (0)5154 82 28 00

www.Lenze.com

Lenze