

Automation systems Drive solutions

Controls
Inverters
Motors
Gearboxes
Engineering Tools

Motors: MCS synchronous servo motors

Gearboxes: g700-P planetary gearbox

Lenze
As easy as that.

Contents of the L-force catalogue

About Lenze	Lenze makes many things easy for you. A matter of principle: the right products for every application. L-force product portfolio		
Automation systems	Controller-based Automation Drive-based automation	1.1 1.2	
Drive solutions	HighLine tasks StateLine tasks BaseLine tasks	2.1 2.2 2.3	
Controls	Cabinet Controller Panel Controller I/O system 1000 Monitor Panel	3.1 3.2 3.3 3.4 3.5 3.6	
Inverters	Decentralised Cabinet	Inverter Drives 8400 protec Inverter Drives 8400 motec Servo Drives 9400 HighLine Inverter Drives 8400 TopLine Servo Inverters i700 Inverter Drives 8400 HighLine Inverter Drives 8400 StateLine Inverter Drives 8400 BaseLine	4.1 4.2 4.4 4.5 4.6 4.7 4.8 4.10
Motors	Servo motors Three-phase AC motors	MCS synchronous servo motors MDKS synchronous servo motors MQA asynchronous servo motors MCA asynchronous servo motors MF three-phase AC motors MH three-phase AC motors MD three-phase AC motors m300 Lenze Smart Motor MD/MH basic three-phase AC motors	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9
Gearboxes	Axial gearbox Right-angle gearbox Motor data	g700-P planetary gearbox MPR/MPG planetary gearboxes g500-H helical gearbox GST helical gearboxes g500-S shaft-mounted helical gearbox GFL shaft-mounted helical gearboxes g500-B bevel gearbox GKR bevel gearboxes GKS helical-bevel gearboxes GSS helical-worm gearboxes Assignment see above	6.1 6.2 6.3 6.4 6.5 6.6 6.7 6.8 6.9 6.10 6.11
Engineering Tools	Navigator Drive Solution Designer Drive Solution Catalogue Engineer PLC Designer VisiWinNET® EASY Starter	7.1 7.2 7.3 7.4 7.5 7.6 7.7	

 Selected portfolio

 Additional portfolio

Lenze makes many things easy for you.

With our motivated and committed approach, we work together with you to create the best possible solution and set your ideas in motion - whether you are looking to optimise an existing machine or develop a new one. We always strive to make things easy and seek perfection therein. This is anchored in our thinking, in our services and in every detail of our products. It's as easy as that!

1

Developing ideas

Are you looking to build the best machine possible and already have some initial ideas? Then get these down on paper together with us, starting with small innovative details and stretching all the way to completely new machines. Working together, we will develop an intelligent and sustainable concept that is perfectly aligned with your specific requirements.

2

Drafting concepts

We see welcome challenges in your machine tasks, supporting you with our comprehensive expertise and providing valuable impetus for your innovations. We take a holistic view of the individual motion and control functions here and draw up consistent, end-to-end drive and automation solutions for you - keeping everything as easy as possible and as extensive as necessary.

3

Implementing solutions

Our easy formula for satisfied customers is to establish an active partnership with fast decision-making processes and an individually tailored offer. We have been using this simple principle to meet the ever more specialised customer requirements in the field of mechanical engineering for many years.

4

Manufacturing machines

Functional diversity in perfect harmony: as one of the few full-range providers in the market, we can provide you with precisely those products that you actually need for any machine task – no more and no less. Our L-force product portfolio, a consistent platform for implementing drive and automation tasks, is invaluable in this regard.

5

Ensuring productivity

Productivity, reliability and new performance peaks on a daily basis – these are our key success factors for your machine. After delivery, we offer you cleverly devised service concepts to ensure continued safe operation. The primary focus here is on technical support, based on the excellent application expertise of our highly-skilled and knowledgeable after-sales team.

A matter of principle: the right products for every application.


Lenze's extensive L-force product portfolio follows a very simple principle. The functions of our finely scaled products are assigned to the three lines Base-Line, State-Line or High-Line.

But what does this mean for you? It allows you to quickly recognise which products represent the best solution for your own specific requirements.

Powerful products with a major impact:


- Easy handling
- High quality and durability
- Reliable technologies in tune with the latest developments

Lenze products undergo the most stringent testing in our own laboratory. This allows us to ensure that you will receive consistently high quality and a long service life. In addition to this, five logistics centres ensure that the Lenze products you select are available for quick delivery anywhere across the globe. It's as easy as that!

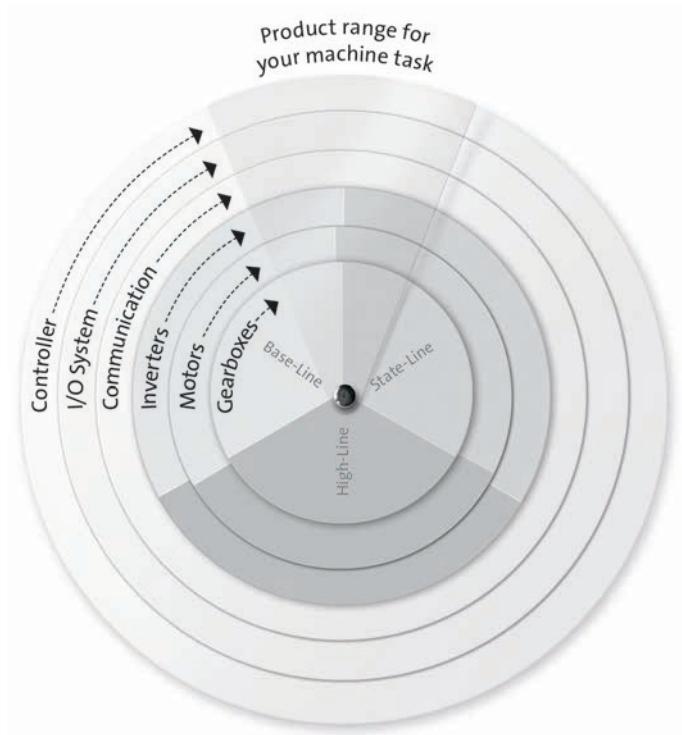


L-force product portfolio

Controls

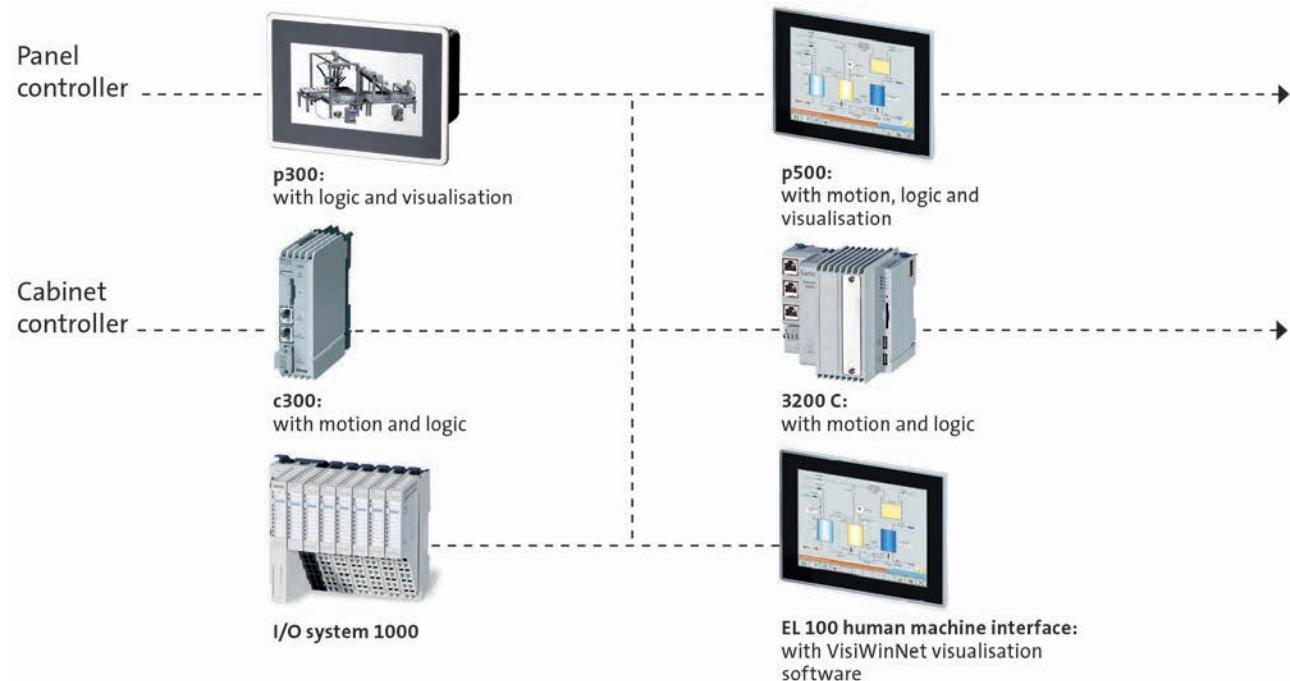

Engineering Tools

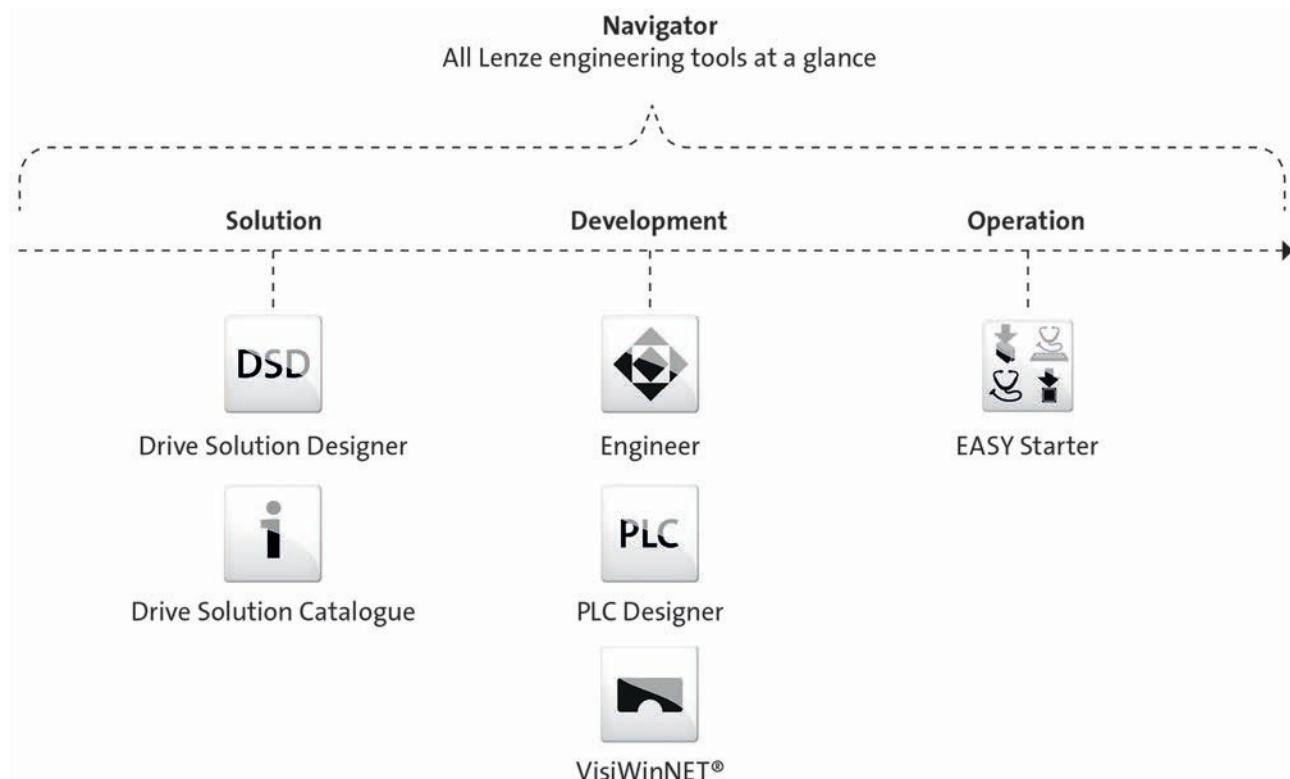

L-force product portfolio

Inverters

High-Line



Servo-Inverter i700



Servo Drives ECS



Inverter Drives 8400
TopLine



Servo Drives 9400 HighLine



Inverter Drives 8400
HighLine

State-Line



Inverter Drives 8400
StateLine



decentralised
Inverter Drives 8400 protec



decentralised
Inverter Drives 8400 motec



decentralised
Inverter Drives SMV
IP65



Inverter Drives SMV IP31

Base-Line



Inverter Drives smd




Inverter Drives 8400
BaseLine


L-force product portfolio

Motors


High-Line

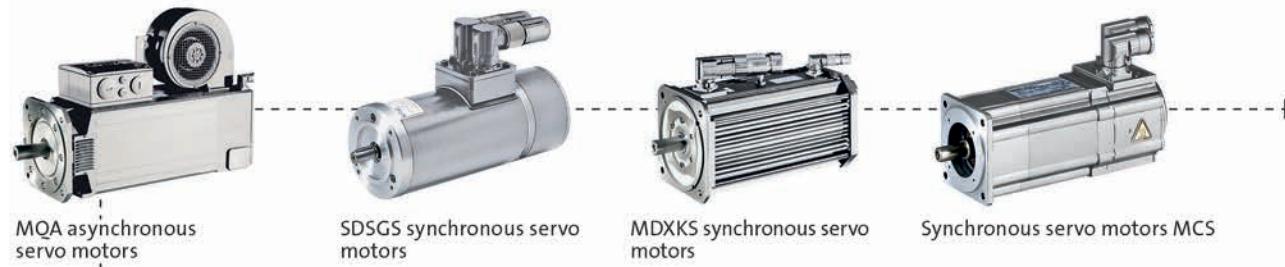

State-Line

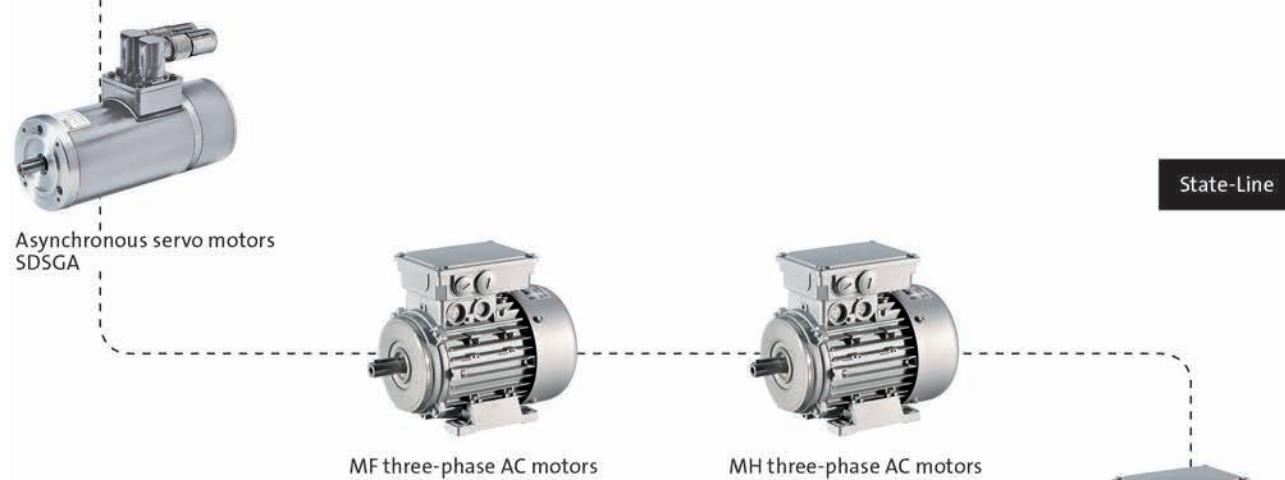

Base-Line

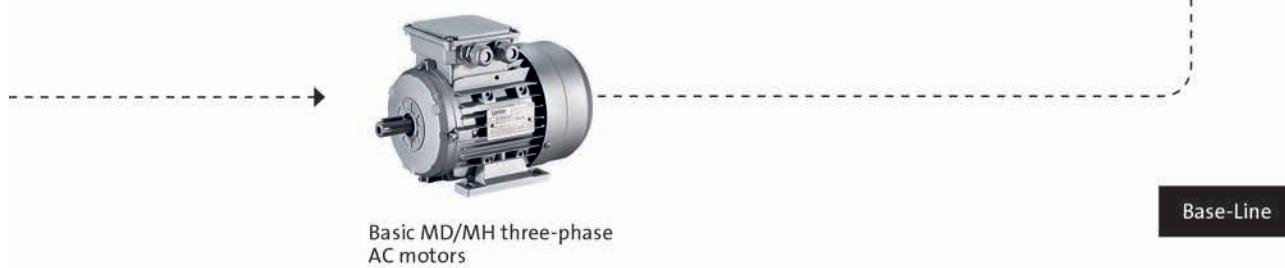

L-force product portfolio

Gearboxes

High-Line



Planetary gearboxes



Shaft-mounted helical
gearboxes

State-Line



Helical-bevel gearboxes



Helical gearboxes



Bevel gearboxes



Helical-worm gearboxes



Worm gearboxes

Base-Line

Gearboxes

g700-P planetary-geared motors

3 ... 707 Nm (synchronous servo motors)



g700-P planetary geared motors

Contents



General information	List of abbreviations	6.1 - 5
	Product information	6.1 - 6
	Equipment	6.1 - 7
	The gearbox kit	6.1 - 9
	Dimensioning	6.1 - 14
Technical data	Selection tables, notes	6.1 - 17
	Selection tables	6.1 - 18
	Dimensions, notes	6.1 - 43
	Dimensions, self-ventilated motors	6.1 - 44
	Dimensions, forced ventilated motors	6.1 - 64
	Weights, self-ventilated motors	6.1 - 72
	Weights, forced ventilated motors	6.1 - 73
	Surface and corrosion protection	6.1 - 74

g700-P planetary geared motors

Contents



g700-P planetary geared motors



General information

List of abbreviations

c		Load capacity
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass
M ₂	[Nm]	Output torque
M _{2, max}	[Nm]	Max. output torque
n _{2, eto}	[r/min]	Transition speed
n _{2, th}	[r/min]	Thermal limit speed

CCC	China Compulsory Certificate
CE	Communauté Européenne
CSA	Canadian Standards Association
cURus	Combined certification marks of UL for the USA and Canada
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

g700-P planetary geared motors



General information

Product information

In combination with synchronous servo motors, our planetary gearbox form a compact and powerful drive unit. Numerous options at the input end provide for the drive to be easily and precisely adapted to your application.

The planetary gearbox g700 is the ideal solution for demanding and dynamic tasks. With its high reliability, long service life and outstanding scalability, it provides everything you need to manage demanding machine tasks.

Versions

- High input speed possible Max. input speed 18000 rpm
- Wide variety of ratios $i = 3 \dots 512$ in 24 ratios
- High rated torque bandwidth 20 ... 800 Nm in five sizes
- Lifetime lubrication
- Suitable for any mounting position, hence only one variant
- With MCS synchronous servo motors, rated torque: 0.5 Nm ... 72 Nm

The product name

Gearbox type	Product range		Design	Rated torque [Nm]	Product
Planetary gearbox	g700	-	P	20	g700-P20
				44	g700-P44
				130	g700-P130
				260	g700-P260
				800	g700-P800

g700-P planetary geared motors




General information

Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

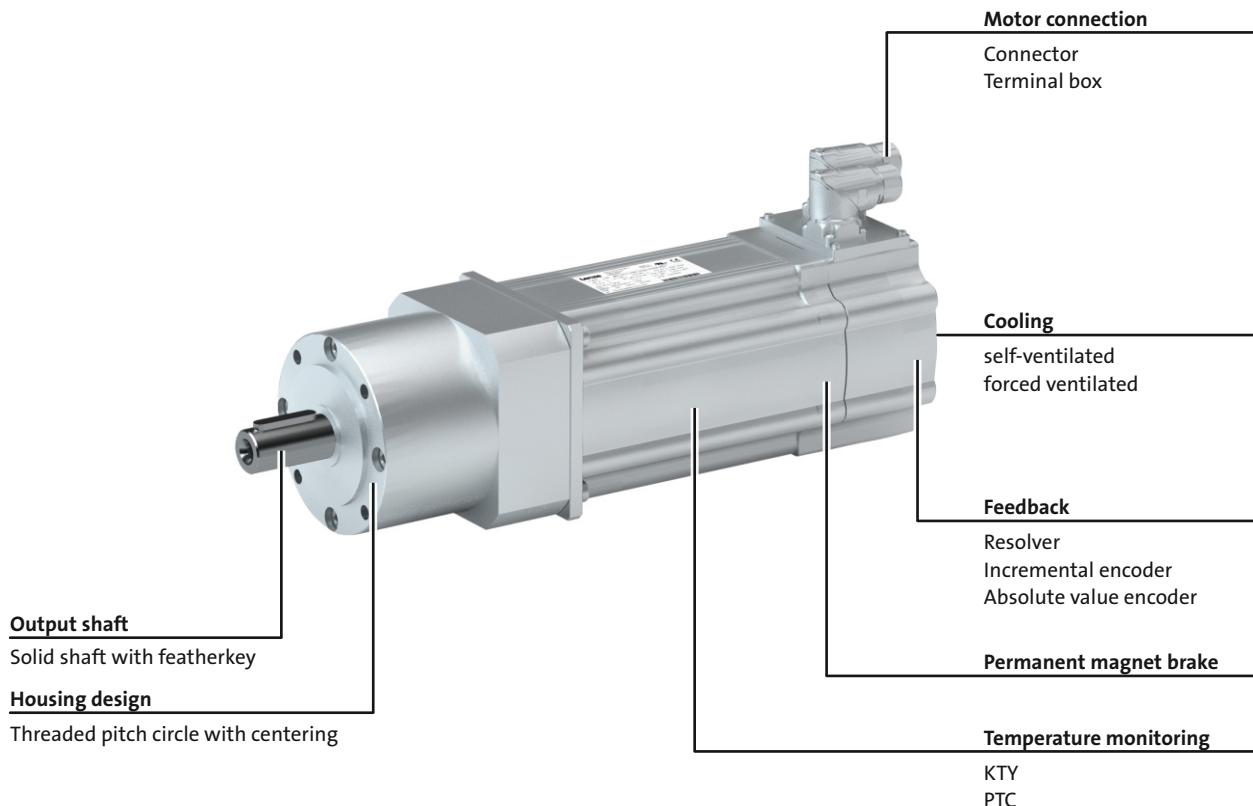

g700-P planetary geared motors

General information



6.1

g700-P planetary geared motors



General information

The gearbox kit

Geared motor

Product	g700-P20	g700-P44	g700-P130	g700-P260	g700-P800
Motor type			Synchronous servo motor		
Servo motor					
0.6 - 1.5 Nm		MCS06			
2.3 - 4.5 Nm			MCS09		
5.5 - 17 Nm				MCS12	
9.2 - 42 Nm					MCS14
27 - 72 Nm					MCS19
Technical data					
Output torque		See selection table			
Output speed		See selection table			
Ratio		See selection table			
Load capacity		See selection table			
Moment of inertia		See selection table			
Mounting position					
Standard		Any			
Colour		Primed			
		Paint in various corrosion-protection designs in accordance with RAL colours			
Surface and corrosion protection		Without OKS(uncoated) OKS-G (primed) OKS-S (small) OKS-M (medium) OKS-L (large)			

g700-P planetary geared motors

General information



The gearbox kit

Motor details

Product	MCS				
	06C41	09L41	12H14	14D14	19F12
	06C60	09D41	12L17	14L14	19P12
	06F41	09L51	12D17	14H12	19J12
	06F60	09D60	12L20	14P11	19P14
	06I41	09F38	12H15	14P14	19J14
	06I60	09F60	12D20	14D15	19F14
		09H41	12D35	14H15	19J29
		09H60	12H34	14L15	19P29
			12L39	14H28	19F29
			12D41	14P26	19J30
			12H35	14L30	19F30
			12L41	14D30	19P30
				14H32	
				14P32	
				14D36	
				14L32	
Connection type	Plug connectors		Plug connectors Terminal box		
Permanent magnet holding brake					
Rated torque [Nm]	2.2	8.0	12	22	37
Brake voltage [V]			DC 24		
Feedback			With absolute value encoder With incremental encoder With resolver		
Cooling	Self-ventilated		Self-ventilated Forced-ventilated		
Temperature monitoring	KTY83-110 thermal detector		KTY83-110 thermal detector PTC thermistor		
Approval			cURus GOST_R UkrSepro		
Degree of protection			IP54 IP65		

- ▶ Further information and installation feasibilities can be found in the Motors chapter.


g700-P planetary geared motors

General information



The gearbox kit

Motor details

Connection type
 Plug connectors
 Terminal box
Cooling: self-ventilated
 With resolver
 With permanent magnet brake
 With feedback With feedback and permanent magnet brake
Cooling: forced ventilated
 With resolver
 With permanent magnet brake
 With feedback With feedback and permanent magnet brake

6.1

g700-P planetary geared motors

General information



The gearbox kit

Gearbox details

Product	g700-P20	g700-P44	g700-P130	g700-P260	g700-P800
Driven shaft					
Solid shaft with featherkey [mm]	10x23	14x30	20x36	25x50	40x80
Design			Standard		
Gasket			NBR		
Bearing			Standard		
Housing					
Housing version			Without foot with centering		
Output flange					
flange diameter [mm]	40	60	80	115	160
Lubricant					
Type			Klüberplex BEM34-132		
Breather element			Without		
Backlash					
Backlash			Standard		

- ▶ Further information and installation feasibilities can be found in the Gearboxes chapter.


g700-P planetary geared motors

General information



The gearbox kit

Gearbox details

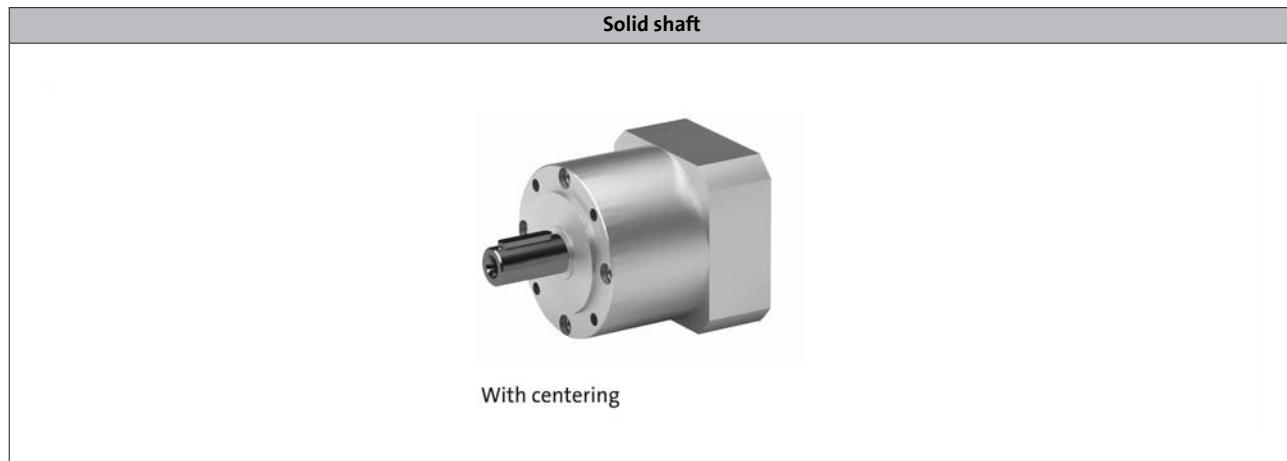

6.1

g700-P planetary geared motors

General information



Dimensioning

General information about the data provided in this catalogue

The powers, torques and speeds specified in this catalogue are rounded values and are valid under the following conditions:

- Operating time/day = 8 h (100% OT)
- Duty class I for up to 10 switching operations/h
- Mounting positions and designs in this catalogue
- Standard lubricant
- $T_{amb} = 30 \text{ }^{\circ}\text{C}$ for gearboxes,
 $T_{amb} = 40 \text{ }^{\circ}\text{C}$ for motors (in accordance with EN 60034)
- Site altitude $< = 1000 \text{ m amsl}$
- The selection tables provide the permissible mechanical powers and torques. For notes on the thermal power limit, see chapter drive dimensioning.
- The rated power specified for motors and geared motors applies to operating mode S1 (in accordance with EN 60034).

Under different operating conditions, the values obtained may vary from those listed here.

In the case of extreme operating conditions, please consult your Lenze sales office.

g700-P planetary geared motors



General information

Dimensioning

Load capacity and application factor

Load capacity c of gearbox

Rated value for the load capacity of Lenze geared motors.

- c is the ratio of the permissible rated torque of the gearbox to the rated torque supplied by the drive component (e.g. the built-in Lenze motor).
- The value of c must always be greater than the value of the application factor k calculated for the application.


Application factor k (according to DIN 3990)

Takes into account the influence of temporally variable loads which are actually present during the anticipated operating time of gearboxes and geared motors.

k is determined by:

- the type of load
- the load intensity
- temporal influences

Duty class	Load type
I	Smooth operation, small or light jolts
II	Uneven operation, average jolts
III	Uneven operation, severe jolts and/or alternating load

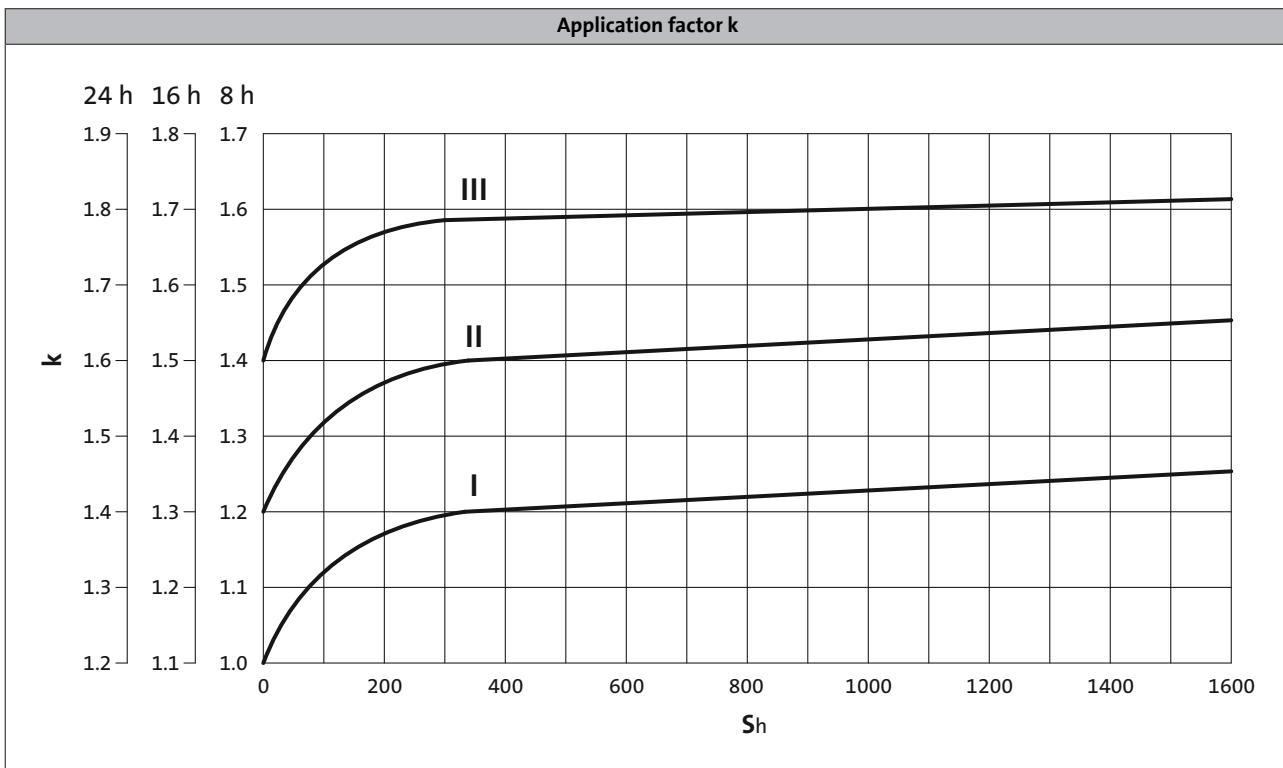

► S_h = switchings/h

g700-P planetary geared motors

General information



Dimensioning

Weights

The values given in the tables consider the following gearbox/motor combination:

- Gearbox with solid shaft including lubricant amount
- Motor with feedback

For versions deviating from this, additional weights have to be considered.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data
- Motor options: Brake
 - > Chapter: Motors/Accessories

Moments of inertia

The given moments of inertia of the gearbox refer to the drive shaft. The influence of the ratio (i^2) has been considered in the data.

When the total moment of inertia of the geared motor is calculated, the values of the geared motors and the brake have to be added.

The respective values can be found for:

- Geared motors with feedback
 - > Chapter: Geared motors/Technical data/Selection tables
- Motor options: Brake
 - > Chapter: Motors/Accessories

g700-P planetary geared motors



Technical data

Selection tables, notes

Notes on the selection tables

The selection tables show the available combinations of gearbox type, number of stages, ratio and motor. They are used only to provide basic orientation.

The following legend indicates the structure of the selection tables.

Number of the gear stage of the gearbox



2-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g700	MCS		
6.7	506	5	506	1.3	0.200	8.000	-P20	06C41	Selbst	27
9.4	579	4	579	2.1	0.200	7.000	-P20	06C41	Selbst	27
15	810	3	810	4.8	0.200	5.000	-P20	06C41	Selbst	27
17	405	6	405	2.6	0.300	10.000	-P44	06C41	Selbst	29

For operating mode S1
Torque M₂ and
thermal output speed n_{2, th}

For operating mode S2, S3 und S6
Max. permissible acceleration torque of geared
motor M_{2, max} and
output speed n_{2, eto}

Load capacity of the gearbox

c is the ratio between the permissible rated torque of the gearbox and the rated torque of the three-phase AC motor (converted to the driven shaft).

c must be always higher than the service factor k determined for the application k.

$$c = \frac{M_{2,zul}}{M_{1N} \cdot i \cdot \eta_{Getr}} > k$$

Page number
for dimensions

g700-P planetary geared motors

Technical data



Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
5.0	500	5	500	1.1	0.200	10.000	-P20	06C60	natural	44
6.0	625	4	625	1.6	0.200	8.000	-P20	06C60	natural	44
6.0	506	5	506	1.3	0.200	8.000	-P20	06C41	natural	44
9.0	714	3	714	2.5	0.200	7.000	-P20	06C60	natural	44
9.0	579	4	579	2.1	0.200	7.000	-P20	06C41	natural	44
10	1000	2	1000	5.7	0.200	5.000	-P20	06C60	natural	44
10	810	3	810	4.8	0.200	5.000	-P20	06C41	natural	44
15	450	5	450	3.1	0.300	10.000	-P44	06C60	natural	46
15	450	9	450	1.7	0.300	10.000	-P44	06F60	natural	46
15	450	12	450	1.3	0.400	10.000	-P44	06I60	natural	46
15	405	6	405	2.6	0.300	10.000	-P44	06C41	natural	46
15	405	12	405	1.3	0.300	10.000	-P44	06F41	natural	46
15	405	14	405	1.0	0.400	10.000	-P44	06I41	natural	46
16	563	3	563	4.6	0.200	8.000	-P44	06C60	natural	46
17	506	4	506	3.9	0.200	8.000	-P44	06C41	natural	46
18	563	7	563	2.6	0.300	8.000	-P44	06F60	natural	46
18	563	9	563	1.9	0.400	8.000	-P44	06I60	natural	46
18	563	14	563	1.3	1.100	8.000	-P44	09D60	natural	46
18	506	9	506	1.9	0.300	8.000	-P44	06F41	natural	46
18	506	12	506	1.6	0.400	8.000	-P44	06I41	natural	46
18	506	18	506	1.0	1.100	8.000	-P44	09D41	natural	46
24	1500	4	1500	5.3	1.200	3.000	-P44	09D60	natural	46
25	1350	6	1350	4.1	1.200	3.000	-P44	09D41	natural	46
25	810	6	810	5.4	0.400	5.000	-P44	06I41	natural	46
25	643	6	643	4.1	0.300	7.000	-P44	06F60	natural	46
25	643	8	643	3.1	0.400	7.000	-P44	06I60	natural	46
25	643	12	643	2.0	1.100	7.000	-P44	09D60	natural	46
25	643	16	643	1.5	1.500	7.000	-P44	09F60	natural	46
25	579	8	579	3.1	0.300	7.000	-P44	06F41	natural	46
25	579	10	579	2.5	0.400	7.000	-P44	06I41	natural	46
25	579	15	579	1.6	1.100	7.000	-P44	09D41	natural	46
25	536	21	536	1.2	1.500	7.000	-P44	09F38	natural	46
28	1500	6	1500	4.0	1.600	3.000	-P44	09F60	natural	46
28	1250	9	1250	3.1	1.600	3.000	-P44	09F38	natural	46
29	500	8	500	5.4	0.600	8.000	-P130	06F41	natural	49
31	1125	6	1125	5.4	1.200	4.000	-P44	09D60	natural	46
33	1013	8	1013	4.2	1.200	4.000	-P44	09D41	natural	46
38	1125	8	1125	4.0	1.600	4.000	-P44	09F60	natural	46
38	938	11	938	3.1	1.600	4.000	-P44	09F38	natural	46
38	305	8	305	4.4	1.000	10.000	-P130	06F60	natural	49

6.1

g700-P planetary geared motors



Technical data

Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
38	305	11	305	3.3	1.000	10.000	-P130	06F41	natural	49
38	305	11	305	3.3	1.000	10.000	-P130	06I60	natural	49
38	305	14	305	2.6	1.000	10.000	-P130	06I41	natural	49
38	305	17	305	2.2	1.800	10.000	-P130	09D60	natural	49
38	305	22	305	1.7	1.800	10.000	-P130	09D41	natural	49
38	305	23	305	1.6	2.200	10.000	-P130	09F60	natural	49
38	305	29	305	1.3	2.600	10.000	-P130	09H60	natural	49
38	305	30	305	1.3	2.200	10.000	-P130	09F38	natural	49
38	305	35	305	1.1	3.500	10.000	-P130	09L51	natural	49
38	305	36	305	1.0	2.600	10.000	-P130	09H41	natural	49
40	900	8	900	4.5	1.200	5.000	-P44	09D60	natural	46
40	900	11	900	3.4	1.600	5.000	-P44	09F60	natural	46
40	810	10	810	3.5	1.200	5.000	-P44	09D41	natural	46
40	750	14	750	2.6	1.600	5.000	-P44	09F38	natural	46
41	500	8	500	5.4	0.700	8.000	-P130	06I60	natural	49
43	550	17	550	5.6	6.600	3.000	-P260	12D17	forced	66
43	500	10	500	4.3	0.700	8.000	-P130	06I41	natural	49
45	900	15	900	4.8	4.800	3.000	-P130	12D35	forced	64
45	650	14	650	5.3	4.800	3.000	-P130	12D20	natural	49
46	550	18	550	4.1	4.800	3.000	-P130	12D17	forced	64
50	500	13	500	3.6	1.500	8.000	-P130	09D60	natural	49
50	500	17	500	2.8	1.500	8.000	-P130	09D41	natural	49
50	500	18	500	2.7	1.900	8.000	-P130	09F60	natural	49
50	500	23	500	2.1	2.300	8.000	-P130	09H60	natural	49
50	500	28	500	1.8	3.200	8.000	-P130	09L51	natural	49
50	500	29	500	1.7	2.300	8.000	-P130	09H41	natural	49
50	500	33	500	1.5	4.400	8.000	-P130	12D41	natural	49
50	500	35	500	1.4	3.200	8.000	-P130	09L41	natural	49
50	469	24	469	2.1	1.900	8.000	-P130	09F38	natural	49
50	441	46	441	1.1	4.400	8.000	-P130	12D35	forced	64
50	244	42	244	1.2	4.400	8.000	-P130	12D20	natural	49
56	571	11	571	5.1	1.500	7.000	-P130	09D60	natural	49
58	413	23	413	5.7	5.800	4.000	-P260	12D17	forced	66
59	571	14	571	4.0	1.500	7.000	-P130	09D41	natural	49
60	625	20	625	4.9	4.500	4.000	-P130	12D35	forced	64
60	488	18	488	5.3	4.500	4.000	-P130	12D20	natural	49
62	571	15	571	3.8	1.900	7.000	-P130	09F60	natural	49
62	571	19	571	3.0	2.300	7.000	-P130	09H60	natural	49
62	571	24	571	2.5	3.200	7.000	-P130	09L51	natural	49
62	571	25	571	2.4	2.300	7.000	-P130	09H41	natural	49

g700-P planetary geared motors

Technical data



Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
62	571	29	571	2.1	4.400	7.000	-P130	12D41	natural	49
62	571	30	571	2.0	3.200	7.000	-P130	09L41	natural	49
62	536	20	536	3.0	1.900	7.000	-P130	09F38	natural	49
62	504	40	504	1.5	4.400	7.000	-P130	12D35	forced	64
62	504	50	504	1.2	7.700	7.000	-P130	12H35	natural	49
62	429	54	429	1.1	7.700	7.000	-P130	12H30	natural	49
62	413	24	413	4.2	4.500	4.000	-P130	12D17	forced	64
62	279	37	279	1.7	4.400	7.000	-P130	12D20	natural	49
62	236	47	236	1.3	4.400	7.000	-P130	12D17	forced	64
72	850	19	850	5.2	11.000	3.000	-P260	14D36	natural	54
72	850	19	850	5.2	9.900	3.000	-P260	12H35	natural	54
72	330	28	330	5.7	5.500	5.000	-P260	12D17	forced	66
73	850	20	850	4.9	9.900	3.000	-P260	12H30	natural	54
75	600	18	600	5.2	4.500	5.000	-P130	12D41	natural	49
76	500	24	500	4.3	11.000	3.000	-P260	14D15	natural	54
77	900	20	900	3.9	8.100	3.000	-P130	12H35	natural	49
77	500	27	500	3.9	9.900	3.000	-P260	12H15	natural	54
78	900	21	900	3.6	8.100	3.000	-P130	12H30	natural	49
78	850	28	850	3.7	11.000	3.000	-P260	14D30	forced	66
78	850	28	850	3.7	9.900	3.000	-P260	12H34	forced	66
78	265	15	265	5.4	3.700	10.000	-P260	09D60	natural	54
79	600	27	600	3.7	4.500	5.000	-P130	12D35	forced	64
79	450	33	450	3.3	11.000	3.000	-P260	14D14	forced	66
79	450	33	450	3.3	9.900	3.000	-P260	12H14	forced	66
79	390	24	390	4.1	4.500	5.000	-P130	12D20	natural	49
80	600	15	600	5.9	2.400	5.000	-P130	09H41	natural	49
80	500	28	500	2.9	8.100	3.000	-P130	12H15	natural	49
81	330	32	330	3.2	4.500	5.000	-P130	12D17	forced	64
83	265	20	265	4.3	3.700	10.000	-P260	09D41	natural	54
95	265	21	265	4.1	4.100	10.000	-P260	09F60	natural	54
95	265	27	265	3.3	4.500	10.000	-P260	09H60	natural	54
95	265	28	265	3.2	4.100	10.000	-P260	09F38	natural	54
95	265	34	265	2.7	5.400	10.000	-P260	09L51	natural	54
95	265	36	265	2.6	4.500	10.000	-P260	09H41	natural	54
95	265	41	265	2.3	6.600	10.000	-P260	12D41	natural	54
95	265	43	265	2.2	5.400	10.000	-P260	09L41	natural	54
95	265	58	265	1.6	6.600	10.000	-P260	12D35	forced	66
95	265	72	265	1.3	11.000	10.000	-P260	14D36	natural	54
95	265	72	265	1.3	9.900	10.000	-P260	12H35	natural	54
95	265	77	265	1.2	9.900	10.000	-P260	12H30	natural	54

g700-P planetary geared motors

Technical data



Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
95	195	53	195	1.8	6.600	10.000	-P260	12D20	natural	54
95	165	67	165	1.4	6.600	10.000	-P260	12D17	forced	66
95	150	88	150	1.1	11.000	10.000	-P260	14D15	natural	54
96	625	25	625	5.3	9.800	4.000	-P260	14D36	natural	54
96	625	25	625	5.3	9.100	4.000	-P260	12H35	natural	54
98	625	27	625	4.9	9.100	4.000	-P260	12H30	natural	54
101	438	21	438	5.0	2.800	8.000	-P260	09F38	natural	54
101	375	32	375	4.3	9.800	4.000	-P260	14D15	natural	54
102	625	27	625	3.9	7.800	4.000	-P130	12H35	natural	49
102	375	35	375	4.0	9.100	4.000	-P260	12H15	natural	54
103	625	37	625	3.8	9.800	4.000	-P260	14D30	forced	66
103	625	37	625	3.8	9.100	4.000	-P260	12H34	forced	66
104	625	29	625	3.7	7.800	4.000	-P130	12H30	natural	49
105	338	44	338	3.3	9.800	4.000	-P260	14D14	forced	66
105	338	44	338	3.3	9.100	4.000	-P260	12H14	forced	66
107	375	37	375	2.9	7.800	4.000	-P130	12H15	natural	49
108	500	26	500	4.6	5.400	7.000	-P260	12D41	natural	54
110	600	19	600	5.0	3.300	5.000	-P130	09L41	natural	49
110	600	35	600	3.0	7.800	5.000	-P130	12H35	natural	49
110	600	37	600	2.8	7.800	5.000	-P130	12H30	natural	49
110	300	48	300	2.2	7.800	5.000	-P130	12H15	natural	49
112	500	38	500	3.3	5.400	7.000	-P260	12D35	forced	66
113	279	34	279	3.6	5.400	7.000	-P260	12D20	natural	54
115	850	30	850	3.6	13.000	3.000	-P260	12L41	natural	54
115	850	39	850	2.8	17.000	3.000	-P260	14H32	natural	54
115	850	39	850	2.8	13.000	3.000	-P260	12L39	forced	66
115	850	49	850	2.3	26.000	3.000	-P260	14L32	natural	54
115	850	60	850	1.9	70.000	3.000	-P260	19F30	natural	54
115	650	37	650	2.9	13.000	3.000	-P260	12L20	natural	54
115	550	48	550	2.3	13.000	3.000	-P260	12L17	forced	66
115	500	45	500	2.4	17.000	3.000	-P260	14H15	natural	54
115	500	66	500	1.7	26.000	3.000	-P260	14L15	natural	54
115	475	78	475	1.4	70.000	3.000	-P260	19F14	natural	54
115	236	45	236	2.8	5.400	7.000	-P260	12D17	forced	66
116	500	22	500	5.2	3.300	7.000	-P260	09H41	natural	54
120	500	31	500	5.3	9.600	5.000	-P260	14D36	natural	54
120	500	31	500	5.3	8.800	5.000	-P260	12H35	natural	54
120	438	20	438	5.2	3.200	8.000	-P260	09H60	natural	54
120	438	25	438	4.3	4.100	8.000	-P260	09L51	natural	54
120	438	27	438	4.1	3.200	8.000	-P260	09H41	natural	54

g700-P planetary geared motors

Technical data



Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
120	438	31	438	3.6	5.300	8.000	-P260	12D41	natural	54
120	438	32	438	3.4	4.100	8.000	-P260	09L41	natural	54
120	438	45	438	2.6	5.300	8.000	-P260	12D35	forced	66
120	438	57	438	2.1	9.400	8.000	-P260	14D36	natural	54
120	438	57	438	2.1	8.600	8.000	-P260	12H35	natural	54
120	438	84	438	1.4	12.000	8.000	-P260	12L41	natural	54
120	438	108	438	1.1	12.000	8.000	-P260	12L39	forced	66
120	422	81	422	1.5	8.600	8.000	-P260	12H34	forced	66
120	403	108	403	1.1	15.000	8.000	-P260	14H32	natural	54
120	375	61	375	1.9	8.600	8.000	-P260	12H30	natural	54
120	375	81	375	1.5	9.400	8.000	-P260	14D30	forced	66
120	244	41	244	2.8	5.300	8.000	-P260	12D20	natural	54
120	244	104	244	1.1	12.000	8.000	-P260	12L20	natural	54
120	206	53	206	2.2	5.300	8.000	-P260	12D17	forced	66
120	188	71	188	1.7	9.400	8.000	-P260	14D15	natural	54
120	188	77	188	1.6	8.600	8.000	-P260	12H15	natural	54
120	169	92	169	1.3	9.400	8.000	-P260	14D14	forced	66
120	169	92	169	1.3	8.600	8.000	-P260	12H14	forced	66
122	500	34	500	5.0	8.800	5.000	-P260	12H30	natural	54
126	300	40	300	4.3	9.600	5.000	-P260	14D15	natural	54
128	300	44	300	4.0	8.800	5.000	-P260	12H15	natural	54
129	500	47	500	3.8	9.600	5.000	-P260	14D30	forced	66
129	500	47	500	3.8	8.800	5.000	-P260	12H34	forced	66
132	270	54	270	3.3	9.600	5.000	-P260	14D14	forced	66
132	270	54	270	3.3	8.800	5.000	-P260	12H14	forced	66
133	300	57	300	5.8	26.000	3.000	-P800	14H12	forced	68
135	500	21	500	5.5	4.200	7.000	-P260	09L51	natural	54
135	500	27	500	4.4	4.200	7.000	-P260	09L41	natural	54
135	500	49	500	2.6	9.500	7.000	-P260	14D36	natural	54
135	500	49	500	2.6	8.700	7.000	-P260	12H35	natural	54
135	500	74	500	1.8	12.000	7.000	-P260	12L41	natural	54
135	500	94	500	1.4	12.000	7.000	-P260	12L39	forced	66
135	482	71	482	1.9	8.700	7.000	-P260	12H34	forced	66
135	461	94	461	1.4	16.000	7.000	-P260	14H32	natural	54
135	461	116	461	1.2	25.000	7.000	-P260	14L32	natural	54
135	429	53	429	2.5	8.700	7.000	-P260	12H30	natural	54
135	429	71	429	1.9	9.500	7.000	-P260	14D30	forced	66
135	279	91	279	1.5	12.000	7.000	-P260	12L20	natural	54
135	236	114	236	1.2	12.000	7.000	-P260	12L17	forced	66
135	214	61	214	2.2	9.500	7.000	-P260	14D15	natural	54

g700-P planetary geared motors

Technical data



Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
135	214	67	214	2.0	8.700	7.000	-P260	12H15	natural	54
135	214	108	214	1.2	16.000	7.000	-P260	14H15	natural	54
135	193	81	193	1.7	9.500	7.000	-P260	14D14	forced	66
135	193	81	193	1.7	8.700	7.000	-P260	12H14	forced	66
155	625	39	625	3.6	12.000	4.000	-P260	12L41	natural	54
155	625	52	625	2.8	16.000	4.000	-P260	14H32	natural	54
155	625	52	625	2.8	12.000	4.000	-P260	12L39	forced	66
155	625	65	625	2.3	25.000	4.000	-P260	14L32	natural	54
155	625	81	625	1.9	69.000	4.000	-P260	19F30	natural	54
155	488	50	488	2.9	12.000	4.000	-P260	12L20	natural	54
155	413	64	413	2.3	12.000	4.000	-P260	12L17	forced	66
155	375	60	375	2.5	16.000	4.000	-P260	14H15	natural	54
155	375	88	375	1.7	25.000	4.000	-P260	14L15	natural	54
155	356	104	356	1.5	69.000	4.000	-P260	19F14	natural	54
179	250	67	250	5.6	22.000	4.000	-P800	14H28	forced	68
185	250	79	250	4.9	22.000	4.000	-P800	14H12	forced	68
186	300	55	300	5.9	36.000	3.000	-P800	14L15	natural	60
187	188	65	188	5.8	12.000	8.000	-P800	12H15	natural	60
190	194	69	194	5.5	12.000	8.000	-P800	12H34	forced	68
190	194	69	194	5.5	13.000	8.000	-P800	14D30	forced	68
191	300	63	300	5.3	36.000	3.000	-P800	14L30	forced	68
195	500	49	500	3.6	12.000	5.000	-P260	12L41	natural	54
195	500	65	500	2.8	16.000	5.000	-P260	14H32	natural	54
195	500	65	500	2.8	12.000	5.000	-P260	12L39	forced	66
195	500	81	500	2.3	25.000	5.000	-P260	14L32	natural	54
195	500	101	500	1.9	69.000	5.000	-P260	19F30	natural	54
195	390	62	390	3.0	12.000	5.000	-P260	12L20	natural	54
195	330	80	330	2.3	12.000	5.000	-P260	12L17	forced	66
195	300	75	300	2.5	16.000	5.000	-P260	14H15	natural	54
195	300	110	300	1.7	25.000	5.000	-P260	14L15	natural	54
195	285	130	285	1.5	69.000	5.000	-P260	19F14	natural	54
196	169	81	169	4.8	12.000	8.000	-P800	12H14	forced	68
196	169	81	169	4.8	13.000	8.000	-P800	14D14	forced	68
199	300	79	300	4.5	36.000	3.000	-P800	14L14	forced	68
216	300	68	300	5.0	77.000	3.000	-P800	19F14	natural	60
223	230	65	230	5.7	20.000	5.000	-P800	14H15	natural	60
225	300	85	300	4.2	77.000	3.000	-P800	19F29	forced	68
231	300	102	300	3.6	77.000	3.000	-P800	19F12	forced	68
232	230	70	230	5.4	17.000	5.000	-P800	12L17	forced	68
236	230	88	230	4.5	20.000	5.000	-P800	14H28	forced	68

6.1

g700-P planetary geared motors

Technical data



Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
242	230	104	230	3.9	20.000	5.000	-P800	14H12	forced	68
259	250	77	250	5.0	31.000	4.000	-P800	14L15	natural	60
265	250	88	250	4.5	31.000	4.000	-P800	14L30	forced	68
270	300	77	300	4.5	47.000	3.000	-P800	14P14	natural	60
274	250	109	250	3.8	31.000	4.000	-P800	14L14	forced	68
276	300	87	300	4.1	47.000	3.000	-P800	14P26	forced	68
283	250	69	250	5.5	73.000	4.000	-P800	19F30	natural	60
287	300	115	300	3.2	47.000	3.000	-P800	14P11	forced	68
299	250	94	250	4.3	73.000	4.000	-P800	19F14	natural	60
309	250	117	250	3.5	73.000	4.000	-P800	19F29	forced	68
316	250	140	250	3.0	73.000	4.000	-P800	19F12	forced	68
318	230	71	230	5.3	29.000	5.000	-P800	14L32	natural	60
330	300	74	300	4.7	117.000	3.000	-P800	19J30	natural	60
339	230	101	230	4.0	29.000	5.000	-P800	14L15	natural	60
345	250	69	250	5.5	42.000	4.000	-P800	14P32	natural	60
345	230	114	230	3.6	29.000	5.000	-P800	14L30	forced	68
350	300	108	300	3.4	117.000	3.000	-P800	19J14	natural	60
354	230	140	230	3.0	29.000	5.000	-P800	14L14	forced	68
361	300	141	300	2.7	117.000	3.000	-P800	19J29	forced	68
369	300	179	300	2.2	117.000	3.000	-P800	19J12	forced	68
371	194	73	194	5.3	15.000	8.000	-P800	12L41	natural	60
372	230	91	230	4.4	71.000	5.000	-P800	19F30	natural	60
373	250	106	250	3.8	42.000	4.000	-P800	14P14	natural	60
378	250	119	250	3.5	42.000	4.000	-P800	14P26	forced	68
385	194	98	194	4.1	19.000	8.000	-P800	14H32	natural	60
389	230	122	230	3.4	71.000	5.000	-P800	19F14	natural	60
389	194	94	194	4.3	15.000	8.000	-P800	12L20	natural	60
391	250	156	250	2.7	42.000	4.000	-P800	14P11	forced	68
394	194	98	194	4.1	15.000	8.000	-P800	12L39	forced	68
394	188	115	188	3.6	19.000	8.000	-P800	14H15	natural	60
399	230	151	230	2.8	71.000	5.000	-P800	19F29	forced	68
400	300	84	300	4.3	172.000	3.000	-P800	19P30	natural	60
400	300	143	300	2.7	172.000	3.000	-P800	19P14	natural	60
400	300	149	300	2.6	172.000	3.000	-P800	19P29	forced	68
400	300	207	300	1.9	172.000	3.000	-P800	19P12	forced	68
406	230	179	230	2.4	71.000	5.000	-P800	19F12	forced	68
406	194	152	194	2.8	19.000	8.000	-P800	14H28	forced	68
408	194	123	194	3.4	15.000	8.000	-P800	12L17	forced	68
413	150	177	150	2.5	19.000	8.000	-P800	14H12	forced	68
450	250	102	250	4.0	113.000	4.000	-P800	19J30	natural	60

g700-P planetary geared motors

Technical data



Selection tables

1-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
450	250	115	250	3.6	168.000	4.000	-P800	19P30	natural	60
450	250	148	250	2.9	113.000	4.000	-P800	19J14	natural	60
450	250	192	250	2.3	113.000	4.000	-P800	19J29	forced	68
450	250	194	250	2.3	168.000	4.000	-P800	19P14	natural	60
450	250	202	250	2.2	168.000	4.000	-P800	19P29	forced	68
450	250	240	250	1.8	113.000	4.000	-P800	19J12	forced	68
450	250	276	250	1.6	168.000	4.000	-P800	19P12	forced	68
450	230	91	230	4.4	41.000	5.000	-P800	14P32	natural	60
450	230	132	230	3.2	111.000	5.000	-P800	19J30	natural	60
450	230	138	230	3.1	41.000	5.000	-P800	14P14	natural	60
450	230	148	230	2.9	166.000	5.000	-P800	19P30	natural	60
450	230	153	230	2.8	41.000	5.000	-P800	14P26	forced	68
450	230	190	230	2.3	111.000	5.000	-P800	19J14	natural	60
450	230	242	230	1.8	111.000	5.000	-P800	19J29	forced	68
450	230	245	230	1.8	166.000	5.000	-P800	19P14	natural	60
450	230	254	230	1.7	166.000	5.000	-P800	19P29	forced	68
450	230	300	230	1.5	111.000	5.000	-P800	19J12	forced	68
450	230	346	230	1.3	166.000	5.000	-P800	19P12	forced	68
450	210	200	210	2.2	41.000	5.000	-P800	14P11	forced	68
450	194	125	194	3.4	28.000	8.000	-P800	14L32	natural	60
450	194	156	194	2.8	70.000	8.000	-P800	19F30	natural	60
450	194	156	194	2.8	39.000	8.000	-P800	14P32	natural	60
450	194	194	194	2.3	28.000	8.000	-P800	14L30	forced	68
450	194	223	194	2.0	110.000	8.000	-P800	19J30	natural	60
450	194	246	194	1.8	165.000	8.000	-P800	19P30	natural	60
450	194	250	194	1.8	70.000	8.000	-P800	19F29	forced	68
450	194	253	194	1.8	39.000	8.000	-P800	14P26	forced	68
450	194	388	194	1.1	110.000	8.000	-P800	19J29	forced	68
450	194	407	194	1.1	165.000	8.000	-P800	19P29	forced	68
450	188	173	188	2.5	28.000	8.000	-P800	14L15	natural	60
450	178	206	178	2.1	70.000	8.000	-P800	19F14	natural	60
450	178	307	178	1.4	110.000	8.000	-P800	19J14	natural	60
450	169	230	169	1.9	39.000	8.000	-P800	14P14	natural	60
450	169	234	169	1.9	28.000	8.000	-P800	14L14	forced	68
450	169	392	169	1.1	165.000	8.000	-P800	19P14	natural	60
450	150	292	150	1.5	70.000	8.000	-P800	19F12	forced	68
450	131	323	131	1.4	39.000	8.000	-P800	14P11	forced	68

g700-P planetary geared motors

Technical data



Selection tables

2-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
17	556	4	556	3.8	0.200	9.000	-P20	06C60	natural	45
17	450	5	450	3.2	0.200	9.000	-P20	06C41	natural	45
18	333	7	333	2.5	0.200	15.000	-P20	06C60	natural	45
18	270	8	270	2.1	0.200	15.000	-P20	06C41	natural	45
18	200	12	200	1.6	0.200	25.000	-P20	06C60	natural	45
18	162	14	162	1.3	0.200	25.000	-P20	06C41	natural	45
20	417	5	417	3.5	0.200	12.000	-P20	06C60	natural	45
20	338	6	338	2.9	0.200	12.000	-P20	06C41	natural	45
20	313	7	313	2.6	0.200	16.000	-P20	06C60	natural	45
20	253	9	253	2.2	0.200	16.000	-P20	06C41	natural	45
20	250	9	250	2.1	0.200	20.000	-P20	06C60	natural	45
20	203	11	203	1.8	0.200	20.000	-P20	06C41	natural	45
20	156	15	156	1.4	0.200	32.000	-P20	06C60	natural	45
20	127	18	127	1.1	0.200	32.000	-P20	06C41	natural	45
26	281	5	281	5.7	0.200	16.000	-P44	06C60	natural	47
26	270	7	270	5.1	0.200	15.000	-P44	06C41	natural	47
27	500	6	500	5.6	0.300	9.000	-P44	06F60	natural	47
29	253	7	253	4.8	0.200	16.000	-P44	06C41	natural	47
31	450	8	450	4.2	0.300	9.000	-P44	06F41	natural	47
36	225	8	225	4.6	0.200	20.000	-P44	06C60	natural	47
39	203	10	203	3.8	0.200	20.000	-P44	06C41	natural	47
40	180	11	180	3.4	0.200	25.000	-P44	06C60	natural	47
40	180	21	180	1.9	0.300	25.000	-P44	06F60	natural	47
40	180	28	180	1.4	0.400	25.000	-P44	06I60	natural	47
40	162	13	162	2.8	0.200	25.000	-P44	06C41	natural	47
40	162	28	162	1.4	0.300	25.000	-P44	06F41	natural	47
40	162	35	162	1.1	0.400	25.000	-P44	06I41	natural	47
40	113	19	113	2.1	0.200	40.000	-P44	06C60	natural	47
40	113	34	113	1.2	0.300	40.000	-P44	06F60	natural	47
40	101	23	101	1.8	0.200	40.000	-P44	06C41	natural	47
41	375	8	375	4.2	0.300	12.000	-P44	06F60	natural	47
44	500	8	500	4.2	0.400	9.000	-P44	06I60	natural	47
44	500	14	500	2.8	1.200	9.000	-P44	09D60	natural	47
44	500	20	500	2.1	1.600	9.000	-P44	09F60	natural	47
44	450	11	450	3.4	0.400	9.000	-P44	06I41	natural	47
44	450	19	450	2.2	1.200	9.000	-P44	09D41	natural	47
44	417	26	417	1.6	1.600	9.000	-P44	09F38	natural	47
44	375	12	375	3.2	0.400	12.000	-P44	06I60	natural	47
44	375	20	375	2.1	1.200	12.000	-P44	09D60	natural	47
44	375	27	375	1.6	1.600	12.000	-P44	09F60	natural	47

6.1

g700-P planetary geared motors



Technical data

Selection tables

2-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
44	338	12	338	3.2	0.300	12.000	-P44	06F41	natural	47
44	338	16	338	2.5	0.400	12.000	-P44	06I41	natural	47
44	338	26	338	1.7	1.200	12.000	-P44	09D41	natural	47
44	313	35	313	1.2	1.600	12.000	-P44	09F38	natural	47
44	300	11	300	3.4	0.300	15.000	-P44	06F60	natural	47
44	300	16	300	2.5	0.400	15.000	-P44	06I60	natural	47
44	300	25	300	1.7	1.100	15.000	-P44	09D60	natural	47
44	300	34	300	1.3	1.600	15.000	-P44	09F60	natural	47
44	281	12	281	3.2	0.300	16.000	-P44	06F60	natural	47
44	281	18	281	2.4	0.400	16.000	-P44	06I60	natural	47
44	281	27	281	1.6	1.200	16.000	-P44	09D60	natural	47
44	281	36	281	1.2	1.600	16.000	-P44	09F60	natural	47
44	270	16	270	2.5	0.300	15.000	-P44	06F41	natural	47
44	270	21	270	2.0	0.400	15.000	-P44	06I41	natural	47
44	270	32	270	1.3	1.100	15.000	-P44	09D41	natural	47
44	253	18	253	2.4	0.300	16.000	-P44	06F41	natural	47
44	253	23	253	1.9	0.400	16.000	-P44	06I41	natural	47
44	253	35	253	1.3	1.200	16.000	-P44	09D41	natural	47
44	225	16	225	2.5	0.300	20.000	-P44	06F60	natural	47
44	225	23	225	1.9	0.400	20.000	-P44	06I60	natural	47
44	225	34	225	1.3	1.100	20.000	-P44	09D60	natural	47
44	203	23	203	1.9	0.300	20.000	-P44	06F41	natural	47
44	203	28	203	1.5	0.400	20.000	-P44	06I41	natural	47
44	141	14	141	2.9	0.200	32.000	-P44	06C60	natural	47
44	141	27	141	1.6	0.300	32.000	-P44	06F60	natural	47
44	141	36	141	1.2	0.400	32.000	-P44	06I60	natural	47
44	127	17	127	2.4	0.200	32.000	-P44	06C41	natural	47
44	127	36	127	1.2	0.300	32.000	-P44	06F41	natural	47
50	63	28	63	1.8	0.700	64.000	-P130	06C60	natural	51
50	63	34	63	1.5	0.700	64.000	-P130	06C41	natural	51
63	200	17	200	5.2	0.700	20.000	-P130	06F41	natural	51
64	100	13	100	5.8	0.500	40.000	-P130	06C60	natural	51
67	267	16	267	5.1	1.000	15.000	-P130	06I41	natural	51
71	250	17	250	5.2	0.800	16.000	-P130	06I41	natural	51
71	100	18	100	4.9	0.500	40.000	-P130	06C41	natural	51
77	313	15	313	5.7	1.800	12.000	-P130	09D60	natural	51
79	160	16	160	5.2	0.700	25.000	-P130	06F60	natural	51
87	313	21	313	4.5	1.800	12.000	-P130	09D41	natural	51
89	200	17	200	5.2	0.700	20.000	-P130	06I60	natural	51
89	160	24	160	3.9	0.700	25.000	-P130	06F41	natural	51

g700-P planetary geared motors



Technical data

Selection tables

2-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
98	200	24	200	4.2	0.700	20.000	-P130	06I41	natural	51
100	417	21	417	4.8	1.900	9.000	-P130	09F38	natural	51
109	125	22	125	4.4	0.600	32.000	-P130	06F60	natural	51
110	267	21	267	4.2	1.800	15.000	-P130	09D60	natural	51
110	267	29	267	3.3	1.800	15.000	-P130	09D41	natural	51
110	267	31	267	3.2	2.200	15.000	-P130	09F60	natural	51
110	267	41	267	2.5	2.600	15.000	-P130	09H60	natural	51
110	267	50	267	2.1	3.500	15.000	-P130	09L51	natural	51
110	267	54	267	2.0	2.600	15.000	-P130	09H41	natural	51
110	267	61	267	1.8	4.700	15.000	-P130	12D41	natural	51
110	267	63	267	1.7	3.500	15.000	-P130	09L41	natural	51
110	250	42	250	2.5	2.200	15.000	-P130	09F38	natural	51
110	235	85	235	1.3	4.700	15.000	-P130	12D35	forced	65
110	235	106	235	1.0	8.000	15.000	-P130	12H35	natural	51
110	160	24	160	3.9	0.700	25.000	-P130	06I60	natural	51
110	160	32	160	3.1	0.700	25.000	-P130	06I41	natural	51
110	160	40	160	2.6	1.500	25.000	-P130	09D60	natural	51
110	160	54	160	2.0	1.500	25.000	-P130	09D41	natural	51
110	160	56	160	1.9	1.900	25.000	-P130	09F60	natural	51
110	160	71	160	1.5	2.300	25.000	-P130	09H60	natural	51
110	160	85	160	1.3	3.200	25.000	-P130	09L51	natural	51
110	160	89	160	1.2	2.300	25.000	-P130	09H41	natural	51
110	160	101	160	1.1	4.400	25.000	-P130	12D41	natural	51
110	160	106	160	1.0	3.200	25.000	-P130	09L41	natural	51
110	150	73	150	1.5	1.900	25.000	-P130	09F38	natural	51
110	130	78	130	1.4	4.700	15.000	-P130	12D20	natural	51
110	110	99	110	1.1	4.700	15.000	-P130	12D17	forced	65
110	100	31	100	3.3	0.600	40.000	-P130	06F60	natural	51
110	100	44	100	2.4	0.600	40.000	-P130	06F41	natural	51
110	100	44	100	2.4	0.700	40.000	-P130	06I60	natural	51
110	100	56	100	1.9	0.700	40.000	-P130	06I41	natural	51
110	100	68	100	1.6	1.500	40.000	-P130	09D60	natural	51
110	100	86	100	1.3	1.500	40.000	-P130	09D41	natural	51
110	100	90	100	1.2	1.900	40.000	-P130	09F60	natural	51
112	389	27	389	5.6	5.300	9.000	-P260	12D41	natural	56
118	250	22	250	4.3	1.600	16.000	-P130	09D60	natural	51
120	313	22	313	4.3	2.200	12.000	-P130	09F60	natural	51
120	313	30	313	3.4	2.600	12.000	-P130	09H60	natural	51
120	313	32	313	3.3	2.200	12.000	-P130	09F38	natural	51
120	313	38	313	2.9	3.500	12.000	-P130	09L51	natural	51

g700-P planetary geared motors



Technical data

Selection tables

2-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
120	313	41	313	2.7	2.600	12.000	-P130	09H41	natural	51
120	313	47	313	2.4	4.700	12.000	-P130	12D41	natural	51
120	313	50	313	2.3	3.500	12.000	-P130	09L41	natural	51
120	294	68	294	1.7	4.700	12.000	-P130	12D35	forced	65
120	294	85	294	1.4	8.000	12.000	-P130	12H35	natural	51
120	250	31	250	3.4	1.600	16.000	-P130	09D41	natural	51
120	250	33	250	3.3	2.000	16.000	-P130	09F60	natural	51
120	250	43	250	2.6	2.400	16.000	-P130	09H60	natural	51
120	250	53	250	2.2	3.300	16.000	-P130	09L51	natural	51
120	250	57	250	2.1	2.400	16.000	-P130	09H41	natural	51
120	250	65	250	1.8	4.500	16.000	-P130	12D41	natural	51
120	250	68	250	1.7	3.300	16.000	-P130	09L41	natural	51
120	250	90	250	1.3	8.000	12.000	-P130	12H30	natural	51
120	234	45	234	2.5	2.000	16.000	-P130	09F38	natural	51
120	220	90	220	1.3	4.500	16.000	-P130	12D35	forced	65
120	220	113	220	1.0	7.800	16.000	-P130	12H35	natural	51
120	200	30	200	3.5	1.500	20.000	-P130	09D60	natural	51
120	200	41	200	2.7	1.500	20.000	-P130	09D41	natural	51
120	200	43	200	2.6	1.900	20.000	-P130	09F60	natural	51
120	200	56	200	2.1	2.300	20.000	-P130	09H60	natural	51
120	200	68	200	1.7	3.200	20.000	-P130	09L51	natural	51
120	200	71	200	1.6	2.300	20.000	-P130	09H41	natural	51
120	200	81	200	1.4	4.400	20.000	-P130	12D41	natural	51
120	200	85	200	1.4	3.200	20.000	-P130	09L41	natural	51
120	188	58	188	2.0	1.900	20.000	-P130	09F38	natural	51
120	176	113	176	1.0	4.400	20.000	-P130	12D35	forced	65
120	163	62	163	1.9	4.700	12.000	-P130	12D20	natural	51
120	138	79	138	1.5	4.700	12.000	-P130	12D17	forced	65
120	125	33	125	3.3	0.600	32.000	-P130	06F41	natural	51
120	125	33	125	3.3	0.700	32.000	-P130	06I60	natural	51
120	125	43	125	2.6	0.700	32.000	-P130	06I41	natural	51
120	125	53	125	2.2	1.500	32.000	-P130	09D60	natural	51
120	125	69	125	1.7	1.500	32.000	-P130	09D41	natural	51
120	125	72	125	1.6	1.900	32.000	-P130	09F60	natural	51
120	125	90	125	1.3	2.300	32.000	-P130	09H60	natural	51
120	125	108	125	1.1	3.200	32.000	-P130	09L51	natural	51
120	125	113	125	1.0	8.000	12.000	-P130	12H15	natural	51
120	125	114	125	1.0	2.300	32.000	-P130	09H41	natural	51
120	122	83	122	1.4	4.500	16.000	-P130	12D20	natural	51
120	117	93	117	1.3	1.900	32.000	-P130	09F38	natural	51

g700-P planetary geared motors

Technical data



Selection tables

2-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
120	103	105	103	1.1	4.500	16.000	-P130	12D17	forced	65
120	98	103	98	1.1	4.400	20.000	-P130	12D20	natural	51
120	55	25	55	4.2	2.700	64.000	-P260	06C60	natural	56
120	55	32	55	3.5	2.700	64.000	-P260	06C41	natural	56
120	55	51	55	2.3	2.800	64.000	-P260	06F60	natural	56
120	55	68	55	1.8	2.900	64.000	-P260	06I60	natural	56
120	55	68	55	1.8	2.800	64.000	-P260	06F41	natural	56
120	55	85	55	1.4	2.900	64.000	-P260	06I41	natural	56
120	55	103	55	1.2	3.700	64.000	-P260	09D60	natural	56
125	217	38	217	4.4	5.300	9.000	-P260	12D20	natural	56
127	389	43	389	4.0	5.300	9.000	-P260	12D35	forced	67
127	175	31	175	5.9	2.600	20.000	-P260	09D41	natural	56
127	88	35	88	5.1	1.600	40.000	-P260	06F41	natural	56
130	444	20	444	5.0	2.300	9.000	-P130	09H60	natural	51
130	444	26	444	4.1	3.200	9.000	-P130	09L51	natural	51
130	444	28	444	3.9	2.300	9.000	-P130	09H41	natural	51
130	444	32	444	3.5	4.400	9.000	-P130	12D41	natural	51
130	444	34	444	3.3	3.200	9.000	-P130	09L41	natural	51
130	392	49	392	2.5	4.400	9.000	-P130	12D35	forced	65
130	392	63	392	2.0	7.700	9.000	-P130	12H35	natural	51
130	333	68	333	1.9	7.700	9.000	-P130	12H30	natural	51
130	217	44	217	2.7	4.400	9.000	-P130	12D20	natural	51
130	183	59	183	2.1	4.400	9.000	-P130	12D17	forced	65
130	167	85	167	1.5	7.700	9.000	-P130	12H15	natural	51
134	183	53	183	3.4	5.300	9.000	-P260	12D17	forced	67
135	109	33	109	5.7	1.600	32.000	-P260	06I41	natural	56
154	221	37	221	5.3	6.600	12.000	-P260	12D41	natural	56
159	221	30	221	5.9	4.500	12.000	-P260	09H41	natural	56
162	213	33	213	5.2	4.100	15.000	-P260	09F38	natural	56
167	194	35	194	5.5	3.300	16.000	-P260	09F38	natural	56
167	140	32	140	5.4	2.600	25.000	-P260	09D60	natural	56
171	163	52	163	4.1	6.600	12.000	-P260	12D20	natural	56
173	221	59	221	3.8	6.600	12.000	-P260	12D35	forced	67
179	88	35	88	5.1	1.600	40.000	-P260	06I60	natural	56
181	138	72	138	3.2	6.600	12.000	-P260	12D17	forced	67
186	140	45	140	4.2	2.600	25.000	-P260	09D41	natural	56
197	88	48	88	4.1	1.600	40.000	-P260	06I41	natural	56
203	389	29	389	5.3	4.100	9.000	-P260	09L41	natural	56
206	175	33	175	5.6	3.000	20.000	-P260	09F60	natural	56
210	389	58	389	3.2	8.600	9.000	-P260	12H35	natural	56

6.1

g700-P planetary geared motors

Technical data



Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
210	389	58	389	3.2	9.300	9.000	-P260	14D36	natural	56
210	389	92	389	2.2	12.000	9.000	-P260	12L41	natural	56
210	389	118	389	1.7	12.000	9.000	-P260	12L39	forced	67
210	375	87	375	2.3	8.600	9.000	-P260	12H34	forced	67
210	358	118	358	1.7	15.000	9.000	-P260	14H32	natural	56
210	358	146	358	1.4	25.000	9.000	-P260	14L32	natural	56
210	333	63	333	3.0	8.600	9.000	-P260	12H30	natural	56
210	333	87	333	2.3	9.300	9.000	-P260	14D30	forced	67
210	333	178	333	1.1	69.000	9.000	-P260	19F30	natural	56
210	217	114	217	1.8	12.000	9.000	-P260	12L20	natural	56
210	183	144	183	1.4	12.000	9.000	-P260	12L17	forced	67
210	167	74	167	2.6	9.300	9.000	-P260	14D15	natural	56
210	167	82	167	2.4	8.600	9.000	-P260	12H15	natural	56
210	167	135	167	1.5	15.000	9.000	-P260	14H15	natural	56
210	167	195	167	1.1	25.000	9.000	-P260	14L15	natural	56
210	150	101	150	2.0	8.600	9.000	-P260	12H14	forced	67
210	150	101	150	2.0	9.300	9.000	-P260	14D14	forced	67
212	213	32	213	5.3	4.500	15.000	-P260	09H60	natural	56
219	194	33	194	5.6	3.700	16.000	-P260	09H60	natural	56
221	213	53	213	3.7	6.500	15.000	-P260	12D41	natural	56
227	109	43	109	4.8	2.400	32.000	-P260	09D60	natural	56
230	213	42	213	4.4	5.400	15.000	-P260	09L51	natural	56
230	213	45	213	4.2	4.500	15.000	-P260	09H41	natural	56
230	213	56	213	3.5	5.400	15.000	-P260	09L41	natural	56
230	213	80	213	2.7	6.500	15.000	-P260	12D35	forced	67
230	213	105	213	2.1	9.800	15.000	-P260	12H35	natural	56
230	213	105	213	2.1	11.000	15.000	-P260	14D36	natural	56
230	213	148	213	1.5	9.800	15.000	-P260	12H34	forced	67
230	213	155	213	1.4	13.000	15.000	-P260	12L41	natural	56
230	213	197	213	1.1	13.000	15.000	-P260	12L39	forced	67
230	213	197	213	1.1	17.000	15.000	-P260	14H32	natural	56
230	200	113	200	2.0	9.800	15.000	-P260	12H30	natural	56
230	200	148	200	1.5	11.000	15.000	-P260	14D30	forced	67
230	140	48	140	4.0	3.000	25.000	-P260	09F60	natural	56
230	140	64	140	3.2	3.400	25.000	-P260	09H60	natural	56
230	140	67	140	3.1	3.000	25.000	-P260	09F38	natural	56
230	140	80	140	2.7	4.300	25.000	-P260	09L51	natural	56
230	140	86	140	2.5	3.400	25.000	-P260	09H41	natural	56
230	140	99	140	2.3	5.500	25.000	-P260	12D41	natural	56
230	140	105	140	2.1	4.300	25.000	-P260	09L41	natural	56

g700-P planetary geared motors

Technical data



Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
230	140	141	140	1.6	5.500	25.000	-P260	12D35	forced	67
230	140	176	140	1.3	8.800	25.000	-P260	12H35	natural	56
230	140	176	140	1.3	9.500	25.000	-P260	14D36	natural	56
230	130	72	130	2.9	6.500	15.000	-P260	12D20	natural	56
230	130	190	130	1.2	13.000	15.000	-P260	12L20	natural	56
230	120	188	120	1.2	8.800	25.000	-P260	12H30	natural	56
230	110	97	110	2.3	6.500	15.000	-P260	12D17	forced	67
230	100	130	100	1.7	11.000	15.000	-P260	14D15	natural	56
230	100	141	100	1.6	9.800	15.000	-P260	12H15	natural	56
230	90	169	90	1.3	9.800	15.000	-P260	12H14	forced	67
230	90	169	90	1.3	11.000	15.000	-P260	14D14	forced	67
230	88	61	88	3.4	2.400	40.000	-P260	09D60	natural	56
230	88	82	88	2.7	2.400	40.000	-P260	09D41	natural	56
230	88	87	88	2.5	2.800	40.000	-P260	09F60	natural	56
230	88	112	88	2.0	3.200	40.000	-P260	09H60	natural	56
230	88	117	88	2.0	2.800	40.000	-P260	09F38	natural	56
230	88	135	88	1.7	4.100	40.000	-P260	09L51	natural	56
230	88	143	88	1.6	3.200	40.000	-P260	09H41	natural	56
230	88	162	88	1.4	5.300	40.000	-P260	12D41	natural	56
230	88	169	88	1.4	4.100	40.000	-P260	09L41	natural	56
230	88	226	88	1.0	5.300	40.000	-P260	12D35	forced	67
230	78	129	78	1.8	5.500	25.000	-P260	12D20	natural	56
230	66	165	66	1.4	5.500	25.000	-P260	12D17	forced	67
230	60	216	60	1.1	9.500	25.000	-P260	14D15	natural	56
230	49	207	49	1.1	5.300	40.000	-P260	12D20	natural	56
232	194	55	194	3.9	5.800	16.000	-P260	12D41	natural	56
232	175	48	175	4.4	3.000	20.000	-P260	09F38	natural	56
235	83	97	83	5.8	20.000	12.000	-P800	14D14	forced	70
235	83	97	83	5.8	20.000	12.000	-P800	12H14	forced	70
235	70	93	70	6.0	11.000	20.000	-P800	12D17	forced	70
246	194	47	194	4.5	3.700	16.000	-P260	09H41	natural	56
249	122	76	122	3.1	5.800	16.000	-P260	12D20	natural	56
249	109	60	109	3.7	2.400	32.000	-P260	09D41	natural	56
250	194	85	194	2.8	5.800	16.000	-P260	12D35	forced	67
258	103	102	103	2.4	5.800	16.000	-P260	12D17	forced	67
260	221	39	221	5.0	5.400	12.000	-P260	09L41	natural	56
260	221	78	221	3.0	9.900	12.000	-P260	12H35	natural	56
260	221	78	221	3.0	11.000	12.000	-P260	14D36	natural	56
260	221	85	221	2.8	9.900	12.000	-P260	12H30	natural	56
260	221	117	221	2.1	9.900	12.000	-P260	12H34	forced	67

g700-P planetary geared motors

Technical data



Selection tables

2-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
260	221	117	221	2.1	11.000	12.000	-P260	14D30	forced	67
260	221	124	221	2.0	13.000	12.000	-P260	12L41	natural	56
260	221	158	221	1.6	13.000	12.000	-P260	12L39	forced	67
260	221	158	221	1.6	17.000	12.000	-P260	14H32	natural	56
260	221	194	221	1.3	26.000	12.000	-P260	14L32	natural	56
260	221	237	221	1.1	70.000	12.000	-P260	19F30	natural	56
260	194	43	194	4.7	4.600	16.000	-P260	09L51	natural	56
260	194	59	194	3.8	4.600	16.000	-P260	09L41	natural	56
260	194	111	194	2.3	9.100	16.000	-P260	12H35	natural	56
260	194	111	194	2.3	9.800	16.000	-P260	14D36	natural	56
260	194	158	194	1.6	9.100	16.000	-P260	12H34	forced	67
260	194	165	194	1.5	12.000	16.000	-P260	12L41	natural	56
260	194	211	194	1.2	12.000	16.000	-P260	12L39	forced	67
260	194	211	194	1.2	16.000	16.000	-P260	14H32	natural	56
260	188	119	188	2.1	9.100	16.000	-P260	12H30	natural	56
260	188	158	188	1.6	9.800	16.000	-P260	14D30	forced	67
260	175	46	175	4.5	3.400	20.000	-P260	09H60	natural	56
260	175	59	175	3.8	4.300	20.000	-P260	09L51	natural	56
260	175	63	175	3.6	3.400	20.000	-P260	09H41	natural	56
260	175	74	175	3.1	5.500	20.000	-P260	12D41	natural	56
260	175	78	175	3.0	4.300	20.000	-P260	09L41	natural	56
260	175	111	175	2.3	5.500	20.000	-P260	12D35	forced	67
260	175	141	175	1.8	8.800	20.000	-P260	12H35	natural	56
260	175	141	175	1.8	9.500	20.000	-P260	14D36	natural	56
260	175	207	175	1.2	12.000	20.000	-P260	12L41	natural	56
260	169	197	169	1.3	8.800	20.000	-P260	12H34	forced	67
260	163	152	163	1.7	13.000	12.000	-P260	12L20	natural	56
260	150	150	150	1.7	8.800	20.000	-P260	12H30	natural	56
260	150	197	150	1.3	9.500	20.000	-P260	14D30	forced	67
260	138	192	138	1.3	13.000	12.000	-P260	12L17	forced	67
260	125	100	125	2.5	11.000	12.000	-P260	14D15	natural	56
260	125	111	125	2.3	9.900	12.000	-P260	12H15	natural	56
260	125	180	125	1.4	17.000	12.000	-P260	14H15	natural	56
260	122	203	122	1.3	12.000	16.000	-P260	12L20	natural	56
260	113	135	113	1.9	9.900	12.000	-P260	12H14	forced	67
260	113	135	113	1.9	11.000	12.000	-P260	14D14	forced	67
260	109	64	109	3.6	2.800	32.000	-P260	09F60	natural	56
260	109	85	109	2.9	3.200	32.000	-P260	09H60	natural	56
260	109	88	109	2.8	2.800	32.000	-P260	09F38	natural	56
260	109	105	109	2.4	4.100	32.000	-P260	09L51	natural	56

g700-P planetary geared motors

Technical data



Selection tables

2-stage gearbox

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g700	MCS		
260	109	112	109	2.3	3.200	32.000	-P260	09H41	natural	56
260	109	129	109	2.0	5.300	32.000	-P260	12D41	natural	56
260	109	135	109	1.9	4.100	32.000	-P260	09L41	natural	56
260	109	180	109	1.4	5.300	32.000	-P260	12D35	forced	67
260	109	226	109	1.1	8.600	32.000	-P260	12H35	natural	56
260	109	226	109	1.1	9.300	32.000	-P260	14D36	natural	56
260	98	100	98	2.5	5.500	20.000	-P260	12D20	natural	56
260	98	254	98	1.0	12.000	20.000	-P260	12L20	natural	56
260	94	138	94	1.8	9.800	16.000	-P260	14D15	natural	56
260	94	150	94	1.7	9.100	16.000	-P260	12H15	natural	56
260	94	241	94	1.1	8.600	32.000	-P260	12H30	natural	56
260	94	241	94	1.1	16.000	16.000	-P260	14H15	natural	56
260	84	180	84	1.4	9.100	16.000	-P260	12H14	forced	67
260	84	180	84	1.4	9.800	16.000	-P260	14D14	forced	67
260	83	132	83	1.9	5.500	20.000	-P260	12D17	forced	67
260	75	173	75	1.5	9.500	20.000	-P260	14D15	natural	56
260	75	188	75	1.4	8.800	20.000	-P260	12H15	natural	56
260	68	226	68	1.1	8.800	20.000	-P260	12H14	forced	67
260	68	226	68	1.1	9.500	20.000	-P260	14D14	forced	67
260	61	165	61	1.6	5.300	32.000	-P260	12D20	natural	56
260	52	211	52	1.2	5.300	32.000	-P260	12D17	forced	67
309	87	98	87	5.3	20.000	15.000	-P800	14D15	natural	62
317	75	101	75	5.7	16.000	16.000	-P800	14D15	natural	62
317	68	97	68	5.4	9.900	25.000	-P800	12D20	natural	62
322	87	111	87	4.9	20.000	15.000	-P800	12H15	natural	62
326	68	110	68	4.9	9.900	25.000	-P800	12D35	forced	70
329	87	119	87	4.6	20.000	15.000	-P800	14D30	forced	70
329	87	119	87	4.6	20.000	15.000	-P800	12H34	forced	70
332	75	114	75	5.2	15.000	16.000	-P800	12H15	natural	62
340	75	123	75	5.0	16.000	16.000	-P800	14D30	forced	70
340	75	123	75	5.0	15.000	16.000	-P800	12H34	forced	70
346	87	143	87	4.0	20.000	15.000	-P800	14D14	forced	70
346	87	143	87	4.0	20.000	15.000	-P800	12H14	forced	70
347	66	137	66	4.2	9.900	25.000	-P800	12D17	forced	70
360	75	149	75	4.3	16.000	16.000	-P800	14D14	forced	70
360	75	149	75	4.3	15.000	16.000	-P800	12H14	forced	70
401	70	104	70	5.6	14.000	20.000	-P800	12H35	natural	62
401	70	104	70	5.6	15.000	20.000	-P800	14D36	natural	62
415	70	114	70	5.2	14.000	20.000	-P800	12H30	natural	62
429	59	131	59	4.8	10.000	32.000	-P800	12D20	natural	62

g700-P planetary geared motors

Technical data



Selection tables

2-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
438	59	148	59	4.4	10.000	32.000	-P800	12D35	forced	70
443	70	140	70	4.5	15.000	20.000	-P800	14D15	natural	62
450	47	248	47	1.8	8.600	64.000	-P800	12D41	natural	62
450	47	346	47	1.3	8.600	64.000	-P800	12D35	forced	70
450	47	432	47	1.0	12.000	64.000	-P800	12H35	natural	62
450	47	432	47	1.0	13.000	64.000	-P800	14D36	natural	62
450	31	317	31	1.4	8.600	64.000	-P800	12D20	natural	62
450	26	403	26	1.1	8.600	64.000	-P800	12D17	forced	70
457	70	158	70	4.2	14.000	20.000	-P800	12H15	natural	62
463	52	183	52	3.8	10.000	32.000	-P800	12D17	forced	70
465	70	168	70	4.0	15.000	20.000	-P800	14D30	forced	70
465	70	168	70	4.0	14.000	20.000	-P800	12H34	forced	70
484	83	117	83	5.1	23.000	12.000	-P800	12L20	natural	62
484	83	123	83	5.0	27.000	12.000	-P800	14H32	natural	62
485	68	201	68	3.5	15.000	20.000	-P800	14D14	forced	70
485	68	201	68	3.5	14.000	20.000	-P800	12H14	forced	70
496	83	123	83	5.0	23.000	12.000	-P800	12L39	forced	70
512	83	149	83	4.3	27.000	12.000	-P800	14H15	natural	62
537	83	162	83	4.1	23.000	12.000	-P800	12L17	forced	70
554	83	207	83	3.4	27.000	12.000	-P800	14H28	forced	70
559	58	134	58	4.3	9.400	40.000	-P800	12D41	natural	62
574	83	246	83	3.0	27.000	12.000	-P800	14H12	forced	70
584	68	151	68	3.9	13.000	25.000	-P800	12H35	natural	62
584	68	151	68	3.9	14.000	25.000	-P800	14D36	natural	62
596	68	164	68	3.7	13.000	25.000	-P800	12H30	natural	62
607	49	185	49	3.4	9.400	40.000	-P800	12D20	natural	62
611	58	207	58	3.1	9.400	40.000	-P800	12D35	forced	70
620	60	197	60	3.2	14.000	25.000	-P800	14D15	natural	62
633	60	218	60	3.0	13.000	25.000	-P800	12H15	natural	62
633	41	250	41	2.7	9.400	40.000	-P800	12D17	forced	70
641	68	232	68	2.8	14.000	25.000	-P800	14D30	forced	70
641	68	232	68	2.8	13.000	25.000	-P800	12H34	forced	70
647	87	127	87	4.4	23.000	15.000	-P800	12L41	natural	62
658	54	272	54	2.5	14.000	25.000	-P800	14D14	forced	70
658	54	272	54	2.5	13.000	25.000	-P800	12H14	forced	70
671	75	132	75	4.7	18.000	16.000	-P800	12L41	natural	62
690	87	176	87	3.5	27.000	15.000	-P800	14H32	natural	62
695	87	168	87	3.6	23.000	15.000	-P800	12L20	natural	62
700	87	176	87	3.5	23.000	15.000	-P800	12L39	forced	70
700	87	208	87	3.0	27.000	15.000	-P800	14H15	natural	62

6.1

g700-P planetary geared motors

Technical data



Selection tables

2-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
700	87	224	87	2.9	23.000	15.000	-P800	12L17	forced	70
700	87	228	87	2.8	36.000	15.000	-P800	14L32	natural	62
700	87	281	87	2.4	27.000	15.000	-P800	14H28	forced	70
700	87	289	87	2.3	47.000	15.000	-P800	14P32	natural	62
700	87	289	87	2.3	77.000	15.000	-P800	19F30	natural	62
700	87	322	87	2.1	36.000	15.000	-P800	14L15	natural	62
700	87	360	87	1.9	36.000	15.000	-P800	14L30	forced	70
700	87	381	87	1.8	77.000	15.000	-P800	19F14	natural	62
700	87	409	87	1.7	117.000	15.000	-P800	19J30	natural	62
700	87	423	87	1.6	47.000	15.000	-P800	14P14	natural	62
700	87	430	87	1.6	36.000	15.000	-P800	14L14	forced	70
700	87	451	87	1.5	172.000	15.000	-P800	19P30	natural	62
700	87	458	87	1.5	77.000	15.000	-P800	19F29	forced	70
700	87	465	87	1.5	47.000	15.000	-P800	14P26	forced	70
700	87	564	87	1.2	117.000	15.000	-P800	19J14	natural	62
700	80	330	80	2.1	27.000	15.000	-P800	14H12	forced	70
700	80	536	80	1.3	77.000	15.000	-P800	19F12	forced	70
700	70	592	70	1.2	47.000	15.000	-P800	14P11	forced	70
700	68	245	68	2.7	16.000	25.000	-P800	12L41	natural	62
700	68	313	68	2.2	16.000	25.000	-P800	12L20	natural	62
700	68	326	68	2.1	16.000	25.000	-P800	12L39	forced	70
700	68	326	68	2.1	20.000	25.000	-P800	14H32	natural	62
700	68	404	68	1.7	29.000	25.000	-P800	14L32	natural	62
700	68	482	68	1.4	20.000	25.000	-P800	14H28	forced	70
700	68	494	68	1.4	41.000	25.000	-P800	14P32	natural	62
700	68	494	68	1.4	71.000	25.000	-P800	19F30	natural	62
700	68	599	68	1.2	29.000	25.000	-P800	14L30	forced	70
700	68	682	68	1.0	111.000	25.000	-P800	19J30	natural	62
700	66	400	66	1.7	16.000	25.000	-P800	12L17	forced	70
700	60	376	60	1.8	20.000	25.000	-P800	14H15	natural	62
700	60	541	60	1.3	29.000	25.000	-P800	14L15	natural	62
700	58	272	58	2.5	13.000	40.000	-P800	12H35	natural	62
700	58	272	58	2.5	13.000	40.000	-P800	14D36	natural	62
700	58	293	58	2.3	13.000	40.000	-P800	12H30	natural	62
700	58	395	58	1.8	13.000	40.000	-P800	14D30	forced	70
700	58	395	58	1.8	13.000	40.000	-P800	12H34	forced	70
700	58	414	58	1.7	16.000	40.000	-P800	12L41	natural	62
700	58	526	58	1.3	16.000	40.000	-P800	12L39	forced	70
700	58	526	58	1.3	19.000	40.000	-P800	14H32	natural	62
700	58	647	58	1.1	29.000	40.000	-P800	14L32	natural	62

g700-P planetary geared motors

Technical data



Selection tables

2-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
700	57	635	57	1.1	71.000	25.000	-P800	19F14	natural	62
700	49	508	49	1.4	16.000	40.000	-P800	12L20	natural	62
700	48	552	48	1.3	20.000	25.000	-P800	14H12	forced	70
700	41	639	41	1.1	16.000	40.000	-P800	12L17	forced	70
700	38	345	38	2.0	13.000	40.000	-P800	14D15	natural	62
700	38	376	38	1.9	13.000	40.000	-P800	12H15	natural	62
700	38	602	38	1.2	19.000	40.000	-P800	14H15	natural	62
700	34	451	34	1.6	13.000	40.000	-P800	14D14	forced	70
700	34	451	34	1.6	13.000	40.000	-P800	12H14	forced	70
721	75	184	75	3.7	22.000	16.000	-P800	14H32	natural	62
726	75	175	75	3.9	18.000	16.000	-P800	12L20	natural	62
737	83	165	83	4.0	36.000	12.000	-P800	14L32	natural	62
740	75	184	75	3.7	18.000	16.000	-P800	12L39	forced	70
750	75	218	75	3.3	22.000	16.000	-P800	14H15	natural	62
774	59	200	59	3.5	14.000	32.000	-P800	12H35	natural	62
774	59	200	59	3.5	14.000	32.000	-P800	14D36	natural	62
781	75	235	75	3.1	18.000	16.000	-P800	12L17	forced	70
789	59	218	59	3.3	14.000	32.000	-P800	12H30	natural	62
791	75	296	75	2.5	22.000	16.000	-P800	14H28	forced	70
800	83	214	83	3.3	47.000	12.000	-P800	14P32	natural	62
800	83	214	83	3.3	77.000	12.000	-P800	19F30	natural	62
800	83	240	83	3.0	36.000	12.000	-P800	14L15	natural	62
800	83	272	83	2.7	36.000	12.000	-P800	14L30	forced	70
800	83	292	83	2.6	77.000	12.000	-P800	19F14	natural	62
800	83	318	83	2.4	117.000	12.000	-P800	19J30	natural	62
800	83	330	83	2.3	47.000	12.000	-P800	14P14	natural	62
800	83	337	83	2.3	36.000	12.000	-P800	14L14	forced	70
800	83	356	83	2.2	172.000	12.000	-P800	19P30	natural	62
800	83	363	83	2.1	77.000	12.000	-P800	19F29	forced	70
800	83	369	83	2.1	47.000	12.000	-P800	14P26	forced	70
800	83	429	83	1.8	77.000	12.000	-P800	19F12	forced	70
800	83	451	83	1.7	117.000	12.000	-P800	19J14	natural	62
800	83	474	83	1.6	47.000	12.000	-P800	14P11	forced	70
800	83	570	83	1.4	117.000	12.000	-P800	19J29	forced	70
800	83	575	83	1.4	172.000	12.000	-P800	19P14	natural	62
800	83	598	83	1.3	172.000	12.000	-P800	19P29	forced	70
800	83	705	83	1.1	117.000	12.000	-P800	19J12	forced	70
800	75	239	75	3.0	31.000	16.000	-P800	14L32	natural	62
800	75	305	75	2.5	42.000	16.000	-P800	14P32	natural	62
800	75	305	75	2.5	72.000	16.000	-P800	19F30	natural	62

g700-P planetary geared motors

Technical data



Selection tables

2-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
800	75	339	75	2.3	31.000	16.000	-P800	14L15	natural	62
800	75	348	75	2.2	22.000	16.000	-P800	14H12	forced	70
800	75	382	75	2.0	31.000	16.000	-P800	14L30	forced	70
800	75	406	75	1.9	72.000	16.000	-P800	19F14	natural	62
800	75	436	75	1.8	112.000	16.000	-P800	19J30	natural	62
800	75	451	75	1.7	42.000	16.000	-P800	14P14	natural	62
800	75	459	75	1.7	31.000	16.000	-P800	14L14	forced	70
800	75	481	75	1.6	167.000	16.000	-P800	19P30	natural	62
800	75	489	75	1.6	72.000	16.000	-P800	19F29	forced	70
800	75	496	75	1.6	42.000	16.000	-P800	14P26	forced	70
800	75	572	75	1.4	72.000	16.000	-P800	19F12	forced	70
800	75	602	75	1.3	112.000	16.000	-P800	19J14	natural	62
800	75	760	75	1.0	112.000	16.000	-P800	19J29	forced	70
800	75	767	75	1.0	167.000	16.000	-P800	19P14	natural	62
800	70	179	70	3.8	17.000	20.000	-P800	12L41	natural	62
800	70	233	70	3.1	17.000	20.000	-P800	12L20	natural	62
800	70	244	70	3.0	17.000	20.000	-P800	12L39	forced	70
800	70	244	70	3.0	21.000	20.000	-P800	14H32	natural	62
800	70	287	70	2.6	21.000	20.000	-P800	14H15	natural	62
800	70	309	70	2.5	17.000	20.000	-P800	12L17	forced	70
800	70	313	70	2.4	30.000	20.000	-P800	14L32	natural	62
800	70	384	70	2.0	21.000	20.000	-P800	14H28	forced	70
800	70	395	70	2.0	41.000	20.000	-P800	14P32	natural	62
800	70	395	70	2.0	72.000	20.000	-P800	19F30	natural	62
800	70	432	70	1.8	30.000	20.000	-P800	14L15	natural	62
800	70	479	70	1.6	30.000	20.000	-P800	14L30	forced	70
800	70	508	70	1.5	72.000	20.000	-P800	19F14	natural	62
800	70	545	70	1.4	112.000	20.000	-P800	19J30	natural	62
800	70	602	70	1.3	167.000	20.000	-P800	19P30	natural	62
800	70	611	70	1.3	72.000	20.000	-P800	19F29	forced	70
800	70	620	70	1.3	41.000	20.000	-P800	14P26	forced	70
800	70	752	70	1.0	112.000	20.000	-P800	19J14	natural	62
800	68	564	68	1.4	41.000	20.000	-P800	14P14	natural	62
800	68	573	68	1.4	30.000	20.000	-P800	14L14	forced	70
800	66	632	66	1.2	42.000	16.000	-P800	14P11	forced	70
800	60	442	60	1.8	21.000	20.000	-P800	14H12	forced	70
800	60	714	60	1.1	72.000	20.000	-P800	19F12	forced	70
800	59	304	59	2.5	14.000	32.000	-P800	14D30	forced	70
800	59	304	59	2.5	14.000	32.000	-P800	12H34	forced	70
800	59	321	59	2.4	17.000	32.000	-P800	12L41	natural	62

6.1

g700-P planetary geared motors

Technical data



Selection tables

2-stage gearboxes

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
800	59	406	59	1.9	17.000	32.000	-P800	12L20	natural	62
800	59	421	59	1.9	17.000	32.000	-P800	12L39	forced	70
800	59	421	59	1.9	21.000	32.000	-P800	14H32	natural	62
800	59	517	59	1.5	30.000	32.000	-P800	14L32	natural	62
800	59	617	59	1.3	21.000	32.000	-P800	14H28	forced	70
800	59	632	59	1.3	41.000	32.000	-P800	14P32	natural	62
800	59	632	59	1.3	71.000	32.000	-P800	19F30	natural	62
800	59	767	59	1.0	30.000	32.000	-P800	14L30	forced	70
800	52	511	52	1.6	17.000	32.000	-P800	12L17	forced	70
800	47	259	47	2.9	14.000	32.000	-P800	14D15	natural	62
800	47	287	47	2.6	14.000	32.000	-P800	12H15	natural	62
800	47	481	47	1.6	21.000	32.000	-P800	14H15	natural	62
800	47	692	47	1.1	30.000	32.000	-P800	14L15	natural	62
800	42	356	42	2.2	14.000	32.000	-P800	14D14	forced	70
800	42	356	42	2.2	14.000	32.000	-P800	12H14	forced	70
800	38	707	38	1.1	21.000	32.000	-P800	14H12	forced	70

g700-P planetary geared motors



Technical data

Selection tables

3-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
44	75	27	75	1.6	0.200	60.000	-P44	06C60	natural	47
44	68	32	68	1.3	0.200	60.000	-P44	06C41	natural	48
44	56	36	56	1.2	0.200	80.000	-P44	06C60	natural	47
44	51	43	51	1.0	0.200	80.000	-P44	06C41	natural	48
101	67	21	67	4.0	0.500	60.000	-P130	06C60	natural	53
110	67	28	67	3.3	0.500	60.000	-P130	06C41	natural	53
110	67	47	67	2.2	0.600	60.000	-P130	06F60	natural	53
110	67	65	67	1.7	0.600	60.000	-P130	06F41	natural	53
110	67	65	67	1.7	0.700	60.000	-P130	06I60	natural	53
110	67	81	67	1.3	0.700	60.000	-P130	06I41	natural	53
110	67	97	67	1.1	1.500	60.000	-P130	09D60	natural	53
110	33	53	33	2.1	0.800	120.000	-P130	06C60	natural	53
110	33	64	33	1.7	0.800	120.000	-P130	06C41	natural	53
110	33	96	33	1.1	0.900	120.000	-P130	06F60	natural	53
110	20	85	20	1.3	0.500	200.000	-P130	06C60	natural	53
110	20	102	20	1.1	0.500	200.000	-P130	06C41	natural	53
120	50	31	50	3.3	0.600	80.000	-P130	06C60	natural	53
120	50	40	50	2.8	0.600	80.000	-P130	06C41	natural	53
120	50	65	50	1.8	0.700	80.000	-P130	06F60	natural	53
120	50	86	50	1.4	0.700	80.000	-P130	06F41	natural	53
120	50	86	50	1.4	0.800	80.000	-P130	06I60	natural	53
120	50	108	50	1.1	0.800	80.000	-P130	06I41	natural	53
120	40	42	40	2.7	0.600	100.000	-P130	06C60	natural	53
120	40	53	40	2.2	0.600	100.000	-P130	06C41	natural	53
120	40	81	40	1.5	0.700	100.000	-P130	06F60	natural	53
120	40	108	40	1.1	0.700	100.000	-P130	06F41	natural	53
120	40	108	40	1.1	0.700	100.000	-P130	06I60	natural	53
120	25	70	25	1.7	0.500	160.000	-P130	06C60	natural	53
120	25	84	25	1.4	0.500	160.000	-P130	06C41	natural	53
120	16	108	16	1.1	0.500	256.000	-P130	06C60	natural	53
152	58	31	58	5.2	1.600	60.000	-P260	06F60	natural	58
187	58	51	58	3.9	1.600	60.000	-P260	06F41	natural	58
230	29	92	29	2.5	2.800	120.000	-P260	06F60	natural	58
230	29	125	29	1.8	2.800	120.000	-P260	06F41	natural	58
230	29	125	29	1.8	2.800	120.000	-P260	06I60	natural	58
230	29	157	29	1.5	2.800	120.000	-P260	06I41	natural	58
230	29	188	29	1.2	3.600	120.000	-P260	09D60	natural	58
230	18	101	18	2.3	1.500	200.000	-P260	06C41	natural	58
230	18	151	18	1.5	1.600	200.000	-P260	06F60	natural	58
230	18	202	18	1.1	1.600	200.000	-P260	06F41	natural	58

g700-P planetary geared motors

Technical data



Selection tables

3-stage gearbox

M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]	i	Product		Cooling	
							g700	MCS		
230	18	202	18	1.1	1.600	200.000	-P260	06I60	natural	58
230	11	126	11	1.8	1.500	320.000	-P260	06C60	natural	58
230	11	152	11	1.5	1.500	320.000	-P260	06C41	natural	58
230	11	228	11	1.0	1.600	320.000	-P260	06F60	natural	58
248	44	51	44	4.0	1.800	80.000	-P260	06F60	natural	58
260	58	51	58	3.9	1.600	60.000	-P260	06I60	natural	58
260	58	71	58	3.1	1.600	60.000	-P260	06I41	natural	58
260	58	91	58	2.6	2.400	60.000	-P260	09D60	natural	58
260	58	124	58	2.0	2.400	60.000	-P260	09D41	natural	58
260	58	130	58	2.0	2.800	60.000	-P260	09F60	natural	58
260	58	162	58	1.6	3.200	60.000	-P260	09H60	natural	58
260	58	167	58	1.5	2.800	60.000	-P260	09F38	natural	58
260	58	194	58	1.3	4.100	60.000	-P260	09L51	natural	58
260	58	205	58	1.2	3.200	60.000	-P260	09H41	natural	58
260	58	232	58	1.1	5.300	60.000	-P260	12D41	natural	58
260	58	243	58	1.1	4.100	60.000	-P260	09L41	natural	58
260	44	77	44	3.0	1.800	80.000	-P260	06F41	natural	58
260	44	77	44	3.0	1.800	80.000	-P260	06I60	natural	58
260	44	103	44	2.4	1.800	80.000	-P260	06I41	natural	58
260	44	130	44	2.0	2.600	80.000	-P260	09D60	natural	58
260	44	166	44	1.6	2.600	80.000	-P260	09D41	natural	58
260	44	173	44	1.5	3.000	80.000	-P260	09F60	natural	58
260	44	216	44	1.2	3.400	80.000	-P260	09H60	natural	58
260	44	223	44	1.1	3.000	80.000	-P260	09F38	natural	58
260	35	70	35	3.2	1.700	100.000	-P260	06F60	natural	58
260	35	103	35	2.4	1.700	100.000	-P260	06F41	natural	58
260	35	135	35	2.4	1.800	100.000	-P260	06I60	natural	58
260	35	162	35	1.9	1.800	100.000	-P260	06I41	natural	58
260	35	207	35	1.6	2.600	100.000	-P260	09D60	natural	58
260	35	216	35	1.2	3.000	100.000	-P260	09F60	natural	58
260	22	76	22	3.1	1.500	160.000	-P260	06C41	natural	58
260	22	125	22	2.1	1.600	160.000	-P260	06F60	natural	58
260	22	167	22	1.6	1.600	160.000	-P260	06F41	natural	58
260	22	167	22	1.6	1.600	160.000	-P260	06I60	natural	58
260	22	209	22	1.3	1.600	160.000	-P260	06I41	natural	58
260	22	251	22	1.0	2.400	160.000	-P260	09D60	natural	58
260	14	106	14	2.5	1.500	256.000	-P260	06C60	natural	58
260	14	127	14	2.0	1.500	256.000	-P260	06C41	natural	58
260	14	191	14	1.4	1.600	256.000	-P260	06F60	natural	58

g700-P planetary geared motors

Technical data



Selection tables

3-stage gearboxes

Inverter operation						i	Product		Cooling	
M _{2, max} [Nm]	n _{2, th} [r/min]	M ₂ [Nm]	n _{2, eto} [r/min]	c	J [kgcm ²]		g700	MCS		
260	14	255	14	1.0	1.600	256.000	-P260	06F41	natural	58
260	14	255	14	1.0	1.600	256.000	-P260	06I60	natural	58

g700-P planetary geared motors


Technical data



Dimensions, notes

Notes on the dimensions

The following legend shows the layout of the dimension sheets.

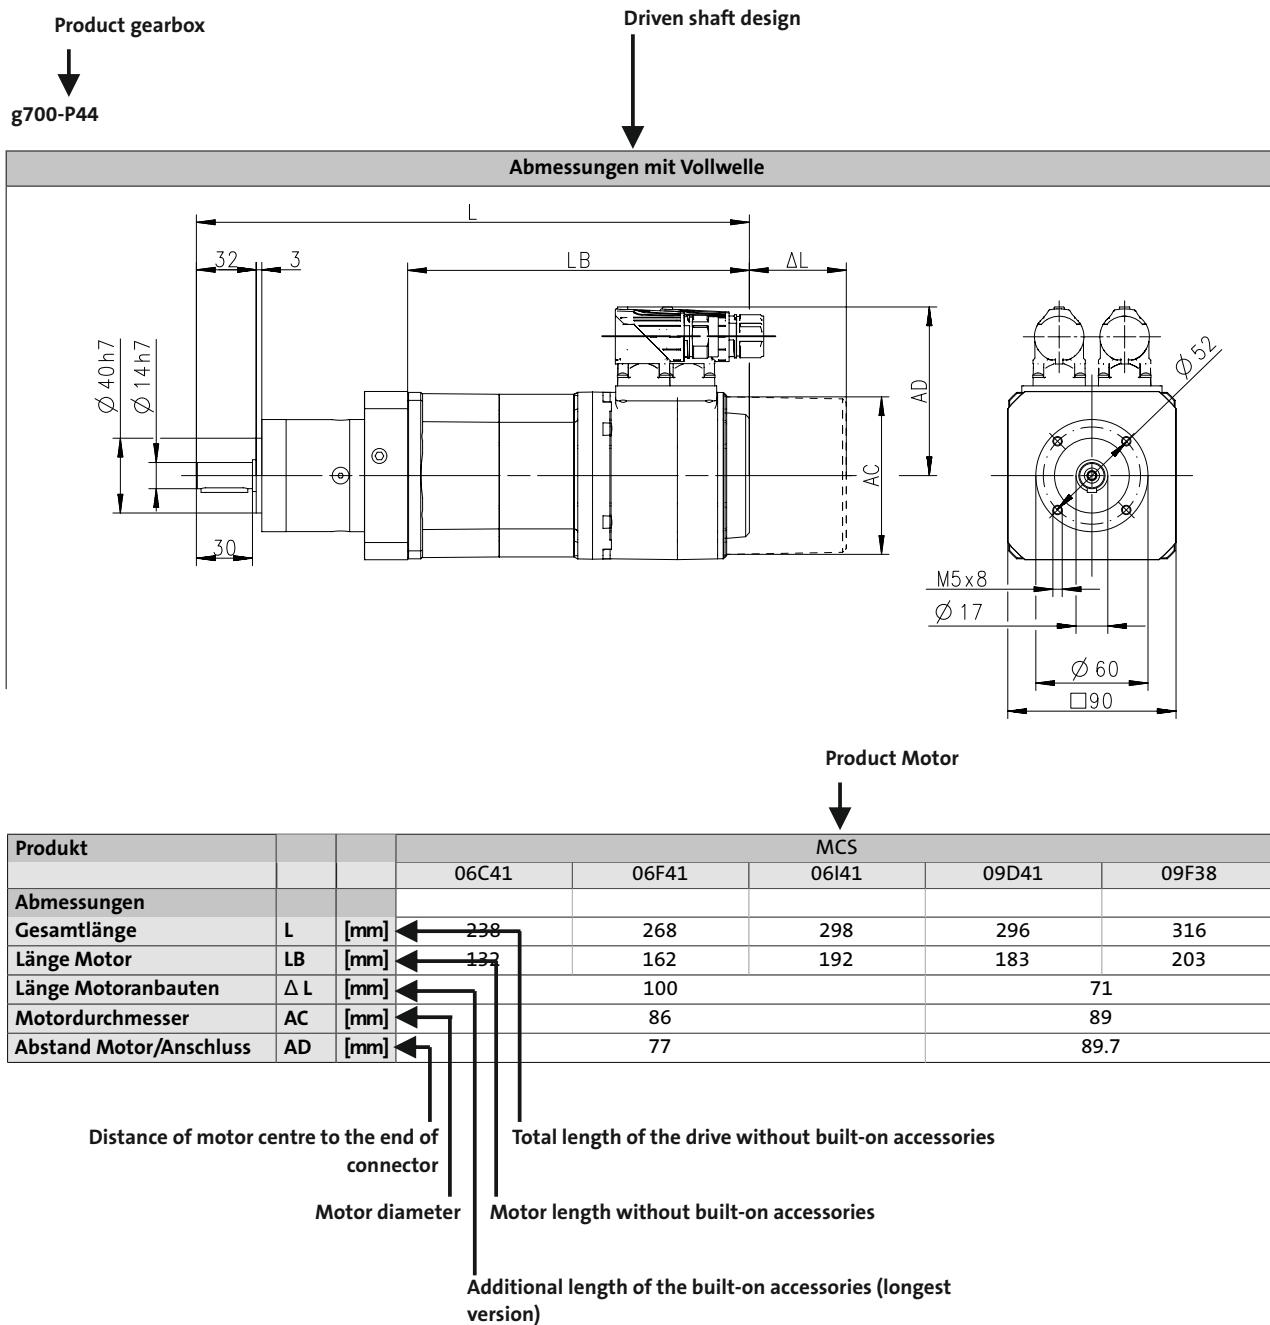

g700-P planetary geared motors

Technical data



Dimensions, self-ventilated motors

g700-P20, 1-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			

6.1

8800241-00

Product	MCS	
	06C41	06C60
Length		
Total length	L [mm]	225
Motor length	LB [mm]	132
Length of motor options	Δ L [mm]	100
Motor diameter	AC [mm]	86
Distance motor/connection	AD [mm]	77

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V01-en_GB-04/2014		

g700-P planetary geared motors



Technical data

Dimensions, self-ventilated motors

g700-P20, 2-stage gearboxes

3 4 5 6

Dimensions with solid shaft and Flange

Dimensions shown in the drawing:

- Shaft diameter: $\varnothing 26\text{ h}7$
- Bearing housing diameter: $\varnothing 10\text{ h}7$
- Shoulder height: 24
- Shoulder width: 2
- Shoulder length: LB
- Axial clearance: ΔL
- Total length: L
- Shoulder thickness: Th
- Axial clearance: AC
- Shoulder width: AD
- Note: M5 x 12
- Flange dimensions: Ø 12, Ø 40, Ø 59, 8, Ø 70
- Flange bore diameter: Ø 34

6.1

8800241-00

Product			MCS	
			06C41	06C60
Length				
Total length	L	[mm]	238	
Motor length	LB	[mm]	132	
Length of motor options	Δ L	[mm]	100	
Motor diameter	AC	[mm]	86	
Distance motor/connection	AD	[mm]	77	

				Allgemeintoleranzen general tolerance nach: 6.1 - 45	Oberflächen/ surface	 Werkst. Rohteil

g700-P planetary geared motors



Technical data

Dimensions, self-ventilated motors

g700-P44, 1-stage gearboxes

3 4 5 6

Dimensions with solid shaft and Flange

$\varnothing 40\text{h}7$

$\varnothing 14\text{h}7$

32 3

L

LB

ΔL

AD

AC

M5x8

$\varnothing 17$

$\varnothing 60$

90

$\varnothing 52$

30

◎

3

8800242-00

8800242-00

Product			MCS								
			06C41	06C60	06F41	06F60	06I41	06I60	09D41	09D60	09F38
Length											
Total length	L	[mm]	238		268		298		296		316
Motor length	LB	[mm]	132		162		192		183		203
Length of motor options	Δ L	[mm]			100						71
Motor diameter	AC	[mm]			86						89
Distance motor/connection	AD	[mm]			77						89.7

g700-P planetary geared motors

Technical data



Dimensions, self-ventilated motors

g700-P44, 2-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			

6.1

8800242-00

Product			MCS									
			06C41	06C60	06F41	06F60	06I41	06I60	09D41	09D60	09F38	09F60
Length												
Total length	L	[mm]	251	251 263		281		311		309		329
Motor length	LB	[mm]		132		162		192		183		203
Length of motor options	Δ L	[mm]			100					71		
Motor diameter	AC	[mm]			86					89		
Distance motor/connection	AD	[mm]			77					89.7		

				Allgemeintoleranzen general tolerance nach: 6.1 - 47	Oberflaechen/ surface	 Werkstoff Rohteil

g700-P planetary geared motors



Technical data

Dimensions, self-ventilated motors

g700-P44, 3-stage gearboxes

Product			MCS
			06C41
Length			
Total length	L	[mm]	263
Motor length	LB	[mm]	132
Length of motor options	Δ L	[mm]	100
Motor diameter	AC	[mm]	86
Distance motor/connection	AD	[mm]	77

				Allgemeintoleranzen general tolerance nach: Lenze V01-en_GB-04/2014	Oberflächen/ surface	
						Werkzeug Rohteil
					Datum/date	Name
						Benennung

g700-P planetary geared motors

Technical data



Dimensions, self-ventilated motors

g700-P130, 1-stage gearbox

3	4	5	6
Dimensions with solid shaft and Flange			
<p>The drawing shows the front view of the motor with a vertical shaft and a side view of the housing. Key dimensions include: - Front width: 37 mm - Shaft diameter: Ø 20 h7 - Total length: L (from front face to rear flange) - Motor length: LB (from front face to rear bearing) - Motor options length: ΔL (from rear bearing to rear flange) - Motor diameter: AC (diameter of the rear flange) - Distance from rear flange to connection: AD - Side view dimensions: M8x20, Ø 25, Ø 80, and a square hole of 90 mm side length. - A note indicates a gear ratio of 10.</p>			

6.1

8800243-00

Product			MCS							
Length			06F41	06F60	06I41	06I60	09D41	09D60	09F38	09F60
Total length	L	[mm]	295		325		316		336	
Motor length	LB	[mm]	162		192		183		203	
Length of motor options	Δ L	[mm]		100				71		
Motor diameter	AC	[mm]		86				89		
Distance motor/connection	AD	[mm]		77				89.7		

				Allgemeintoleranzen general tolerance nach:	Oberflaechen/ surface	
				6.1 - 49		

g700-P planetary geared motors

Technical data



Dimensions, self-ventilated motors

g700-P130, 1-stage gearbox

3	4	5	6
Dimensions with solid shaft and Flange			
6.1			8800243-00

Product			MCS								
Length			09H41	09H60	09L41	09L51	12D20	12D41	12H15	12H30	12H35
Total length	L	[mm]	356		396		331		371		
Motor length	LB	[mm]	223		263		188		228		
Length of motor options	Δ L	[mm]		71				69			
Motor diameter	AC	[mm]		89				116			
Distance motor/connection	AD	[mm]		89.7				105			

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	 Lenze V01-en_GB-04/2014
				nach:		
				Datum/date		

g700-P planetary geared motors

Technical data



Dimensions, self-ventilated motors

g700-P130, 2-stage gearbox

3	4	5	6
Dimensions with solid shaft and Flange			
<p>The drawing shows the front view of the motor with a vertical shaft and a side view of the housing. Key dimensions include: - Front width: 37 mm - Shaft diameter: Ø 20 h7 - Total length: L (varies by model) - Motor length: LB (e.g., 132 mm) - Motor diameter: AC (e.g., 86 mm) - Distance from motor to connection: AD (e.g., 77 mm) - Motor options: Delta L (e.g., 100 mm) - Mounting holes: M8x20, Ø 25, Ø 80, and a square hole of 90 mm side length. - Flange diameter: Ø 170 mm.</p>			

6.1

8800243-00

Product			MCS								
			06C41	06C60	06F41	06F60	06I41	06I60	09D41	09D60	09F38
Length											
Total length	L	[mm]	283		313		343		334		354
Motor length	LB	[mm]	132		162		192		183		203
Length of motor options	Δ L	[mm]			100				71		
Motor diameter	AC	[mm]			86				89		
Distance motor/connection	AD	[mm]			77				89.7		

				Allgemeintoleranzen general tolerance nach:	Oberflaechen/ surface	Werkstat Rohteile
				6.1 - 51		


g700-P planetary geared motors

Technical data



Dimensions, self-ventilated motors

g700-P130, 2-stage gearbox

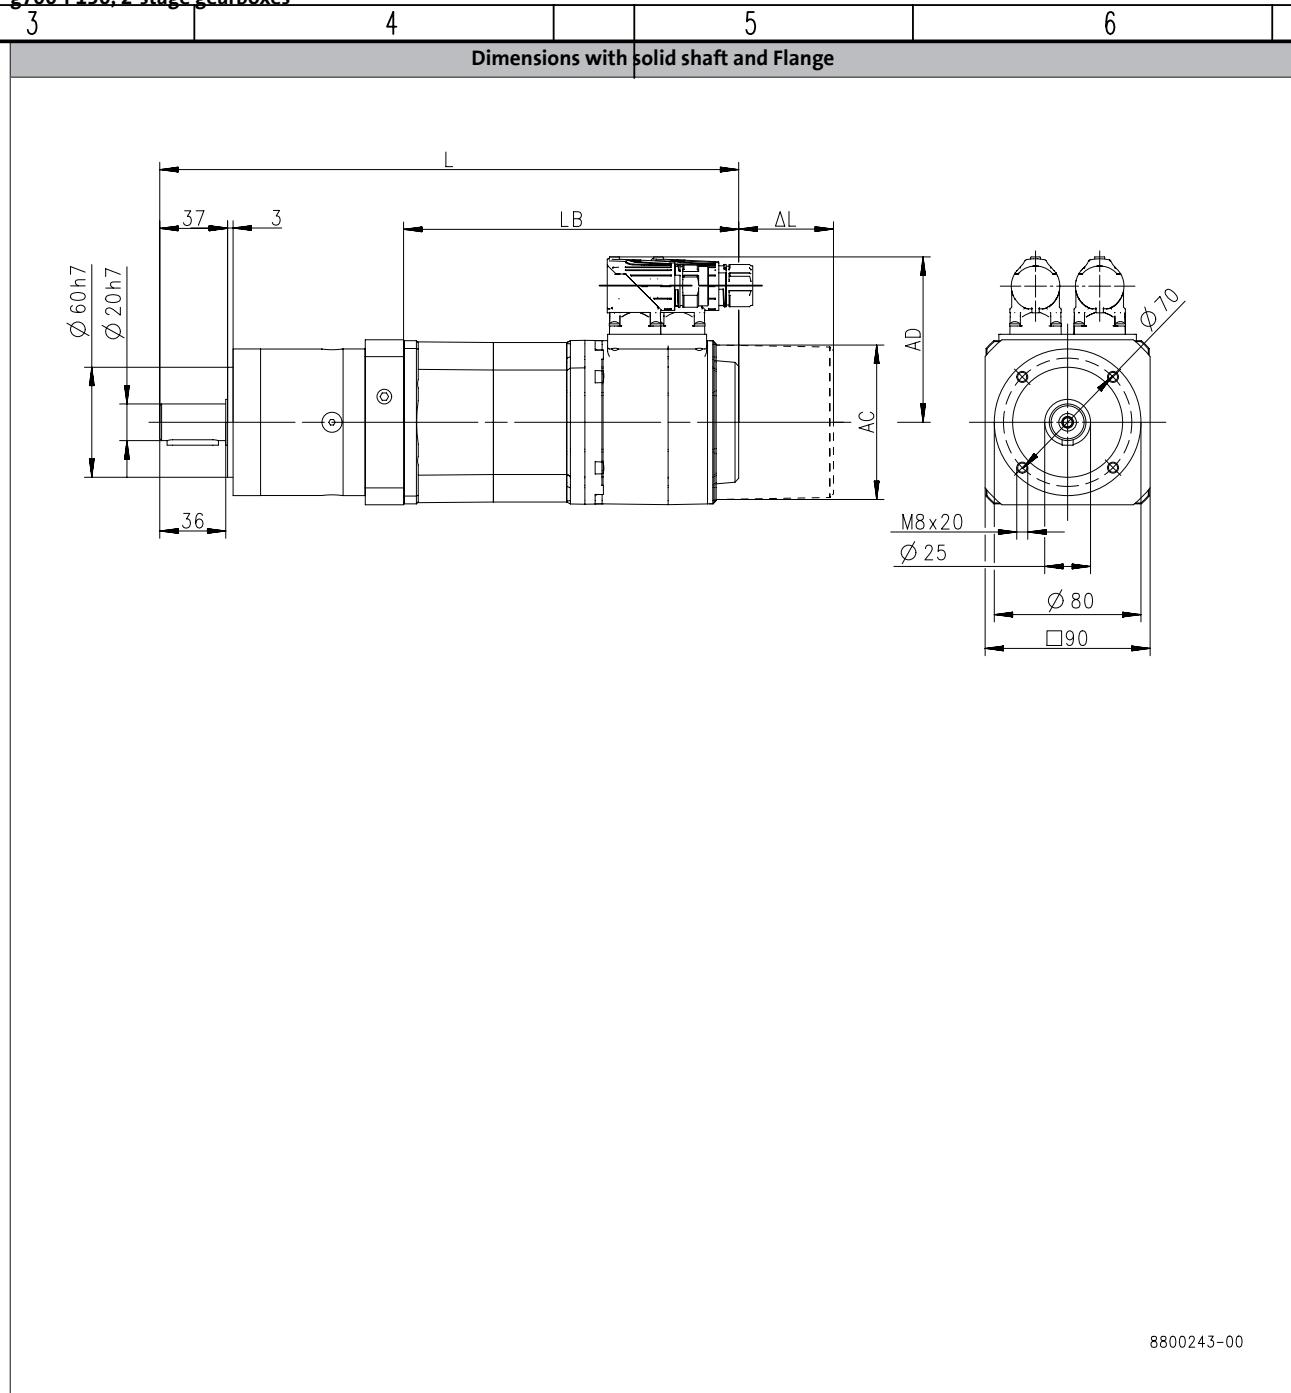

Product			MCS									
Length			09F60	09H41	09H60	09L41	09L51	12D20	12D41	12H15	12H30	12H35
Total length	L	[mm]	354	374		414		349		389		
Motor length	LB	[mm]	203	223		263		188		228		
Length of motor options	Δ L	[mm]		71					69			
Motor diameter	AC	[mm]		89					116			
Distance motor/connection	AD	[mm]		89.7					105			

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V01-en_GB-04/2014		
				Datum/date	Name	

g700-P planetary geared motors

Technical data



Dimensions, self-ventilated motors

g700-P130, 3-stage gearbox

3	4	5	6
Dimensions with solid shaft and Flange			
6.1			
8800243-00			

Product			MCS						
			06C41	06C60	06F41	06F60	06I41	06I60	09D60
Length									
Total length	L	[mm]	300		330		360		351
Motor length	LB	[mm]	132		162		192		183
Length of motor options	Δ L	[mm]			100			71	
Motor diameter	AC	[mm]			86			89	
Distance motor/connection	AD	[mm]			77			89.7	

				Allgemeintoleranzen general tolerance nach: 6.1 - 53	Oberflaechen/ surface	

g700-P planetary geared motors



Technical data

Dimensions, self-ventilated motors

g700-P260, 1-stage gearboxes

3 4 5 6

Dimensions with solid shaft and Flange

$\varnothing 80\text{h}7$

$\varnothing 25\text{h}7$

51 4

L

LB

AL

AD

AC

50

M10x25

$\varnothing 35$

100

115

115

100

Dimensions with solid shaft and Flange

Product			MCS										
			09D41	09D60	09F38	09F60	09H41	09H60	09L41	09L51	12D20	12D41	12H15
Length													
Total length	L	[mm]	359		379		399		439		364		404
Motor length	LB	[mm]	183		203		223		263		188		228
Length of motor options	Δ L	[mm]				71						69	
Motor diameter	AC	[mm]				89						116	
Distance motor/connection	AD	[mm]				89.7						105	

g700-P planetary geared motors

Technical data



Dimensions, self-ventilated motors

g700-P260, 1-stage gearbox

3	4	5	6
Dimensions with solid shaft and Flange			
6.1			
8800244-00			

Product			MCS											
			12H30	12H35	12L20	12L41	14D15	14D36	14H15	14H32	14L15	14L32	19F14	19F30
Length														
Total length	L	[mm]	404		444		387		427		467		424	
Motor length	LB	[mm]	228		268		201		241		281		220	
Length of motor options	Δ L	[mm]		69				78				83		
Motor diameter	AC	[mm]			116				143				192	
Distance motor/connection	AD	[mm]			105				116.5		146	141.5	171	

				Allgemeintoleranzen general tolerance nach: 6.1 - 55	Oberflaechen/ surface	Werksto Rohtei


g700-P planetary geared motors

Technical data



Dimensions, self-ventilated motors

g700-P260, 2-stage gearbox

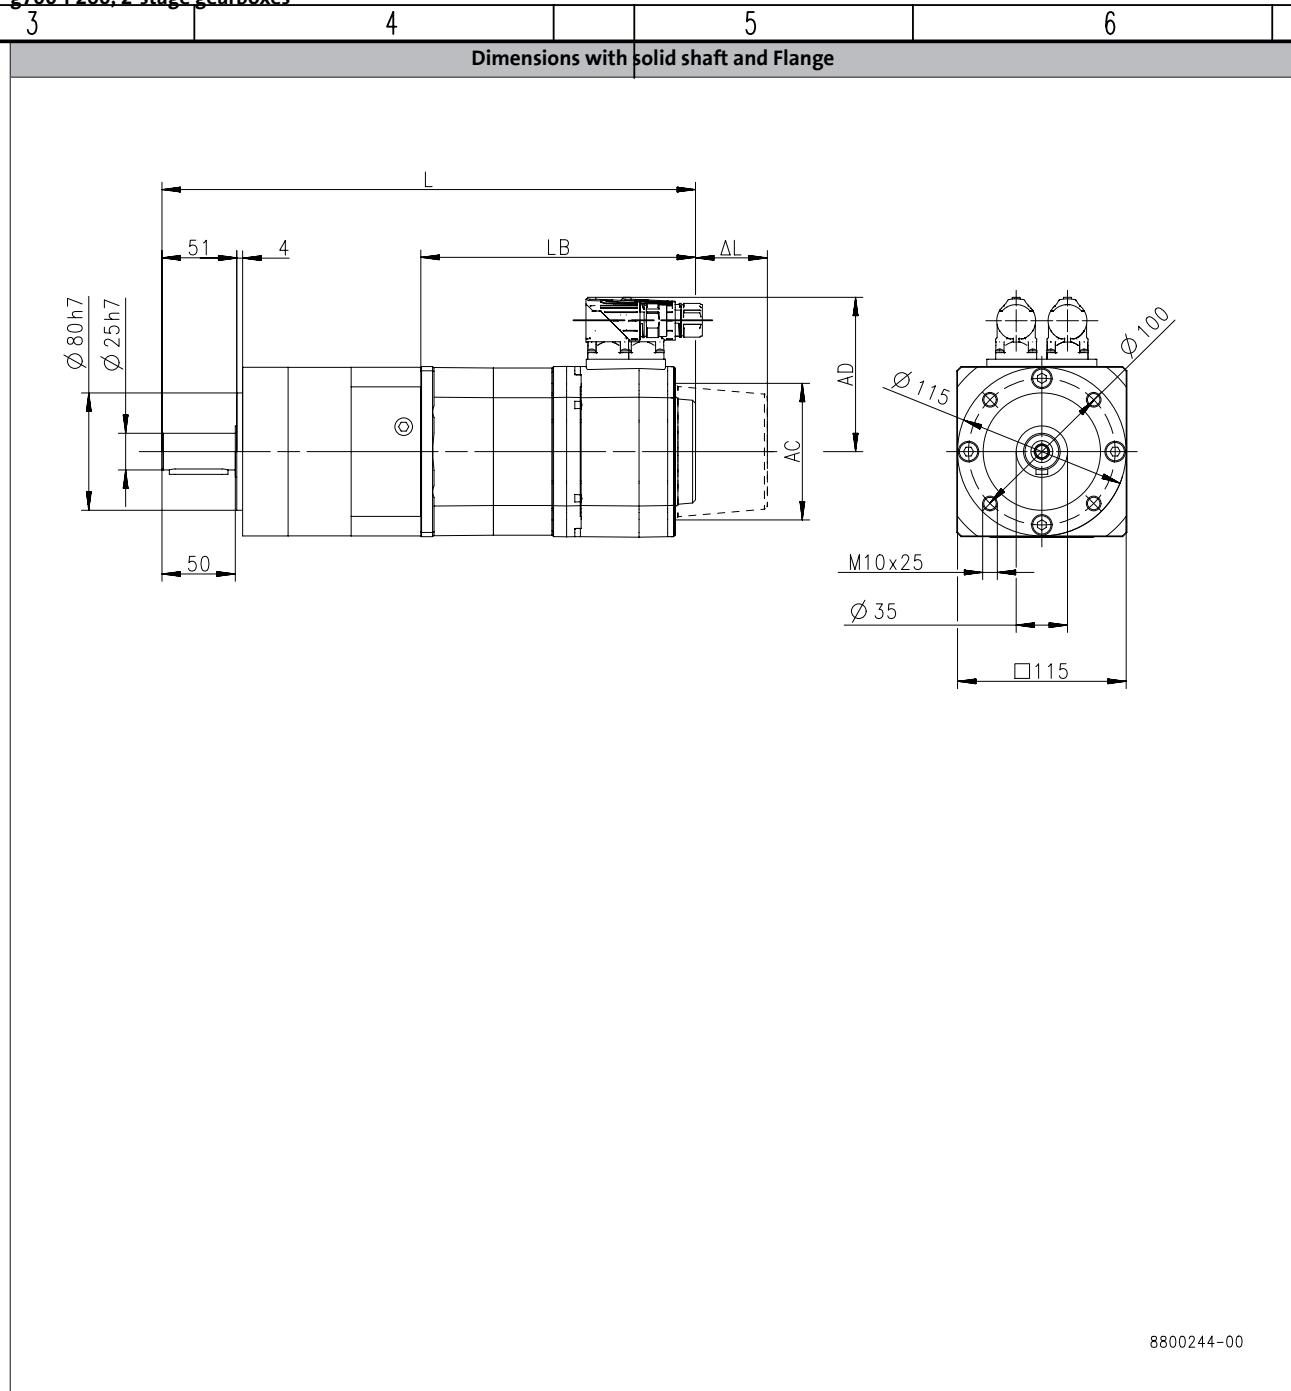

Product			MCS													
Length			06C41	06C60	06F41	06F60	06I41	06I60	09D41	09D60	09F38	09F60	09H41	09H60	09L41	09L51
Total length	L	[mm]	336	366	396	387	407	427	467							
Motor length	LB	[mm]	132	162	192	183	203	223	263							
Length of motor options	Δ L	[mm]			100			71								
Motor diameter	AC	[mm]			86			89								
Distance motor/connection	AD	[mm]			77			89.7								

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V01-en_GB-04/2014		
				Datum/date	Name	Benennung

g700-P planetary geared motors

Technical data



Dimensions, self-ventilated motors

g700-P260, 2-stage gearbox

3	4	5	6
Dimensions with solid shaft and Flange			

6.1

8800244-00

Product			MCS													
Length			12D20	12D41	12H15	12H30	12H35	12L20	12L41	14D15	14D36	14H15	14H32	14L15	14L32	19F30
Total length	L	[mm]	392		432		472		415		455		495		452	
Motor length	LB	[mm]	188		228		268		201		241		281		220	
Length of motor options	Δ L	[mm]			69					78			83			
Motor diameter	AC	[mm]				116				143			192			
Distance motor/connection	AD	[mm]				105				116.5		146	171			

				Allgemeintoleranzen general tolerance nach: 6.1 - 57	Oberflaechen/ surface	

g700-P planetary geared motors



Technical data

Dimensions, self-ventilated motors

g700-P260, 3-stage gearboxes


3 4 5 6

Dimensions with solid shaft and Flange

The technical drawing shows a mechanical assembly with various dimensions labeled:

- Left side vertical dimensions:**
 - Outer width: 51
 - Shaft diameter: $\varnothing 25\text{h}7$
 - Shaft height: 4
 - Base width: 50
- Top horizontal dimensions:**
 - Total length: L
 - Shaft center distance: LB
 - Shaft offset: ΔL
 - Shaft height: AC
 - Shaft width: AD
- Right side flange detail:**
 - Flange outer diameter: $\varnothing 115$
 - Shaft diameter: $\varnothing 35$
 - Shaft width: $\square 115$
 - Shaft height: M10x25
 - Shaft diameter: $\varnothing 100$

Product			MCS						
			06C41	06C60	06F41	06F60	06I41	06I60	09D41
Length									
Total length	L	[mm]	363		393		423		414
Motor length	LB	[mm]	132		162		192		183
Length of motor options	Δ L	[mm]			100				71
Motor diameter	AC	[mm]			86				89
Distance motor/connection	AD	[mm]			77				89.7

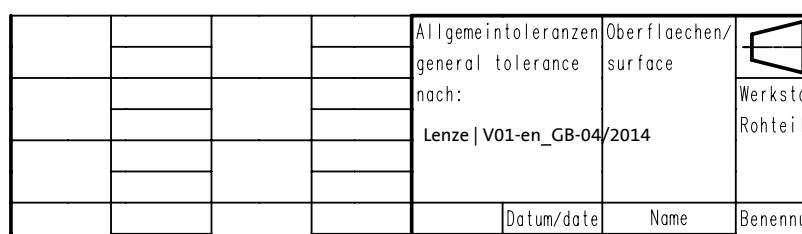

g700-P planetary geared motors

Technical data



Dimensions, self-ventilated motors

g700-P260, 3-stage gearbox

3	4	5	6
Dimensions with solid shaft and Flange			

6.1

8800244-00

Product			MCS							
Length			09D60	09F38	09F60	09H41	09H60	09L41	09L51	12D41
Total length	L	[mm]	414	434		454		494		419
Motor length	LB	[mm]	183	203		223		263		188
Length of motor options	Δ L	[mm]			71				69	
Motor diameter	AC	[mm]			89				116	
Distance motor/connection	AD	[mm]			89.7				105	

				Allgemeintoleranzen general tolerance nach: 6.1 - 59	Oberflaechen/ surface	

g700-P planetary geared motors



Technical data

Dimensions, self-ventilated motors

g700-P800, 1-stage gearboxes

3 4 5 6

Dimensions with solid shaft and Flange

Front View Dimensions:

- Total width: L
- Shaft length: 82
- Shaft shoulder: 5
- Shaft diameter: $\phi 40\text{h}7$
- Shaft shoulder height: 80
- Shaft shoulder to bearing: LB
- Shaft shoulder to bearing: AL
- Bearing height: AD
- Bearing center height: AC
- Shaft shoulder to bearing: M12x30
- Shaft shoulder diameter: $\phi 55$
- Shaft shoulder to bearing: □160
- Shaft shoulder to bearing: □190

Top View Dimension:

- Shaft shoulder diameter: $\phi 145$

Part Number: 8800245-00

8800245-00

Product			MCS						
			12H15	12L20	12L41	14H15	14H32	14L15	14L32
Length									
Total length	L	[mm]	484		524		497		537
Motor length	LB	[mm]	228		268		241		281
Length of motor options	Δ L	[mm]		69			78		
Motor diameter	AC	[mm]		116			143		
Distance motor/connection	AD	[mm]		105			116.5		146

6.1 - 60

				Allgemeintoleranzen general tolerance nach: Lenze V01-en_GB-04	Oberflächen/ surface	
						Werkst. Rohhei
					Datum/date	Name


g700-P planetary geared motors

Technical data



Dimensions, self-ventilated motors

g700-P800, 1-stage gearbox

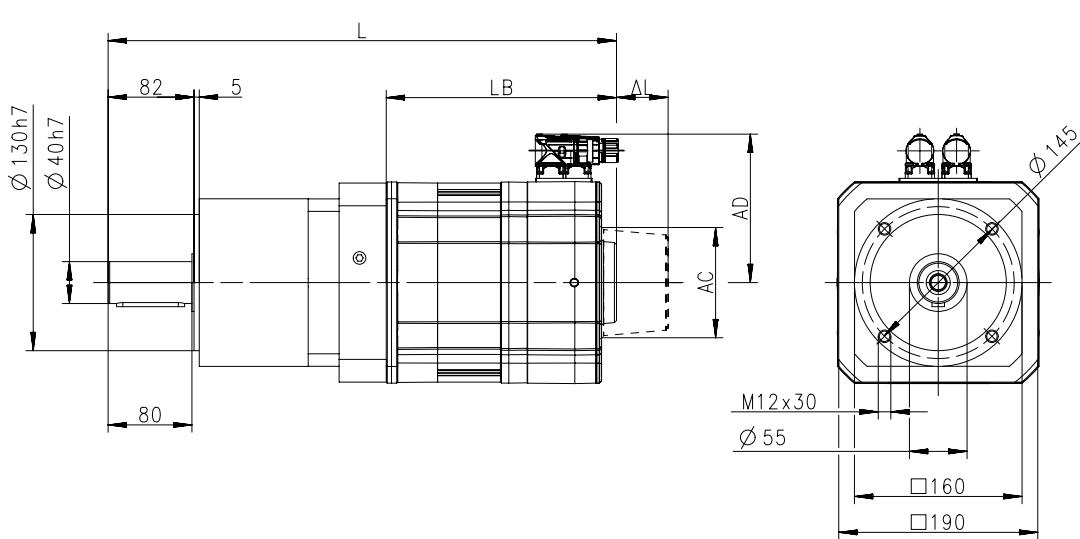3	4	5	6
Dimensions with solid shaft and Flange			
			
6.1			
8800245-00			

Product			MCS							
Length			14P14	14P32	19F14	19F30	19J14	19J30	19P14	19P30
Total length	L	[mm]	577		486		526		586	
Motor length	LB	[mm]	321		220		260		320	
Length of motor options	Δ L	[mm]	78		83		93			
Motor diameter	AC	[mm]	143			192				
Distance motor/connection	AD	[mm]	116.5	146	141.5	171	141.5	171	141.5	171

				Allgemeintoleranzen general tolerance nach: 6.1 - 61	Oberflaechen/ surface	 Werkstoff Rohteil

g700-P planetary geared motors




Technical data

Dimensions, self-ventilated motors

g700-P800, 2-stage gearboxes

8800245-00

Product			MCS								
			12D20	12D41	12H15	12H30	12H35	12L20	12L41	14D15	14D36
Length											
Total length	L	[mm]	493		533		573		506		546
Motor length	LB	[mm]	188		228		268		201		241
Length of motor options	Δ L	[mm]			69				78		
Motor diameter	AC	[mm]			116				143		
Distance motor/connection	AD	[mm]			105				116.5		

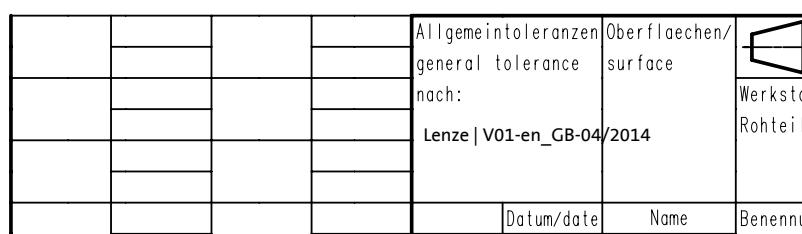

g700-P planetary geared motors



Technical data

Dimensions, self-ventilated motors

g700-P800, 2-stage gearboxes

Dimensions with solid shaft and Flange

Front View Dimensions:

- Total height: $\varnothing 130\text{h}7$
- Vertical slot width: 80
- Vertical slot depth: $\varnothing 40\text{h}7$
- Vertical slot width at top: 82
- Vertical slot depth at top: 5
- Horizontal slot width: LB
- Horizontal slot depth: AL
- Vertical slot width at bottom: AC
- Vertical slot depth at bottom: AD
- Total width: L

Top View Dimensions:

- Flange diameter: $\varnothing 145$
- Central hole diameter: $\varnothing 55$
- Square base width: □160
- Total length: □190
- Note: M12x30

6.1

8800245-00

Product			MCS										
			14H32	14L15	14L32	14P14	14P32	19F14	19F30	19J14	19J30	19P14	19P30
Length													
Total length	L	[mm]	546	586		626		535		575		635	
Motor length	LB	[mm]	241	281		321		220		260		320	
Length of motor options	Δ L	[mm]		78			83			93			
Motor diameter	AC	[mm]		143					192				
Distance motor/connection	AD	[mm]	116.5	146	116.5	146	141.5	171	141.5	171	141.5	171	

				Allgemeintoleranzen general tolerance nach: 6.1 - 63	Oberflächen/ surface	 Werkst. Rohteil

g700-P planetary geared motors

Technical data



Dimensions, forced ventilated motors

g700-P130, 1-stage gearbox

3	4	5	6
Dimensions with solid shaft and Flange			
6.1			8800243-00

Product	MCS		
Length			
Total length	L [mm]	404	
Motor length	LB [mm]	261	
Length of motor options	Δ L [mm]	63	
Motor diameter	AC [mm]	140	
Distance motor/connection	AD [mm]	105	

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V01-en_GB-04/2014		
				Datum/date	Name	Benennung

g700-P planetary geared motors

Technical data



Dimensions, forced ventilated motors

g700-P130, 2-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			

6.1

8800243-00

Product	MCS	
	12D17	12D35
Length		
Total length	L [mm]	422
Motor length	LB [mm]	261
Length of motor options	Δ L [mm]	63
Motor diameter	AC [mm]	140
Distance motor/connection	AD [mm]	105

				Allgemeintoleranzen general tolerance nach: 6.1 - 65	Oberflaechen/ surface	 Werkstoff Rohteil

g700-P planetary geared motors

Technical data



Dimensions, forced ventilated motors

g700-P260, 1-stage gearbox

3	4	5	6
Dimensions with solid shaft and Flange			

6.1

8800244-00

Product			MCS							
			12D17	12D35	12H14	12H34	12L17	12L39	14D14	14D30
Length										
Total length	L	[mm]	437		477		517		475	
Motor length	LB	[mm]	261		301		341		289	
Length of motor options	Δ L	[mm]			63				81.5	
Motor diameter	AC	[mm]			140				167	
Distance motor/connection	AD	[mm]			105				116.5	

				Allgemeintoleranzen general tolerance	Oberflaechen/ surface	
				nach: Lenze V01-en_GB-04/2014		

g700-P planetary geared motors

Technical data



Dimensions, forced ventilated motors

g700-P260, 2-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			

6.1

8800244-00

Product			MCS							
			12D17	12D35	12H14	12H34	12L17	12L39	14D14	14D30
Length										
Total length	L	[mm]	465		505		545		503	
Motor length	LB	[mm]	261		301		341		289	
Length of motor options	Δ L	[mm]			63				81.5	
Motor diameter	AC	[mm]			140				167	
Distance motor/connection	AD	[mm]			105				116.5	

				Allgemeintoleranzen general tolerance nach: 6.1 - 67	Oberflaechen/ surface	

g700-P planetary geared motors



Technical data

Dimensions, forced ventilated motors

g700-P800, 1-stage gearboxes

Dimensions with solid shaft and Flange


Front View Dimensions:

- Total length $L = 130$
- Shaft length $LB = 55$
- Shaft shoulder $AL = 5$
- Shaft shoulder to bearing $AD = 100$
- Shaft shoulder to center $AC = 10$
- Hole diameter $\varnothing 40\text{h}7$
- Shaft shoulder height 80

Top View Dimensions:

- Flange outer diameter $\varnothing 145$
- Central hole diameter $\varnothing 55$
- Mounting hole distance from center: 160 and 190

Product			MCS								
			12H14	12H34	12L17	12L39	14D14	14D30	14H12	14H28	14L14
Length											
Total length	L	[mm]	557		597		545		585		625
Motor length	LB	[mm]	301		341		289		329		369
Length of motor options	Δ L	[mm]		63				81.5			
Motor diameter	AC	[mm]		140				167			
Distance motor/connection	AD	[mm]		105			116.5		146		116.5

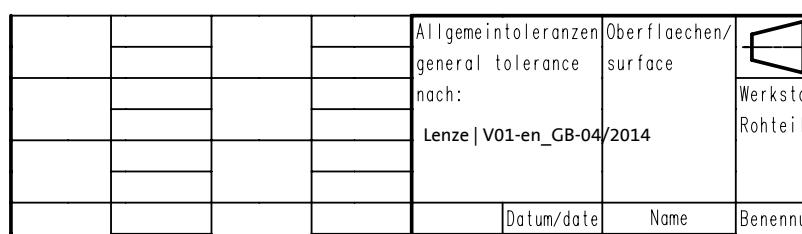

g700-P planetary geared motors



Technical data

Dimensions, forced ventilated motors

g700-P800, 1-stage gearboxes

3 4 5 6

Dimensions with solid shaft and Flange

The drawing consists of two views: a front view on the left and a top view on the right.

Front View Dimensions:

- Total width: $L = 82 + 5 + LB + AL$
- Shaft diameter: $\varnothing 40\text{h}7$
- Shaft height: 80
- Shaft shoulder height: 5
- Shaft shoulder width: 82
- Shaft shoulder center-to-center distance: LB
- Shaft shoulder end distance: AL
- Shaft shoulder center-to-center distance: AC
- Shaft shoulder end distance: AD
- Shaft shoulder center-to-center distance: M12x30
- Shaft shoulder diameter: $\varnothing 55$
- Shaft shoulder width: 160
- Shaft shoulder end distance: 190
- Shaft shoulder center-to-center distance: $\varnothing 145$

Top View Dimensions:

- Shaft shoulder diameter: $\varnothing 145$
- Shaft shoulder width: 160
- Shaft shoulder end distance: 190

6.1

8800245-00

Product			MCS								
			14L30	14P11	14P26	19F12	19F29	19J12	19J29	19P12	19P29
Length											
Total length	L	[mm]	625	665		593		633		693	
Motor length	LB	[mm]	369	409		327		367		427	
Length of motor options	Δ L	[mm]	81.5			72			82		
Motor diameter	AC	[mm]	167					212			
Distance motor/connection	AD	[mm]	146	116.5	146	141.5			171		

				Allgemeintoleranzen general tolerance nach: 6.1 - 69	Oberflächen/ surface	
						Werksto Rohtei
					Datum/date	Name
						Benennung

g700-P planetary geared motors




Technical data

Dimensions, forced ventilated motors

g700-P800, 2-stage gearboxes

Product			MCS								
			12D17	12D35	12H14	12H34	12L17	12L39	14D14	14D30	14H12
Length											
Total length	L	[mm]	566		606		646		594		634
Motor length	LB	[mm]	261		301		341		289		329
Length of motor options	Δ L	[mm]			63				81.5		
Motor diameter	AC	[mm]			140				167		
Distance motor/connection	AD	[mm]			105				116.5		

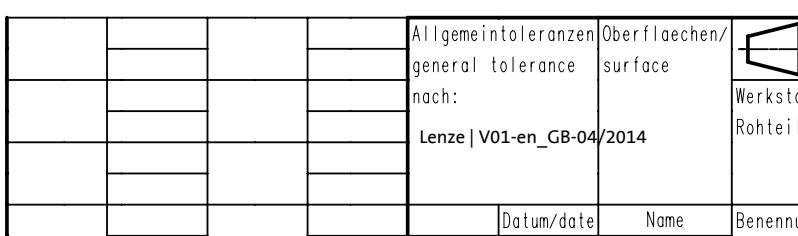

g700-P planetary geared motors

Technical data



Dimensions, forced ventilated motors

g700-P800, 2-stage gearboxes

3	4	5	6
Dimensions with solid shaft and Flange			

6.1

8800245-00

Product			MCS									
			14H28	14L14	14L30	14P11	14P26	19F12	19F29	19J12	19J29	19P29
Length												
Total length	L	[mm]	634	674		714		642		682		742
Motor length	LB	[mm]	329	369		409		327		367		427
Length of motor options	Δ L	[mm]			81.5			72		82		
Motor diameter	AC	[mm]			167				212			
Distance motor/connection	AD	[mm]	146	116.5	146	116.5	146	141.5		171		

				Allgemeintoleranzen general tolerance nach: 6.1 - 71	Oberflaechen/ surface	

g700-P planetary geared motors

Technical data



Weights, self-ventilated motors

1-stage gearboxes

			MCS									
			06C41 06C60	06F41 06F60	06I41 06I60	09D41 09D60	09F38 09F60	09H41 09H60	09L41 09L51	12D20 12D41	12H15	
g700	-P20	m [kg]	2.2									
	-P44	m [kg]	2.7		3.1	3.8	5.2	6.1				
	-P130	m [kg]			4.3	5.0	6.4	7.3	8.2	10	8.5	
	-P260	m [kg]					10	11	12	14	12	
	-P800	m [kg]									28	

			MCS									
			12H30 12H35	12L20 12L41	14D15 14D36	14H15 14H32	14L15 14L32	14P14 14P32	19F14 19F30	19J14 19J30	19P14 19P30	
g700	-P130	m [kg]	12									
	-P260	m [kg]	16	19	17	22	26		29			
	-P800	m [kg]		31		34	38	43	41	48	58	

2-stage gearboxes

			MCS									
			06C41 06C60	06F41 06F60	06I41 06I60	09D41 09D60	09F38 09F60	09H41 09H60	09L41 09L51	12D20 12D41	12H15 12H30 12H35	
g700	-P20	m [kg]	2.3									
	-P44	m [kg]	2.9	3.3	4.0	5.4	6.3					
	-P130	m [kg]	4.4	4.8	5.5	6.9	7.8	8.7	10	9.0	12	
	-P260	m [kg]	9.8	10	11	12	13	14	16	14	18	
	-P800	m [kg]								28	32	

			MCS									
			12L20 12L41	14D15 14D36	14H15 14H32	14L15 14L32	14P14 14P32	19F14	19F30	19J14 19J30	19P14 19P30	
g700	-P260	m [kg]	21	19	24	28			31			
	-P800	m [kg]	35	33	38	42	47	45		52	62	

3-stage gearboxes

6.1

			MCS														
			06C41	06C60	06F41	06F60	06I41	06I60	09D41	09D60	09F38	09F60	09H41	09H60	09L41	09L51	12D41
g700	-P44	m [kg]	3.1														
	-P130	m [kg]		4.9		5.3		6.0		7.4							
	-P260	m [kg]		12			13		14		15		16		18	16	

g700-P planetary geared motors

Technical data



Weights, forced ventilated motors

1-stage gearboxes

		MCS									
		12D17 12D35	12H14 12H34	12L17 12L39	14D14 14D30	14H12 14H28	14L14 14L30	14P11 14P26 19F12 19F29	19J12 19J29	19P12 19P29	
g700	-P130	m [kg]	11								
	-P260	m [kg]	14	18	21	20					
	-P800	m [kg]		30	33	32	38	42	47	54	

2-stage gearboxes

		MCS									
		12D17 12D35	12H14 12H34	12L17 12L39	14D14 14D30	14H12 14H28	14L14 14L30	14P11 14P26 19F12 19F29	19J12 19J29	19P12 19P29	
g700	-P130	m [kg]	11								
	-P260	m [kg]	16	20	23	22					
	-P800	m [kg]	30	34	37	36	42	46	51	58	

g700-P planetary geared motors

Technical data



Surface and corrosion protection

For optimum protection of geared motors against ambient conditions, the surface and corrosion protection system (OKS) offers tailor-made solutions.

Various surface coatings combined with other protective measures ensure that the geared motors operate reliably even at high air humidity, in outdoor installations or in the presence of atmospheric impurities. Any colour from the RAL Classic collection can be chosen for the top coat. The geared motors are also available unpainted (no surface and corrosion protection).

Surface and corrosion protection	Applications	Measures
OKS-G (primed)	<ul style="list-style-type: none">Dependent on subsequent top coat applied	<ul style="list-style-type: none">2K PUR priming coat (grey)Zinc-coated screwsRust-free breather elements <p>Optional measures</p> <ul style="list-style-type: none">Stainless steel nameplate
OKS-S (small)	<ul style="list-style-type: none">Standard applicationsInternal installation in heated buildingsAir humidity up to 90%	<ul style="list-style-type: none">Surface coating as per corrosivity category C1 (in line with EN 12944-2)Zinc-coated screwsRust-free breather elements <p>Optional measures</p> <ul style="list-style-type: none">Stainless steel nameplate
OKS-M (medium)	<ul style="list-style-type: none">Internal installation in non-heated buildingsCovered, protected external installationAir humidity up to 95%	<ul style="list-style-type: none">Surface coating as per corrosivity category C2 (in line with EN 12944-2)Zinc-coated screwsRust-free breather elements <p>Optional measures</p> <ul style="list-style-type: none">Stainless steel shaftStainless steel nameplateRust-free shrink disc (on request)
OKS-L (large)	<ul style="list-style-type: none">External installationAir humidity above 95%Chemical industry plantsFood industry	<ul style="list-style-type: none">Surface coating as per corrosivity category C3 (in line with EN 12944-2)Blower cover and B end shield additionally primedCable glands with gasketsCorrosion-resistant brake with cover ring, stainless friction plate, and chrome-plated armature plate (on request)All screws/screw plugs zinc-coatedStainless breather elementsThreaded holes that are not used are closed by means of plastic plugs <p>Optional measures</p> <ul style="list-style-type: none">Sealed recesses on motor (on request)Stainless steel shaftStainless steel nameplateRust-free shrink disc (on request)Additional priming coat on cast iron fanOil expansion tank and torque plates painted separately and supplied loose

g700-P planetary geared motors

Technical data



Surface and corrosion protection

Structure of surface coating

Surface and corrosion protection	Corrosivity category	Surface coating	Colour
	DIN EN ISO 12944-2	Structure	
Without OKS(uncoated)		Dipping primed gearbox	
OKS-G (primed)		Dipping primed gearbox 2K PUR priming coat	
OKS-S (small)	C1	Dipping primed gearbox 2K-PUR top coat	Standard: RAL 7012 Optional: RAL Classic
OKS-M (medium)	C2	Dipping primed gearbox 2K PUR priming coat	
OKS-L (large)	C3	2K-PUR top coat	

g700-P planetary geared motors

Technical data




6.1

Gearboxes

g700-P planetary gearbox

20 to 800 Nm

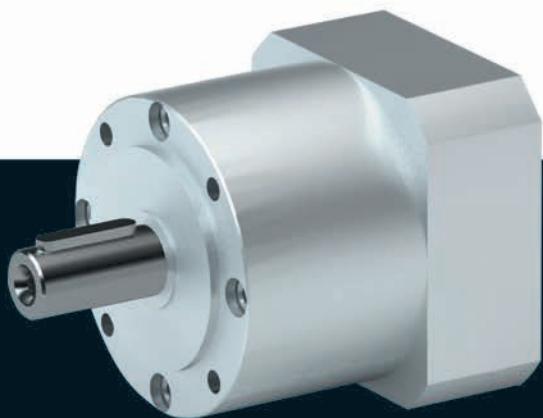

g700-P planetary gearbox



Contents

General information	List of abbreviations	6.1.1 - 5
	Product information	6.1.1 - 6
	Equipment	6.1.1 - 7
	The gearbox kit	6.1.1 - 8
	Functions and features	6.1.1 - 10
Technical data	Permissible radial and axial forces at output	6.1.1 - 11
	Backlash and torsional rigidity	6.1.1 - 12
	Speeds and torques	6.1.1 - 12
	Moments of inertia	6.1.1 - 16

6.1.1

g700-P planetary gearbox

Contents



6.1.1

g700-P planetary gearbox

General information



List of abbreviations

F _{ax,max}	[N]	Max. axial force
F _{rad,max}	[N]	Max. radial force
i		Ratio
J	[kgcm ²]	Moment of inertia
m	[kg]	Mass

6.1.1

g700-P planetary gearbox

General information



Product information

The planetary gearbox g700 is the ideal solution for demanding and dynamic tasks. With its high reliability, long service life and outstanding scalability, it provides everything you need to manage demanding machine tasks.

Versions

- High input speed possible Max. input speed 18000 rpm
- Wide variety of ratios i= 3...512 in 24 ratios
- High rated torque bandwidth 20 ... 800 Nm in five sizes
- Lifetime lubrication
- Suitable for any mounting position, hence only one variant

The product name

Gearbox type	Product range		Design	Rated torque [Nm]	Product
Planetary gearbox	g700	-	P	20	g700-P20
				44	g700-P44
				130	g700-P130
				260	g700-P260
				800	g700-P800

g700-P planetary gearbox


General information



Equipment

Overview

The equipment includes all the options available as standard and all the built-on accessories of the product.

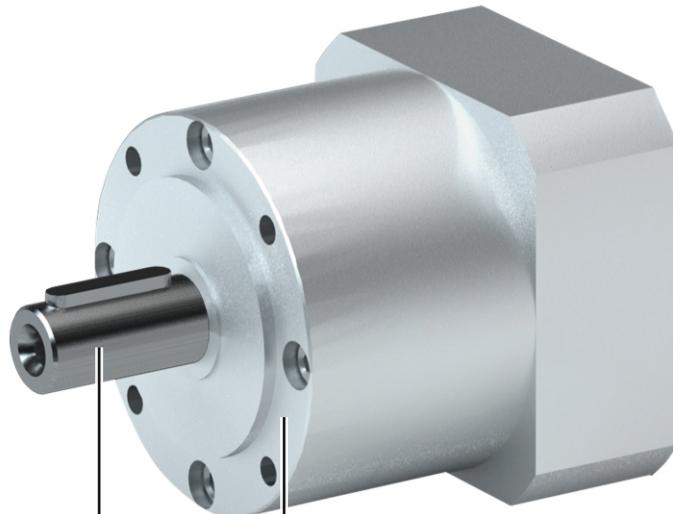

Output shaft

Solid shaft with featherkey

Housing design

Threaded pitch circle with centering

6.1.1

g700-P planetary gearbox



General information

The gearbox kit

Gearbox details

Product	g700-P20	g700-P44	g700-P130	g700-P260	g700-P800
Driven shaft					
Solid shaft with featherkey [mm]	10x23	14x30	20x36	25x50	40x80
Design			Standard		
Gasket			NBR		
Bearing			Standard		
Housing					
Housing version			Without foot with centering		
Output flange					
flange diameter [mm]	40	60	80	115	160
Lubricant					
Type			Klüberplex BEM34-132		
Breather element			Without		
Backlash					
Backlash			Standard		

- ▶ Further information and installation feasibilities can be found in the Gearboxes chapter.


g700-P planetary gearbox

General information



The gearbox kit

Gearbox details

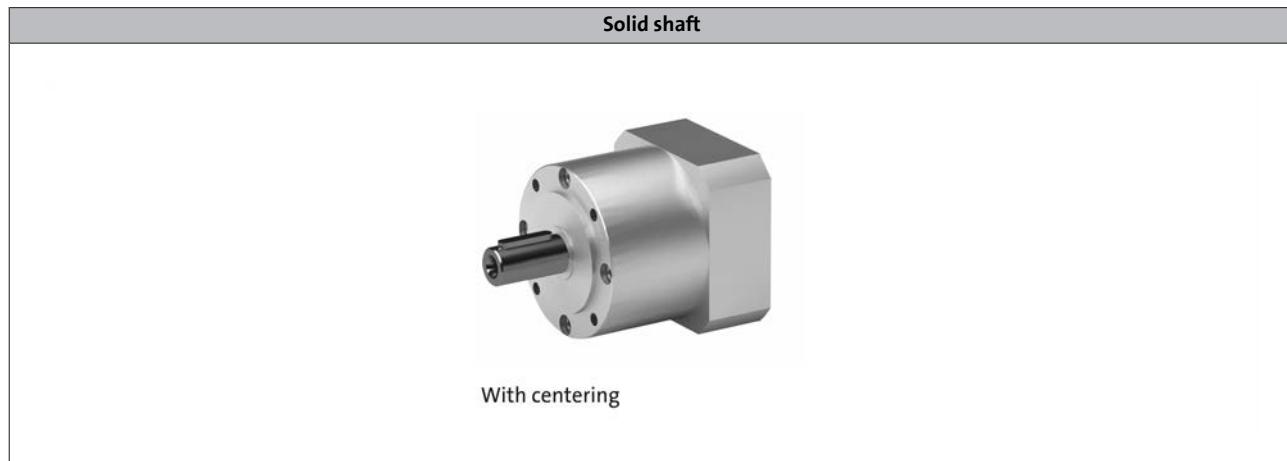

6.1.1

g700-P planetary gearbox

General information



Functions and features

Product	g700-P20	g700-P44	g700-P130	g700-P260	g700-P800
Housing					
Design		Cylindrical shape			
Solid shaft					
Design		with keyway to DIN 6885			
Tolerance			h7		
Toothed parts					
Design		Spur-toothed			
Ratios		Mathematically precise			
Shaft-hub joint		Force-fit, motor gearbox connected via clamping hub			
Lubricants					
Changing interval		Lubricated for life			
Quantities		Can be installed in any orientation			
Mechanical efficiency					
1-stage gearboxes [$\eta_c=1$]		0.96			
2-stage gearboxes [$\eta_c=1$]		0.94			
3-stage gearboxes [$\eta_c=1$]		0.90			

Direction of rotation



6.1.1

g700-P planetary gearbox



Technical data

Permissible radial and axial forces at output


Permissible radial force

$F_{rad,per} = F_{rad,max}$ if $F_{ax} = 0$

Permissible axial force

$F_{ax,per} = F_{ax,max}$ if $F_{rad} = 0$

- If F_{rad} and $F_{ax} \neq 0$, please contact Lenze.

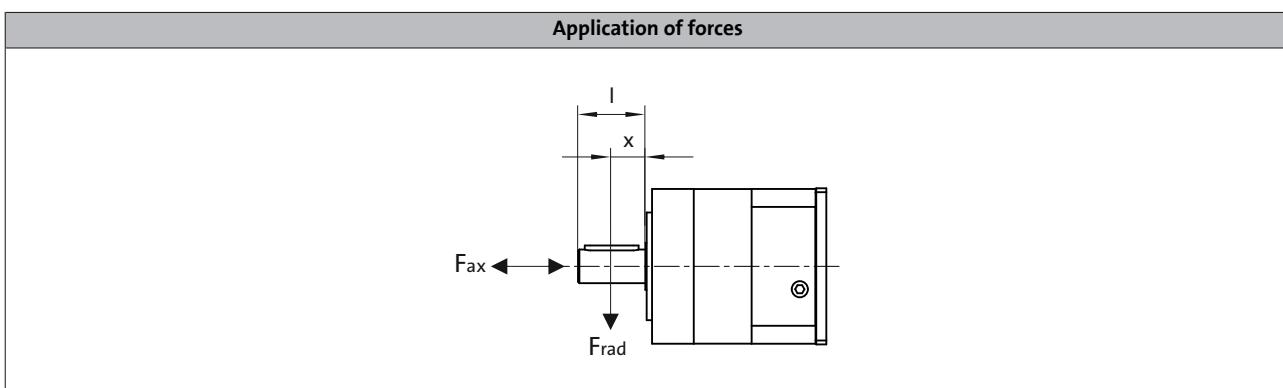

Product	n_2 [r/min]	
	100	
	Max. radial force, Solid shaft with flange	Max. axial force, Solid shaft with flange
	$F_{rad,max}$	$F_{ax,max}$
	[N]	[N]
g700-P20	200	200
g700-P44	500	400
g700-P130	1000	750
g700-P260	2500	1750
g700-P800	7000	5000

- Application of force F_{rad} : centre of shaft journal ($x = l/2$)

- $F_{ax,max}$ only valid with $F_{rad} = 0$

g700-P planetary gearbox



Technical data

Backlash and torsional rigidity

1-stage gearboxes

Product	Backlash	Torsional stiffness
	[arcmin]	[Nm/arcmin]
g700-P20	15.0	1.00
g700-P44	10.0	2.30
g700-P130	7.00	6.00
g700-P260		12.0
g700-P800	6.00	38.0

2-stage gearboxes

Product	Backlash	Torsional stiffness
	[arcmin]	[Nm/arcmin]
g700-P20	19.0	1.10
g700-P44	12.0	2.50
g700-P130	9.00	6.50
g700-P260		13.0
g700-P800	10.0	41.0

3-stage gearboxes

Product	Backlash	Torsional stiffness
	[arcmin]	[Nm/arcmin]
g700-P20	22.0	1.00
g700-P44	15.0	2.50
g700-P130	11.0	6.30
g700-P260		12.0

- The backlash is measured with 1 % of the rated torque, at least 1 Nm.

g700-P planetary gearbox



Technical data

Speeds and torques

- ▶ **Rated torque $M_{2, GN}$**
At rated speed, ambient temperature 30 °C and duty type S1.
- ▶ **Max. output torque $M_{2, max}$**
At output speed 100 r/min, duty type S1, uniform and shock-free motion.
- ▶ **Emergency off torque $M_{2, not}$**
Max.1000 emergency switching off actions during gearbox service life

- ▶ **Max. gearbox input speed**
 $n_{1, max\ 50\%}$
Max. medium speed at 50 % rated torque
- $n_{1, max\ 100\%}$
Max. medium speed at 100 % rated torque
- $n_{1, max}$
Max. permissible speed

1-stage gearboxes

Product	Ratio i	Rated torque $M_{2, GN}$	Max. output torque $M_{2, max}$	Max. gearbox input speed			Emergency off-torque $M_{2, not}$
				$n_{1, max\ 50\%}$ [r/min]	$n_{1, max\ 100\%}$ [r/min]	$n_{1, max}$ [r/min]	
		[Nm]	[Nm]				
g700-P20	3.000	11	18	5000	5000	18000	23
	4.000	15	24	5000	5000		30
	5.000	14	22	5000	5000		36
	7.000	9	14	5000	5000		26
	8.000	6	10	5000	5000		27
	10.000	5	8	5000	5000		27
g700-P44	3.000	28	45	4500	4500	13000	66
	4.000	38	61	4500	4500		88
	5.000	40	64	4500	4500		80
	7.000	25	40	4500	4500		80
	8.000	18	29	4500	4500		80
	10.000	15	24	4500	4500		80
g700-P130	3.000	85	136	4000	2700	7000	180
	4.000	115	184	3850	2500		240
	5.000	110	176	4000	3000		220
	7.000	65	104	4000	4000		178
	8.000	50	80	4000	4000		190
	10.000	38	61	4000	4000		200
g700-P260	3.000	115	184	3350	2550	6500	390
	4.000	155	248	3400	2500		520
	5.000	195	312	3500	2500		500
	7.000	135	216	3500	3500		340
	8.000	120	192	3500	3500		380
	10.000	95	152	3500	3500		480
g700-P800	3.000	400	640	1350	900	6500	800
	4.000	450	720	1450	1000		900
	5.000	450	720	1650	1150		900
	8.000	450	720	2150	1550		900

6.1.1

g700-P planetary gearbox



Technical data

Speeds and torques

2-stage gearboxes

Product	Ratio	Rated torque	Max. output torque	Max. gearbox input speed			Emergency off-torque		
				M _{2, GN}	M _{2, max}	n _{1, max 50%}	n _{1, max 100%}	n _{1, max}	
	i	M _{2, GN}	M _{2, max}	[Nm]	[Nm]	[r/min]	[r/min]	[r/min]	[Nm]
g700-P20	9.000	17	26	5000	5000	5000	5000	5000	33
	12.000	20	32	5000	5000	5000	5000	5000	40
	15.000	18	29	5000	5000	5000	5000	5000	36
	16.000	20	32	5000	5000	5000	5000	5000	40
	20.000	20	32	5000	5000	5000	5000	5000	40
	25.000	18	29	5000	5000	5000	5000	5000	36
	32.000	20	32	5000	5000	5000	5000	5000	40
	40.000	18	29	5000	5000	5000	5000	5000	36
	64.000	8	12	5000	5000	5000	5000	5000	27
g700-P44	9.000	44	70	4500	4500	4500	4500	4500	88
	12.000	44	70	4500	4500	4500	4500	4500	88
	15.000	44	70	4500	4500	4500	4500	4500	88
	16.000	44	70	4500	4500	4500	4500	4500	88
	20.000	44	70	4500	4500	4500	4500	4500	88
	25.000	40	64	4500	4500	4500	4500	4500	80
	32.000	44	70	4500	4500	4500	4500	4500	88
	40.000	40	64	4500	4500	4500	4500	4500	80
	64.000	18	29	4500	4500	4500	4500	4500	80
g700-P130	9.000	130	208	4000	3050	3050	3050	3050	260
	12.000	120	192	4000	3750	3750	3750	3750	240
	15.000	110	176	4000	4000	4000	4000	4000	220
	16.000	120	192	4000	4000	4000	4000	4000	240
	20.000	120	192	4000	4000	4000	4000	4000	240
	25.000	110	176	4000	4000	4000	4000	4000	220
	32.000	120	192	4000	4000	4000	4000	4000	240
	40.000	110	176	4000	4000	4000	4000	4000	220
	64.000	50	80	4000	4000	4000	4000	4000	190
g700-P260	9.000	210	336	3500	2650	2650	2650	2650	500
	12.000	260	416	3500	2650	2650	2650	2650	520
	15.000	230	368	3500	3200	3200	3200	3200	500
	16.000	260	416	3500	3100	3100	3100	3100	520
	20.000	260	416	3500	3500	3500	3500	3500	520
	25.000	230	368	3500	3500	3500	3500	3500	500
	32.000	260	416	3500	3500	3500	3500	3500	520
	40.000	230	368	3500	3500	3500	3500	3500	500
	64.000	120	192	3500	3500	3500	3500	3500	380
g700-P800	12.000	800	1280	1550	1000	1000	1000	1000	1600
	15.000	700	1120	1850	1300	1300	1300	1300	1400
	16.000	800	1280	1750	1200	1200	1200	1200	1600
	20.000	800	1280	2050	1400	1400	1400	1400	1600
	25.000	700	1120	2350	1700	1700	1700	1700	1400
	32.000	800	1280	2650	1900	1900	1900	1900	1600
	40.000	700	1120	2950	2300	2300	2300	2300	1400
	64.000	450	720	3000	3000	3000	3000	3000	900

6.1.1

g700-P planetary gearbox



Technical data

Speeds and torques

3-stage gearboxes

Product	Ratio i	Rated torque M_2, GN [Nm]	Max. output torque M_2, max [Nm]	Max. gearbox input speed			Emergency off- torque [Nm]
				$n_1, \text{max } 50\%$ [r/min]	$n_1, \text{max } 100\%$ [r/min]	n_1, max [r/min]	
g700-P20	60.000	20	32	5000	5000	18000	40
	80.000	20	32	5000	5000		40
	100.000	20	32	5000	5000		40
	120.000	18	29	5000	5000		36
	160.000	20	32	5000	5000		40
	200.000	18	29	5000	5000		36
	256.000	20	32	5000	5000		40
	320.000	18	29	5000	5000		36
	512.000	8	12	5000	5000		27
g700-P44	60.000	44	70	4500	4500	13000	88
	80.000	44	70	4500	4500		88
	100.000	44	70	4500	4500		88
	120.000	44	70	4500	4500		88
	160.000	44	70	4500	4500		88
	200.000	40	64	4500	4500		80
	256.000	44	70	4500	4500		88
	320.000	40	64	4500	4500		80
	512.000	18	29	4500	4500		80
g700-P130	60.000	110	176	4000	4000	7000	220
	80.000	120	192	4000	4000		240
	100.000	120	192	4000	4000		240
	120.000	110	176	4000	4000		220
	160.000	120	192	4000	4000		240
	200.000	110	176	4000	4000		220
	256.000	120	192	4000	4000		240
	320.000	110	176	4000	4000		220
	512.000	50	80	4000	4000		190
g700-P260	60.000	260	416	3500	3500	6500	520
	80.000	260	416	3500	3500		520
	100.000	260	416	3500	3500		520
	120.000	230	368	3500	3500		500
	160.000	260	416	3500	3500		520
	200.000	230	368	3500	3500		500
	256.000	260	416	3500	3500		520
	320.000	230	368	3500	3500		500
	512.000	120	192	3500	3500		380

6.1.1

g700-P planetary gearbox

Technical data



Moments of inertia

- The moments of inertia relate to the drive shaft of the gearbox.
- The total moment of inertia is calculated by adding the values of the gearbox, motor and accessories.

1-stage gearboxes

Product	Dimensions	Ratio	Moment of iner-
			tia
			Motor shaft diameter
	d	i	J
	[mm]		[kgcm ²]
g700-P20	11	3.000	0.065
	11	4.000	0.056
	11	5.000	0.053
	11	7.000	0.052
	11	8.000	0.051
	11	10.000	0.043
g700-P44	11	3.000	0.134
	11	4.000	0.092
	11	5.000	0.077
	11	7.000	0.071
	11	8.000	0.064
	11	10.000	0.130
	14	3.000	0.108
	14	4.000	0.066
	14	5.000	0.051
	14	7.000	0.014
	14	8.000	0.038
	14	10.000	0.014
	11	3.000	0.770
	11	4.000	0.520
6.1.1	11	5.000	0.450
	11	7.000	0.420
	11	8.000	0.390
	11	10.000	0.740
	14	3.000	0.770
	14	4.000	0.520
	14	5.000	0.450
	14	7.000	0.420
	14	8.000	0.390
	14	10.000	0.740
	19	3.000	0.770
	19	4.000	0.520
	19	5.000	0.450
	19	7.000	0.420
	19	8.000	0.390
	19	10.000	0.740
g700-P260	11	3.000	2.662
	11	4.000	1.822
	11	5.000	1.562
	11	7.000	1.442
	11	8.000	1.352
	11	10.000	2.652

Product	Dimensions	Ratio	Moment of iner-
			tia
			Motor shaft diameter
	d	i	J
	[mm]		[kgcm ²]
g700-P260	14	3.000	2.655
	14	4.000	1.815
	14	5.000	1.555
	14	7.000	1.435
	14	8.000	1.345
	14	10.000	2.645
	19	3.000	2.630
	19	4.000	1.790
	19	5.000	1.530
	19	7.000	1.410
	19	8.000	1.320
	19	10.000	2.620
	24	3.000	2.574
	24	4.000	1.734
g700-P800	24	5.000	1.474
	24	7.000	1.354
	24	8.000	1.264
	24	10.000	2.564
	28	3.000	4.897
	28	4.000	4.057
	28	5.000	3.797
	28	7.000	3.687
	28	8.000	3.587
	28	10.000	4.887
	19	3.000	12.211
	19	4.000	7.851
	19	5.000	6.141
	19	8.000	4.701
g700-P800	24	3.000	12.140
	24	4.000	7.780
	24	5.000	6.070
	24	8.000	4.630
	28	3.000	12.040
	28	4.000	7.680
	28	5.000	5.970
	28	8.000	4.530

g700-P planetary gearbox

Technical data



Moments of inertia

2-stage gearboxes

Product	Dimensions	Ratio	Moment of inertia
	Motor shaft diameter		
	d	i	J
	[mm]		[kgcm ²]
g700-P20	11	9.000	0.064
	11	12.000	0.063
	11	15.000	0.057
	11	16.000	0.056
	11	20.000	0.053
	11	25.000	0.053
	11	32.000	0.051
	11	40.000	0.050
	11	64.000	0.063
	14	9.000	0.063
g700-P44	11	12.000	0.126
	11	15.000	0.076
	11	16.000	0.087
	11	20.000	0.074
	11	25.000	0.074
	11	32.000	0.063
	11	40.000	0.063
	11	64.000	0.075
	14	9.000	0.064
	14	12.000	0.100
	14	15.000	0.050
	14	16.000	0.061
	14	20.000	0.048
	14	25.000	0.048
	14	32.000	0.014
	14	40.000	0.037
	14	64.000	0.049
g700-P130	11	9.000	0.390
	11	12.000	0.720
	11	15.000	0.710
	11	16.000	0.500
	11	20.000	0.440
	11	25.000	0.440
	11	32.000	0.390
	11	40.000	0.390
	11	64.000	0.510
	14	9.000	0.390
	14	12.000	0.720
	14	15.000	0.710
	14	16.000	0.500
	14	20.000	0.440
	14	25.000	0.440
	14	32.000	0.390
	14	40.000	0.390
	14	64.000	0.510
	19	9.000	0.390
	19	12.000	0.720
	19	15.000	0.710
	19	16.000	0.500
	19	20.000	0.440
	19	25.000	0.440
	19	32.000	0.390
	19	40.000	0.390
	19	64.000	0.510

Product	Dimensions	Ratio	Moment of inertia
	Motor shaft diameter		
	d	i	J
	[mm]		[kgcm ²]
g700-P260	11	9.000	1.332
	11	12.000	2.592
	11	15.000	2.562
	11	16.000	1.782
	11	20.000	1.532
	11	25.000	1.522
	11	32.000	1.332
	11	40.000	1.332
	11	64.000	2.602
	14	9.000	1.325
	14	12.000	2.585
	14	15.000	2.555
	14	16.000	1.775
	14	20.000	1.525
	14	25.000	1.515
	14	32.000	1.325
	14	40.000	1.325
	14	64.000	2.595
	19	9.000	1.300
	19	12.000	2.560
	19	15.000	2.530
	19	16.000	1.750
	19	20.000	1.500
	19	25.000	1.490
	19	32.000	1.300
	19	40.000	1.300
	19	64.000	2.570
	24	9.000	1.244
	24	12.000	2.504
	24	15.000	2.474
	24	16.000	1.694
	24	20.000	1.444
	24	25.000	1.434
	24	32.000	1.244
	24	40.000	1.244
	24	64.000	2.514
	28	9.000	3.567
	28	12.000	4.827
	28	15.000	4.797
	28	16.000	4.017
	28	20.000	3.767
	28	25.000	3.757
	28	32.000	3.567
	28	40.000	3.567
	28	64.000	4.837

6.1.1

g700-P planetary gearbox



Technical data

Moments of inertia

2-stage gearboxes

Product	Dimensions	Ratio	Moment of inertia
	Motor shaft diameter		
	d	i	J
	[mm]		[kgcm ²]
g700-P800	19	12.000	12.441
	19	15.000	12.421
	19	16.000	7.541
	19	20.000	6.721
	19	25.000	5.881
	19	32.000	6.431
	19	40.000	5.351
	19	64.000	4.571
	24	12.000	12.370
	24	15.000	12.350
	24	16.000	7.470
	24	20.000	6.650
	24	25.000	5.810
	24	32.000	6.360
	24	40.000	5.280
	24	64.000	4.500
	28	12.000	12.270
	28	15.000	12.250
	28	16.000	7.370
	28	20.000	6.550
	28	25.000	5.710
	28	32.000	6.260
	28	40.000	5.180
	28	64.000	4.400

6.1.1

g700-P planetary gearbox



Technical data

Moments of inertia

3-stage gearboxes

Product	Dimensions	Ratio	Moment of inertia
	Motor shaft diameter		
	d	i	J
	[mm]		[kgcm ²]
g700-P20	11	60.000	0.050
	11	80.000	0.053
	11	100.000	0.053
	11	120.000	0.063
	11	160.000	0.050
	11	200.000	0.050
	11	256.000	0.050
	11	320.000	0.050
	11	512.000	0.050
g700-P44	11	60.000	0.063
	11	80.000	0.074
	11	100.000	0.074
	11	120.000	0.063
	11	160.000	0.063
	11	200.000	0.063
	11	256.000	0.063
	11	320.000	0.063
	11	512.000	0.063
	14	60.000	0.037
	14	80.000	0.048
	14	100.000	0.048
	14	120.000	0.037
	14	160.000	0.037
	14	200.000	0.037
	14	256.000	0.037
	14	320.000	0.037
	14	512.000	0.037
g700-P130	11	60.000	0.390
	11	80.000	0.500
	11	100.000	0.440
	11	120.000	0.700
	11	160.000	0.390
	11	200.000	0.390
	11	256.000	0.390
	11	320.000	0.390
	11	512.000	0.390
	14	60.000	0.390
	14	80.000	0.500
	14	100.000	0.440
	14	120.000	0.700
	14	160.000	0.390
	14	200.000	0.390
	14	256.000	0.390
	14	320.000	0.390
	14	512.000	0.390
	19	60.000	0.390
	19	80.000	0.500
	19	100.000	0.440
	19	120.000	0.700
	19	160.000	0.390
	19	200.000	0.390
	19	256.000	0.390
	19	320.000	0.390
	19	512.000	0.390

Product	Dimensions	Ratio	Moment of inertia
	Motor shaft diameter		
	d	i	J
	[mm]		[kgcm ²]
g700-P260	11	60.000	1.332
	11	80.000	1.532
	11	100.000	1.522
	11	120.000	2.532
	11	160.000	1.332
	11	200.000	1.332
	11	256.000	1.332
	11	320.000	1.332
	11	512.000	1.332
	14	60.000	1.325
	14	80.000	1.525
	14	100.000	1.515
	14	120.000	2.525
	14	160.000	1.325
	14	200.000	1.325
	14	256.000	1.325
	14	320.000	1.325
	14	512.000	1.325
	19	60.000	1.300
	19	80.000	1.500
	19	100.000	1.490
	19	120.000	2.500
	19	160.000	1.300
	19	200.000	1.300
	19	256.000	1.300
	19	320.000	1.300
	19	512.000	1.300
	24	60.000	1.244
	24	80.000	1.444
	24	100.000	1.434
	24	120.000	2.444
	24	160.000	1.244
	24	200.000	1.244
	24	256.000	1.244
	24	320.000	1.244
	24	512.000	1.244
	28	60.000	3.567
	28	80.000	3.767
	28	100.000	3.757
	28	120.000	4.767
	28	160.000	3.567
	28	200.000	3.567
	28	256.000	3.567
	28	320.000	3.567
	28	512.000	3.567

6.1.1

g700-P planetary gearbox

Technical data



6.1.1

Motors

MCS synchronous servo motors

0.25 to 190 Nm



MCS synchronous servo motors



Contents

General information	List of abbreviations	6.11 - 4
	Product key	6.11 - 6
	Product information	6.11 - 8
	Functions and features	6.11 - 9
	Dimensioning	6.11 - 10
Technical data	Standards and operating conditions	6.11 - 17
	Permissible radial and axial forces	6.11 - 18
	Rated data, non-ventilated	6.11 - 19
	Rated data, forced ventilated	6.11 - 24
	Selection tables, Servo Drives 9400 HighLine	6.11 - 26
	Selection tables, Inverter Drives 8400 TopLine	6.11 - 36
	Selection tables, Servo Drives ECS	6.11 - 47
	Selection tables, Servo Inverter 9300	6.11 - 56
	Torque characteristics	6.11 - 63
	Dimensions, self-ventilated	6.11 - 100
	Dimensions, forced ventilated	6.11 - 104
Accessories	Permanent magnet holding brake	6.11 - 107
	Resolver	6.11 - 109
	Incremental encoder and SinCos absolute value encoder	6.11 - 110
	Blowers	6.11 - 112
	Temperature monitoring	6.11 - 113
	Terminal box	6.11 - 114
	ICN connector	6.11 - 116

MCS synchronous servo motors



General information

List of abbreviations

$\eta_{100\%}$	[%]	Efficiency
$\cos \varphi$		Power factor
dU/dt	[kV/ μ s]	Insulation resistance
$F_{ax,-}$	[N]	Min. axial force
$F_{ax,+}$	[N]	Max. axial force
$f_{in,max}$	[Hz]	Max. input frequency
f_{max}	[kHz]	Limit frequency
f_{max}	[kHz]	Max. switching frequency
f_N	[Hz]	Rated frequency
F_{rad}	[N]	Max. radial force
H_{max}	[m]	Site altitude
I_0	[A]	Standstill current
I_{max}	[A]	Max. short-time DC-bus current
I_{max}	[A]	Max. current
I_{max}	[A]	Max. current consumption
I_{max}	[A]	Max. current
I_{max}	[A]	Max. DC-bus current
I_N	[A]	Rated current
J	[kgcm ²]	Moment of inertia
J_{MB}	[kgcm ²]	Moment of inertia
$KE_{LL\ 150\ ^\circ C}$	[V /1000 rp]	Voltage constant
$Kt_{0\ 150\ ^\circ C}$	[Nm/A]	Torque constant
L	[mH]	Mutual inductance
$L_{1\sigma}$	[mH]	Stator leakage inductance
$L_{2\sigma}$	[mH]	Rotor leakage inductance
L_N	[mH]	Rated inductance
m	[kg]	Mass
M_0	[Nm]	Stall torque
$M_{0,\ max}$	[Nm]	Max. standstill torque
M_{av}	[Nm]	Average dynamic torque
M_{max}	[Nm]	Max. torque
M_N	[Nm]	Rated torque
n_{eto}	[r/min]	Transition speed
n_k	[r/min]	Speed
n_{max}	[r/min]	Max. speed

n_N	[r/min]	Rated speed
P_N	[kW]	Rated power
Q_E	[J]	Maximum switching energy
R	[Ω]	Insulation resistance
R	[Ω]	Min. insulation resistance
R_1	[Ω]	Stator impedance
R_2	[Ω]	Charging resistor
R_2	[Ω]	Rotor impedance
$R_{UV\ 150\ ^\circ C}$	[Ω]	Stator impedance
$R_{UV\ 20\ ^\circ C}$	[Ω]	Stator impedance
$S_{hü}$	[1/h]	Transition operating frequency
T	[$^\circ$ C]	Operating temperature
T	[$^\circ$ C]	Rated temperature
T	[$^\circ$ C]	Max. ambient temperature of bearing
T	[$^\circ$ C]	Max. surface temperature
T	[$^\circ$ C]	Max. ambient temperature for transport
T	[$^\circ$ C]	Min. ambient storage temperature
T	[$^\circ$ C]	Min. ambient temperature for transport
T	[$^\circ$ C]	Ambient temperature
t_1	[ms]	Engagement time
t_2	[ms]	Disengagement time
$T_{opr,max}$	[$^\circ$ C]	Max. ambient operating temperature
$T_{opr,min}$	[$^\circ$ C]	Min. ambient operating temperature
$U_{in,max}$	[V]	Max. input voltage
$U_{in,min}$	[V]	Min. input voltage
U_{max}	[V]	Max. mains voltage
U_{max}	[V]	Min. input voltage
U_{min}	[V]	Min. mains voltage
$U_{N, AC}$	[V]	Rated voltage
$U_{N, DC}$	[V]	Rated voltage
Z_{ro}	[Ω]	Rotor impedance
Z_{rs}	[Ω]	Impedance
Z_{so}	[Ω]	Stator impedance

MCS synchronous servo motors

General information



List of abbreviations


CE	Communauté Européenne
CSA	Canadian Standards Association
DIN	Deutsches Institut für Normung e.V.
EMC	Electromagnetic compatibility
EN	European standard
GOST	Certificate for Russian Federation
IEC	International Electrotechnical Commission
IM	International Mounting Code
IP	International Protection Code
NEMA	National Electrical Manufacturers Association
UkrSEPRO	Certificate for Ukraine
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

MCS synchronous servo motors



General information

Product key

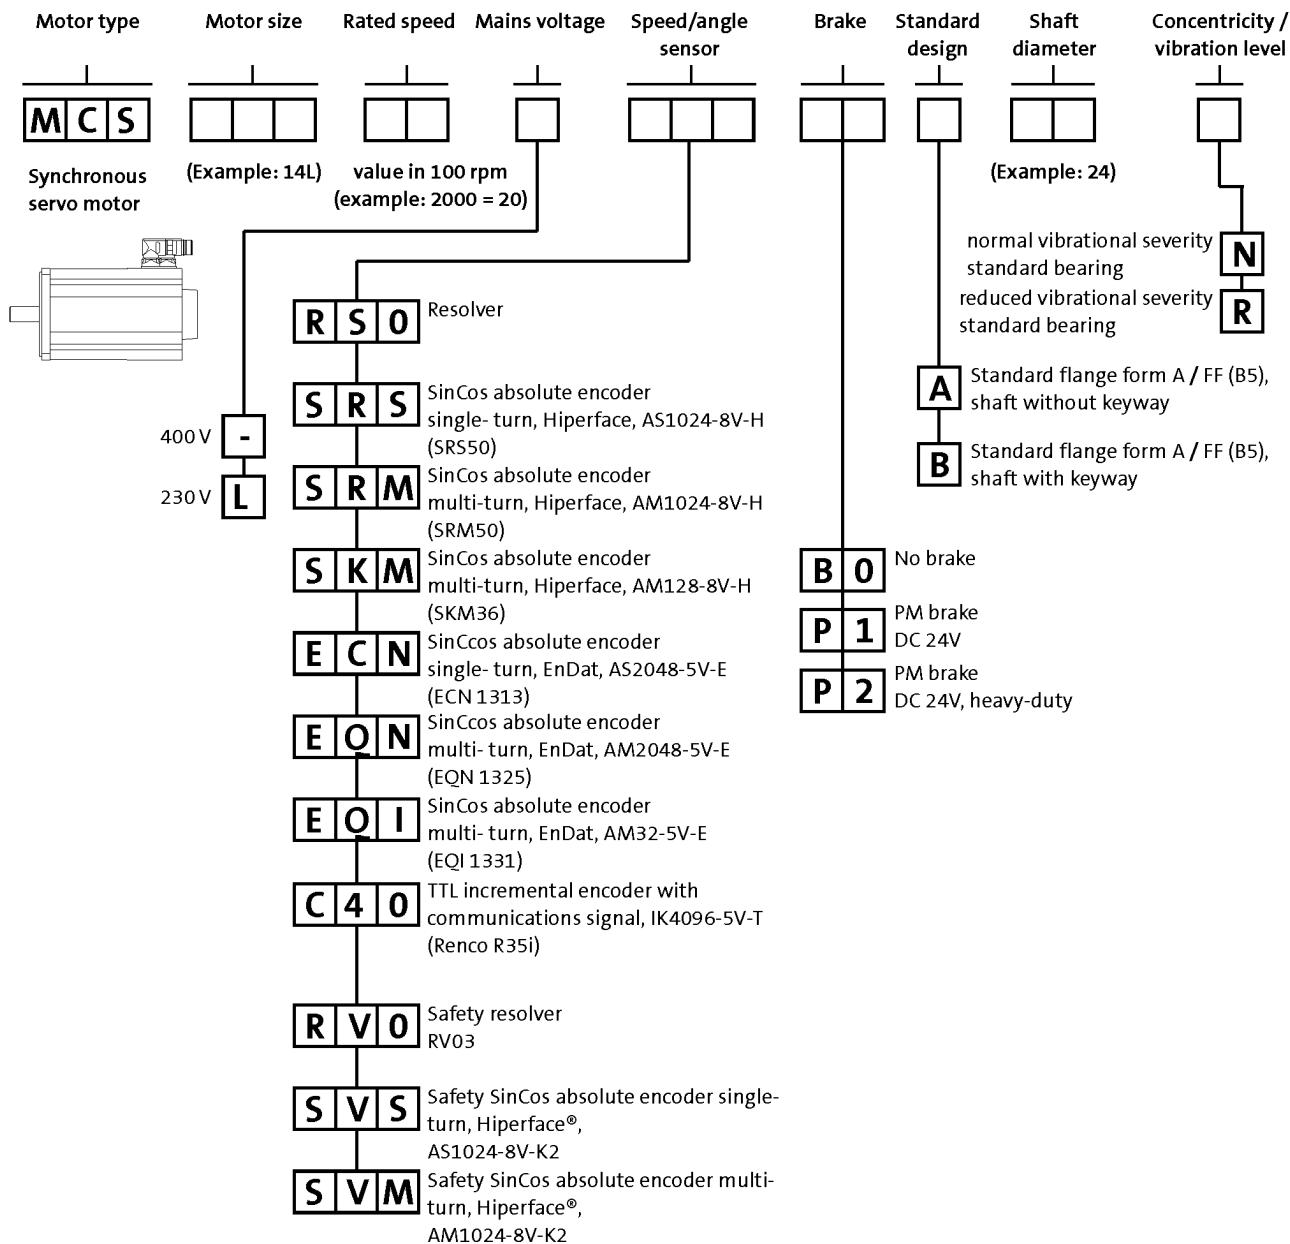


MCS synchronous servo motors



General information

Product key

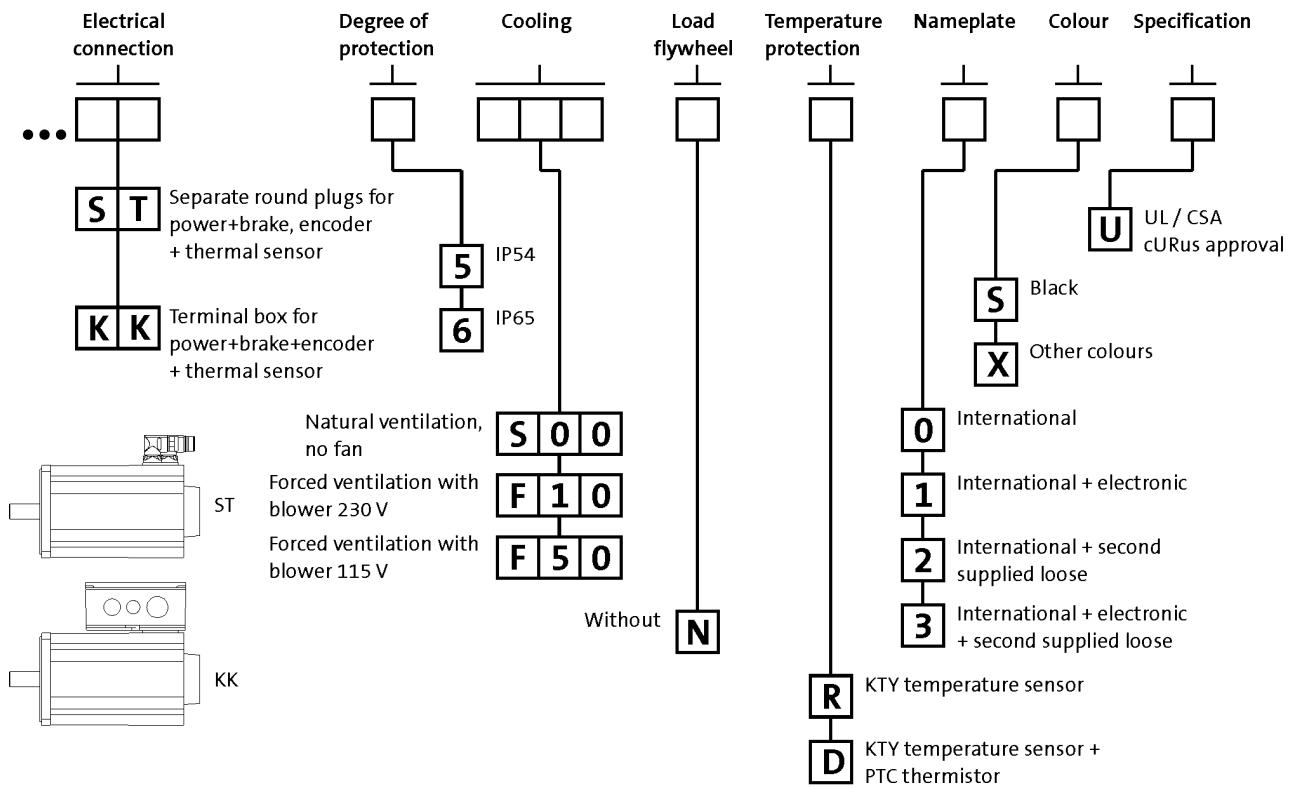

MCS synchronous servo motors

General information



Product information

When space is limited, but strict requirements in terms of dynamics and precision still have to be met, the MCS synchronous servo motors are the right choice.

With a power range from 0.25 kW to 15.8 kW and a rated torque range from 0.5 Nm to 72 Nm and peak torques of up to 190 Nm, these motors leave nothing to be desired in installations requiring compact and dynamic drive technology.

The stator winding of the MCS motors employs innovative Single Element Pole Technology – SEPT – and is made up of individual coils. High-quality magnetic materials and specially developed pole shapes set the conditions for their excellent drive characteristics. This results in a significant increase in power density, while at the same time reducing moments of inertia. The minimum detent torques offer exceptional smooth running characteristics and thereby secure excellent control behaviour.

The robust mechanical structure with reinforced bearings, the high degree of protection and the full stator encapsulation increase operational reliability, even in harsh ambient conditions.

Advantages

- High dynamic performance thanks to low moments of inertia
- Compact size with high power density
- Cooling with or without axial external fan
- Robust regenerative resolver system as standard
- Alternatively sin/cos encoder for the highest precision
- Easy to install and service friendly thanks to use of SpeedTec connectors
- Optional terminal box
- Protection: IP54, IP65 optional
- cURus-approved, GOST-certified, CE, RoHS compliant
- Smooth surface
- Single Element Pole Technology
- Optimum rotation characteristics
- Virtually free of detent torque
- Electronic nameplate



MCS09 synchronous servo motor

MCS synchronous servo motors



General information

Functions and features

	MCS06	MCS09	MCS12	MCS14	MCS19
Design	B5-FF75	B5-FF100	B5-FF130	B5-FF165	B5-FF215
Shaft end (with and without keyway)	11 x 23	14 x 30	19 x 40	24 x 50	28 x 60
A end shield			Not oil-tight		
Brake	DC 24 V		DC 24 V 24 V DC, reinforced		
Speed and angle encoder		Resolver SinCos single-turn/multi-turn			
Cooling					
Without blower		Naturally ventilated			
Axial blower, 1 phase			230 V; 50 Hz 115 V; 60 Hz		
Temperature sensor					
Thermal detector		KTY			
PTC thermistor			2x PTC additional (3-phase monitoring)		
Motor connection: plug connector	Power + brake Encoder + thermal sensor		Power + brake Encoder + thermal sensor Blower		
Motor connection: terminal box		Power + brake + encoder + thermal sensor			
Shaft bearings					
Bearing type	Deep-groove ball bearing with high-temperature resistant grease, sealing disc or cover plate				
Position of the locating bearing		Non-drive end			
Colour		RAL9005M			

► Terminal boxes not possible if blower is fitted.

MCS synchronous servo motors



General information

Dimensioning

Speed-dependent safety functions

Single encoder concepts with resolvers

Servo motors can perform speed-dependent safety functions for safe speed and / or safe relative position monitoring in a drive system with the Servo Drives 9400. The SM301 safety module, which can be integrated in the Servo Drives 9400, is used to implement these functions. When planning systems/installations of this kind, the following must always be observed:

When using just one single feedback system in the environment of these safety applications, the applicable safety engineering standard IEC 61800-5-2 [Adjustable speed electrical power drive systems - Part: 5-2: Safety requirements - Functional] stipulates special requirements for the connection between feedback system and motor shaft. This is due to the fact that two-channel safety systems at this point in the mechanical system are actually designed as single-channel systems. If this mechanical connection is designed with considerable overdimensioning, the standard permits exclusion of the fault "encoder-shaft breakage" or "encoder-shaft slip". As such, acceleration limit values must not be exceeded for the individual drive solutions. You can find the limit values in the corresponding feedback data of the individual motor ranges.

Speed-dependent safety functions in connection with the SM301 safety module

For the following speed-dependent safety functions, the motor-feedback system combinations listed in the following table are available:

- Safe stop 1 (SS1)
- Safe operational stop (SOS)
- Safely Limited Speed (SLS)
- Safe Maximum Speed (SMS)
- Safe direction (SDI)
- Operation mode selector (OMS) with confirmation (ES)
- Safe speed monitor (SSM)
- Safely limited increment (SLI).

Encoder type	Encoder type	Product key	Feedback	Safe speed monitoring
			Design	
SinCos absolute value	Single-turn	AS1024-8V-K2		PL d/SIL 2
	Multi-turn	AM1024-8V-K2		PL e/SIL 3
Resolver		RV03	2-encoder concept	up to PL e / SIL 3

MCS synchronous servo motors



General information

Dimensioning

Cooling effect of mounting flange

Mounting on a thermally conducting / insulating plate or machine chassis has an influence on heating up the motor, particularly when using naturally ventilated motors.

The motor rating data specified in the catalogue applies when mounting on a steel plate with free convection with the following dimensions:

- MCS06: 270 x 270 mm
- MCS09: 330 x 330 mm
- MCS12 / 14 / 19: 450 x 450 mm

Vibrational severity

		MCS06	MCS09	MCS12	MCS14	MCS19
Vibrational severity						
IEC/EN 60034-14				A		
Maximum r.m.s. value of the vibration velocity ¹⁾	[mm/s]			1.60		

¹⁾ Free suspension

► at n = 600 to 3,600 rpm


MCS synchronous servo motors



General information

Dimensioning

Concentricity and axial run-out of the mounting flanges and smooth running of the shaft ends

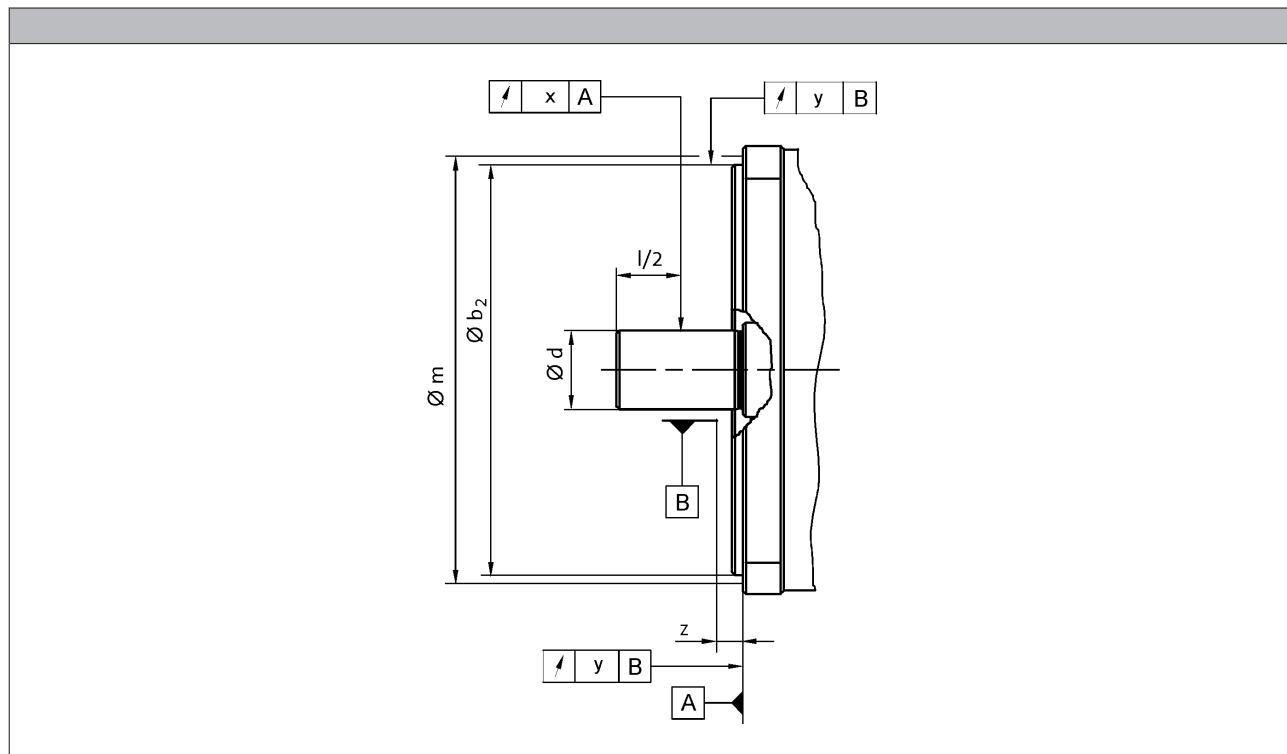

			MCS06	MCS09	MCS12	MCS14	MCS19	
Flange size			FF75	FF100	FF130	FF165	FF215	
Dimensions								
	b ₂	j6	[mm]	60	80	110	130	180
	d	k6	[mm]	11	14	19	24	28
Distance								
Measuring diameter	m		[mm]	65.0	85.0	115	135	185
Dial gauge holder for flange check	z	+/- 1	[mm]			10.0		
Concentricity								
IEC 60072					Normal class			
Value	y		[mm]	0.080		0.10		
Linear movement								
IEC 60072					Normal class			
Value	y		[mm]	0.080		0.10		
Smooth running								
IEC 60072					Normal class			
Value	x		[mm]	0.035		0.040		

- Limit values for checking the smooth running of the shaft ends as well as the concentricity and axial run-out of the mounting flange to IEC 60072


MCS synchronous servo motors



General information

Dimensioning

Notes on the selection tables

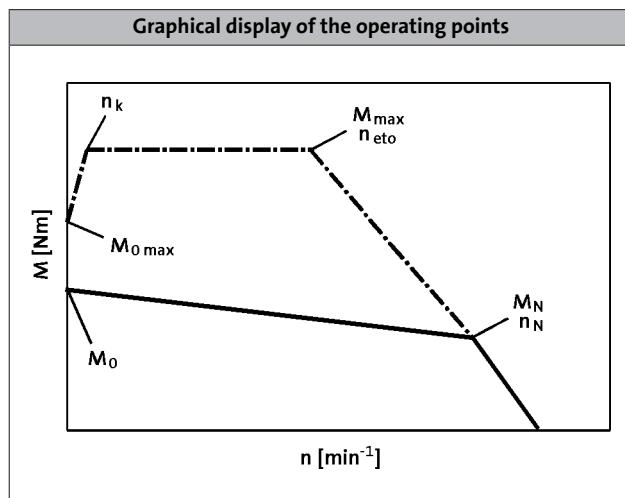

Please note:

- In case of an active load (e.g. vertical drive axes, hoists, test benches, unwinders), $M_{0\max}$ has to be considered
- In case of a passive load (e.g. horizontal drive axes), M_{\max} can be usually used
- In case of a speed $n < n_k$ and inverter-specifically, the achievable torque $M_{0\max}$ is smaller than M_{\max}
- In case of a speed $n = 0$, the standstill torque M_0 and the standstill current I_0 have to be reduced by 30% after 2 seconds. In case of applications which require a longer holding of M_0 , we recommend the drive to be held via the holding brake and reduce the current, e.g. by controller inhibit.
- In case of servo inverters, the switching frequency dependent overload capacity is considered in the default setting. For more information, see the servo inverter catalogue.

	n_k [r/min]
MCS	75.0
MDSKS	
MDFKS	100

Further selection tables with different switching frequencies are available with the following codes:

- DS_ZT_MCS_0001
- DS_ZT_MCA_0001
- DS_ZT_MDSKS_0001
- DS_ZT_MDFKS_0001

Simply enter this code (e.g. DS_ZT_MCS_0001) as a search string at www.lenze.de/dsc and you will be given the information immediately in the form of a PDF format.


MCS synchronous servo motors

General information



Dimensioning

Notes on the torque characteristics

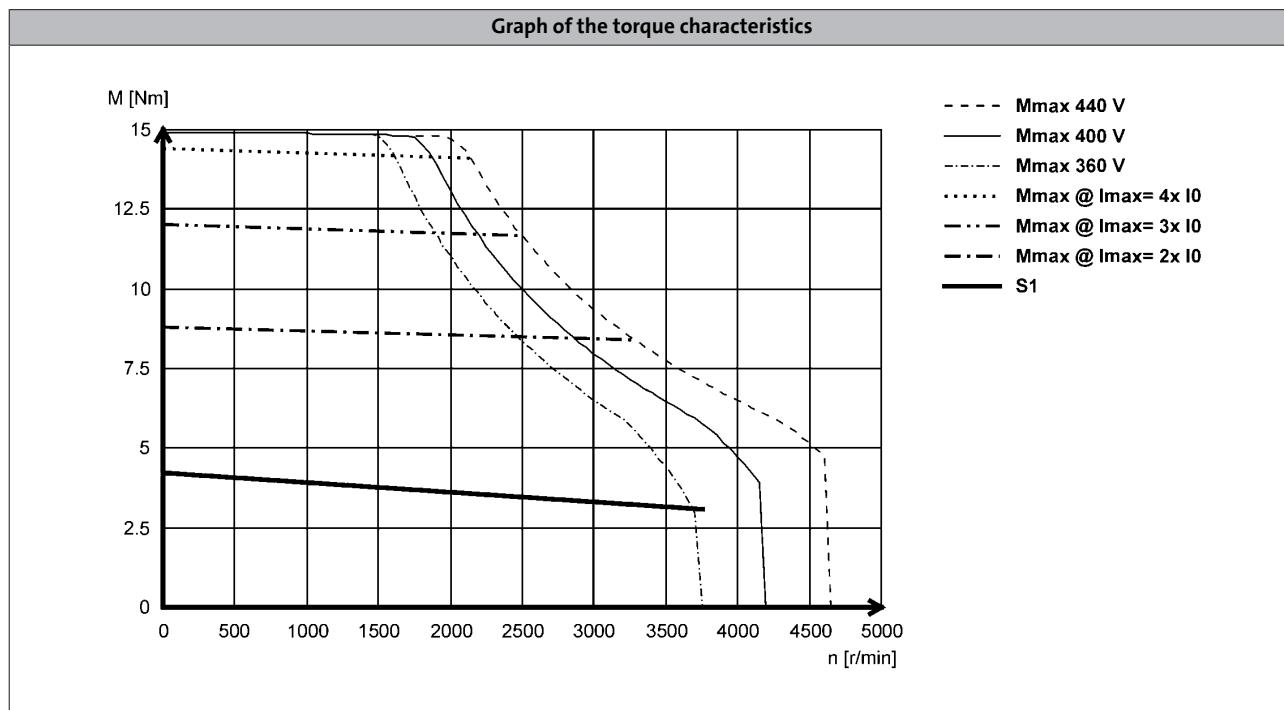

With synchronous servo motors, the limit torque characteristics that result from the selection of servo inverters with maximum currents are also shown alongside the characteristics for continuous operation (S1). These correspond to a multiple of the motor standstill current ($2 \times I_0$ to $4 \times I_0$).

Characteristics in the Internet

You can find the torque characteristic for inverter-motor combinations on the Internet at www.lenze.de/dsc. This lists all useful combinations with the servo inverters 9400, 9300, ECS and Inverter Drives 8400 TopLine. These characteristics are each determined using the factory default settings of the inverters:

- 9400 with variables switching frequency.
This means that up to 6-fold overcurrent can be applied in borderline cases.
- 9300 and ECS with fixed switching frequency.
- 8400 TopLine with variables switching frequency.

The continuous operation characteristics (S1) show the inverter-independent motor rating values

Further information on the terms switching frequency and factory default settings can be found in the operating manual of the respective servo inverter.

MCS synchronous servo motors




General information

Dimensioning

Influence of ambient temperature and site altitude

The information relating to the servo motors in the tables and graphs is valid for a maximum ambient temperature (T_{opr}) of 40 °C and a site altitude (H) up to 1000 m above sea level. The torque correction factor (k_{M1}) shall be applied to the S1 torque characteristic ($M_0 \dots M_N$) in the event of differing installation conditions.

- The maximum permissible ambient temperature (T_{opr}) for servo motors with blowers is 40 °C

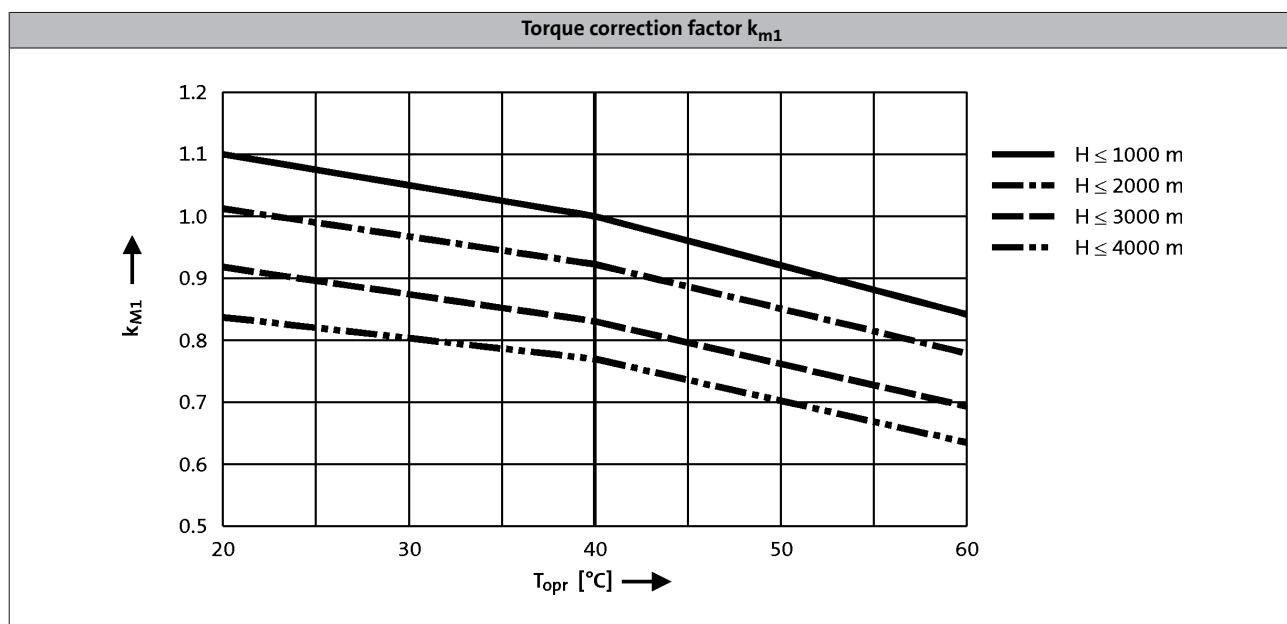

MCS synchronous servo motors

General information



MCS synchronous servo motors



Technical data

Standards and operating conditions

			MCS	
Cooling type			Naturally ventilated	Blower
Degree of protection			IP54 IP65	IP54
Temperature class			F	H
IEC/EN 60034-1; utilisation				
IEC/EN 60034-1; insulation system (enamel-insulated wire)				
Approval			cURus ¹⁾ GOST-R UkrSepro	
Max. voltage load			Pulse voltage limiting curve A	
IEC/TS 60034-25				
Smooth running			Normal class	
IEC 60072				
Linear movement			Normal class	
IEC 60072				
Concentricity			Normal class	
IEC 60072				
Mechanical ambient conditions (vibration)			3M6	
IEC/EN 60721-3-3				
Min. ambient operating temperature				
Without brake	T _{opr,min}	[°C]	-20	-15
With brake	T _{opr,min}	[°C]		-10
Max. ambient temperature for operation			40	
	T _{opr,max}	[°C]		
Max. surface temperature			140	
	T	[°C]		110
Mechanical tolerance				
Flange centring diameter			b ₂ ≤ 230 mm = j6	
			b ₂ > 230 mm = h6	
Shaft diameter			d ≤ 50 mm = k6	
			d > 50 mm = m6	
Site altitude				
Amsl	H _{max}	[m]	4000	


¹⁾ Recognized component File No. E 210321.

MCS synchronous servo motors

Technical data



Permissible radial and axial forces

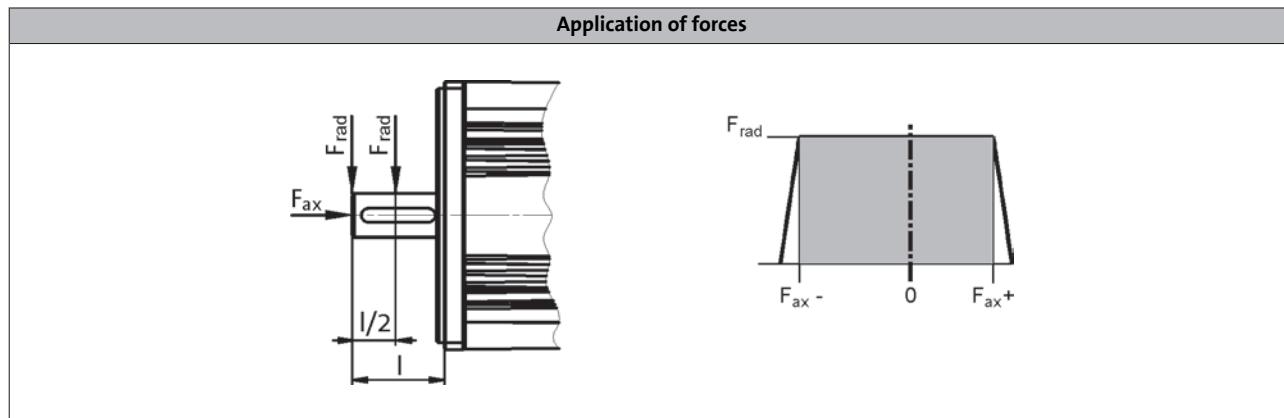

Application of force at $I/2$

Bearing service life L_{10}															
	5000 h		10000 h		20000 h		30000 h		50000 h						
	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]												
MCS06	740	-260	140	590	-210	80	470	-170	40	410	-150	30	340	-140	10
MCS09	1040	-700	470	830	-550	310	660	-440	200	580	-380	150	490	-330	90
MCS12	1030	-880	560	820	-690	370	650	-550	230	570	-490	160	480	-420	100
MCS14	1830	-1150	720	1450	-900	470	1150	-720	290	1010	-640	200	850	-550	120
MCS19	3840	-1550	950	3050	-1210	620	2430	-960	360	2120	-840	250	1790	-730	130

Application of force at I

Bearing service life L_{10}															
	5000 h		10000 h		20000 h		30000 h		50000 h						
	F_{rad} [N]	$F_{ax,-}$ [N]	$F_{ax,+}$ [N]												
MCS06	630	-210	90	500	-170	50	400	-140	20	350	-130	0	290	-120	-10
MCS09	900	-630	400	710	-500	260	570	-400	160	500	-350	120	420	-300	70
MCS12	890	-820	490		-640	320	560	-520	190	490	-460	130		-400	
MCS14	1590	-1040	610	1260	-820	390	1000	-660	230	880	-580	150	740	-510	
MCS19	3330	-1320	730	2650	-1040	450	2100	-830	240	1840	-740	140	1550	-640	40

- The values for the bearing service life L_{10} refer to an average speed of 4000 r/min. Depending on the ambient temperatures, the service life of the bearings is also reduced by the grease lifetime.

MCS synchronous servo motors



Technical data

Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS06C41-	4050	0.80	0.60	2.40	0.25	1.30	1.30	5.40	225	270
MCS06C60-	6000	0.80	0.50	2.40	0.31	2.50	2.40	10.8	135	400
MCS06F41-	4050	1.50	1.20	4.40	0.51	1.50	1.50	5.30	320	270
MCS06F60-	6000	1.50	0.90	4.40	0.57	2.90	2.50	10.5	180	400
MCS06I41-	4050	2.00	1.50	6.20	0.64	1.70	1.60	5.90	325	270
MCS06I60-	6000	2.00	1.20	6.20	0.75	3.40	2.90	11.8	190	400
MCS09D41-	4050	3.30	2.30	9.50	1.00	2.60	2.30	10.0	320	270
MCS09D60-	6000	3.30	1.80	9.50	1.10	5.30	3.80	20.0	210	400
MCS09F38-	3750	4.20	3.10	15.0	1.20	3.00	2.50	15.0	330	250
MCS09F60-	6000	4.20	2.40	15.0	1.50	6.00	4.50	30.0	230	400
MCS09H41-	4050	5.50	3.80	20.0	1.60	4.30	3.40	20.0	300	270
MCS09H60-	6000	5.50	3.00	20.0	1.90	8.50	6.00	40.0	190	400
MCS09L41-	4050	7.50	4.50	32.0	1.90	6.20	4.20	32.0	295	270
MCS09L51-	5100	7.50	3.60	32.0	1.90	12.4	6.90	64.0	180	340

	$\eta_{100\%}$ [%]	$J^1)$ [kgcm ²]	$K_E_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_{0\ 150\ ^\circ C}$ [Nm/A]	$n_{max}^2)$ [r/min]	$m^1)$ [kg]
MCS06C41-	65.0	0.14	36.6	27.1	36.5	51.0	0.66	8000	1.80
MCS06C60-	70.0	0.14	18.3	6.80	9.10	12.8	0.33	8000	1.80
MCS06F41-	77.0	0.22	60.1	21.9	29.5	63.5	1.05	8000	2.20
MCS06F60-	81.0	0.22	30.0	5.50	7.40	15.9	0.53	8000	2.20
MCS06I41-	81.0	0.30	73.4	18.8	25.4	60.2	1.21	8000	2.90
MCS06I60-	84.0	0.30	36.7	4.70	6.30	15.1	0.60	8000	2.90
MCS09D41-	87.0	1.10	71.2	7.00	9.40	25.1	1.25	7000	4.30
MCS09D60-	87.0	1.10	35.6	1.80	2.40	6.30	0.62	7000	4.30
MCS09F38-	91.0	1.50	79.8	5.20	7.00	24.6	1.40	7000	5.20
MCS09F60-	91.0	1.50	39.9	1.30	1.80	6.20	0.70	7000	5.20
MCS09H41-	91.0	1.90	75.7	3.20	4.30	16.1	1.29	7000	6.10
MCS09H60-	91.0	1.90	37.8	0.80	1.10	4.00	0.65	7000	6.10
MCS09L41-	91.0	2.80	71.7	1.80	2.40	9.90	1.21	7000	7.90
MCS09L51-	91.0	2.80	35.9	0.44	0.59	2.50	0.60	7000	7.90

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS12D20-	1950	6.40	5.50	18.0	1.10	2.70	2.60	10.0	345	130
MCS12D41-	4050	6.40	4.30	18.0	1.80	5.50	4.50	20.0	310	270
MCS12H15-	1500	11.4	10.0	29.0	1.60	4.10	3.80	12.0	300	100
MCS12H35-	3525	11.4	7.50	29.0	2.80	8.20	5.70	24.0	325	235
MCS12L20-	1950	15.0	13.5	56.0	2.80	6.20	5.90	28.0	330	130
MCS12L41-	4050	15.0	11.0	56.0	4.70	12.4	10.2	57.0	300	270
MCS14D15-	1500	11.0	9.20	29.0	1.45	5.00	4.50	17.0	305	100
MCS14D36-	3600	11.0	7.50	29.0	2.80	10.0	7.50	33.0	295	240
MCS14H15-	1500	21.0	16.0	55.0	2.50	8.50	6.60	26.0	325	100
MCS14H32-	3225	21.0	14.0	55.0	4.70	16.9	11.9	52.0	295	215
MCS14L15-	1500	28.0	23.0	77.0	3.60	12.0	9.70	37.0	315	100
MCS14L32-	3225	28.0	17.2	77.0	5.80	24.0	15.0	75.0	275	215
MCS14P14-	1350	37.0	30.0	105	4.20	12.2	10.8	46.0	340	90
MCS14P32-	3225	37.0	21.0	105	7.10	24.3	15.6	92.0	315	215

	$\eta_{100\%}$ [%]	$J^1)$ [kgcm ²]	$K_E_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_{0\ 150\ ^\circ C}$ [Nm/A]	$n_{max}^2)$ [r/min]	$m^1)$ [kg]
MCS12D20-	79.0	4.00	137	8.70	11.8	52.2	2.34	6000	6.40
MCS12D41-	84.0	4.00	68.6	2.20	2.90	13.0	1.17	6000	6.40
MCS12H15-	88.0	7.30	173	5.70	7.70	42.1	2.79	6000	9.50
MCS12H35-	91.0	7.30	86.5	1.40	1.90	10.5	1.40	6000	9.50
MCS12L20-	90.0	10.6	149	2.20	3.00	21.8	2.42	6000	12.6
MCS12L41-	91.0	10.6	74.6	0.55	0.75	5.50	1.21	6000	12.6
MCS14D15-	88.0	8.10	129	4.00	5.40	49.8	2.19	6000	10.7
MCS14D36-	92.0	8.10	64.2	1.00	1.35	12.5	1.09	6000	10.7
MCS14H15-	92.0	14.2	153	2.08	2.81	34.1	2.48	6000	15.5
MCS14H32-	93.0	14.2	76.3	0.52	0.70	8.50	1.24	6000	15.5
MCS14L15-	90.0	23.4	152	1.21	1.64	22.0	2.33	6000	20.1
MCS14L32-	93.0	23.4	76.2	0.30	0.41	5.50	1.16	6000	20.1
MCS14P14-	90.0	34.7	179	1.10	1.49	23.9	3.04	6000	24.9
MCS14P32-	93.0	34.7	89.4	0.28	0.37	6.00	1.52	6000	24.9

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS19F14-	1425	32.0	27.0	86.0	4.00	9.90	8.60	31.0	335	95
MCS19F30-	3000	32.0	21.0	86.0	6.60	19.8	14.0	63.0	300	200
MCS19J14-	1425	51.0	40.0	129	6.00	15.2	12.3	45.0	330	95
MCS19J30-	3000	51.0	29.0	129	9.10	30.5	18.5	90.0	300	200
MCS19P14-	1350	64.0	51.0	190	7.20	17.5	14.3	60.0	330	90
MCS19P30-	3000	64.0	32.0	190	10.0	34.9	19.0	120	320	200

	$\eta_{100\%}$ [%]	$J^1)$ [kgcm ²]	$KE_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_0\ 150\ ^\circ C$ [Nm/A]	$n_{max}^2)$ [r/min]	$m^1)$ [kg]
MCS19F14-	92.0	65.0	195	1.30	1.75	20.8	3.23	4000	23.0
MCS19F30-	93.0	65.0	97.2	0.32	0.44	5.20	1.62	4000	23.0
MCS19J14-	92.0	105	199	0.65	0.88	12.8	3.31	4000	30.0
MCS19J30-	93.0	105	99.5	0.16	0.22	3.20	1.65	4000	30.0
MCS19P14-	92.0	160	216	0.54	0.73	9.60	3.66	4000	40.0
MCS19P30-	93.0	160	108	0.14	0.18	2.40	1.83	4000	40.0

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 230 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS06C41L	4050	0.80	0.60	2.40	0.25	2.50	2.50	10.8	125	270
MCS06C60L	6000	0.80	0.50	2.40	0.31	4.30	4.00	18.5	85	400
MCS06F41L	4050	1.50	1.20	4.40	0.51	2.90	2.90	10.5	165	270
MCS06F60L	6000	1.50	0.90	4.40	0.57	3.80	3.40	16.5	125	400
MCS06I41L	4050	2.00	1.50	6.20	0.64	3.10	2.90	11.8	175	270
MCS06I60L	6000	2.00	1.20	6.20	0.75	4.20	3.60	16.0	150	400
MCS09D41L	4050	3.30	2.30	9.50	1.00	5.30	4.60	20.0	165	270
MCS09D60L	6000	3.30	1.80	9.50	1.10	10.3	7.00	39.0	110	400
MCS09F38L	3750	4.20	3.10	15.0	1.20	6.00	5.00	30.0	160	250
MCS09F60L	6000	4.20	2.40	15.0	1.50	10.5	7.90	53.0	125	400
MCS09H41L	4050	5.50	3.80	20.0	1.60	8.50	6.80	40.0	160	270
MCS09H60L	6000	5.50	3.00	20.0	1.90	12.0	8.00	57.0	145	400
MCS09L41L	4050	7.50	4.50	32.0	1.90	12.4	8.40	64.0	145	270

	$\eta_{100\%}$ [%]	$J^{1)}$ [kgcm ²]	$KE_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_{0\ 150\ ^\circ C}$ [Nm/A]	$n_{max}^{2)}$ [r/min]	$m^{1)}$ [kg]
MCS06C41L	65.0	0.14	21.5	6.00	8.00	12.8	0.33	8000	1.80
MCS06C60L	70.0	0.14	12.5	2.20	2.90	4.30	0.19	8000	1.80
MCS06F41L	81.0	0.22	34.5	5.50	7.40	15.9	0.62	8000	2.20
MCS06F60L	82.0	0.22	22.2	2.30	3.00	6.90	0.40	8000	2.20
MCS06I41L	81.0	0.30	38.0	4.70	6.20	15.1	0.64	8000	2.90
MCS06I60L	84.0	0.30	28.5	2.50	3.40	9.30	0.48	8000	2.90
MCS09D41L	87.0	1.10	35.6	1.80	2.40	6.30	0.62	7000	4.30
MCS09D60L	87.0	1.10	18.3	0.45	0.61	1.70	0.32	7000	4.30
MCS09F38L	90.0	1.50	39.9	1.30	1.80	6.20	0.70	7000	5.20
MCS09F60L	91.0	1.50	22.8	0.42	0.56	2.00	0.40	7000	5.20
MCS09H41L	91.0	1.90	37.8	0.80	1.10	4.00	0.65	7000	6.10
MCS09H60L	91.0	1.90	26.6	0.36	0.48	2.00	0.46	7000	6.10
MCS09L41L	91.0	2.80	35.9	0.44	0.59	2.50	0.60	7000	7.90

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Rated data, non-ventilated

► The data applies to a mains connection voltage of 3 x 230 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS12D20L	1950	6.40	5.50	18.0	1.10	5.50	5.20	20.0	175	130
MCS12D41L	4050	6.40	4.30	18.0	1.80	10.7	8.80	40.0	155	270
MCS12H15L	1500	11.4	10.0	29.0	1.60	8.20	7.80	24.0	158	100
MCS12H30L	3000	11.4	8.00	29.0	2.50	13.5	10.5	39.0	165	200
MCS12L20L	1950	15.0	13.5	56.0	2.80	12.4	11.8	57.0	165	130

	$\eta_{100\%}$ [%]	$J^{1)}$ [kgcm ²]	$KE_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_{0\ 150\ ^\circ C}$ [Nm/A]	$n_{max}^{2)}$ [r/min]	$m^{1)}$ [kg]
MCS12D20L	79.0	4.00	68.6	2.20	2.90	13.0	1.17	6000	6.40
MCS12D41L	84.0	4.00	35.0	0.55	0.75	3.40	0.60	6000	6.40
MCS12H15L	82.0	7.30	86.5	1.41	1.90	10.5	1.40	6000	9.50
MCS12H30L	87.0	7.30	53.0	0.50	0.67	4.00	0.86	6000	9.50
MCS12L20L	90.0	10.6	76.9	0.55	0.75	5.50	1.21	6000	12.6

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Rated data, forced ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS12D17-	1650	7.50	7.00	17.7	1.20	3.20	3.00	10.0	330	110
MCS12D35-	3525	7.50	6.00	17.7	2.20	6.40	5.60	20.0	300	235
MCS12H14-	1350	12.8	12.0	29.0	1.70	4.30	4.10	12.0	310	90
MCS12H34-	3375	12.8	10.5	29.0	3.70	8.50	7.50	24.0	320	225
MCS12L17-	1650	19.0	17.0	56.4	2.90	7.20	6.70	28.0	300	110
MCS12L39-	3900	19.0	14.0	56.4	5.70	14.4	11.7	57.0	295	260
MCS14D14-	1350	12.5	12.0	29.0	1.70	5.70	5.40	17.0	345	90
MCS14D30-	3000	12.5	10.5	29.0	3.30	11.4	9.70	33.0	325	200
MCS14H12-	1200	25.5	23.5	54.8	3.00	9.30	8.30	26.0	335	80
MCS14H28-	2775	25.5	20.5	54.8	6.00	18.4	15.0	52.0	325	185
MCS14L14-	1350	34.5	30.5	77.1	4.30	13.4	11.8	37.0	335	90
MCS14L30-	3000	34.5	25.5	77.1	8.00	26.7	20.8	75.0	310	200
MCS14P11-	1050	43.5	42.0	105	4.60	14.1	13.4	46.0	330	70
MCS14P26-	2625	43.5	33.0	105	9.10	28.3	21.9	92.0	325	175

	$\eta_{100\%}$ [%]	$J^1)$ [kgcm ²]	$K_E_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_{0\ 150\ ^\circ C}$ [Nm/A]	$n_{max}^2)$ [r/min]	$m^1)$ [kg]
MCS12D17-	75.0	4.00	137	8.72	11.8	52.2	2.34	6000	8.50
MCS12D35-	82.0	4.00	68.6	2.18	2.94	13.0	1.17	6000	8.50
MCS12H14-	80.0	7.30	173	5.72	7.72	42.1	2.98	6000	11.6
MCS12H34-	86.0	7.30	86.5	1.39	1.88	10.5	1.51	6000	11.6
MCS12L17-	90.0	10.6	149	2.22	2.99	21.8	2.64	6000	14.7
MCS12L39-	94.0	10.6	74.6	0.55	0.75	5.50	1.32	6000	14.7
MCS14D14-	84.0	8.10	129	4.00	5.40	49.8	2.19	6000	14.5
MCS14D30-	92.0	8.10	64.2	1.00	1.35	12.5	1.09	6000	14.5
MCS14H12-	87.0	14.2	153	2.08	2.81	34.1	2.75	6000	19.5
MCS14H28-	93.0	14.2	76.3	0.52	0.70	8.50	1.39	6000	19.5
MCS14L14-	88.0	23.4	152	1.21	1.64	22.0	2.57	6000	24.0
MCS14L30-	92.0	23.4	76.2	0.30	0.41	5.50	1.29	6000	24.0
MCS14P11-	86.0	34.7	179	1.10	1.49	23.9	3.08	6000	29.0
MCS14P26-	92.0	34.7	89.4	0.28	0.37	6.00	1.54	6000	29.0

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Rated data, forced ventilated

► The data applies to a mains connection voltage of 3 x 400 V.

	n_N [r/min]	M_0 [Nm]	M_N [Nm]	M_{max} [Nm]	P_N [kW]	I_0 [A]	I_N [A]	I_{max} [A]	$U_{N, AC}$ [V]	f_N [Hz]
MCS19F12-	1200	41.5	38.0	86.0	4.80	12.2	11.3	31.0	320	80
MCS19F29-	2850	41.5	32.5	86.0	9.70	24.5	20.1	63.0	320	190
MCS19J12-	1200	70.5	62.5	129	7.90	20.3	18.3	45.0	320	80
MCS19J29-	2850	70.5	50.5	129	15.1	40.6	31.0	90.0	315	190
MCS19P12-	1200	86.0	72.0	190	9.00	22.4	21.3	60.0	310	80
MCS19P29-	2850	86.0	53.0	190	15.8	44.7	29.5	120	315	190

	$\eta_{100\%}$ [%]	$J^1)$ [kgcm ²]	$KE_{LL\ 150\ ^\circ C}$ [V / 1000 rp]	$R_{UV\ 20\ ^\circ C}$ [Ω]	$R_{UV\ 150\ ^\circ C}$ [Ω]	L_N [mH]	$Kt_0\ 150\ ^\circ C$ [Nm/A]	$n_{max}^2)$ [r/min]	$m^1)$ [kg]
MCS19F12-	90.4	65.0	195	1.30	1.75	20.8	3.40	4000	29.0
MCS19F29-	94.7	65.0	97.2	0.32	0.44	5.20	1.69	4000	29.0
MCS19J12-	89.3	105	199	0.65	0.88	12.8	3.47	4000	36.0
MCS19J29-	92.8	105	99.5	0.16	0.22	3.20	1.74	4000	36.0
MCS19P12-	90.3	160	216	0.54	0.73	9.60	3.84	4000	46.0
MCS19P29-	93.4	160	108	0.14	0.18	2.40	1.92	4000	46.0

¹⁾ Without brake.

²⁾ Mechanically permissible maximum speed.

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
06C41-	0.6	4050	1.3	0.25	M ₀	0.8										
					M _N	0.6										
					M _{0,max}	2.4										
					M _{max}	2.4										
					n _{eto}	-										
06C60-	0.5	6000	2.4	0.31	M ₀	0.6	0.8									
					M _N	0.4	0.5									
					M _{0,max}	1.5	2.3									
					M _{max}	1.5	2.3									
					n _{eto}	-	-									
06F41-	1.2	4050	1.5	0.51	M ₀	1.5										
					M _N	1.2										
					M _{0,max}	4.4										
					M _{max}	4.4										
					n _{eto}	-										
06F60-	0.9	6000	2.5	0.57	M ₀	1.0	1.5									
					M _N	0.7	0.9									
					M _{0,max}	3.0	4.3									
					M _{max}	3.0	4.3									
					n _{eto}	-	-									
06I41-	1.5	4050	1.6	0.64	M ₀	2.0										
					M _N	1.5										
					M _{0,max}	6.2										
					M _{max}	6.2										
					n _{eto}	-										
06I60-	1.2	6000	2.9	0.75	M ₀	1.1	1.8	2.0								
					M _N	0.8	1.2	1.2								
					M _{0,max}	3.3	5.5	6.2								
					M _{max}	3.3	5.5	6.2								
					n _{eto}	-	-	-								
09D41-	2.3	4050	2.3	1.00	M ₀	2.4	3.3									
					M _N	1.9	2.3									
					M _{0,max}	6.3	9.5									
					M _{max}	6.3	9.5									
					n _{eto}	-	-									
09D60-	1.8	6000	3.8	1.10	M ₀			3.1	3.3							
					M _N			1.8	1.8							
					M _{0,max}			8.0	9.5							
					M _{max}			8.0	9.5							
					n _{eto}			-	-							
09F38-	3.1	3750	2.5	1.20	M ₀			4.2	4.2							
					M _N			3.1	3.1							
					M _{0,max}			11.6	14.9							
					M _{max}			11.6	14.9							
					n _{eto}			-	-							

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594	
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0	
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0	
09F60-	2.4	6000	4.5	1.50	M ₀			3.5	4.2	4.2	4.2						
					M _N			2.4	2.4	2.4	2.4						
					M _{0,max}			9.8	12.0	14.4	14.9						
					M _{max}			9.8	12.0	14.4	14.9						
					n _{eto}			-	-	-	-						
09H41-	3.8	4050	3.4	1.60	M ₀			4.0	5.5	5.5							
					M _N			3.5	3.8	3.8							
					M _{0,max}			12.0	17.5	20.4							
					M _{max}			12.0	17.5	20.4							
					n _{eto}			-	-	-							
09H60-	3.0	6000	6.0	1.90	M ₀				5.5	5.5	5.5	5.5					
					M _N				3.0	3.0	3.0	3.0					
					M _{0,max}				12.5	15.8	20.1	20.4					
					M _{max}				12.5	15.8	20.1	20.4					
					n _{eto}				-	-	-	-					
09L41-	4.5	4050	4.2	1.90	M ₀				6.0	7.5	7.5						
					M _N				4.5	4.5	4.5						
					M _{0,max}				17.4	22.2	28.5						
					M _{max}				17.4	22.2	28.5						
					n _{eto}				-	-	-						
09L51-	3.6	5100	6.9	1.90	M ₀					5.3	7.0	7.5	7.5	7.5			
					M _N					3.6	3.6	3.6	3.6	3.6			
					M _{0,max}					11.9	15.5	20.9	25.8	29.7			
					M _{max}					11.9	15.5	20.9	25.8	29.7			
					n _{eto}					-	-	-	-	-			
12D20-	5.5	1950	2.6	1.10	M ₀					4.4	6.4						
					M _N					4.0	5.5						
					M _{0,max}					11.8	17.7						
					M _{max}					11.8	17.7						
					n _{eto}					-	-						
12D41-	4.3	4050	4.5	1.80	M ₀						5.9	6.4					
					M _N						4.3	4.3					
					M _{0,max}						14.7	17.7					
					M _{max}						14.7	17.7					
					n _{eto}						-	-					
12H15-	10.0	1500	3.8	1.60	M ₀						8.7	11.4					
					M _N						8.2	10.0					
					M _{0,max}						24.6	29.0					
					M _{max}						24.6	29.0					
					n _{eto}						-	-					
12H35-	7.5	3525	5.7	2.80	M ₀							7.0	11.4	11.4	11.4		
					M _N							6.6	7.5	7.5	7.5		
					M _{0,max}							20.1	25.8	29.0	29.0		
					M _{max}							20.1	25.8	29.0	29.0		
					n _{eto}							-	-	-	-		

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
12L20-	13.5	1950	5.9	2.80	M ₀			12.1	15.0	15.0						
					M _N			11.4	13.5	13.5	13.5					
					M _{0,max}			35.5	44.6	55.7	56.4					
					M _{max}			35.5	44.6	55.7	56.4					
					n _{eto}			-	-	-	-					
12L41-	11.0	4050	10.2	4.70	M ₀				10.6	14.0	15.0	15.0	15.0			
					M _N				9.5	11.0	11.0	11.0	11.0			
					M _{0,max}			24.4	31.6	41.9	50.8	56.4				
					M _{max}			24.4	31.6	41.9	50.8	56.4				
					n _{eto}			-	-	-	-	-				
14D15-	9.2	1500	4.5	1.45	M ₀			11.0	11.0							
					M _N			9.2	9.2							
					M _{0,max}			28.3	29.0							
					M _{max}			28.3	29.0							
					n _{eto}			-	-							
14D36-	7.5	3600	7.5	2.80	M ₀				9.6	11.0	11.0					
					M _N				7.5	7.5	7.5					
					M _{0,max}			20.2	25.6	29.0						
					M _{max}			20.2	25.6	29.0						
					n _{eto}			-	-	-						
14H15-	16.0	1500	6.6	2.50	M ₀			12.4	21.0	21.0	21.0					
					M _N			12.1	16.0	16.0	16.0					
					M _{0,max}			37.1	46.6	54.8	54.8					
					M _{max}			37.1	46.6	54.8	54.8					
					n _{eto}			-	-	-	-					
14H32-	14.0	3225	11.9	4.70	M ₀					14.4	20.3	21.0	21.0			
					M _N					13.6	14.0	14.0	14.0			
					M _{0,max}					33.0	43.9	53.2	54.8			
					M _{max}					33.0	43.9	53.2	54.8			
					n _{eto}					-	-	-	-			
14L15-	23.0	1500	9.7	3.60	M ₀				20.5	27.1	28.0					
					M _N				20.9	23.0	23.0					
					M _{0,max}				48.0	61.4	77.1					
					M _{max}				48.0	61.4	77.1					
					n _{eto}				-	-	-					
14L32-	17.2	3225	15.0	5.80	M ₀						19.0	24.0	28.0	28.0	28.0	
					M _N						17.2	17.2	17.2	17.2	17.2	
					M _{0,max}						45.0	55.3	63.9	77.1	77.1	
					M _{max}						45.0	55.3	63.9	77.1	77.1	
					n _{eto}						-	-	-	-	-	
14P14-	30.0	1350	10.8	4.20	M ₀				26.7	35.2	37.0	37.0				
					M _N				24.4	30.0	30.0	30.0				
					M _{0,max}				56.1	71.7	93.3	105.1				
					M _{max}				56.1	71.7	93.3	105.1				
					n _{eto}				-	-	-	-				

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594		
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0		
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0		
					I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0		
					M ₀					24.8	31.4	37.0	37.0	37.0	37.0	37.0		
					M _N					21.0	21.0	21.0	21.0	21.0	21.0	21.0		
					M _{0,max}					52.5	64.6	74.7	92.2	105.1				
					M _{max}					52.5	64.6	74.7	92.2	105.1				
					n _{eto}					-	-	-	-	-	-	-		
					M ₀				28.4	32.0	32.0							
					M _N				27.0	27.0	27.0							
					M _{0,max}				62.1	78.9	86.0							
					M _{max}				62.1	78.9	86.0							
					n _{eto}				-	-	-							
					M ₀					26.3	32.0	32.0	32.0					
					M _N					21.0	21.0	21.0	21.0					
					M _{0,max}					56.6	70.2	81.6	86.0					
					M _{max}					56.6	70.2	81.6	86.0					
					n _{eto}					-	-	-	-					
					M ₀				38.9	51.0	51.0							
					M _N				37.7	40.0	40.0							
					M _{0,max}				85.0	114.4	129.0							
					M _{max}				85.0	114.4	129.0							
					n _{eto}				-	-	-							
					M ₀					27.3	34.4	49.2	51.0	51.0				
					M _N					25.6	29.0	29.0	29.0	29.0				
					M _{0,max}					60.8	75.9	88.9	112.9	129.0				
					M _{max}					60.8	75.9	88.9	112.9	129.0				
					n _{eto}					-	-	-	-	-				
					M ₀					59.6	64.0	64.0	64.0					
					M _N					51.0	51.0	51.0	51.0					
					M _{0,max}					128.4	159.9	186.6	190.0					
					M _{max}					128.4	159.9	186.6	190.0					
					n _{eto}					-	-	-	-					
					M ₀					29.9	37.8	53.9	64.0	64.0	64.0			
					M _N					27.5	32.0	32.0	32.0	32.0	32.0	32.0		
					M _{0,max}					65.7	83.6	98.5	126.6	152.5	187.2			
					M _{max}					65.7	83.6	98.5	126.6	152.5	187.2			
					n _{eto}					-	-	-	-	-	-	-	-	
14P32-	21.0	3225	15.6	7.10	M ₀													
19F14-	27.0	1425	8.6	4.00	M _N													
19F30-	21.0	3000	14.0	6.60	M _{0,max}													
19J14-	40.0	1425	12.3	6.00	M _{max}													
19J30-	29.0	3000	18.5	9.10	n _{eto}													
19P14-	51.0	1350	14.3	7.20	M ₀													
19P30-	32.0	3000	19.0	10.00	M _N													

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
					I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
					M ₀	0.6	0.8							
					M _N	0.5	0.6							
					M _{0,max}	1.5	2.3							
					M _{max}	1.5	2.3							
					n _{eto}	-	-							
06C41L	0.6	4050	2.6	0.25	M ₀		0.6	0.8	0.8					
06C60L	0.5	6000	4.0	0.31	M _N		0.4	0.5	0.5					
06F41L	1.2	4050	2.9	0.51	M _{0,max}		1.5	2.2	2.4					
06F60L	0.9	6000	3.8	0.57	M _{max}		1.5	2.2	2.4					
06I41L	1.5	4050	3.2	0.64	n _{eto}		-	-	-					
06I60L	1.2	6000	3.8	0.75	M ₀		2.0	2.0						
09D41L	2.3	4050	4.6	1.00	M _N		1.5	1.5						
09D60L	1.8	6000	7.0	1.10	M _{0,max}		5.4	6.2						
09F38L	3.1	3750	5.0	1.20	M _{max}		5.4	6.2						
09F38L	3.1	3750	5.0	1.20	n _{eto}		-	-	-	-	-	-	-	-

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



Selection tables, Servo Drives 9400 HighLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
					I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8
09F60L	2.4	6000	7.9	1.50	M ₀				3.5	4.2	4.2	4.2	4.2	
					M _N				2.4	2.4	2.4	2.4	2.4	
					M _{0,max}				7.8	9.8	12.6	14.5	15.0	
					M _{max}				7.8	9.8	12.6	14.5	15.0	
					n _{eto}				-	-	-	-	-	
09H41L	3.8	4050	6.8	1.60	M ₀				5.5	5.3	5.5	5.5		
					M _N				3.8	3.0	3.8	3.8		
					M _{0,max}				12.4	11.8	19.7	20.0		
					M _{max}				12.4	11.8	19.7	20.0		
					n _{eto}				-	-	-	-		
09H60L	3.0	6000	8.0	1.90	M ₀				4.0	5.5	5.5	5.5	5.5	
					M _N				3.0	3.8	3.0	3.0	3.0	
					M _{0,max}				9.2	15.6	15.4	18.3	20.0	
					M _{max}				9.2	15.6	15.4	18.3	20.0	
					n _{eto}				-	-	-	-	-	
09L41L	4.5	4050	8.4	1.90	M ₀				5.3	7.0	7.5	7.5	7.5	
					M _N				4.5	4.5	4.5	4.5	4.5	
					M _{0,max}				11.9	15.5	20.9	25.8	29.7	31.9
					M _{max}				11.9	15.5	20.9	25.8	29.7	31.9
					n _{eto}				-	-	-	-	-	
12D20L	5.5	1950	5.2	1.10	M ₀				5.9	6.4				
					M _N				5.3	5.5				
					M _{0,max}				14.9	17.7				
					M _{max}				14.9	17.7				
					n _{eto}				-	-				
12D41L	4.3	4050	8.8	1.80	M ₀				5.3	6.4	6.4	6.4		
					M _N				4.3	4.3	4.3	4.3		
					M _{0,max}				10.6	13.6	17.7	17.9		
					M _{max}				10.6	13.6	17.7	17.9		
					n _{eto}				-	-	-	-		
12H15L	10.0	1500	7.6	1.60	M ₀				11.4	11.4	10.0			
					M _N				10.0	10.0	11.4			
					M _{0,max}				25.8	29.0	29.0			
					M _{max}				25.8	29.0	29.0			
					n _{eto}				-	-	-			
12H30L	8.0	3000	10.5	2.50	M ₀				7.4	9.8	11.4			
					M _N				6.7	8.0	8.0			
					M _{0,max}				16.4	21.5	29.0			
					M _{max}				16.4	21.5	29.0			
					n _{eto}				-	-	-			
12L20L	13.5	1950	11.8	2.80	M ₀				10.6	14.0	15.0	15.0	15.0	
					M _N				10.1	13.3	13.5	13.5	13.5	
					M _{0,max}				24.4	31.5	41.8	50.5	56.0	
					M _{max}				24.4	31.5	41.8	50.5	56.0	
					n _{eto}				-	-	-	-	-	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
12D17-	7.0	1650	3.0	1.20	M ₀	4.4	7.3									
					M _N	4.0	7.0									
					M _{0,max}	11.8	17.7									
					M _{max}	11.8	17.7									
					n _{eto}	-	-									
12D35-	6.0	3525	5.6	2.20	M ₀			5.9	7.5							
					M _N			5.4	6.0							
					M _{0,max}			14.7	17.7							
					M _{max}			14.7	17.7							
					n _{eto}			-	-							
12H14-	12.0	1350	4.1	1.70	M ₀			8.7	12.8							
					M _N			8.2	12.0							
					M _{0,max}			24.6	29.0							
					M _{max}			24.6	29.0							
					n _{eto}			-	-							
12H34-	10.5	3375	7.5	3.70	M ₀			7.0	12.8	12.8	12.8					
					M _N			6.6	10.5	10.5	10.5					
					M _{0,max}			20.1	25.8	29.0	29.0					
					M _{max}			20.1	25.8	29.0	29.0					
					n _{eto}			-	-	-	-					
12L17-	17.0	1650	6.7	2.90	M ₀			12.1	19.0	19.0	19.0					
					M _N			11.4	17.0	17.0	17.0					
					M _{0,max}			35.5	44.6	55.7	56.4					
					M _{max}			35.5	44.6	55.7	56.4					
					n _{eto}			-	-	-	-					
12L39-	14.0	3900	11.7	5.70	M ₀			10.6	15.3	19.0	19.0	19.0				
					M _N			9.5	13.9	14.0	14.0	14.0	14.0			
					M _{0,max}			24.4	31.6	41.9	50.8	56.4				
					M _{max}			24.4	31.6	41.9	50.8	56.4				
					n _{eto}			-	-	-	-	-				
14D14-	12.0	1350	5.4	1.70	M ₀			11.0	12.5							
					M _N			11.0	12.0							
					M _{0,max}			28.3	29.0							
					M _{max}			28.3	29.0							
					n _{eto}			-	-							
14D30-	10.5	3000	9.7	3.30	M ₀			9.6	12.5	12.5						
					M _N			9.5	10.5	10.5						
					M _{0,max}			20.2	25.6	29.0						
					M _{max}			20.2	25.6	29.0						
					n _{eto}			-	-	-						
14H12-	23.5	1200	8.3	3.00	M ₀			12.4	24.1	25.5	25.5					
					M _N			12.1	23.5	23.5	23.5					
					M _{0,max}			37.1	46.6	54.8	54.8					
					M _{max}			37.1	46.6	54.8	54.8					
					n _{eto}			-	-	-	-					

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594	
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0	
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0	
14H28-	20.5	2775	15.0	6.00	M ₀					16.1	20.5	25.5	25.5				
					M _N					15.9	20.5	20.5	20.5				
					M _{0,max}					33.0	43.9	53.2	54.8				
					M _{max}					33.0	43.9	53.2	54.8				
					n _{eto}					-	-	-	-	-			
14L14-	30.5	1350	11.8	4.30	M ₀					20.5	30.0	34.5					
					M _N					20.5	30.0	30.5					
					M _{0,max}					48.0	61.4	77.1					
					M _{max}					48.0	61.4	77.1					
					n _{eto}					-	-	-					
14L30-	25.5	3000	20.8	8.00	M ₀						21.0	26.6	34.5	34.5	34.5		
					M _N						20.0	25.3	25.5	25.5	25.5		
					M _{0,max}						45.0	55.3	63.9	77.1	77.1		
					M _{max}						45.0	55.3	63.9	77.1	77.1		
					n _{eto}						-	-	-	-	-		
14P11-	42.0	1050	13.4	4.60	M ₀					26.7	36.4	43.5					
					M _N					24.4	36.4	42.0					
					M _{0,max}					56.1	71.7	93.3	105.1				
					M _{max}					56.1	71.7	93.3	105.1				
					n _{eto}					-	-	-	-	-			
14P26-	33.0	2625	21.9	9.10	M ₀						24.8	31.4	43.5	43.5	43.5		
					M _N						24.6	31.0	33.0	33.0	33.0		
					M _{0,max}						52.5	64.6	74.7	92.2	105.1		
					M _{max}						52.5	64.6	74.7	92.2	105.1		
					n _{eto}						-	-	-	-	-		
19F12-	38.0	1200	11.3	4.80	M ₀					29.9	39.5	41.5					
					M _N					29.3	38.0	38.0					
					M _{0,max}					62.1	78.9	86.0					
					M _{max}					62.1	78.9	86.0					
					n _{eto}					-	-	-					
19F29-	32.5	2850	20.1	9.70	M ₀						26.3	34.9	41.5	41.5			
					M _N						26.0	32.5	32.5	32.5			
					M _{0,max}						56.6	70.2	81.6	86.0			
					M _{max}						56.6	70.2	81.6	86.0			
					n _{eto}						-	-	-	-	-		
19J12-	62.5	1200	18.3	7.90	M ₀						56.6	70.5					
					M _N						55.7	62.5					
					M _{0,max}						114.4	129.0					
					M _{max}						114.4	129.0					
					n _{eto}						-	-					
19J29-	50.5	2850	31.0	15.10	M ₀							49.2	66.7	70.5			
					M _N							47.9	50.5	50.5			
					M _{0,max}							88.9	112.9	129.0			
					M _{max}							88.9	112.9	129.0			
					n _{eto}							-	-	-	-		

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives 9400 HighLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					E94A□□	E0024	E0034	E0044	E0074	E0094	E0134	E0174	E0244	E0324	E0474	E0594
MCS	M _N	n _N	I _N	P _N	I _N	1.9	3.1	5.0	8.8	11.7	16.3	20.6	29.4	38.4	47.0	59.0
					I _{0,max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
					I _{max}	6.0	10.0	16.0	21.0	28.0	39.0	49.5	58.8	76.8	94.0	118.0
					M ₀							79.1	86.0	86.0		
					M _N							69.6	72.0	72.0		
					M _{0,max}							159.9	186.6	190.0		
					M _{max}							159.9	186.6	190.0		
					n _{eto}							-	-	-		
					M ₀								56.5	73.9	86.0	86.0
					M _N								52.8	53.0	53.0	53.0
					M _{0,max}								98.5	126.6	152.5	187.2
					M _{max}								98.5	126.6	152.5	187.2
					n _{eto}								-	-	-	-
19P12-	72.0	1200	21.3	9.00												
19P29-	53.0	2850	29.5	15.80												

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors

Technical data



MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
MCS	M _N	n _N	I _N	P _N	I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
					I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
					M ₀	0.8	0.8	0.8	0.8	0.8		
					M _N	0.6	0.6	0.6	0.6	0.6		
					M _{0,max}	1.4	1.7	2.3	2.4	2.4		
					M _{max}	1.4	1.7	2.3	2.4	2.4		
					n _{eto}	-	-	-	-	-		
06C41-	0.6	4050	1.3	0.25	M ₀			0.8	0.8	0.8	0.8	0.8
06C60-	0.5	6000	2.4	0.31	M _N			0.5	0.5	0.5	0.5	0.5
					M _{0,max}			1.3	1.6	2.0	2.4	2.4
					M _{max}			1.3	1.6	2.0	2.4	2.4
					n _{eto}			-	-	-	-	-
06F41-	1.2	4050	1.5	0.51	M ₀	1.3	1.5	1.5	1.5	1.5		
					M _N	1.0	1.2	1.2	1.2	1.2		
					M _{0,max}	2.3	3.2	4.3	4.4	4.4		
					M _{max}	2.3	3.2	4.3	4.4	4.4		
					n _{eto}	-	-	-	-	-		
06F60-	0.9	6000	2.5	0.57	M ₀			1.2	1.5	1.5	1.5	1.5
					M _N			0.9	0.9	0.9	0.9	0.9
					M _{0,max}			2.1	3.3	4.0	4.4	4.4
					M _{max}			2.1	3.3	4.0	4.4	4.4
					n _{eto}			-	-	-	-	-
06I41-	1.5	4050	1.6	0.64	M ₀	1.6	2.0	2.0	2.0	2.0		
					M _N	1.2	1.5	1.5	1.5	1.5		
					M _{0,max}	2.9	4.0	5.3	6.2	6.2		
					M _{max}	2.9	4.0	5.3	6.2	6.2		
					n _{eto}	-	-	-	-	-		
06I60-	1.2	6000	2.9	0.75	M ₀				2.0	2.0	2.0	2.0
					M _N				1.2	1.2	1.2	1.2
					M _{0,max}				3.6	4.4	5.7	5.7
					M _{max}				3.6	4.4	5.7	5.7
					n _{eto}				-	-	-	-
09D41-	2.3	4050	2.3	1.00	M ₀	2.2	3.1	3.3	3.3	3.3	3.3	3.3
					M _N	1.7	2.3	2.3	2.3	2.3	2.3	2.3
					M _{0,max}	4.0	5.3	6.7	8.2	9.4	9.4	9.4
					M _{max}	4.0	5.3	6.7	8.2	9.4	9.4	9.4
					n _{eto}	-	-	-	-	-	-	-
09D60-	1.8	6000	3.8	1.10	M ₀				2.0	2.4	3.3	3.3
					M _N				1.5	1.8	1.8	1.8
					M _{0,max}				3.5	4.2	6.3	7.8
					M _{max}				3.5	4.2	6.3	7.8
					n _{eto}				-	-	-	-
09F38-	3.1	3750	2.5	1.20	M ₀			3.4	4.2	4.2	4.2	4.2
					M _N			3.0	3.1	3.1	3.1	3.1
					M _{0,max}			6.6	8.4	10.2	12.0	12.0
					M _{max}			6.6	8.4	10.2	12.0	12.0
					n _{eto}			-	-	-	-	-

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC					
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I_N					
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I_{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I_{max}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
								M_N					
								M_{0,max}					
								M_{max}					
								n_{eto}					
								M₀					
	</td												

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
MCS	M _N	n _N	I _N	P _N	I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
					I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
09F60-	2.4	6000	4.5	1.50	M ₀						4.2	4.2
					M _N						2.4	2.4
					M _{0,max}						7.8	9.6
					M _{max}						7.8	9.6
					n _{eto}						-	-
09H41-	3.8	4050	3.4	1.60	M ₀				4.7	5.0	5.5	5.5
					M _N			3.6	3.8	3.8	3.8	
					M _{0,max}		8.1	9.9	14.0	17.4		
					M _{max}		8.1	9.9	14.0	17.4		
					n _{eto}		-	-	-	-		
09H60-	3.0	6000	6.0	1.90	M ₀						4.4	4.5
					M _N						3.0	3.0
					M _{0,max}						7.5	9.3
					M _{max}						7.5	9.3
					n _{eto}						-	-
09L41-	4.5	4050	4.2	1.90	M ₀				3.9	4.7	7.5	7.5
					M _N			3.4	4.2	4.5	4.5	
					M _{0,max}		7.3	8.9	13.1	16.3		
					M _{max}		7.3	8.9	13.1	16.3		
					n _{eto}		-	-	-	-		
09L51-	3.6	5100	6.9	1.90	M ₀							4.2
					M _N							3.6
					M _{0,max}							8.3
					M _{max}							8.3
					n _{eto}							-
12D20-	5.5	1950	2.6	1.10	M ₀			5.7	6.4	6.4	6.4	6.4
					M _N		5.1	5.5	5.5	5.5	5.5	5.5
					M _{0,max}		9.6	12.6	15.3	17.7	17.7	17.7
					M _{max}		9.6	12.6	15.3	17.7	17.7	17.7
					n _{eto}		-	-	-	-	-	-
12D41-	4.3	4050	4.5	1.80	M ₀			3.8	4.6	6.4	6.4	6.4
					M _N		3.0	3.7	4.3	4.3	4.3	
					M _{0,max}		6.4	7.8	11.4	14.0		
					M _{max}		6.4	7.8	11.4	14.0		
					n _{eto}		-	-	-	-		
12H15-	10.0	1500	3.8	1.60	M ₀			9.2	10.9	11.4	11.4	
					M _N		8.4	10.0	10.0	10.0		
					M _{0,max}		16.4	20.0	29.0	29.0		
					M _{max}		16.4	20.0	29.0	29.0		
					n _{eto}		-	-	-	-		
12H35-	7.5	3525	5.7	2.80	M ₀						9.8	9.8
					M _N						7.5	7.5
					M _{0,max}						15.2	18.8
					M _{max}						15.2	18.8
					n _{eto}						-	-

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC	P _N	I _N	n _N	M _N	MCS
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I _N					
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I _{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I _{max}					
4.2	4.2							M ₀					
2.4	2.4							M _N					
11.1	11.4							M _{0,max}					
11.1	11.4							M _{max}					
-	-							n _{eto}					
5.5	5.5							M ₀					
3.8	3.8							M _N					
19.6	20.1							M _{0,max}					
19.6	20.1							M _{max}					
-	-							n _{eto}					
5.5	5.5							M ₀					
3.0	3.0							M _N					
11.4	11.7							M _{0,max}					
11.4	11.7							M _{max}					
-	-							n _{eto}					
7.5	7.5							M ₀					
4.5	4.5							M _N					
20.3	20.8							M _{0,max}					
20.3	20.8							M _{max}					
-	-							n _{eto}					
7.5	7.5	7.5	7.5					M ₀					
3.6	3.6	3.6	3.6					M _N					
10.8	19.1	19.1	19.1					M _{0,max}					
10.8	19.1	19.1	19.1					M _{max}					
-	-	-	-					n _{eto}					
7.5								M ₀					
3.6								M _N					
10.8								M _{0,max}					
10.8								M _{max}					
-								n _{eto}					
7.5								M ₀					
3.6								M _N					
10.8								M _{0,max}					
10.8								M _{max}					
-								n _{eto}					
6.4	6.4							M ₀					
4.3	4.3							M _N					
16.9	17.3							M _{0,max}					
16.9	17.3							M _{max}					
-	-							n _{eto}					
11.4	11.4							M ₀					
10.0	10.0							M _N					
28.3	29.0							M _{0,max}					
28.3	29.0							M _{max}					
-	-							n _{eto}					
11.4	11.4							M ₀					
7.5	7.5							M _N					
23.5	24.1							M _{0,max}					
23.5	24.1							M _{max}					
-	-							n _{eto}					

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
MCS	M _N	n _N	I _N	P _N	I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
					I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
12L20-	13.5	1950	5.9	2.80	M ₀						15.0	15.0
					M _N						13.5	13.5
					M _{0,max}						27.4	33.9
					M _{max}						27.4	33.9
					n _{eto}						-	-
12L41-	11.0	4050	10.2	4.70	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14D15-	9.2	1500	4.5	1.45	M ₀				7.0	8.5	11.0	11.0
					M _N				6.6	8.0	9.2	9.2
					M _{0,max}				13.1	16.0	22.7	28.1
					M _{max}				13.1	16.0	22.7	28.1
					n _{eto}				-	-	-	-
14D36-	7.5	3600	7.5	2.80	M ₀							8.0
					M _N							7.3
					M _{0,max}							15.2
					M _{max}							15.2
					n _{eto}							-
14H15-	16.0	1500	6.6	2.50	M ₀							17.3
					M _N							16.0
					M _{0,max}							35.3
					M _{max}							35.3
					n _{eto}							-
14H32-	14.0	3225	11.9	4.70	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14L15-	23.0	1500	9.7	3.60	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14L32-	17.2	3225	15.0	5.80	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
14P14-	30.0	1350	10.8	4.20	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC	P _N	I _N	n _N	M _N	MCS
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I _N					
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I _{0,max}					
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I _{max}					
15.0	15.0							M ₀					
13.5	13.5							M _N					
40.8	41.9							M _{0,max}					
40.8	41.9							M _{max}					
-	-							n _{eto}					
14.0	15.0	15.0	15.0	15.0				M ₀					
10.2	11.0	11.0	11.0	11.0				M _N					
22.2	30.4	35.5	35.5	35.5				M _{0,max}					
22.2	30.4	49.6	49.6	49.6				M _{max}					
-	-	-	-	-				n _{eto}					
11.0	11.0							M ₀					
9.2	9.2							M _N					
28.3	29.0							M _{0,max}					
28.3	29.0							M _{max}					
-	-							n _{eto}					
11.0	11.0	11.0	11.0					M ₀					
7.5	7.5	7.5	7.5					M _N					
18.5	25.3	29.0	29.0					M _{0,max}					
18.5	22.2	22.2	22.2					M _{max}					
-	-	-	-					n _{eto}					
21.0	21.0							M ₀					
16.0	16.0							M _N					
42.8	43.9							M _{0,max}					
42.8	43.9							M _{max}					
-	-							n _{eto}					
12.9	16.2	21.0	21.0	21.0				M ₀					
11.2	14.0	14.0	14.0	14.0				M _N					
23.2	31.7	37.1	37.1	37.1				M _{0,max}					
23.2	31.7	51.9	51.9	51.9				M _{max}					
-	-	-	-	-				n _{eto}					
27.4	28.0	28.0	28.0					M ₀					
22.5	23.0	23.0	23.0					M _N					
43.8	52.9	52.9	52.9					M _{0,max}					
43.8	60.0	73.8	73.8					M _{max}					
-	-	-	-					n _{eto}					
15.2	27.4	27.4	28.0	28.0	28.0	28.0		M ₀					
14.9	17.2	17.2	17.2	17.2	17.2	17.2		M _N					
31.3	39.7	52.9	52.9	52.9	52.9	52.9		M _{0,max}					
31.3	57.6	73.9	73.9	73.9	73.9	73.9		M _{max}					
-	-	-	-	-	-	-		n _{eto}					
32.5	37.0	37.0	37.0	37.0				M ₀					
26.4	30.0	30.0	30.0	30.0				M _N					
51.2	70.0	80.0	80.0	80.0				M _{0,max}					
51.2	70.0	105.1	105.1	105.1				M _{max}					
-	-	-	-	-				n _{eto}					

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□3714	□5514	□7514	□1124	□1524	□2224	□3024
MCS	M _N	n _N	I _N	P _N	I _N	1.3	1.8	2.4	3.2	3.9	5.9	7.3
					I _{0,max}	2.0	2.7	3.6	4.8	5.9	8.4	11.0
					I _{max}	2.6	3.6	4.8	6.4	7.8	11.8	14.6
14P32-	21.0	3225	15.6	7.10	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19F14-	27.0	1425	8.6	4.00	M ₀						23.6	
					M _N						22.9	
					M _{0,max}						45.9	
					M _{max}						45.9	
					n _{eto}						-	
19F30-	21.0	3000	14.0	6.60	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19J14-	40.0	1425	12.3	6.00	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19J30-	29.0	3000	18.5	9.10	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19P14-	51.0	1350	14.3	7.20	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							
19P30-	32.0	3000	19.0	10.00	M ₀							
					M _N							
					M _{0,max}							
					M _{max}							
					n _{eto}							

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034	E84AVTC							
9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0	I_N	7.10	P _N	I _N	n _N	M _N	MCS	
14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5	I_{0,max}							
19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0	I_{max}							
19.8	35.8	35.8	37.0	37.0	37.0	37.0		M₀							
17.5	21.0	21.0	21.0	21.0	21.0	21.0		M_N							
36.5	46.3	61.8	61.8	61.8	61.8	61.8		M_{0,max}							
36.5	67.3	86.4	86.4	86.4	86.4	86.4		M_{max}							
-	-	-	-	-	-	-		n_{eto}							
32.0	32.0	32.0	32.0					M₀							
27.0	27.0	27.0	27.0					M_N							
56.7	68.3	68.3	68.3					M_{0,max}	4.00	P _N	I _N	n _N	M _N	MCS	
56.7	77.6	86.0	86.0					M_{max}							
-	-	-	-					n_{eto}							
21.0	32.0	32.0	32.0					M₀							
19.5	21.0	21.0	21.0					M_N							
47.2	47.2	47.2	47.2					M_{0,max}		6.60	P _N	I _N	n _N	M _N	MCS
38.9	68.3	68.3	68.3					M_{max}							
-	-	-	-					n_{eto}							
43.6	51.0	51.0	51.0					M₀							
40.0	40.0	40.0	40.0					M_N							
81.1	96.0	96.0	96.0					M_{0,max}	6.00	P _N	I _N	n _N	M _N	MCS	
81.1	129.0	129.0	129.0					M_{max}							
-	-	-	-					n_{eto}							
		39.3	51.0	51.0	51.0	51.0	51.0	M₀							
		29.0	29.0	29.0	29.0	29.0	29.0	M_N		9.10	P _N	I _N	n _N	M _N	MCS
		73.6	79.5	79.5	79.5	79.5	79.5	M_{0,max}							
		110.4	127.6	127.6	127.6	127.6	127.6	M_{max}							
		-	-	-	-	-	-	n_{eto}							
47.5	64.0	64.0	64.0					M₀		7.20	P _N	I _N	n _N	M _N	MCS
46.4	51.0	51.0	51.0					M_N							
92.7	106.7	106.7	106.7					M_{0,max}							
92.7	155.5	155.5	155.5					M_{max}							
-	-	-	-					n_{eto}							
		43.1	58.7	64.0	64.0	64.0	64.0	M₀	10.00	P _N	I _N	n _N	M _N	MCS	
		32.0	32.0	32.0	32.0	32.0	32.0	M_N							
		79.2	87.6	87.6	87.6	87.6	87.6	M_{0,max}							
		118.6	144.3	144.3	144.3	144.3	144.3	M_{max}							
		-	-	-	-	-	-	n_{eto}							

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	1124	1524	2224	3024	4024	5524	7524	1134	1534	1834	2234	3034
MCS	M _N	n _N	I _N	P _N	I _N	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0
					I _{0,max}	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5
12D17-	7.0	1650	3.0	1.20	I _{max}	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0
					M ₀	7.5	7.5	7.5	7.5								
					M _N	7.0	7.0	7.0	7.0								
					M _{0,max}	12.6	15.3	17.7	17.7								
					M _{max}	12.6	15.3	17.7	17.7								
					n _{eto}	-	-	-	-								
12D35-	6.0	3525	5.6	2.20	M ₀	4.6	7.5	7.5	7.5	7.5							
					M _N	3.7	6.0	6.0	6.0	6.0							
					M _{0,max}	7.8	11.4	14.0	16.9	17.3							
					M _{max}	7.8	11.4	14.0	16.9	17.3							
					n _{eto}	-	-	-	-	-							
12H14-	12.0	1350	4.1	1.70	M ₀	8.9	10.9	12.8	12.8	12.8	12.8						
					M _N	8.5	10.3	12.0	12.0	12.0	12.0						
					M _{0,max}	16.4	20.0	29.0	29.0	28.3	29.0						
					M _{max}	16.4	20.0	29.0	29.0	28.3	29.0						
					n _{eto}	-	-	-	-	-	-						
12H34-	10.5	3375	7.5	3.70	M ₀				10.2	12.8	12.8						
					M _N				10.0	10.5	10.5						
					M _{0,max}				18.8	23.5	24.1						
					M _{max}				18.8	23.5	24.1						
					n _{eto}				-	-	-						
12L17-	17.0	1650	6.7	2.90	M ₀				18.5	19.0	19.0						
					M _N				17.0	17.0	17.0						
					M _{0,max}				33.9	40.8	41.9						
					M _{max}				33.9	40.8	41.9						
					n _{eto}				-	-	-						
12L39-	14.0	3900	11.7	5.70	M ₀					17.2	17.2	19.0	19.0	19.0			
					M _N					14.0	14.0	14.0	14.0	14.0			
					M _{0,max}					22.2	30.4	35.5	35.5	35.5			
					M _{max}					22.2	30.4	49.6	49.6	49.6			
					n _{eto}					-	-	-	-	-			
14D14-	12.0	1350	5.4	1.70	M ₀	8.5	12.5	12.5	12.5	12.5	12.5						
					M _N	8.0	12.0	12.0	12.0	12.0	12.0						
					M _{0,max}	16.0	22.7	28.1	28.3	29.0							
					M _{max}	16.0	22.7	28.1	28.3	29.0							
					n _{eto}	-	-	-	-	-	-						
14D30-	10.5	3000	9.7	3.30	M ₀				7.7	12.2	12.5	12.5	12.5				
					M _N				7.0	9.8	10.0	10.0	10.0				
					M _{0,max}				15.2	18.5	25.3	29.0	29.0				
					M _{max}				15.2	18.5	22.2	22.2	22.2				
					n _{eto}				-	-	-	-	-				
14H12-	23.5	1200	8.3	3.00	M ₀				18.0	25.5	25.5						
					M _N				17.9	23.5	23.5						
					M _{0,max}				35.3	42.8	43.9						
					M _{max}				35.3	42.8	43.9						
					n _{eto}				-	-	-						

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	1124	1524	2224	3024	4024	5524	7524	1134	1534	1834	2234	3034
MCS	M _N	n _N	I _N	P _N	I _N	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0
					I _{0,max}	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5
14H28-	20.5	2775	15.0	6.00	I _{max}	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0
14L14-	30.5	1350	11.8	4.30	M ₀						16.2	25.5	25.5				
14L30-	25.5	3000	20.8	8.00	M _N						16.1	20.5	20.5				
14P11-	42.0	1050	13.4	4.60	M _{0,max}						31.7	37.1	37.1				
14P26-	33.0	2625	21.9	9.10	M _{max}						31.7	51.9	51.9				
19F12-	38.0	1200	11.3	4.80	n _{eto}						-	-	-				
19F29-	32.5	2850	20.1	9.70	M ₀						38.9	43.5	43.5				
19J12-	62.5	1200	18.3	7.90	M _N						38.8	42.0	42.0				
19J29-	50.5	2850	31.0	15.10	M _{0,max}						70.0	80.0	80.0				
					M _{max}						70.0	105.1	105.1				
					n _{eto}						-	-	-				

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Inverter Drives 8400 TopLine

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					E84AVTC	□1124	□1524	□2224	□3024	□4024	□5524	□7524	□1134	□1534	□1834	□2234	□3034
MCS	M _N	n _N	I _N	P _N	I _N	3.2	3.9	5.9	7.3	9.5	13.0	16.5	23.5	32.0	39.0	47.0	61.0
					I _{0,max}	4.8	5.9	8.4	11.0	14.3	19.5	26.4	32.9	43.2	60.0	70.5	91.5
19P12-	72.0	1200	21.3	9.00	I _{max}	6.4	7.8	11.8	14.6	19.0	26.0	33.0	47.0	64.0	78.0	94.0	122.0
					M ₀						47.5		86.0	86.0			
					M _N						46.4		72.0	72.0			
					M _{0,max}						92.7		106.7	106.7			
					M _{max}						92.7		155.5	155.5			
					n _{eto}						-		-	-			
19P29-	53.0	2850	29.5	15.80	M ₀								58.7	86.0	86.0	86.0	
					M _N								53.0	53.0	53.0	53.0	
					M _{0,max}								87.6	87.6	87.6	87.6	
					M _{max}								144.3	144.3	144.3	144.3	
					n _{eto}								-	-	-	-	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
06C41-	0.6	4050	1.3	0.25	I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀	0.8					
					M _N	0.6					
					M _{0,max}	1.2					
					M _{max}	1.9					
					n _{eto}	2747					
06C60-	0.5	6000	2.4	0.31	M ₀	0.6	0.8				
					M _N	0.4	0.5				
					M _{0,max}	0.6	1.2				
					M _{max}	1.0	1.9				
					n _{eto}	7000	6814				
06F41-	1.2	4050	1.5	0.51	M ₀	1.5					
					M _N	1.2					
					M _{0,max}	2.0					
					M _{max}	3.6					
					n _{eto}	1902					
06F60-	0.9	6000	2.5	0.57	M ₀	1.0	1.5				
					M _N	0.7	0.9				
					M _{0,max}	1.0	2.0				
					M _{max}	1.8	3.7				
					n _{eto}	7000	4602				
06I41-	1.5	4050	1.6	0.64	M ₀	2.0	2.0				
					M _N	1.5	1.5				
					M _{0,max}	2.6	5.0				
					M _{max}	4.4	6.2				
					n _{eto}	1898	1384				
06I60-	1.2	6000	2.9	0.75	M ₀	1.2	2.0	2.0			
					M _N	0.8	1.2	1.2			
					M _{0,max}	1.3	2.6	5.2			
					M _{max}	2.2	4.7	6.2			
					n _{eto}	6407	4200	3157			
09D41-	2.3	4050	2.3	1.00	M ₀		3.3	3.3			
					M _N		2.3	2.3			
					M _{0,max}		5.0	8.8			
					M _{max}		8.0	9.4			
					n _{eto}		2361	2008			
09D60-	1.8	6000	3.8	1.10	M ₀		2.5	3.3			
					M _N		1.8	1.8			
					M _{0,max}		2.5	4.9			
					M _{max}		4.4	8.0			
					n _{eto}		7000	5217			
09F38-	3.1	3750	2.5	1.20	M ₀		4.2	4.2			
					M _N		3.1	3.1			
					M _{0,max}		6.2	10.8			
					M _{max}		9.8	14.9			
					n _{eto}		2589	1737			

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀		2.8	4.2	4.2		
					M _N		2.1	2.4	2.4		
					M _{0,max}		3.2	6.1	10.8		
					M _{max}		5.4	9.8	14.9		
					n _{eto}	7000	5906	3715			
09F60-	2.4	6000	4.5	1.50	M ₀		5.2	5.5			
09H41-	3.8	4050	3.4	1.60	M _N		3.8	3.8			
09H60-	3.0	6000	6.0	1.90	M _{0,max}		5.9	11.1			
09L41-	4.5	4050	4.2	1.90	M _{max}		9.9	17.5			
09L51-	3.6	5100	6.9	1.90	n _{eto}	3675	2231				
12D20-	5.5	1950	2.6	1.10	M ₀		4.8	7.5	5.5	5.5	
12D41-	4.3	4050	4.5	1.80	M _N		4.3	4.5	3.0	3.0	
12H15-	10.0	1500	3.8	1.60	M _{0,max}		5.2	10.3	11.0	15.5	
12H35-	7.5	3525	5.7	2.80	M _{max}		9.9	17.5	20.1	25.1	20.4
					n _{eto}	7000	5061	4375			
					M ₀		4.8	7.5	7.5	7.5	
					M _N		3.6	3.6	3.6	3.6	
					M _{0,max}		5.2	10.3	15.1	19.6	
					M _{max}		9.1	17.5	25.1	31.9	
					n _{eto}	7000	7000	5647	5647	4076	
					M ₀		4.7	6.4			
					M _N		4.2	5.5			
					M _{0,max}		4.6	9.1	17.0		
					M _{max}		8.0	15.3	17.7		
					n _{eto}	1730	1089	919			
					M ₀		4.7	6.4			
					M _N		3.8	4.3			
					M _{0,max}		4.6	8.8			
					M _{max}		7.8	14.7			
					n _{eto}	3902	2433				
					M ₀		11.2	11.4			
					M _N		10.0	10.0			
					M _{0,max}		11.9	22.6			
					M _{max}		20.1	29.0			
					n _{eto}	1220	918				
					M ₀		5.6	11.2	11.4		
					M _N		5.3	7.5	7.5		
					M _{0,max}		6.0	11.8	22.5		
					M _{max}		10.4	20.1	29.0		
					n _{eto}	3850	2838	2092			

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
12L20-	13.5	1950	5.9	2.80	M ₀			15.0	15.0		
					M _N			13.5	13.5		
					M _{0,max}			21.4	39.4		
					M _{max}			35.5	56.4		
					n _{eto}			1324	863		
12L41-	11.0	4050	10.2	4.70	M ₀			9.7	15.0	15.0	15.0
					M _N			8.6	11.0	11.0	11.0
					M _{0,max}			10.8	21.3	30.8	39.5
					M _{max}			19.0	35.5	49.6	56.4
					n _{eto}			4450	3013	2236	1907
14D15-	9.2	1500	4.5	1.45	M ₀			8.8	11.0		
					M _N			8.2	9.2		
					M _{0,max}			9.6	17.9		
					M _{max}			15.9	28.3		
					n _{eto}			1141	689		
14D36-	7.5	3600	7.5	2.80	M ₀			8.8	11.0		
					M _N			7.5	7.5		
					M _{0,max}			9.5	17.8		
					M _{max}			15.9	28.3		
					n _{eto}			2496	1614		
14H15-	16.0	1500	6.6	2.50	M ₀			19.8	21.0		
					M _N			16.0	16.0		
					M _{0,max}			22.3	41.2		
					M _{max}			37.1	54.8		
					n _{eto}			920	667		
14H32-	14.0	3225	11.9	4.70	M ₀				15.8	21.0	21.0
					M _N				14.0	14.0	14.0
					M _{0,max}				22.2	32.1	41.3
					M _{max}				37.1	51.9	54.8
					n _{eto}				1953	1471	1409
14L15-	23.0	1500	9.7	3.60	M ₀			18.7	28.0		
					M _N			19.0	23.0		
					M _{0,max}			21.9	42.1	59.9	
					M _{max}			37.6	68.5	77.1	
					n _{eto}			1284	828	767	
14L32-	17.2	3225	15.0	5.80	M ₀				14.8	19.8	23.3
					M _N				14.6	17.2	17.2
					M _{0,max}				21.8	32.4	42.2
					M _{max}				37.6	53.9	68.5
					n _{eto}				2801	2096	1757
14P14-	30.0	1350	10.8	4.20	M ₀				37.0	37.0	37.0
					M _N				30.0	30.0	30.0
					M _{0,max}				49.1	70.0	88.4
					M _{max}				80.0	105.1	105.1
					n _{eto}				710	573	573

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
14P32-	21.0	3225	15.6	7.10	I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀				19.3	25.9	30.5
					M _N				17.1	21.0	21.0
					M _{0,max}				25.4	37.9	49.3
					M _{max}				43.9	63.0	80.0
					n _{eto}				2469	1829	1495
19F14-	27.0	1425	8.6	4.00	M ₀			25.9	32.0		
					M _N			25.1	27.0		
					M _{0,max}			28.6	54.6		
					M _{max}			48.9	86.0		
					n _{eto}			1204	746		
19F30-	21.0	3000	14.0	6.60	M ₀				20.5	27.5	32.0
					M _N				19.0	21.0	21.0
					M _{0,max}				27.2	40.5	53.0
					M _{max}				47.2	68.3	86.0
					n _{eto}				2774	2033	1653
19J14-	40.0	1425	12.3	6.00	M ₀			42.6	51.0		
					M _N			40.0	40.0		
					M _{0,max}			58.9	82.8		
					M _{max}			96.0	129.0		
					n _{eto}			1063	839		
19J30-	29.0	3000	18.5	9.10	M ₀				28.4	33.4	
					M _N				26.6	29.0	
					M _{0,max}				42.6	56.9	
					M _{max}				73.8	96.0	
					n _{eto}				2850	2323	
19P14-	51.0	1350	14.3	7.20	M ₀			46.4	62.2	64.0	
					M _N			45.3	51.0	51.0	
					M _{0,max}			64.6	91.5	120.1	
					M _{max}			106.7	155.5	190.0	
					n _{eto}			1227	996	870	
19P30-	32.0	3000	19.0	10.00	M ₀				31.2	36.7	
					M _N				28.6	32.0	
					M _{0,max}				45.8	61.1	
					M _{max}				81.2	106.7	
					n _{eto}				2938	2715	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀	0.6	0.8				
					M _N	0.5	0.6				
					M _{0,max}	0.6	1.1				
					M _{max}	1.0	1.9				
					n _{eto}	6298	2835				
06C41L	0.6	4050	2.6	0.25	M ₀		0.7	0.8			
06C60L	0.5	6000	4.0	0.31	M _N		0.5	0.5			
					M _{0,max}		0.7	1.3			
					M _{max}		1.2	2.2			
					n _{eto}		7000	1149			
06F41L	1.2	4050	2.9	0.51	M ₀	1.0	1.5	1.5			
					M _N	0.8	1.2	1.2			
					M _{0,max}	1.2	2.1	3.9			
					M _{max}	1.9	3.5	4.4			
					n _{eto}	3838	2118	2831			
06F60L	0.9	6000	3.8	0.57	M ₀		1.5	1.5			
					M _N		0.9	0.9			
					M _{0,max}		1.5	2.9			
					M _{max}		2.6	4.3			
					n _{eto}		6138	3182			
06I41L	1.5	4050	3.2	0.64	M ₀	1.3	2.0	2.0			
					M _N	1.0	1.5	1.5			
					M _{0,max}	1.4	2.8	5.0			
					M _{max}	2.4	4.4	6.2			
					n _{eto}	3549	1947	2831			
06I60L	1.2	6000	3.8	0.75	M ₀		1.9	2.0			
					M _N		1.2	1.2			
					M _{0,max}		2.1	4.1			
					M _{max}		3.6	6.2			
					n _{eto}		3417	1149			
09D41L	2.3	4050	4.6	1.00	M ₀	2.5	3.3	3.3			
					M _N	2.0	2.3	2.3			
					M _{0,max}	2.5	4.9	8.8			
					M _{max}	4.4	8.0	9.5			
					n _{eto}	4091	2547	2170			
09D60L	1.8	6000	7.0	1.10	M ₀		2.6	3.3	3.3		
					M _N		1.8	1.8	1.8		
					M _{0,max}		2.6	5.0	7.1		
					M _{max}		4.5	8.1	9.5		
					n _{eto}		7000	5373	4626		
09F38L	3.1	3750	5.0	1.20	M ₀		4.2	4.2			
					M _N		3.1	3.1			
					M _{0,max}		6.1	10.8			
					M _{max}		9.8	15.0			
					n _{eto}		1149	1951			

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Non-ventilated motors

- The data applies to a mains connection voltage of 3x230V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀			3.2	4.2	4.2	4.2
					M _N			2.4	2.4	2.4	2.4
					M _{0,max}			3.6	6.8	9.6	11.9
					M _{max}			6.1	10.9	14.3	15.0
					n _{eto}			6985	3448	2612	2397
					M ₀			5.2	5.5	5.5	
					M _N			3.8	3.8	3.8	
					M _{0,max}			5.9	11.0	15.3	
					M _{max}			9.9	17.2	20.0	
					n _{eto}			1149	2138	1852	
					M ₀			3.7	5.5	5.5	5.5
					M _N			3.0	3.0	3.0	3.0
					M _{0,max}			4.1	8.0	11.5	14.5
					M _{max}			7.2	13.2	17.9	20.0
					n _{eto}			1149	4081	2984	2695
					M ₀			4.8	7.5	7.5	7.5
					M _N			4.3	4.5	4.5	4.5
					M _{0,max}			5.2	10.3	15.1	19.6
					M _{max}			9.1	17.5	25.1	31.9
					n _{eto}			4562	3243	2497	1909
					M ₀			4.7	6.4		
					M _N			4.2	5.5		
					M _{0,max}			4.6	9.0		
					M _{max}			8.0	14.9		
					n _{eto}			1878	1181		
					M ₀			4.8	6.4	6.4	
					M _N			3.9	4.3	4.3	
					M _{0,max}			4.6	9.2	13.3	
					M _{max}			8.1	15.2	17.9	
					n _{eto}			4102	2535	2187	
					M ₀			11.2	11.4		
					M _N			10.0	10.0		
					M _{0,max}			11.8	22.5		
					M _{max}			20.1	29.0		
					n _{eto}			1098	827		
					M ₀			6.8	10.7	11.4	
					M _N			6.1	8.0	8.0	
					M _{0,max}			7.2	14.3	20.9	
					M _{max}			12.7	24.3	29.0	
					n _{eto}			2831	1849	1591	
					M ₀				15.0	15.0	15.0
					M _N				13.5	13.5	13.5
					M _{0,max}				21.3	30.7	39.4
					M _{max}				35.4	49.3	56.0
					n _{eto}				1307	1004	866

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀	4.7	7.5	7.5			
					M _N	4.2	7.0	7.0			
					M _{0,max}	4.6	9.1	17.0			
					M _{max}	8.0	15.3	17.7			
					n _{eto}	1730	1089	919			
12D17-	7.0	1650	3.0	1.20	M ₀		4.7	7.5			
					M _N		3.8	6.0			
					M _{0,max}		4.6	8.8			
					M _{max}		7.8	14.7			
					n _{eto}		3902	2433			
12H14-	12.0	1350	4.1	1.70	M ₀		11.2	12.8			
					M _N		10.6	12.0			
					M _{0,max}		11.9	22.6			
					M _{max}		20.1	29.0			
					n _{eto}		1220	918			
12H34-	10.5	3375	7.5	3.70	M ₀		5.6	11.2	12.8		
					M _N		5.3	10.0	7.5		
					M _{0,max}		6.0	11.8	22.5		
					M _{max}		10.4	20.1	29.0		
					n _{eto}		3850	2838	2092		
12L17-	17.0	1650	6.7	2.90	M ₀			19.0	19.0		
					M _N			17.0	17.0		
					M _{0,max}			21.4	39.4		
					M _{max}			35.5	56.4		
					n _{eto}			1324	863		
12L39-	14.0	3900	11.7	5.70	M ₀			9.7	16.7	19.0	19.0
					M _N			8.6	14.0	14.0	14.0
					M _{0,max}			10.8	21.3	30.8	39.5
					M _{max}			19.0	35.5	49.6	56.4
					n _{eto}			4450	3013	2236	1907
14D14-	12.0	1350	5.4	1.70	M ₀		8.8	12.5			
					M _N		8.2	12.0			
					M _{0,max}		9.6	17.9			
					M _{max}		15.9	28.3			
					n _{eto}		1141	689			
14D30-	10.5	3000	9.7	3.30	M ₀			8.8	11.4		
					M _N			8.6	9.7		
					M _{0,max}			9.5	17.8		
					M _{max}			15.9	28.3		
					n _{eto}			2496	1614		
14H12-	23.5	1200	8.3	3.00	M ₀			19.8	25.5		
					M _N			19.6	23.5		
					M _{0,max}			22.3	41.2		
					M _{max}			37.1	54.8		
					n _{eto}			920	667		

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀				15.8	23.5	25.5
					M _N				15.6	20.5	20.5
					M _{0,max}				22.2	32.1	41.3
					M _{max}				37.1	51.9	54.8
					n _{eto}				1953	1471	1409
					M ₀			18.7	32.7	34.5	
					M _N			19.0	30.5	30.5	
					M _{0,max}			21.9	42.1	59.9	
					M _{max}			37.6	68.5	77.1	
					n _{eto}			1284	828	767	
					M ₀					19.8	23.3
					M _N					19.7	23.3
					M _{0,max}					32.4	42.2
					M _{max}					53.9	68.5
					n _{eto}					2096	1757
					M ₀			39.1	43.5	43.5	
					M _N			38.9	42.0	42.0	
					M _{0,max}			49.1	70.0	88.4	
					M _{max}			80.0	105.1	105.1	
					n _{eto}			710	573	573	
					M ₀					25.9	30.5
					M _N					25.6	30.1
					M _{0,max}					37.9	49.3
					M _{max}					63.0	80.0
					n _{eto}					1829	1495
					M ₀			25.9	41.5		
					M _N			25.1	38.0		
					M _{0,max}			28.6	54.6		
					M _{max}			48.9	86.0		
					n _{eto}			1204	746		
					M ₀					27.5	33.9
					M _N					27.4	32.5
					M _{0,max}					40.5	53.0
					M _{max}					68.3	86.0
					n _{eto}					2033	1653
					M ₀					59.0	69.4
					M _N					58.1	62.5
					M _{0,max}					82.8	82.8
					M _{max}					129.0	129.0
					n _{eto}					839	839
					M ₀						34.3
					M _N						32.6
					M _{0,max}						56.9
					M _{max}						96.0
					n _{eto}						2323

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Drives ECS

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 4 kHz.

					ECS□□	004C□B	008C□B	016C□B	032C□B	048C□B	064C□B
MCS	M _N	n _N	I _N	P _N	I _N	2.0	4.0	8.0	12.7	17.0	20.0
					I _{0,max}	2.3	4.6	9.1	18.1	27.2	36.3
					I _{max}	4.0	8.0	16.0	32.0	48.0	64.0
					M ₀					62.2	76.8
					M _N					57.5	67.6
					M _{0,max}					91.5	120.1
					M _{max}					155.5	190.0
					n _{eto}					996	870
					M ₀						36.7
					M _N						35.9
					M _{0,max}						61.1
					M _{max}						106.7
					n _{eto}						2715
19P12-	72.0	1200	21.3	9.00							
19P29-	53.0	2850	29.5	15.80							

- I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321-E	9322-E	9323-E	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
06C41-	0.6	4050	1.3	0.25	M ₀	0.8	0.8	0.8						
					M _N	0.6	0.6	0.6						
					M _{0,max}	1.2	1.8	2.4						
					M _{max}	1.2	1.8	2.4						
					n _{eto}	4635	2871	2019						
06C60-	0.5	6000	2.4	0.31	M ₀			0.8	0.8	0.8				
					M _N			0.5	0.5	0.5				
					M _{0,max}			1.0	1.5	2.4				
					M _{max}			1.0	1.5	2.4				
					n _{eto}			7000	7000	5368				
06F41-	1.2	4050	1.5	0.51	M ₀	1.5	1.5	1.5						
					M _N	1.2	1.2	1.2						
					M _{0,max}	2.0	3.4	4.4						
					M _{max}	2.0	3.4	4.4						
					n _{eto}	2819	1973	1562						
06F60-	0.9	6000	2.5	0.57	M ₀			1.3	1.5	1.5				
					M _N			0.9	0.9	0.9				
					M _{0,max}			1.7	3.0	4.4				
					M _{max}			1.7	3.0	4.4				
					n _{eto}			7000	5714	3773				
06I41-	1.5	4050	1.6	0.64	M ₀	1.8	2.0	2.0						
					M _N	1.4	1.5	1.5						
					M _{0,max}	2.6	4.2	6.2						
					M _{max}	2.6	4.2	6.2						
					n _{eto}	2994	1980	1384						
06I60-	1.2	6000	2.9	0.75	M ₀			1.5	2.0	2.0				
					M _N			1.0	1.2	1.2				
					M _{0,max}			2.1	3.3	5.7				
					M _{max}			2.1	3.3	5.7				
					n _{eto}			7000	5486	3414				
09D41-	2.3	4050	2.3	1.00	M ₀	3.1	3.3	3.3						
					M _N	2.3	2.3	2.3						
					M _{0,max}	4.2	6.2	9.4						
					M _{max}	4.2	6.2	9.4						
					n _{eto}	4895	2937	2008						
09D60-	1.8	6000	3.8	1.10	M ₀			2.4	3.3	3.3				
					M _N			1.8	1.8	1.8				
					M _{0,max}			3.2	5.6	9.3				
					M _{max}			3.2	5.6	9.3				
					n _{eto}			7000	7000	4492				
09F38-	3.1	3750	2.5	1.20	M ₀	3.5	4.2	4.2						
					M _N	3.1	3.1	3.1						
					M _{0,max}	5.2	7.7	12.0						
					M _{max}	5.2	7.7	12.0						
					n _{eto}	4000	3250	2173						

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321-E	9322-E	9323-E	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
09F60-	2.4	6000	4.5	1.50	M ₀				4.2	4.2				
					M _N				2.4	2.4				
					M _{0,max}				6.9	11.4				
					M _{max}				6.9	11.4				
					n _{eto}				7000	5035				
09H41-	3.8	4050	3.4	1.60	M ₀				5.0	5.5	5.5			
					M _N				3.8	3.8	3.8			
					M _{0,max}				7.5	12.5	20.1			
					M _{max}				7.5	12.5	20.1			
					n _{eto}				4250	2977	1988			
09H60-	3.0	6000	6.0	1.90	M ₀				4.5	5.5				
					M _N				3.0	3.0				
					M _{0,max}				6.7	11.7				
					M _{max}				6.7	11.7				
					n _{eto}				7000	7000				
09L41-	4.5	4050	4.2	1.90	M ₀				4.7	7.5	7.5			
					M _N				4.2	4.5	4.5			
					M _{0,max}				6.7	11.7	20.8			
					M _{max}				6.7	11.7	20.8			
					n _{eto}				4450	4154	2796			
09L51-	3.6	5100	6.9	1.90	M ₀				4.2	7.5	7.5			
					M _N				3.6	3.6	3.6			
					M _{0,max}				6.0	11.1	13.2			
					M _{max}				6.0	11.1	19.1			
					n _{eto}				7000	7000	7000			
12D20-	5.5	1950	2.6	1.10	M ₀				5.9	6.4	6.4			
					M _N				5.3	5.5	5.5			
					M _{0,max}				7.6	11.6	17.7			
					M _{max}				7.6	11.6	17.7			
					n _{eto}				1790	1358	919			
12D41-	4.3	4050	4.5	1.80	M ₀				4.6	6.4	6.4			
					M _N				3.7	4.3	4.3			
					M _{0,max}				5.9	10.1	17.3			
					M _{max}				5.9	10.1	17.3			
					n _{eto}				4344	3275	2116			
12H15-	10.0	1500	3.8	1.60	M ₀				10.9	11.4	11.4			
					M _N				10.0	10.0	10.0			
					M _{0,max}				15.1	25.8	29.0			
					M _{max}				15.1	25.8	29.0			
					n _{eto}				1676	1013	918			
12H35-	7.5	3525	5.7	2.80	M ₀				9.8	11.4				
					M _N				7.5	7.5				
					M _{0,max}				13.5	24.1				
					M _{max}				13.5	24.1				
					n _{eto}				3618	2447				

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321-E	9322-E	9323-E	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E	
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5	
12L20-	13.5	1950	5.9	2.80	M ₀				15.0	15.0					
					M _N				13.5	13.5					
					M _{0,max}				24.4	41.9					
					M _{max}				24.4	41.9					
					n _{eto}				1718	1158					
12L41-	11.0	4050	10.2	4.70	M ₀					15.0	15.0	15.0			
					M _N					11.0	11.0	11.0			
					M _{0,max}					22.8	27.0	35.5			
					M _{max}					22.8	38.5	49.6			
					n _{eto}					4287	2799	2236			
14D15-	9.2	1500	4.5	1.45	M ₀				8.5	11.0	11.0				
					M _N				8.0	9.2	9.2				
					M _{0,max}				12.1	20.2	29.0				
					M _{max}				12.1	20.2	29.0				
					n _{eto}				1437	928	676				
14D36-	7.5	3600	7.5	2.80	M ₀					7.7	11.0	11.0			
					M _N					7.0	7.5	7.5			
					M _{0,max}					10.9	19.0	22.2			
					M _{max}					10.9	19.0	29.0			
					n _{eto}					3479	2159	1593			
14H15-	16.0	1500	6.6	2.50	M ₀					17.3	21.0				
					M _N					16.0	16.0				
					M _{0,max}					25.4	43.9				
					M _{max}					25.4	43.9				
					n _{eto}					1247	800				
14H32-	14.0	3225	11.9	4.70	M ₀						16.2	21.0	21.0		
					M _N						14.0	14.0	14.0		
					M _{0,max}						23.8	28.2	37.1		
					M _{max}						23.8	40.2	51.9		
					n _{eto}						2875	1817	1471		
14L15-	23.0	1500	9.7	3.60	M ₀						28.0	28.0			
					M _N						23.0	23.0			
					M _{0,max}						45.0	52.9			
					M _{max}						45.0	73.8			
					n _{eto}						1126	788			
14L32-	17.2	3225	15.0	5.80	M ₀						15.2	27.4	28.0	28.0	
					M _N						14.9	17.2	17.2	17.2	
					M _{0,max}						23.5	28.3	37.6	52.9	
					M _{max}						23.5	41.0	53.9	73.9	
					n _{eto}						3953	2608	2096	1672	
14P14-	30.0	1350	10.8	4.20	M ₀						37.0	37.0	37.0		
					M _N						30.0	30.0	30.0		
					M _{0,max}						52.5	61.8	80.0		
					M _{max}						52.5	86.3	105.1		
					n _{eto}						998	668	573		

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Non-ventilated motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9321-E	9322-E	9323-E	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E
MCS	M _N	n _N	I _N	P _N	I _{max}	2.3	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
14P32-	21.0	3225	15.6	7.10	M ₀					19.8	35.8	37.0	37.0	
					M _N					17.5	21.0	21.0	21.0	
					M _{0,max}					27.4	33.0	43.9	61.8	
					M _{max}					27.4	47.9	63.0	86.4	
					n _{eto}					3300	2299	1829	1404	
19F14-	27.0	1425	8.6	4.00	M ₀					22.6	32.0	32.0		
					M _N					22.0	27.0	27.0		
					M _{0,max}					33.0	58.2	68.3		
					M _{max}					33.0	58.2	86.0		
					n _{eto}					1459	1056	746		
19F30-	21.0	3000	14.0	6.60	M ₀					21.0	32.0	32.0		
					M _N					19.5	21.0	21.0		
					M _{0,max}					29.2	35.2	47.2		
					M _{max}					29.2	51.5	68.3		
					n _{eto}					3352	2573	2033		
19J14-	40.0	1425	12.3	6.00	M ₀					43.6	51.0	51.0		
					M _N					40.0	40.0	40.0		
					M _{0,max}					60.8	72.4	96.0		
					M _{max}					60.8	104.5	129.0		
					n _{eto}					1376	996	839		
19J30-	29.0	3000	18.5	9.10	M ₀					39.3	51.0	51.0	51.0	
					M _N					29.0	29.0	29.0	29.0	
					M _{0,max}					36.8	50.2	72.4	79.5	
					M _{max}					55.2	73.8	104.7	127.6	
					n _{eto}					3150	2850	2162	1817	
19P14-	51.0	1350	14.3	7.20	M ₀					47.5	64.0	64.0		
					M _N					46.4	51.0	51.0		
					M _{0,max}					69.5	79.6	106.7		
					M _{max}					69.5	116.7	155.5		
					n _{eto}					1400	1187	996		
19P30-	32.0	3000	19.0	10.00	M ₀					43.1	58.7	64.0	64.0	
					M _N					32.0	32.0	32.0	32.0	
					M _{0,max}					39.6	53.9	79.6	87.6	
					M _{max}					59.3	81.2	116.9	144.3	
					n _{eto}					3000	2938	2638	2298	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E	9323-E	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E
MCS	M _N	n _N	I _N	P _N	I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
					I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
					M ₀	5.9	7.5	7.5					
					M _N	5.3	7.0	7.0					
					M _{0,max}	7.6	11.6	17.7					
					M _{max}	7.6	11.6	17.7					
					n _{eto}	1790	1358	919					
					M ₀		4.6	7.5	7.5				
					M _N		3.7	6.0	6.0				
					M _{0,max}		5.9	10.1	17.3				
					M _{max}		5.9	10.1	17.3				
					n _{eto}		4344	3275	2116				
					M ₀			10.9	12.8	12.8			
					M _N			10.3	12.0	12.0			
					M _{0,max}			15.1	25.8	29.0			
					M _{max}			15.1	25.8	29.0			
					n _{eto}			1676	1013	918			
					M ₀				9.8	12.8			
					M _N				9.6	10.5			
					M _{0,max}				13.5	24.1			
					M _{max}				13.5	24.1			
					n _{eto}				3618	2447			
					M ₀					18.5	19.0		
					M _N					17.0	17.0		
					M _{0,max}					24.4	41.9		
					M _{max}					24.4	41.9		
					n _{eto}					1718	1158		
					M ₀						17.2	19.0	
					M _N						14.0	14.0	
					M _{0,max}						22.8	27.0	
					M _{max}						22.8	38.5	
					n _{eto}						4287	2799	
					M ₀							2236	
					M _N								
					M _{0,max}								
					M _{max}								
					n _{eto}								
					M ₀						8.5	12.5	
					M _N						8.0	12.0	
					M _{0,max}						12.1	20.2	
					M _{max}						12.1	20.2	
					n _{eto}						1437	928	
					M ₀							676	
					M _N								
					M _{0,max}								
					M _{max}								
					n _{eto}								
					M ₀						7.7	12.5	
					M _N						7.0	10.0	
					M _{0,max}						10.9	19.0	
					M _{max}						10.9	19.0	
					n _{eto}						3479	2159	
					M ₀								
					M _N								
					M _{0,max}								
					M _{max}								
					n _{eto}								
					M ₀						17.3	25.5	
					M _N						17.2	23.5	
					M _{0,max}						25.4	43.9	
					M _{max}						25.4	43.9	
					n _{eto}						1247	800	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E	9323-E	9324-E	9325-E	9326-E	9327-E	9328-E	9329-E
MCS	M _N	n _N	I _N	P _N	I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
					I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
14H28-	20.5	2775	15.0	6.00	M ₀				16.2	25.5	25.5		
					M _N				16.1	20.5	20.5		
					M _{0,max}				23.8	28.2	37.1		
					M _{max}				23.8	40.2	51.9		
					n _{eto}				2875	1817	1471		
14L14-	30.5	1350	11.8	4.30	M ₀				33.4	34.5			
					M _N				30.5	30.5			
					M _{0,max}				45.0	52.9			
					M _{max}				45.0	73.8			
					n _{eto}				1126	788			
14L30-	25.5	3000	20.8	8.00	M ₀				27.4	34.5	34.5		
					M _N				25.5	25.5	25.5		
					M _{0,max}				28.3	37.6	52.9		
					M _{max}				41.0	53.9	73.9		
					n _{eto}				2608	2096	1672		
14P11-	42.0	1050	13.4	4.60	M ₀				40.1	43.5	43.5		
					M _N				40.0	42.0	42.0		
					M _{0,max}				52.5	61.8	80.0		
					M _{max}				52.5	86.3	105.1		
					n _{eto}				998	668	573		
14P26-	33.0	2625	21.9	9.10	M ₀				35.8	43.5	43.5		
					M _N				33.0	33.0	33.0		
					M _{0,max}				33.0	43.9	61.8		
					M _{max}				47.9	63.0	86.4		
					n _{eto}				2299	1829	1404		
19F12-	38.0	1200	11.3	4.80	M ₀				22.6	41.5	41.5		
					M _N				22.0	38.0	38.0		
					M _{0,max}				33.0	58.2	68.3		
					M _{max}				33.0	58.2	86.0		
					n _{eto}				1459	1056	746		
19F29-	32.5	2850	20.1	9.70	M ₀				39.9	41.5			
					M _N				32.5	32.5			
					M _{0,max}				35.2	47.2			
					M _{max}				51.5	68.3			
					n _{eto}				2573	2033			
19J12-	62.5	1200	18.3	7.90	M ₀				43.6	70.5	70.5		
					M _N				43.4	62.5	62.5		
					M _{0,max}				60.8	72.4	96.0		
					M _{max}				60.8	104.5	129.0		
					n _{eto}				1376	996	839		
19J29-	50.5	2850	31.0	15.10	M ₀				55.5	70.5	70.5		
					M _N				50.5	50.5	50.5		
					M _{0,max}				50.2	72.4	79.5		
					M _{max}				73.8	104.7	127.6		
					n _{eto}				2850	2162	1817		

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors



Technical data

Selection tables, Servo Inverter 9300

Forced ventilated IP54 motors

- The data applies to a mains connection voltage of 3 x 400 V and an inverter switching frequency of 8 kHz.

					EVS	9322-E□	9323-E□	9324-E□	9325-E□	9326-E□	9327-E□	9328-E□	9329-E□
MCS	M _N	n _N	I _N	P _N	I _N	2.5	3.9	7.0	13.0	23.5	32.0	47.0	59.0
					I _{0,max}	3.8	5.9	10.5	19.5	23.5	32.0	47.0	52.0
					I _{max}	3.8	5.9	10.5	19.5	35.3	48.0	70.5	88.5
19P12-	72.0	1200	21.3	9.00	M ₀				47.5	86.0	86.0		
					M _N				46.4	72.0	72.0		
					M _{0,max}				69.5	79.6	106.7		
					M _{max}				69.5	116.7	155.5		
					n _{eto}				1400	1187	996		
19P29-	53.0	2850	29.5	15.80	M ₀					58.7	86.0	86.0	
					M _N					53.0	53.0	53.0	
					M _{0,max}					53.9	79.6	87.6	
					M _{max}					81.2	116.9	144.3	
					n _{eto}					2938	2638	2298	

► I... [A], M... [Nm], n... [r/min], P... [kW]

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06C41- (non-ventilated)

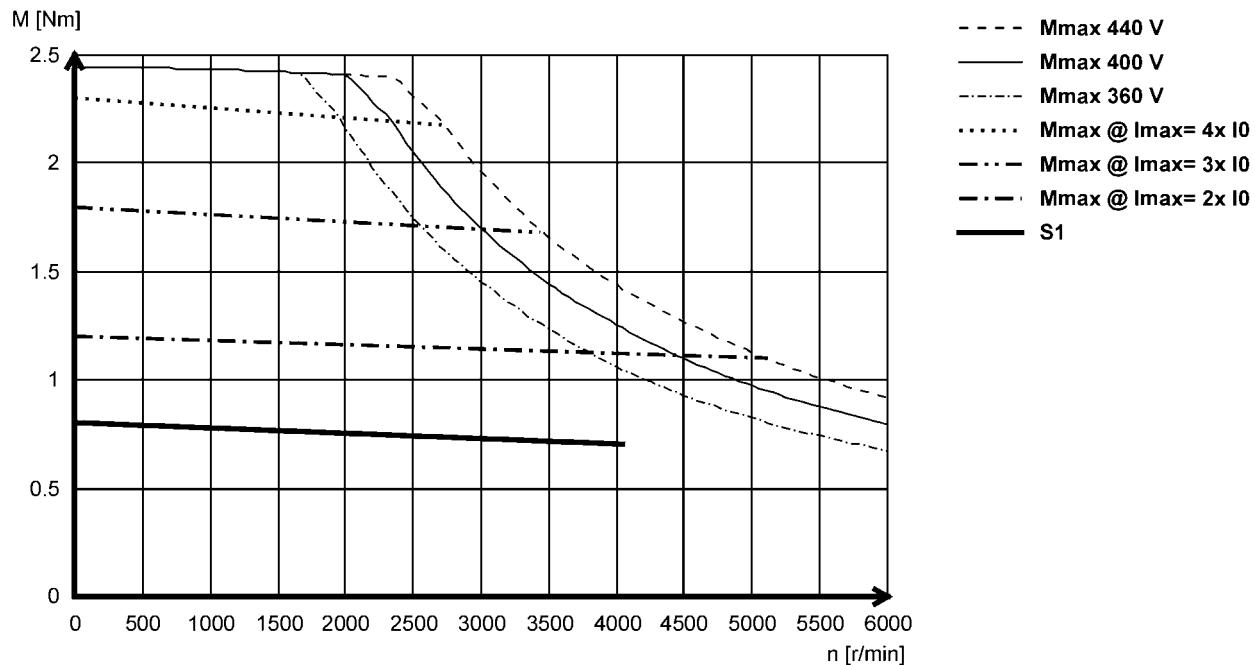

MCS06C60- (non-ventilated)

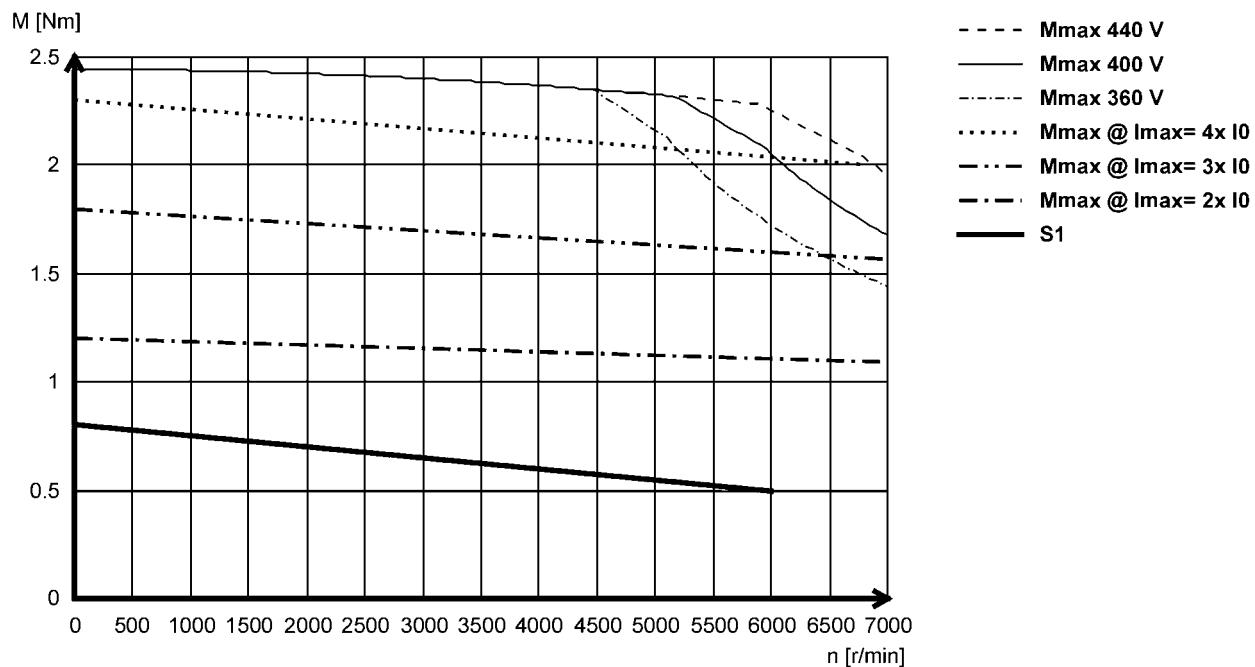

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06F41- (non-ventilated)

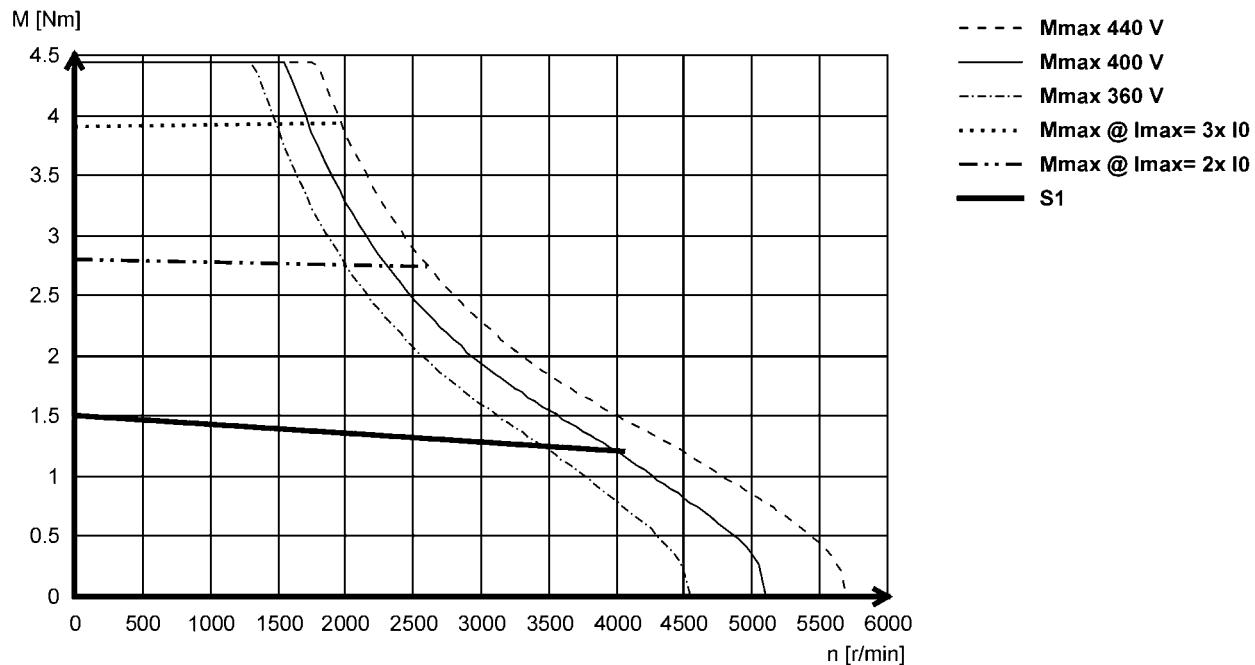

MCS06F60- (non-ventilated)

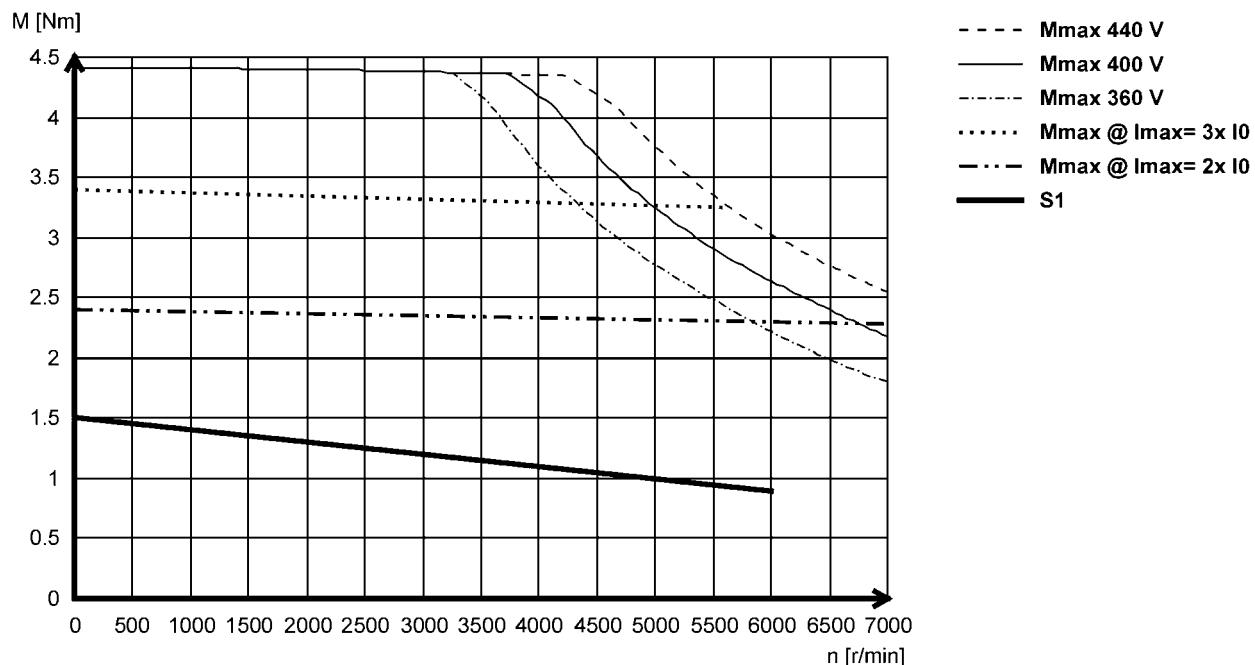

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06I41- (non-ventilated)

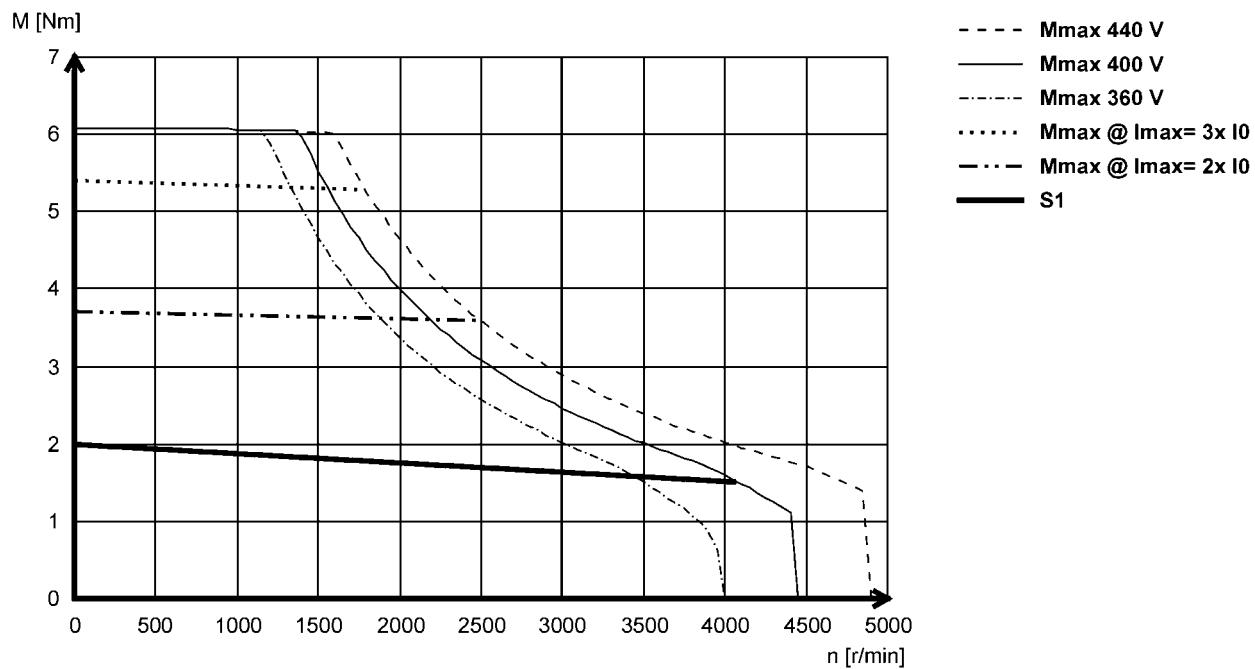

MCS06I60- (non-ventilated)

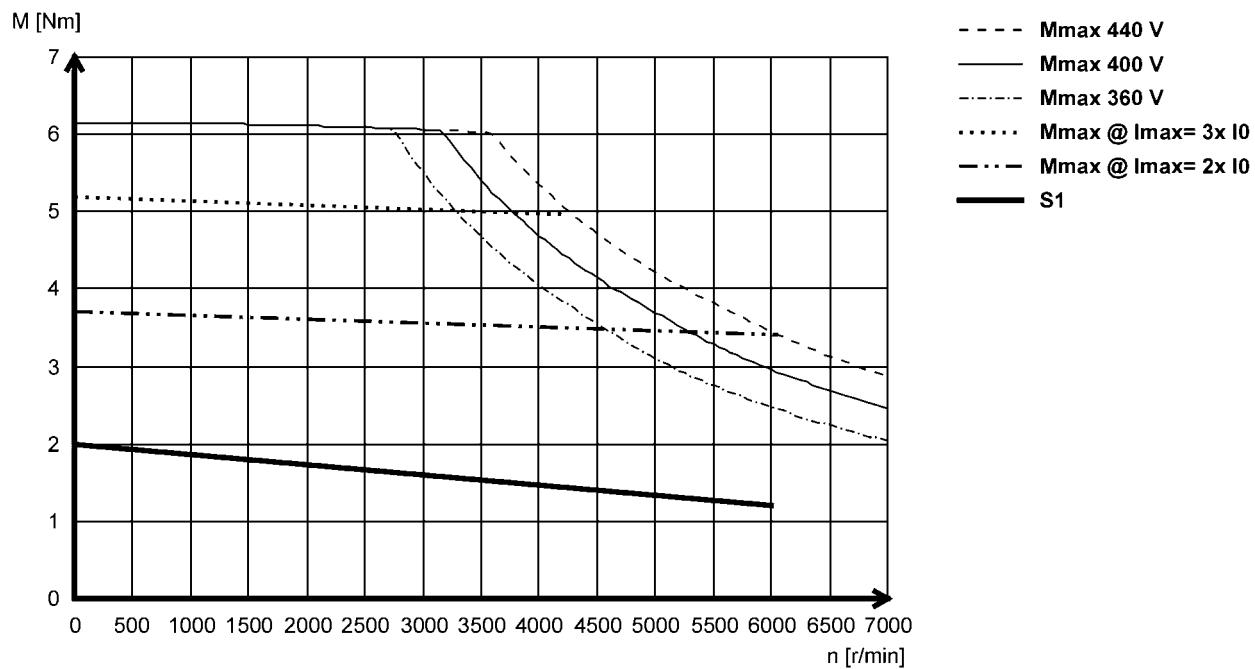

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09D41- (non-ventilated)

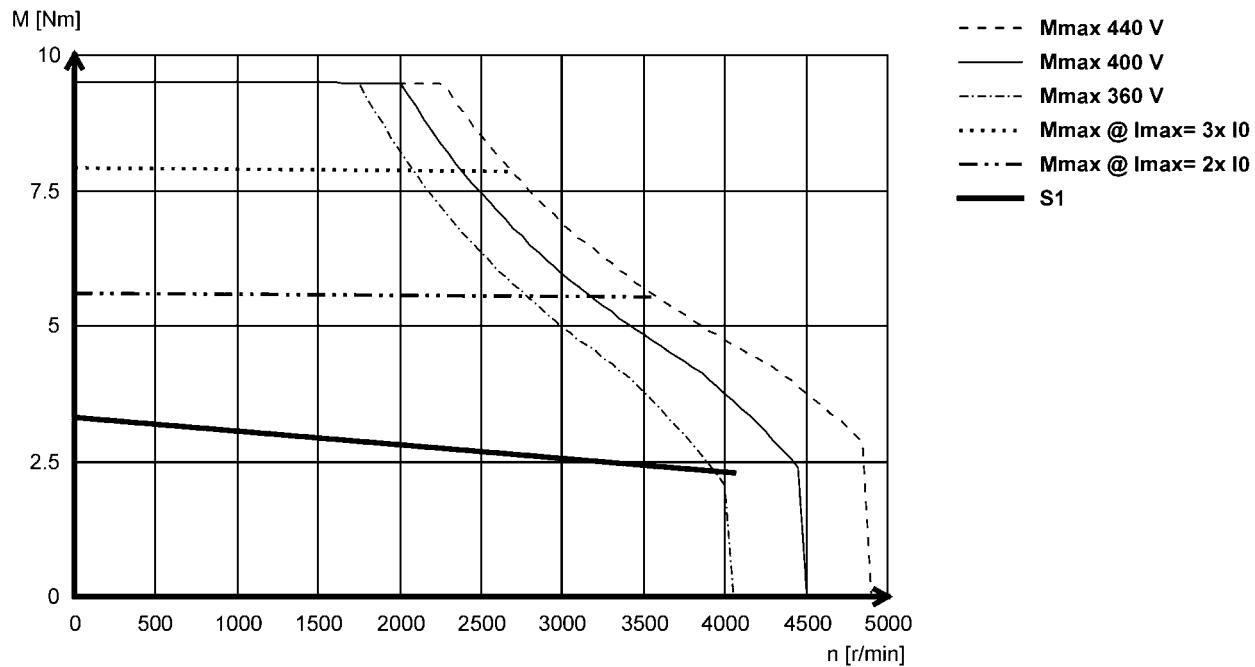

MCS09D60- (non-ventilated)

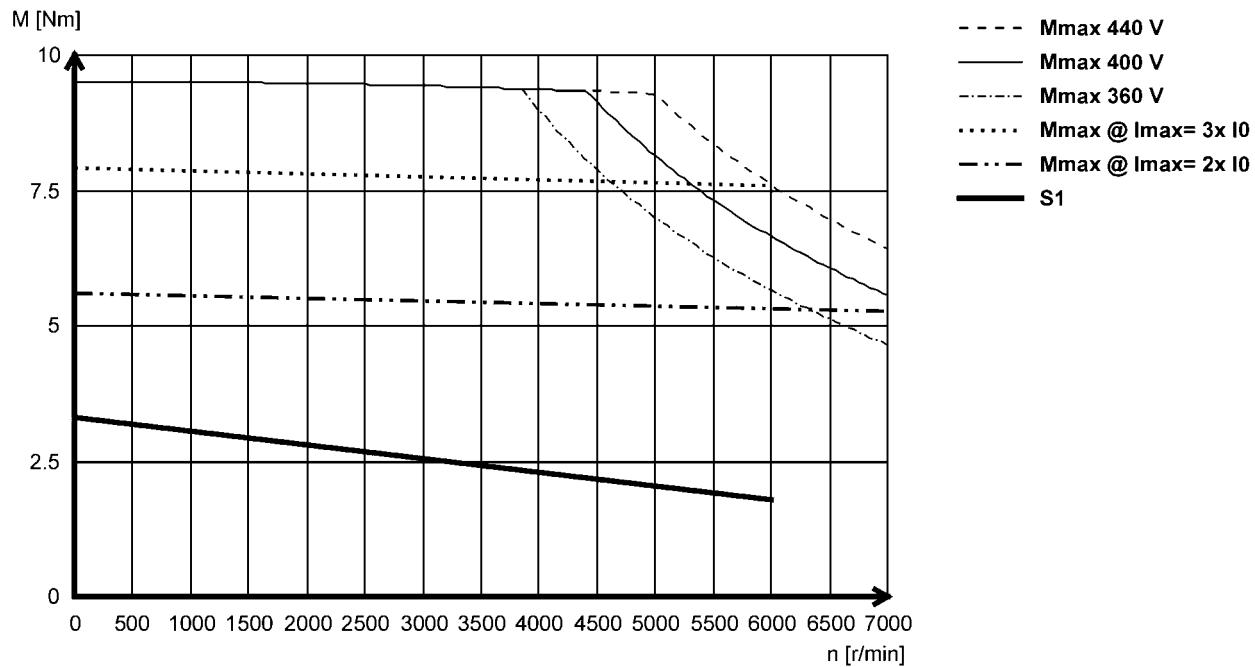

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09F38- (non-ventilated)

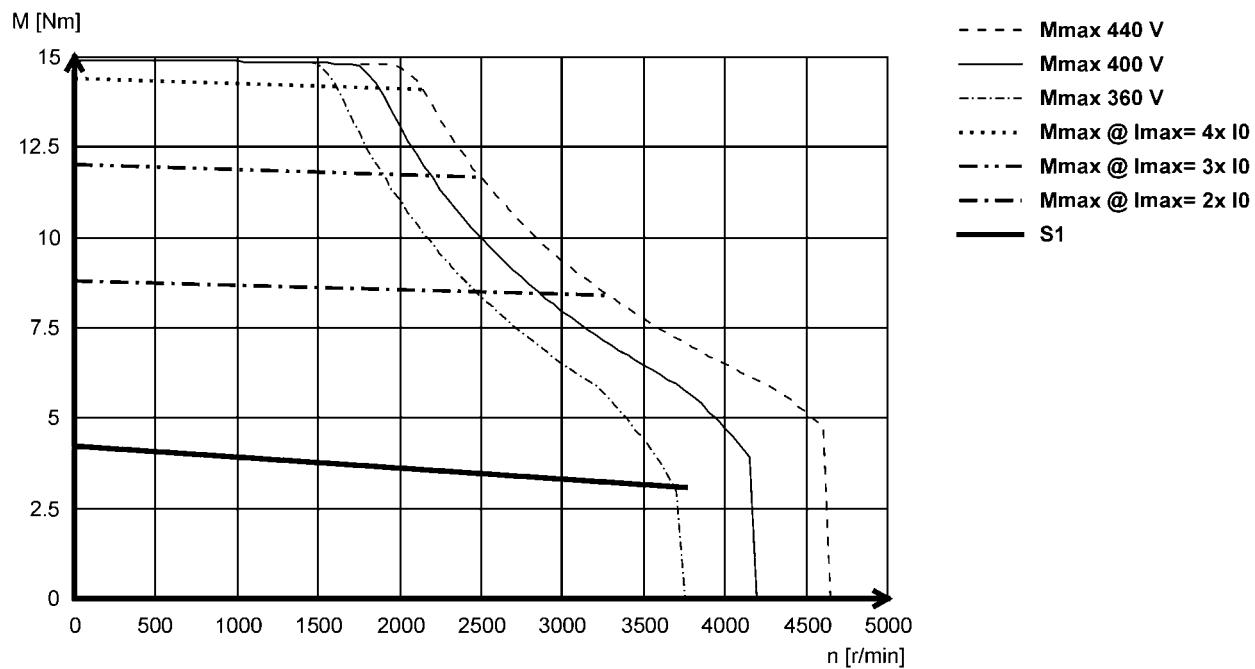

MCS09F60- (non-ventilated)

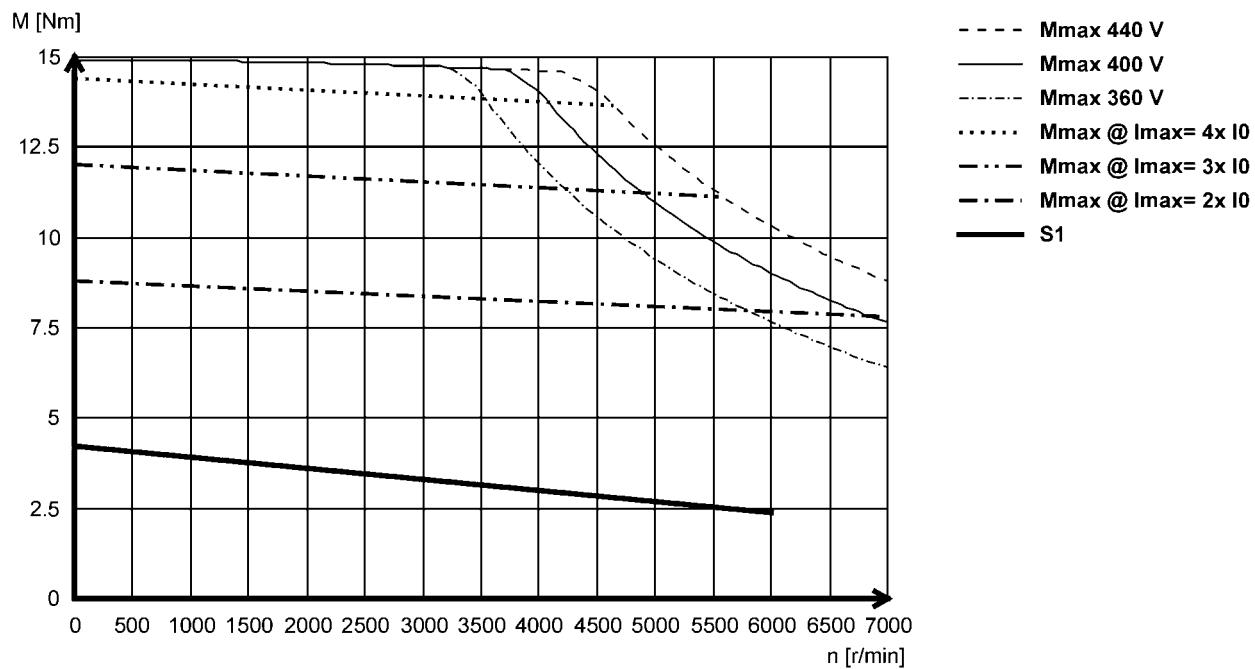

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09H41- (non-ventilated)

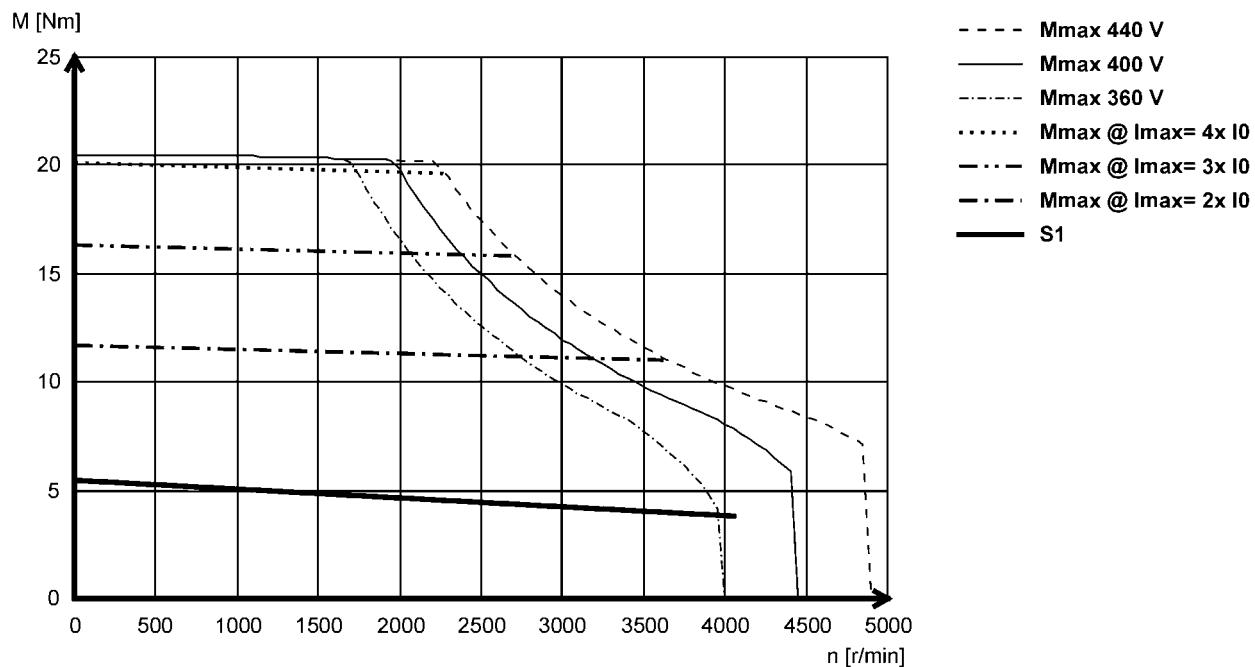

MCS09H60- (non-ventilated)

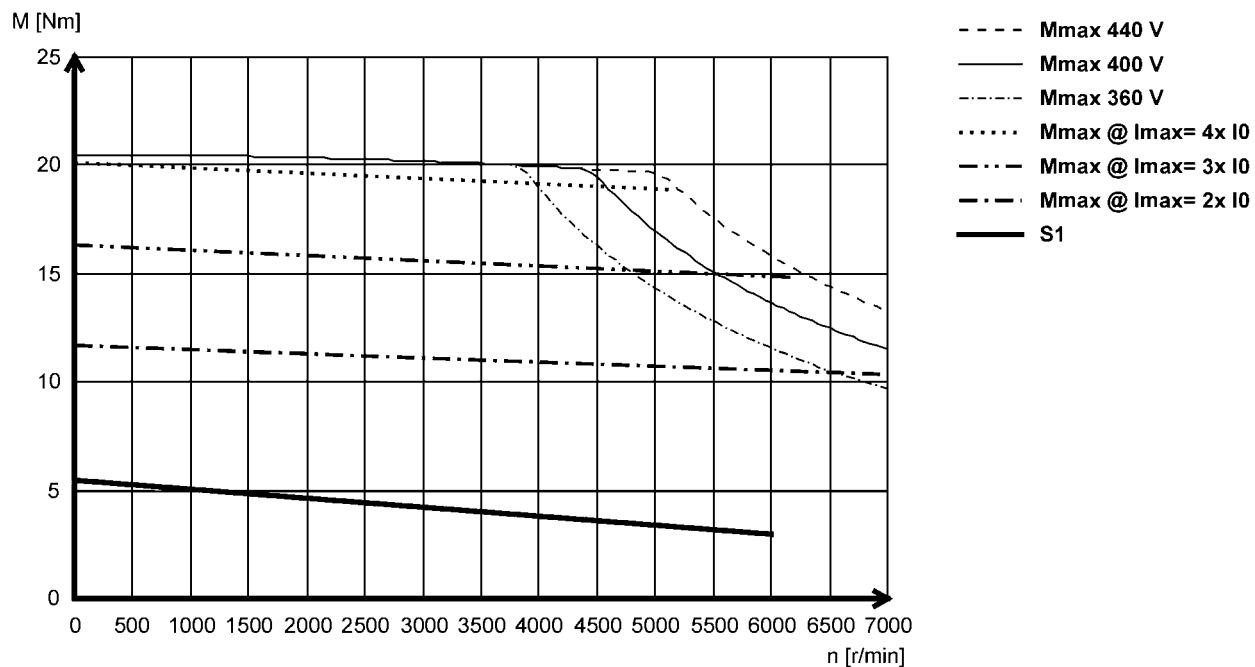

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09L41- (non-ventilated)

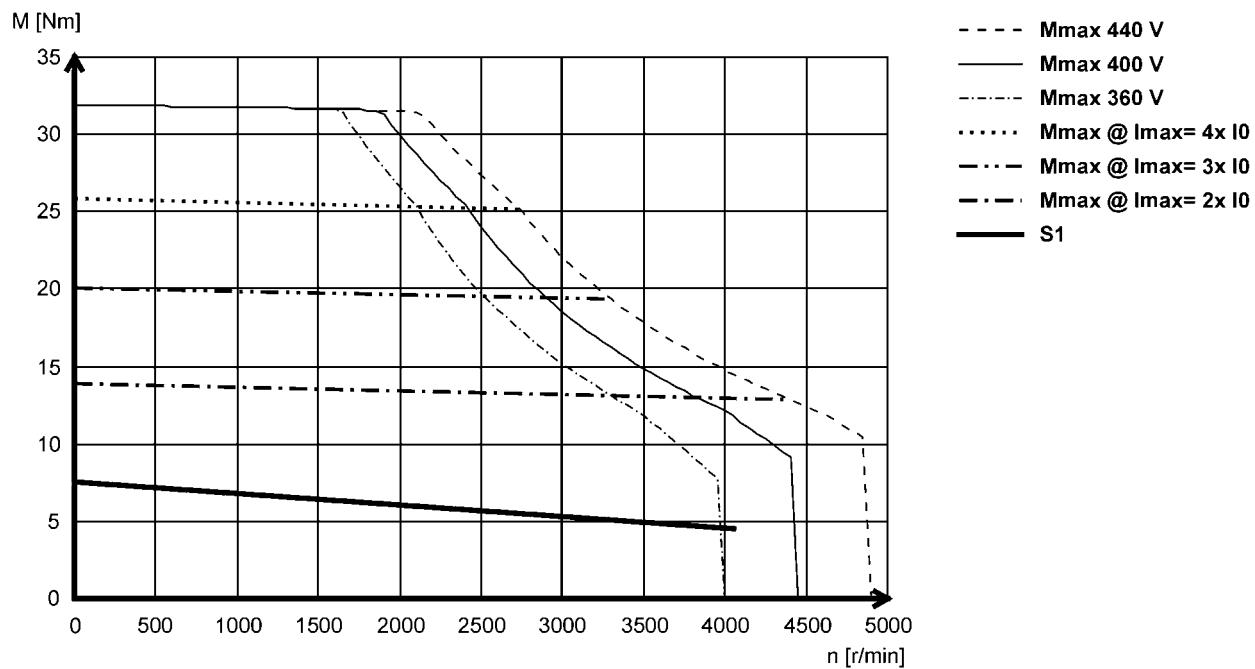

MCS09L51- (non-ventilated)

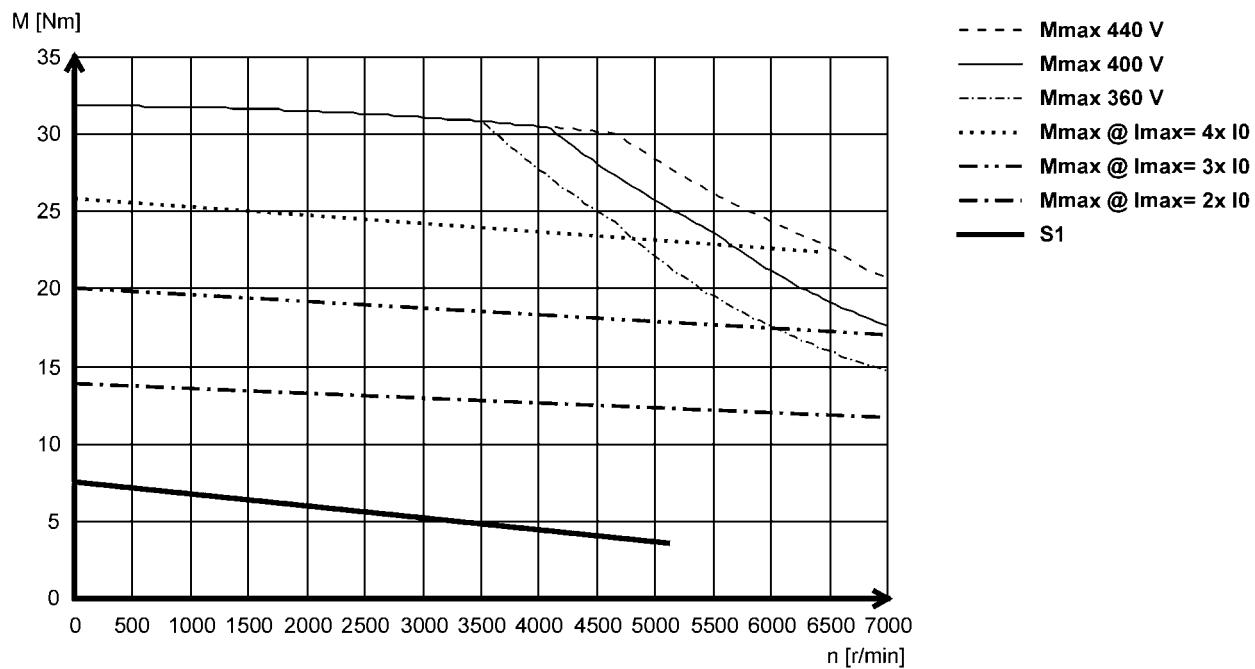

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12D17 (forced ventilated)

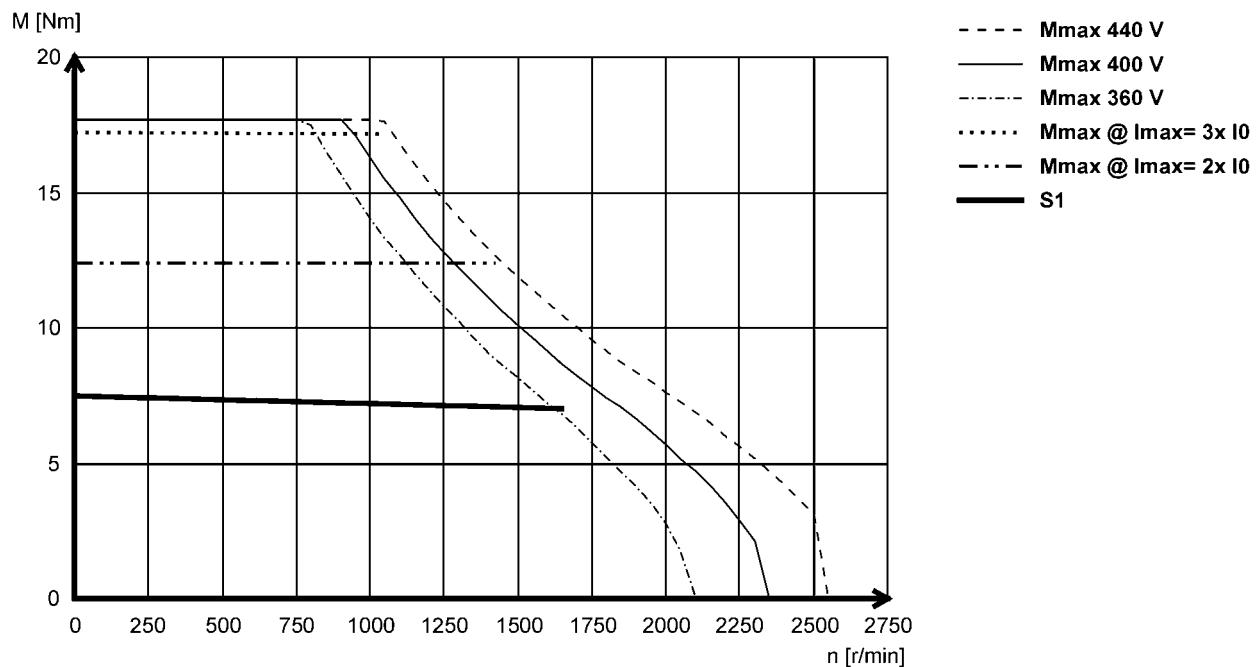

MCS12D20- (non-ventilated)

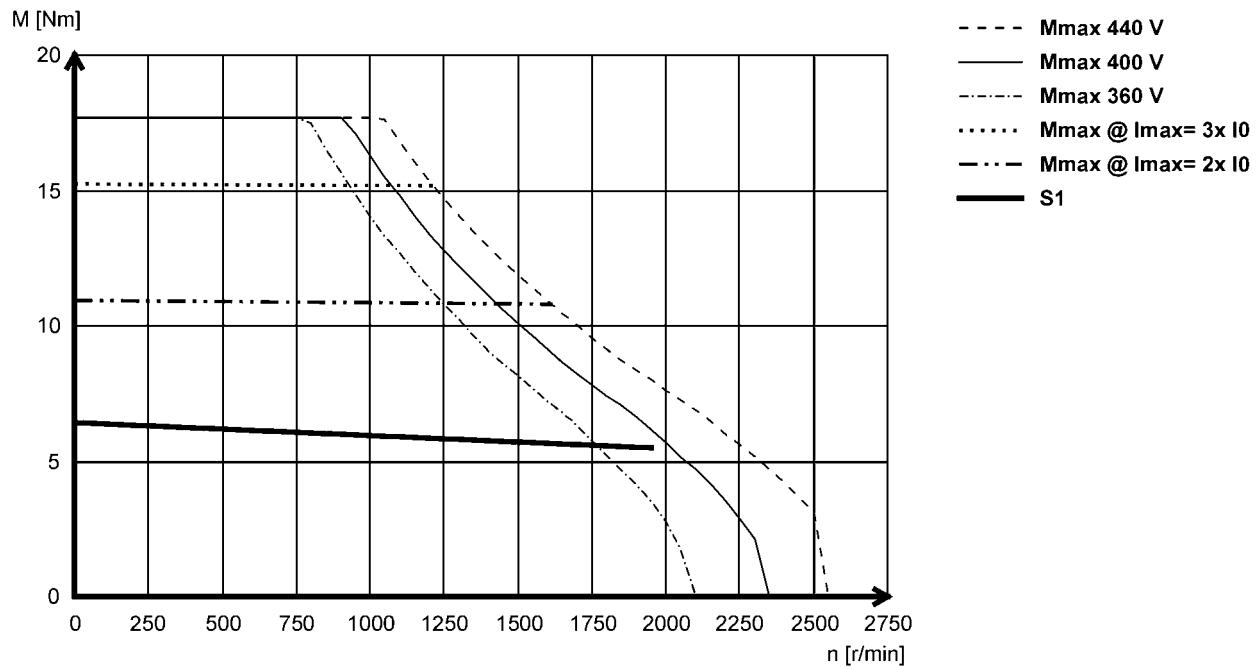

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12D35- (forced ventilated)

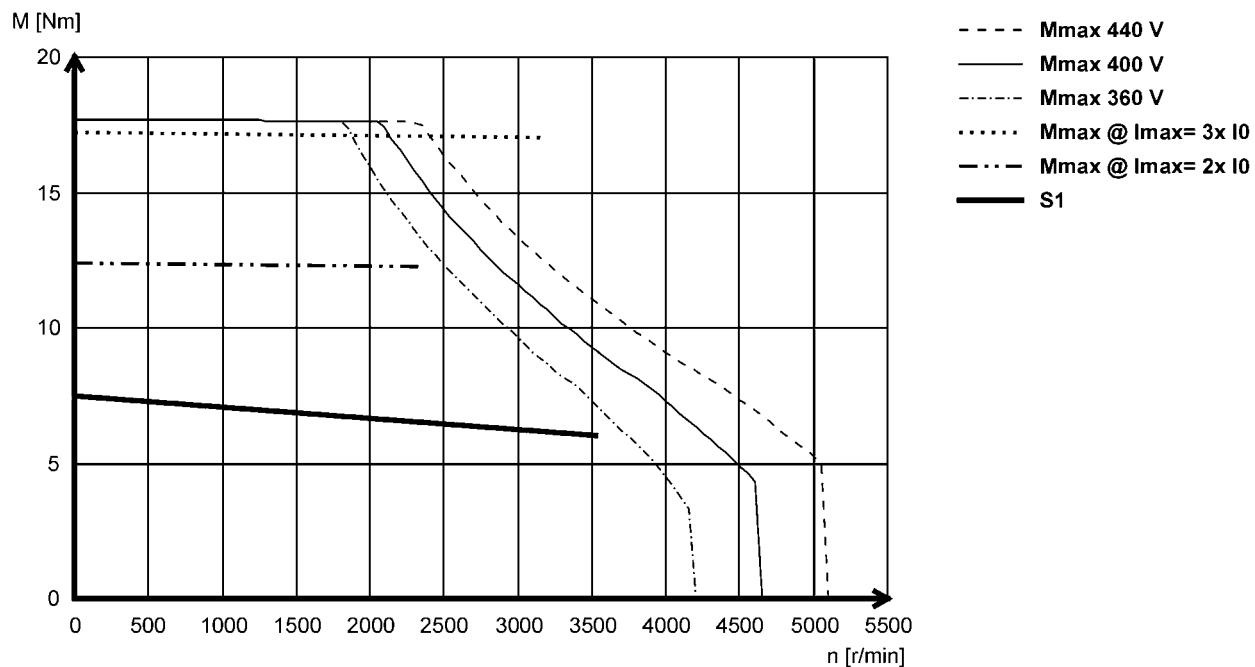

MCS12D41- (non-ventilated)

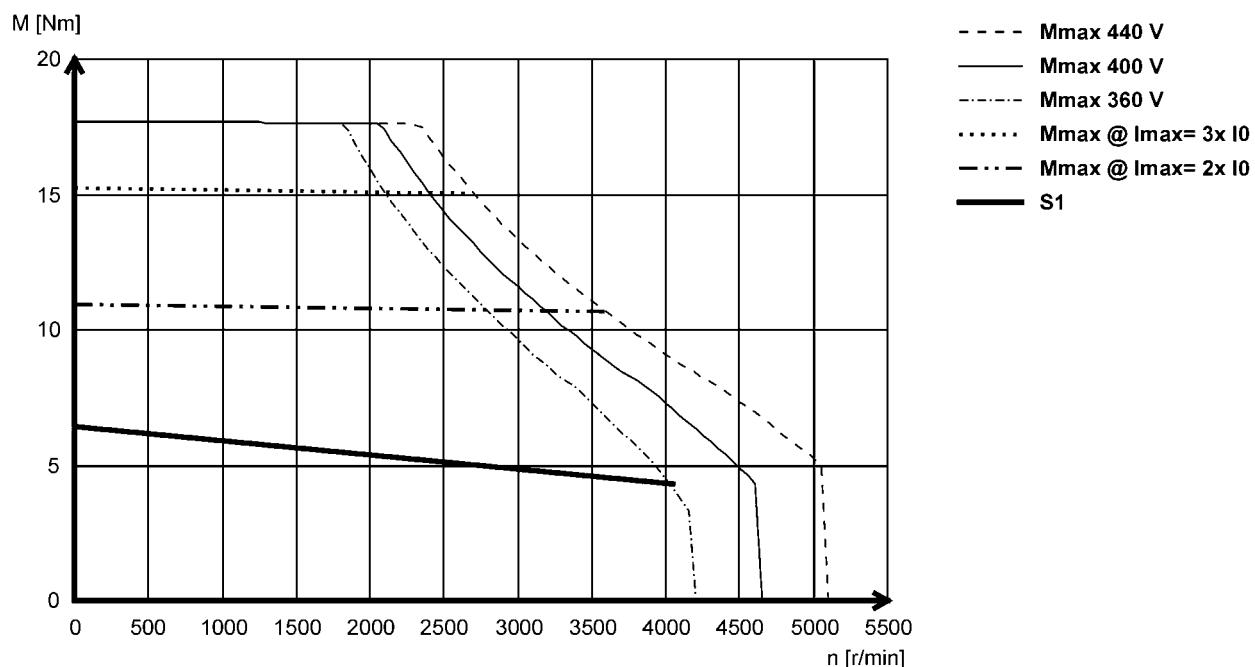

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12H14- (forced ventilated)

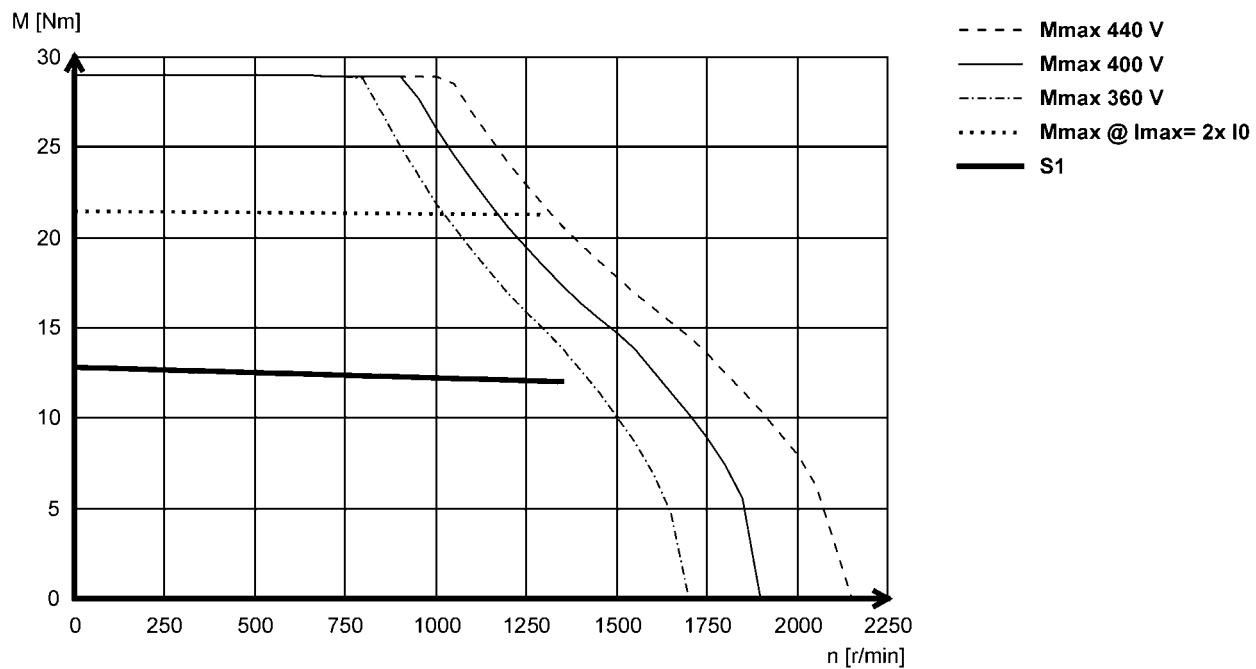

MCS12H15- (non-ventilated)

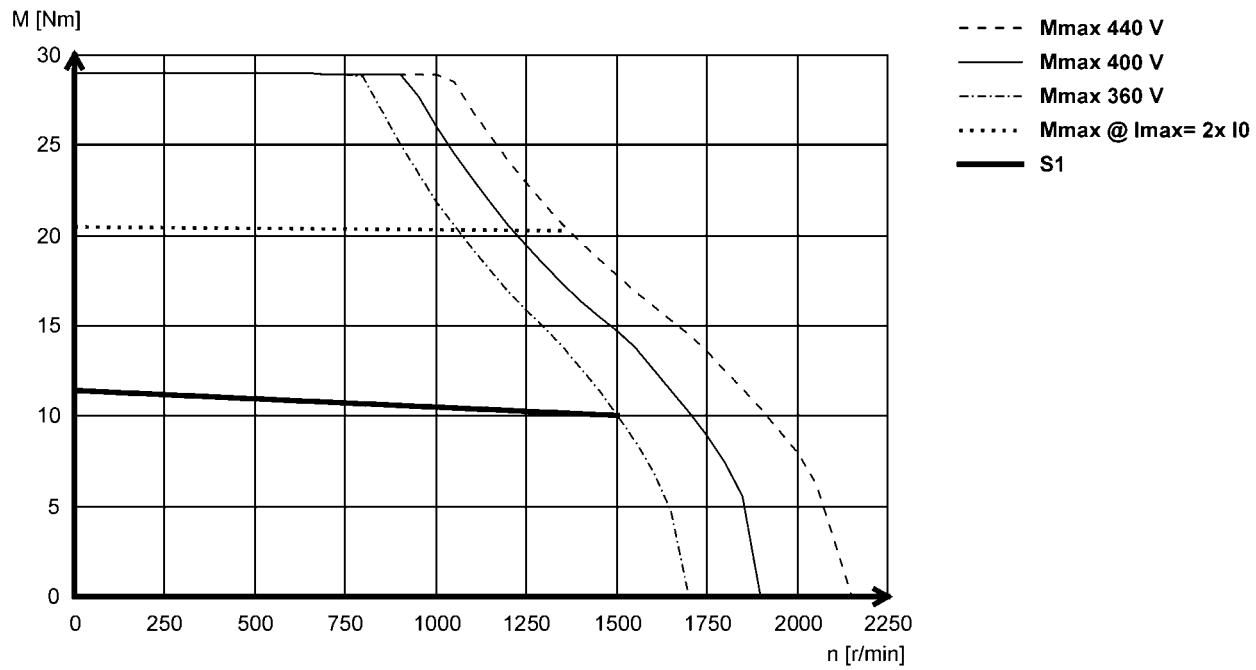

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12H34- (forced ventilated)

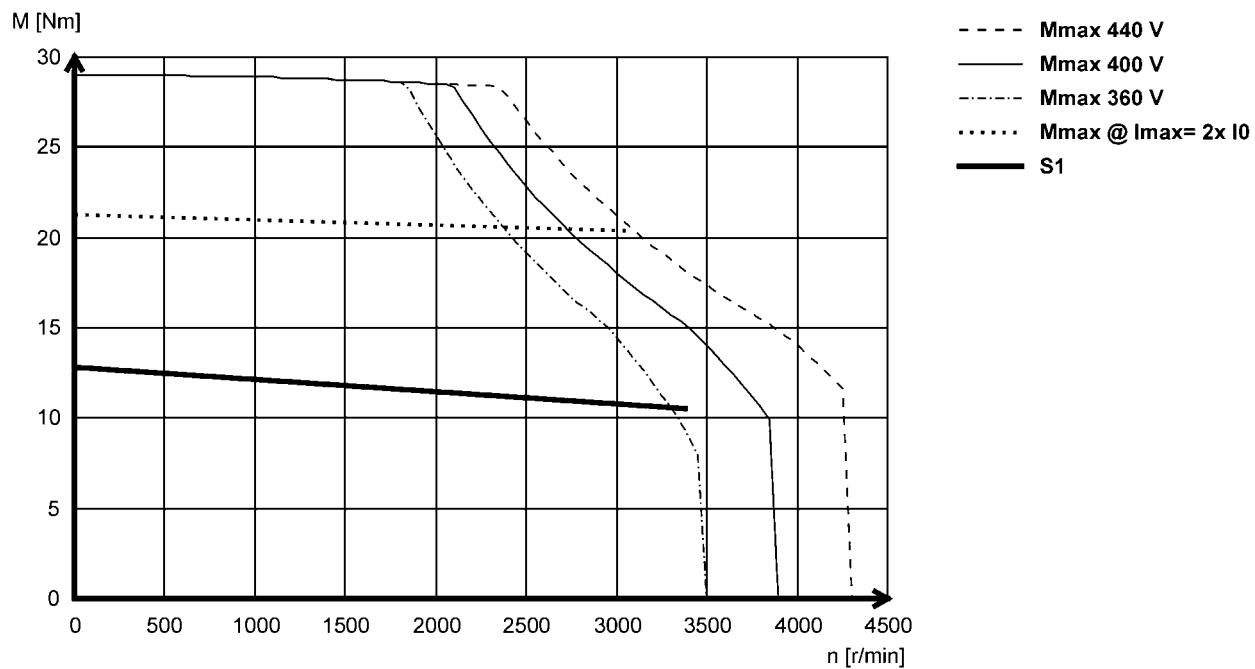

MCS12H35- (non-ventilated)

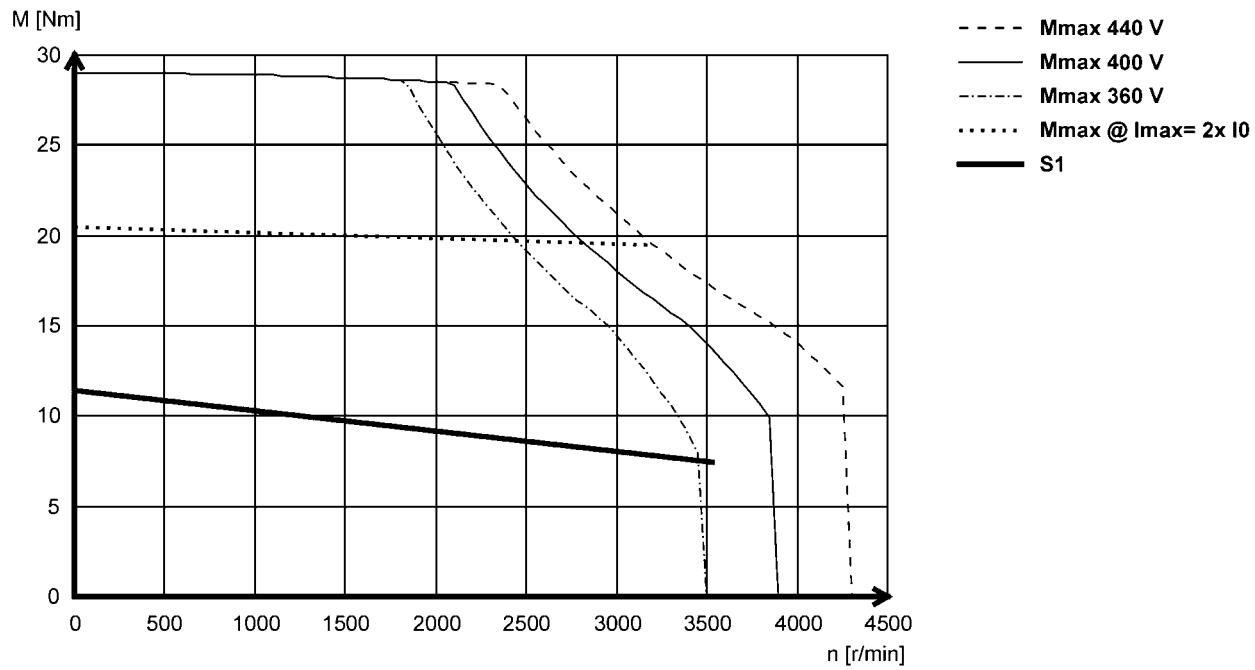

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12L17- (forced ventilated)

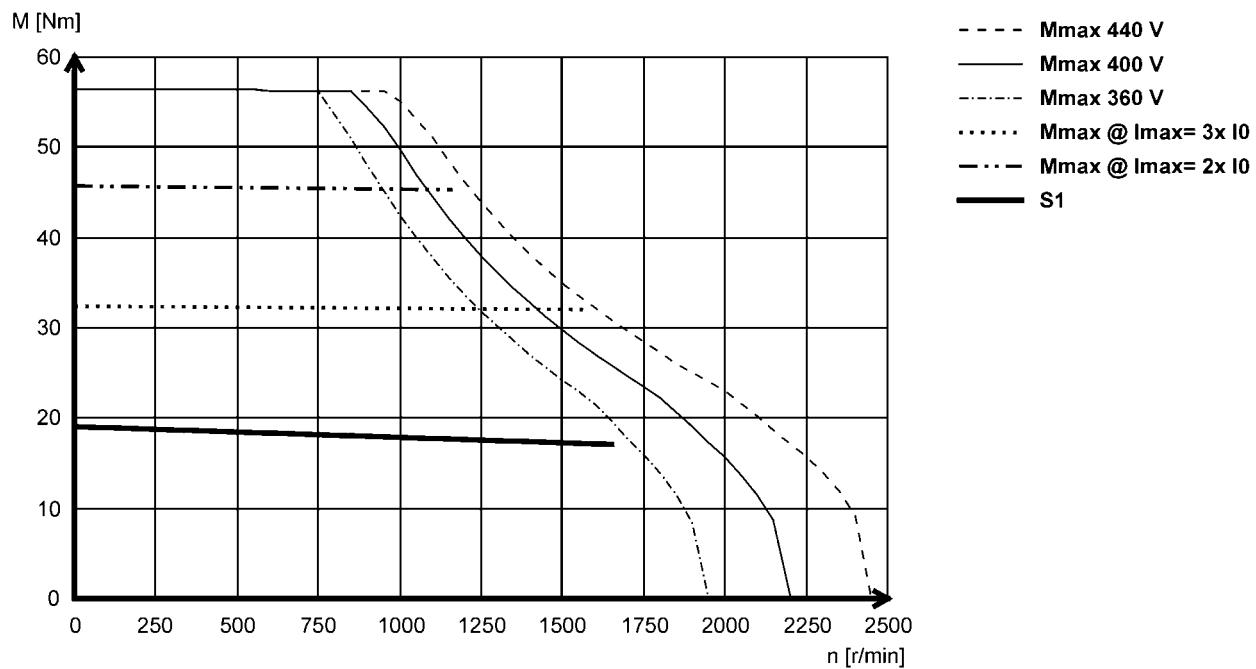

MCS12L20- (non-ventilated)

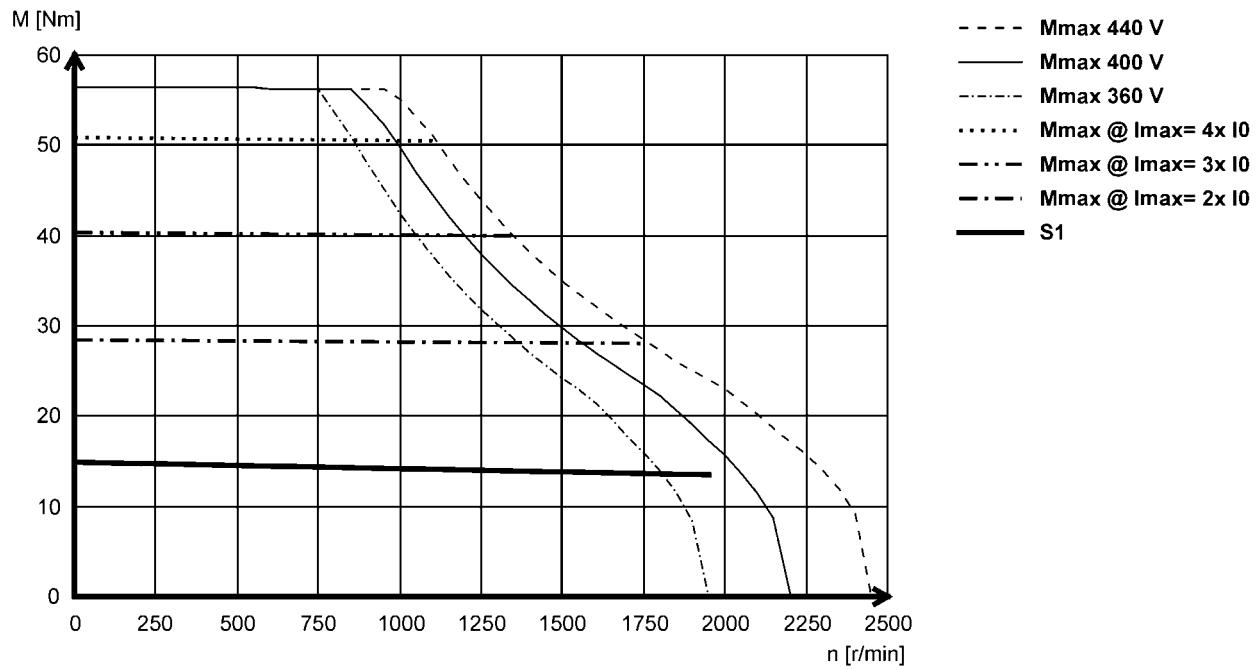

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12L39- (forced ventilated)

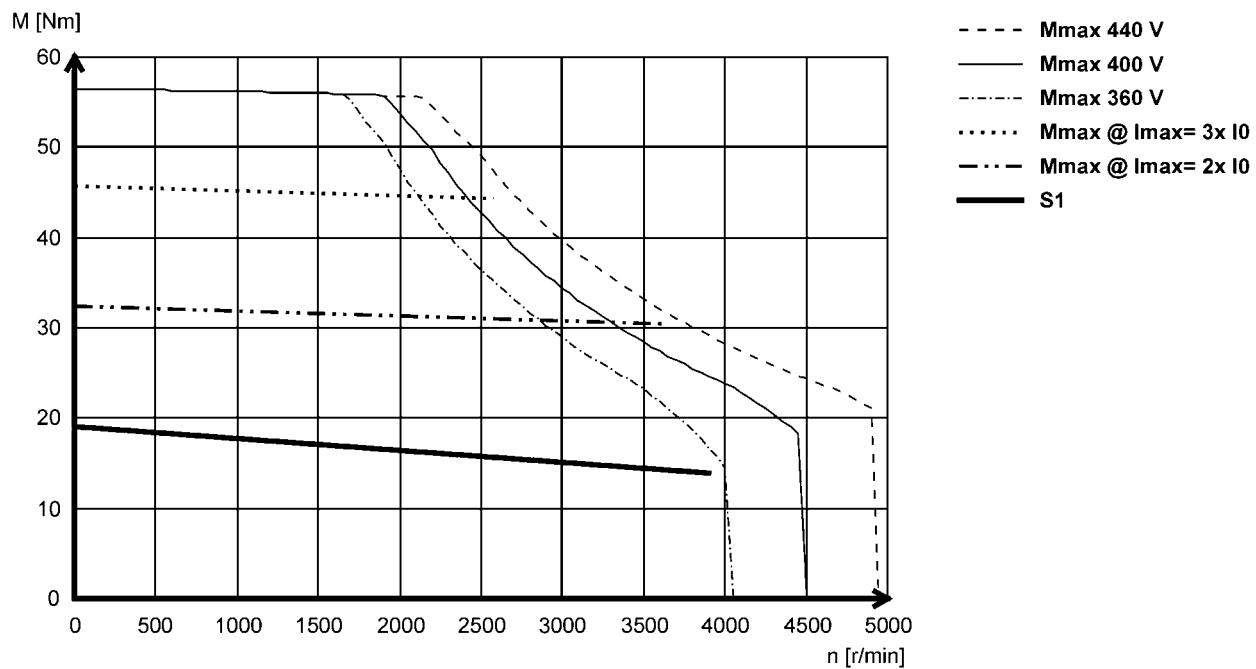

MCS12L41- (non-ventilated)

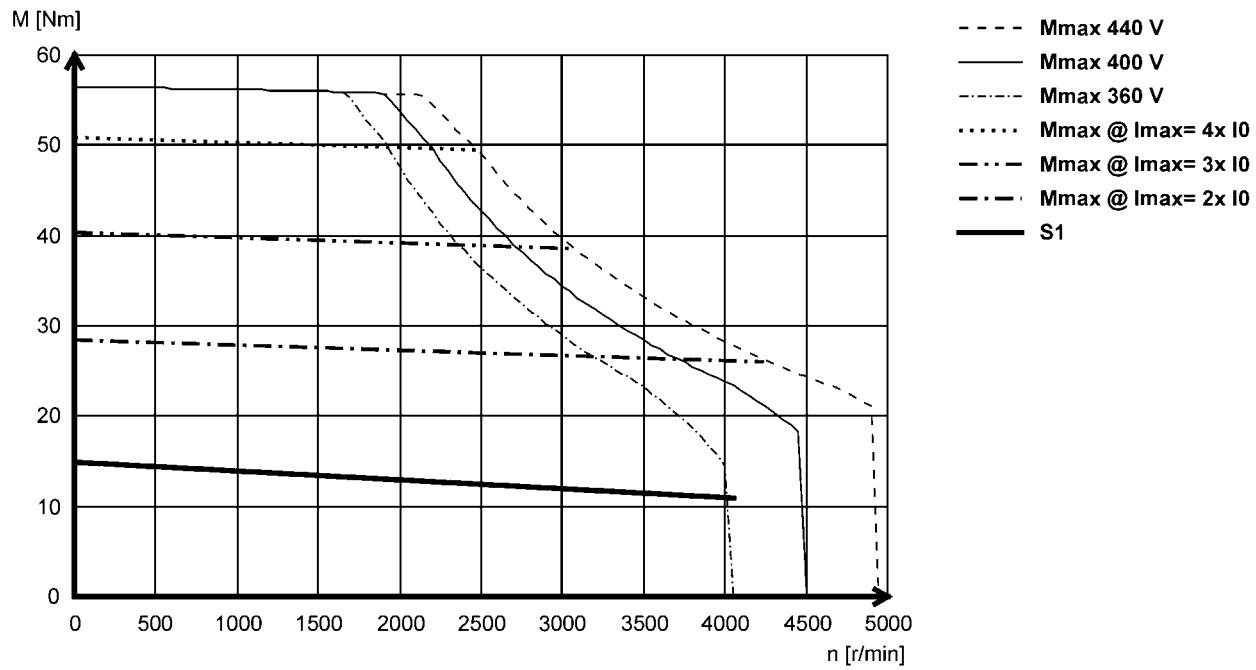

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14D14- (forced ventilated)

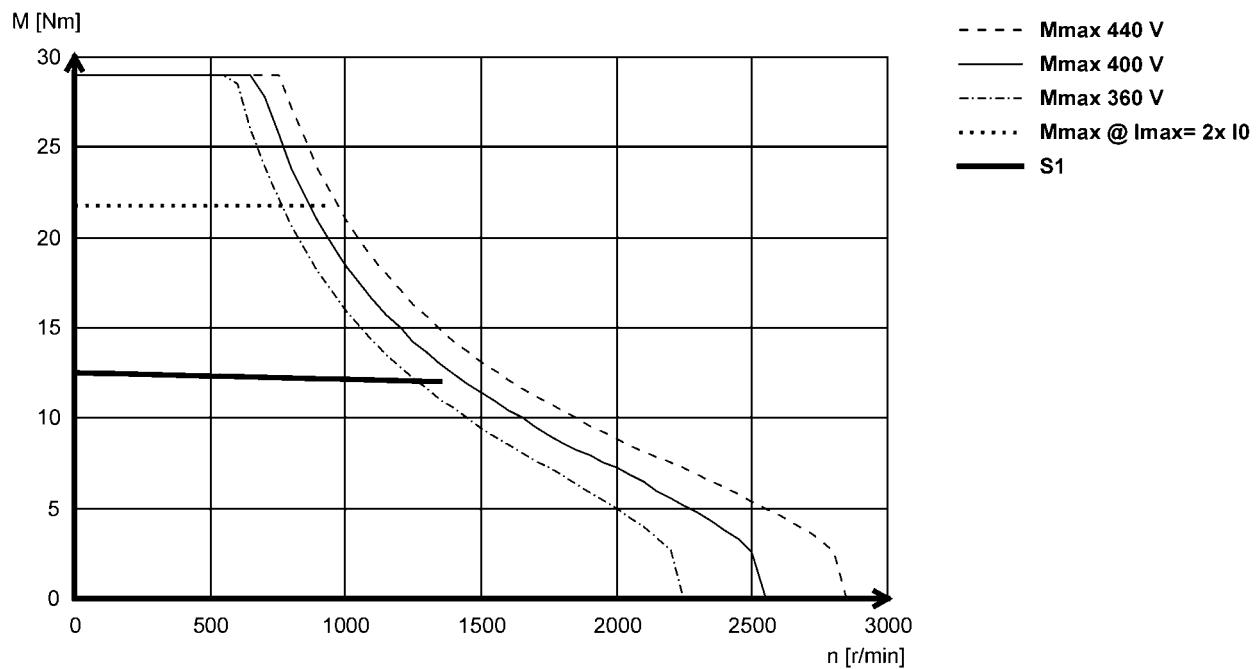

MCS14D15- (non-ventilated)

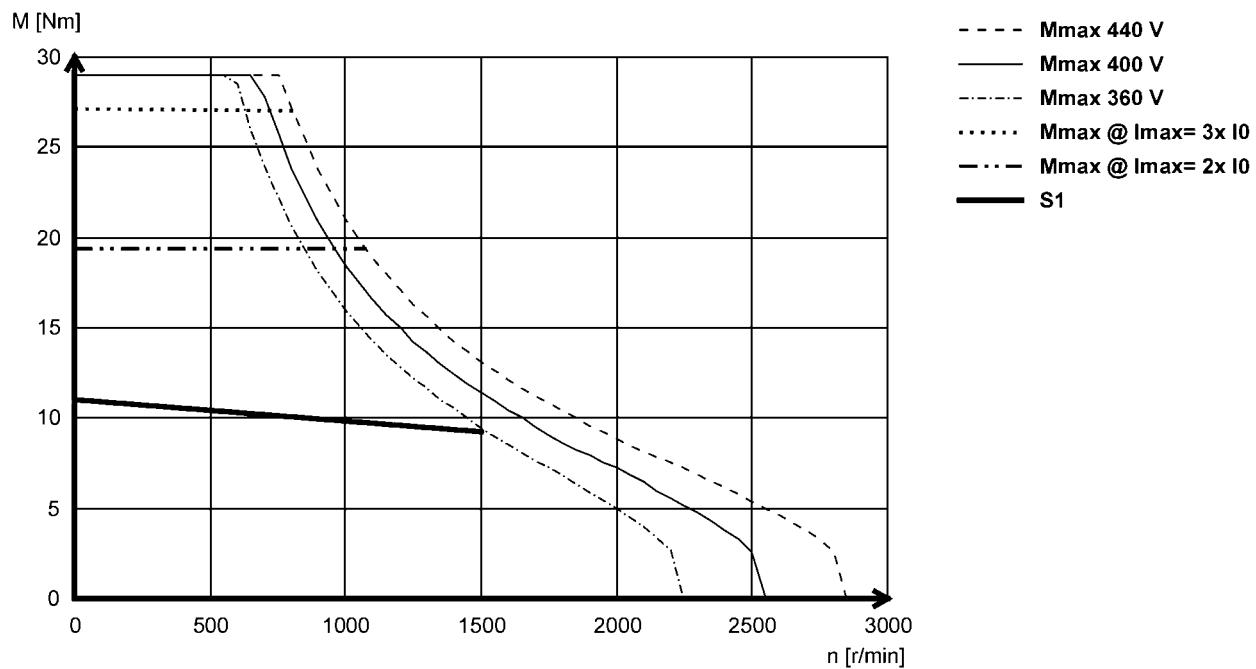

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14D30 (forced ventilated)

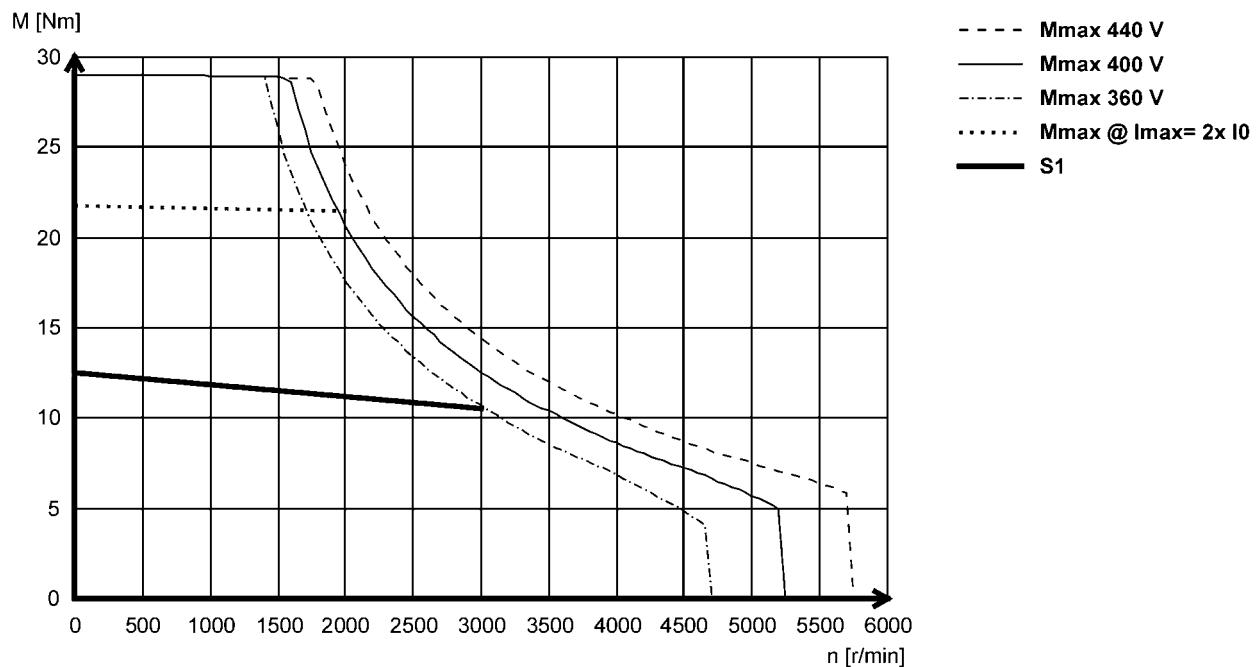

MCS14D36- (non-ventilated)

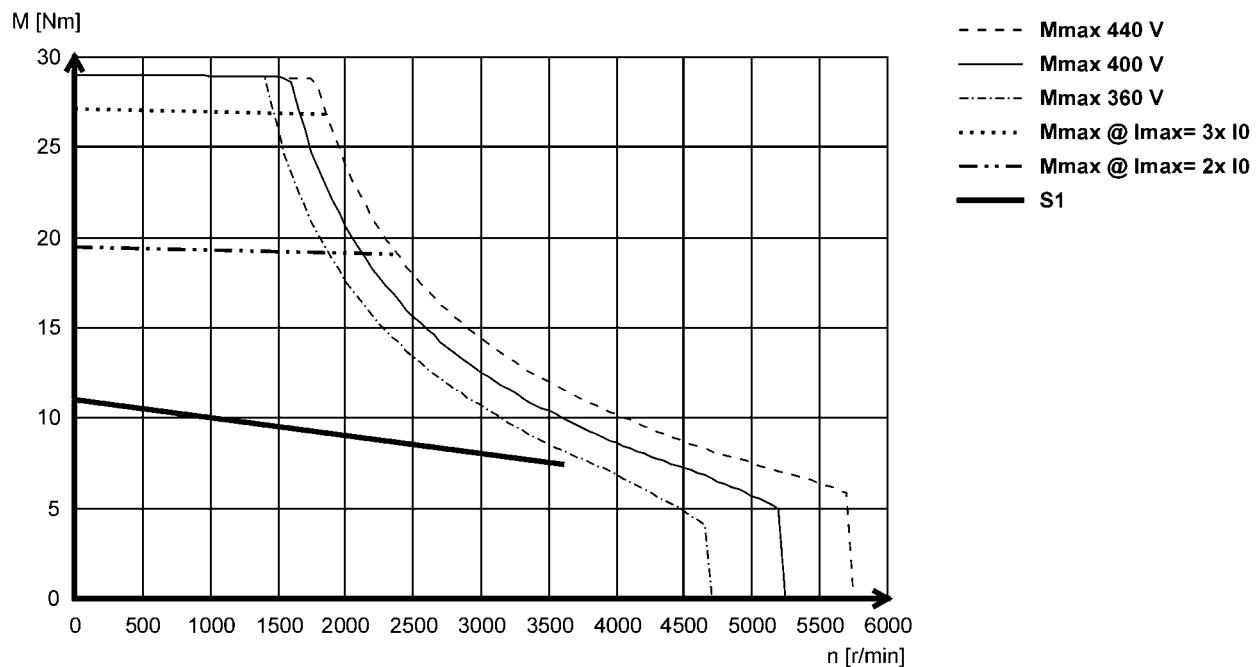

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14H12- (forced ventilated)

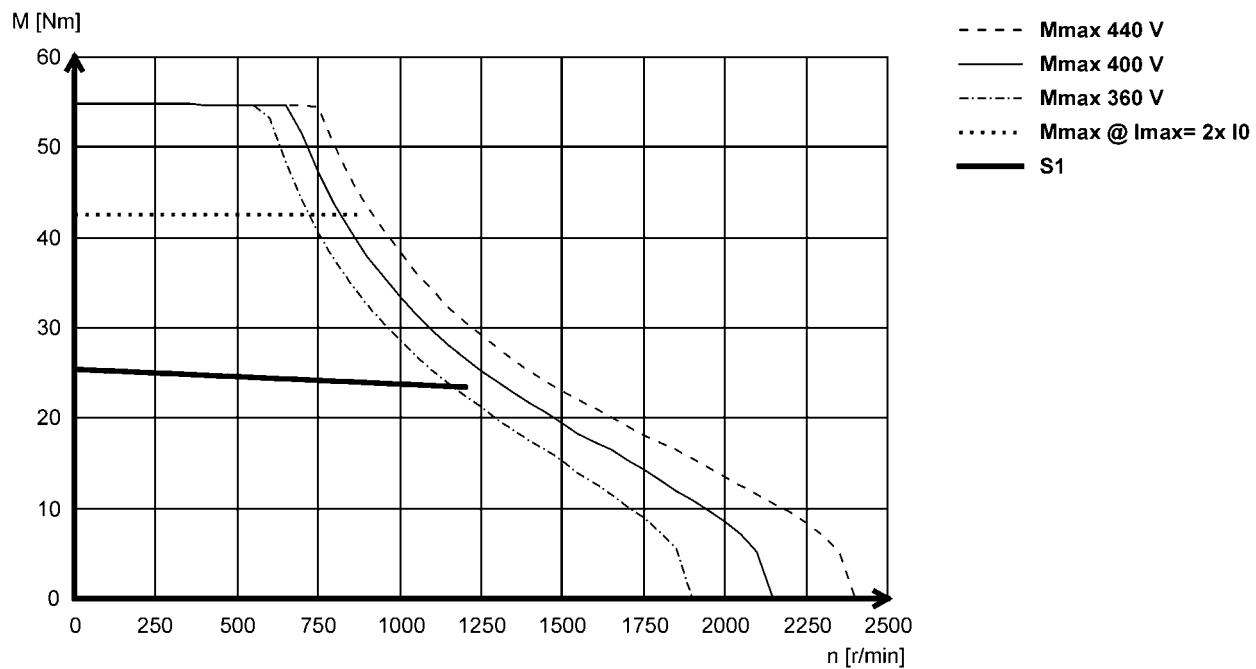

MCS14H15- (non-ventilated)

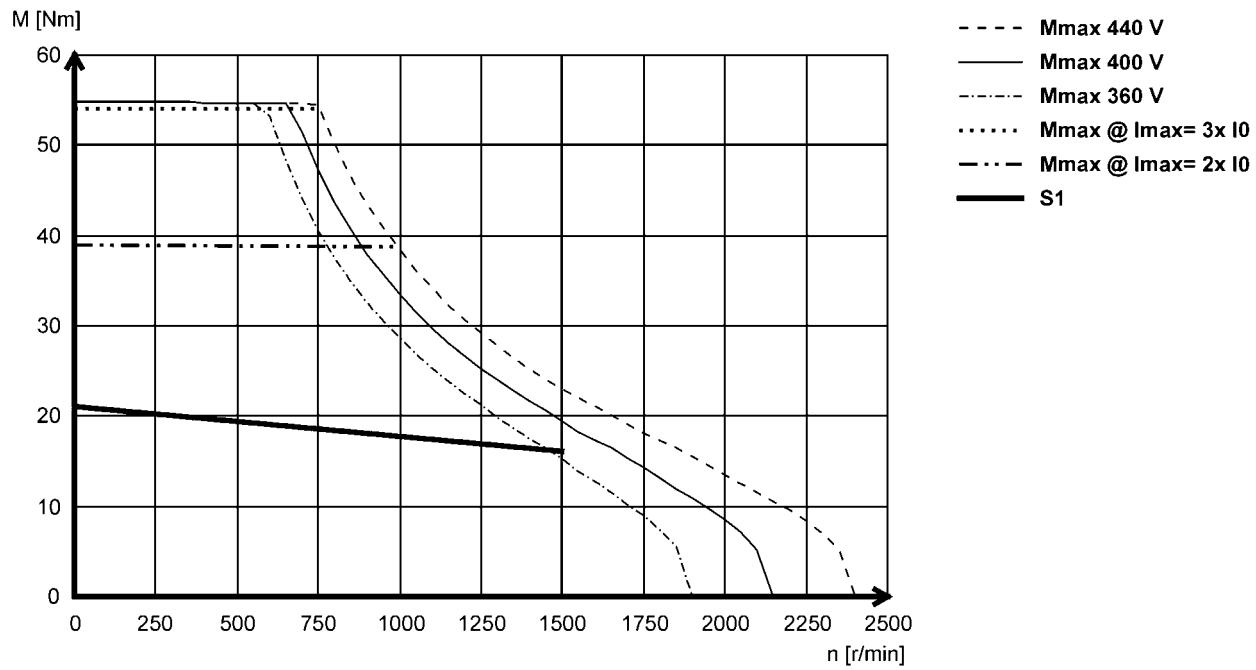

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14H28- (forced ventilated)

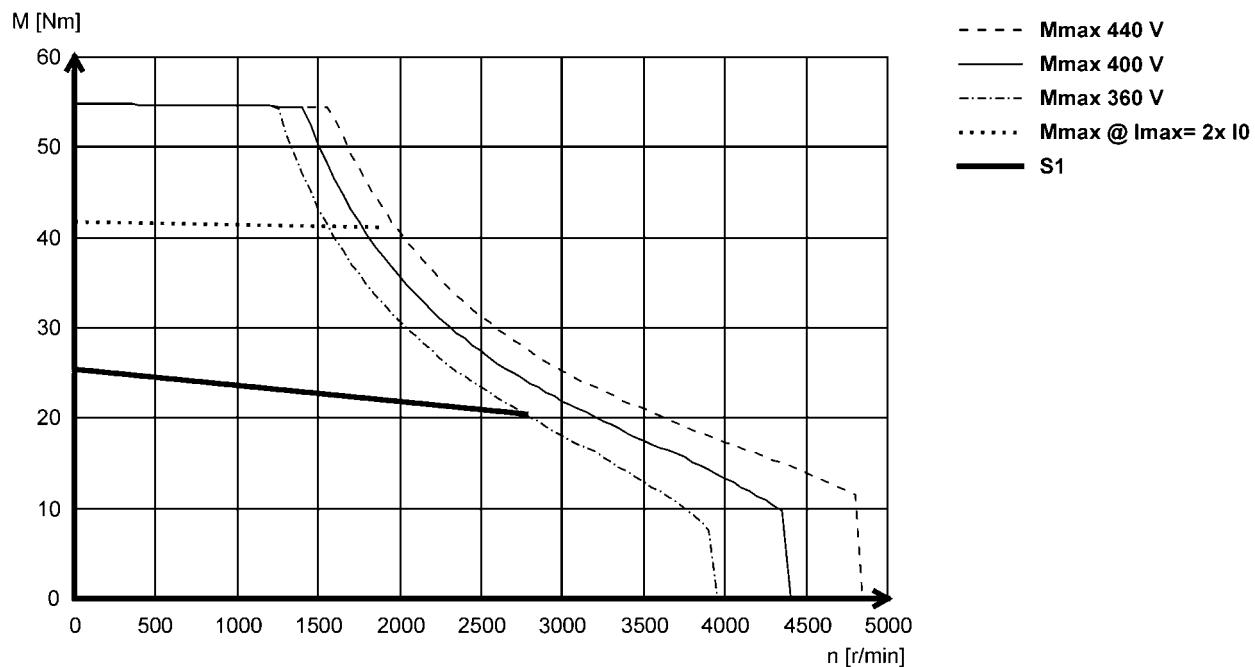

MCS14H32- (non-ventilated)

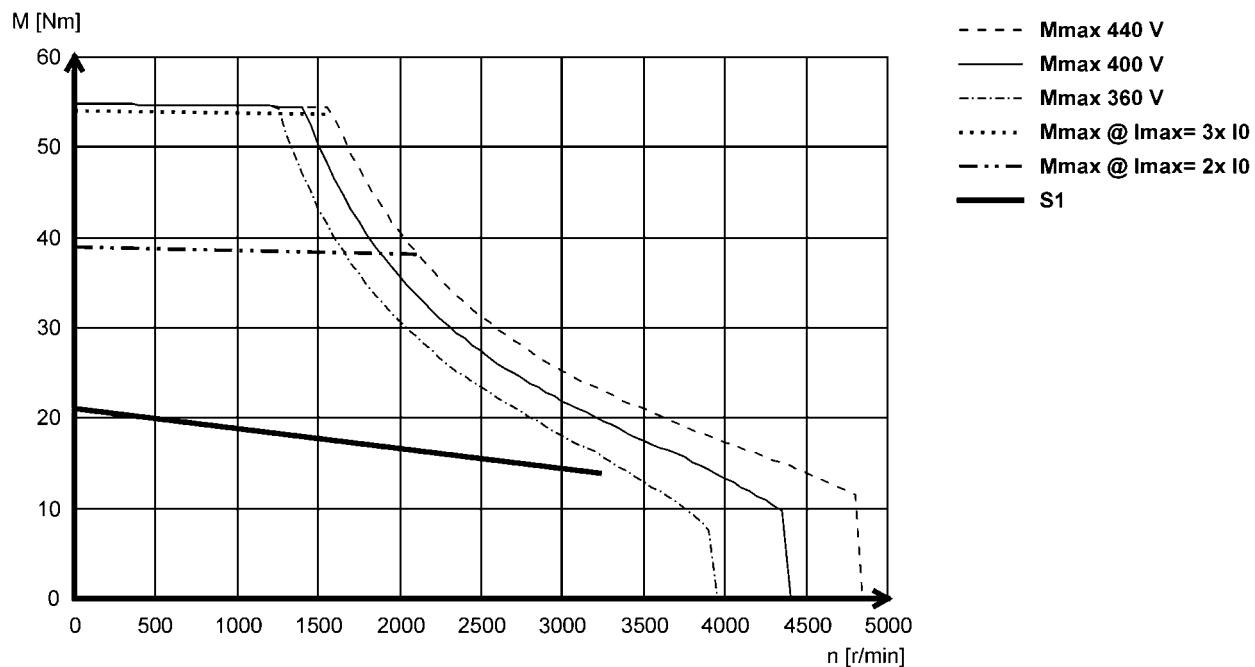

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14L14- (forced ventilated)

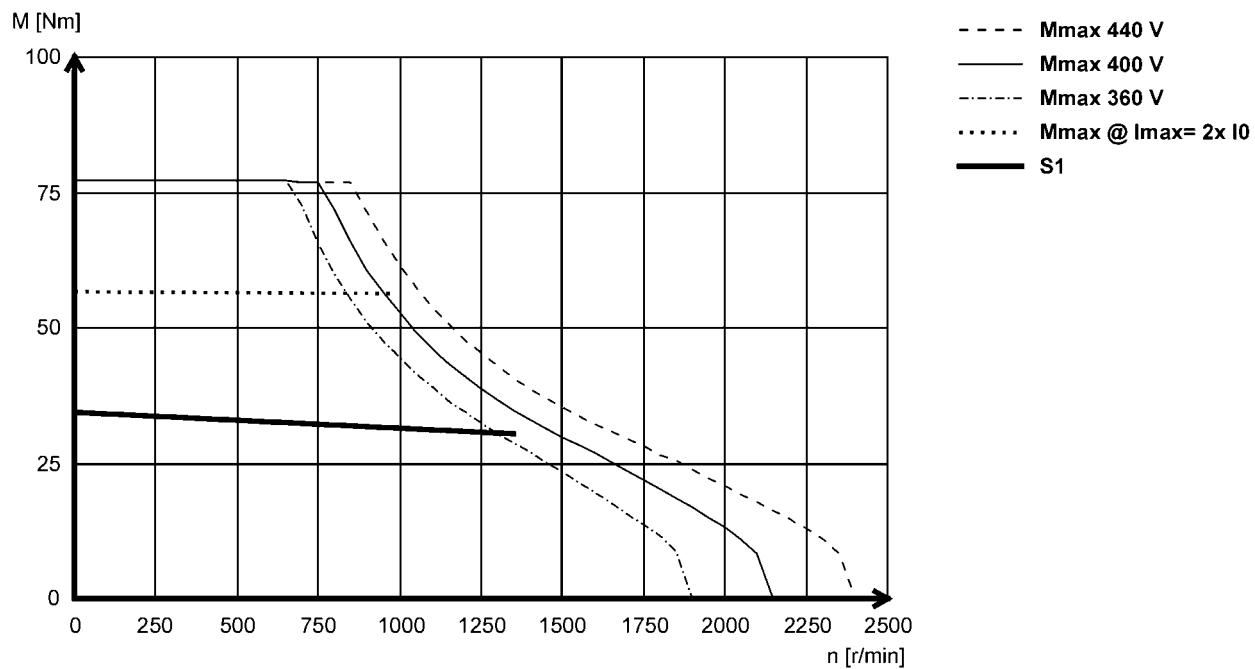

MCS14L15- (non-ventilated)

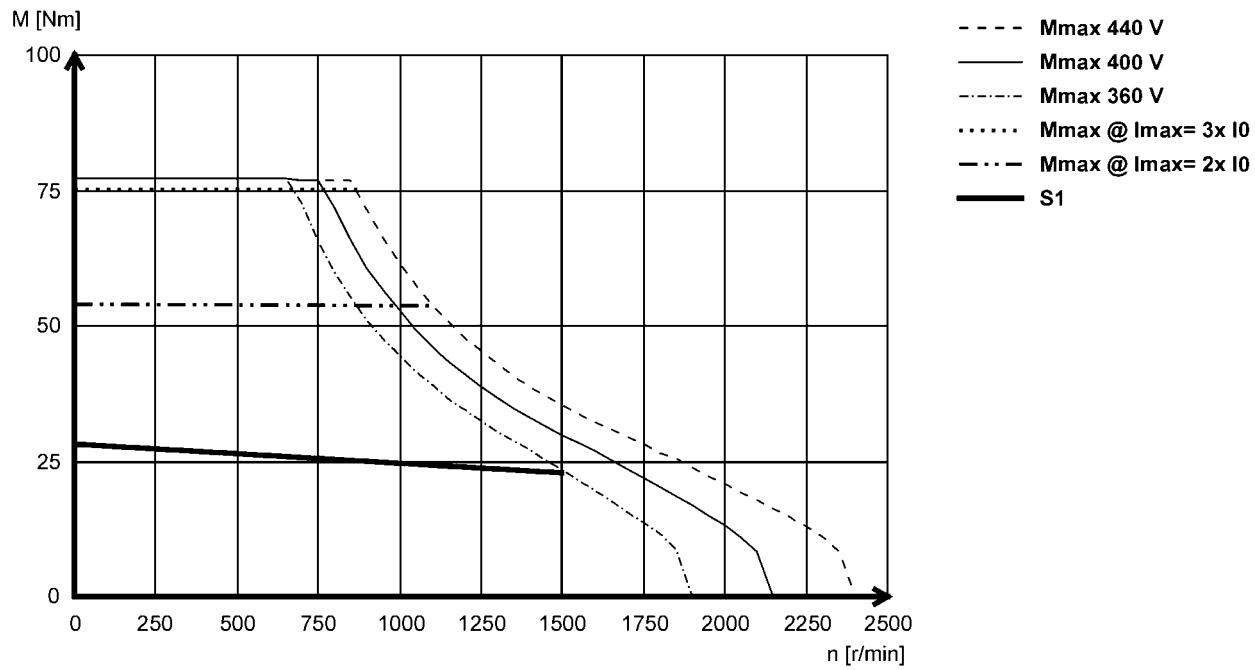

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14L30- (forced ventilated)

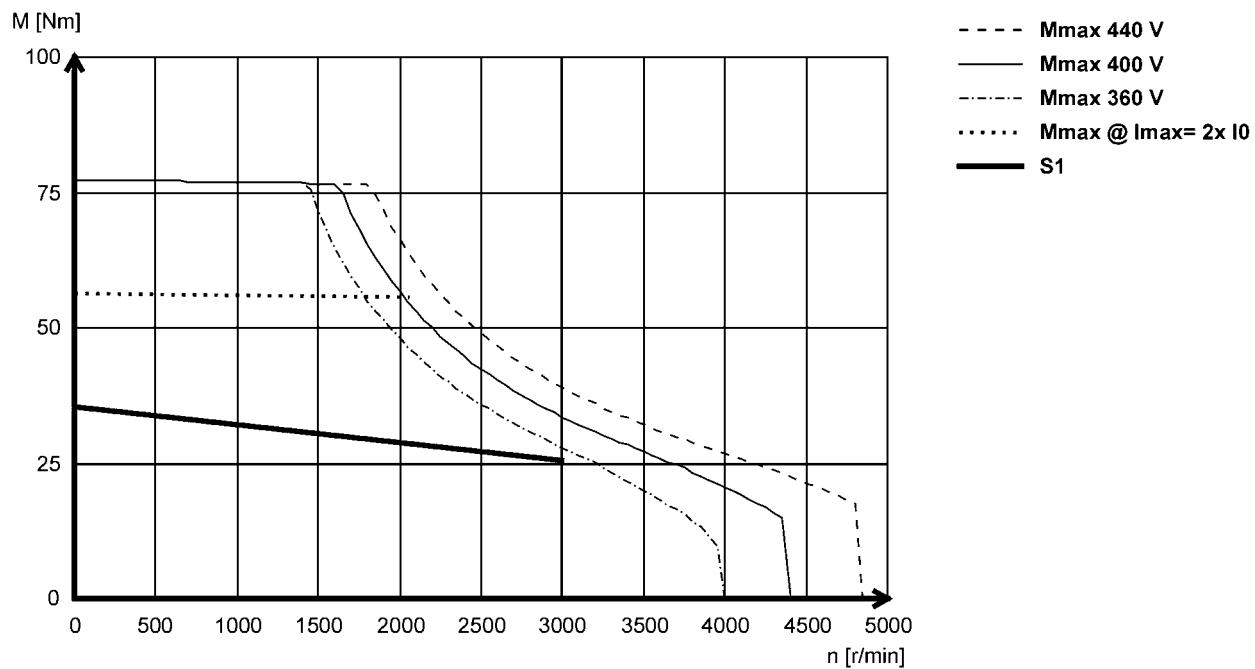

MCS14L32- (non-ventilated)

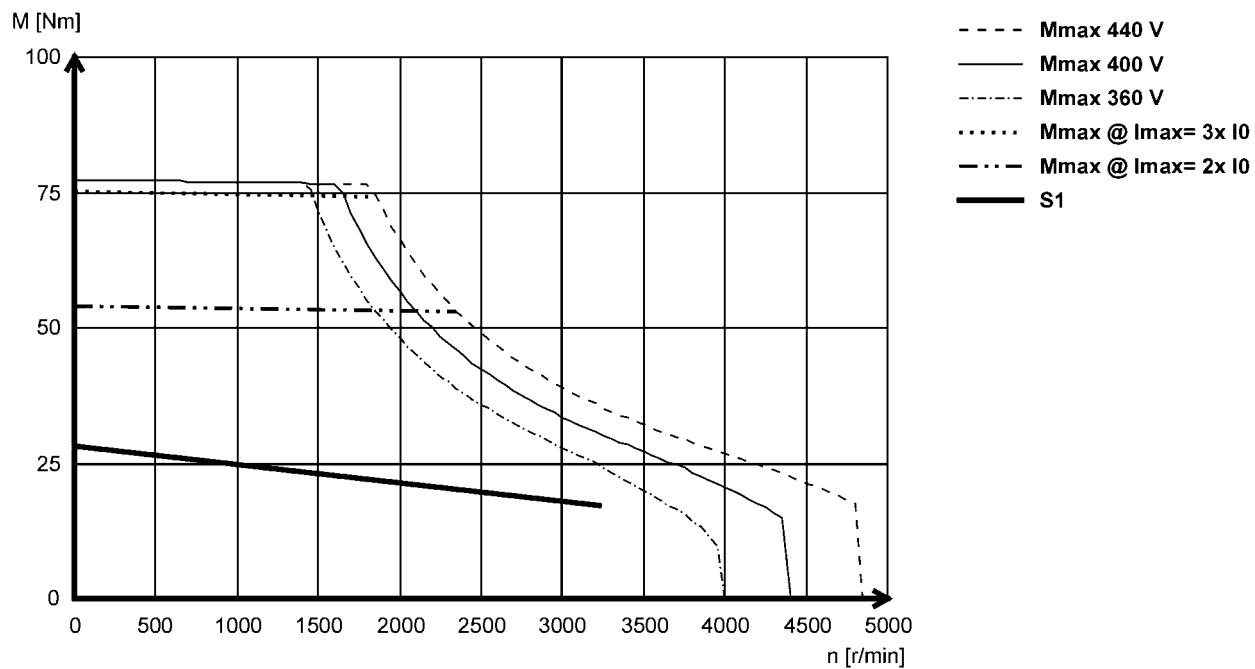

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14P11- (forced ventilated)

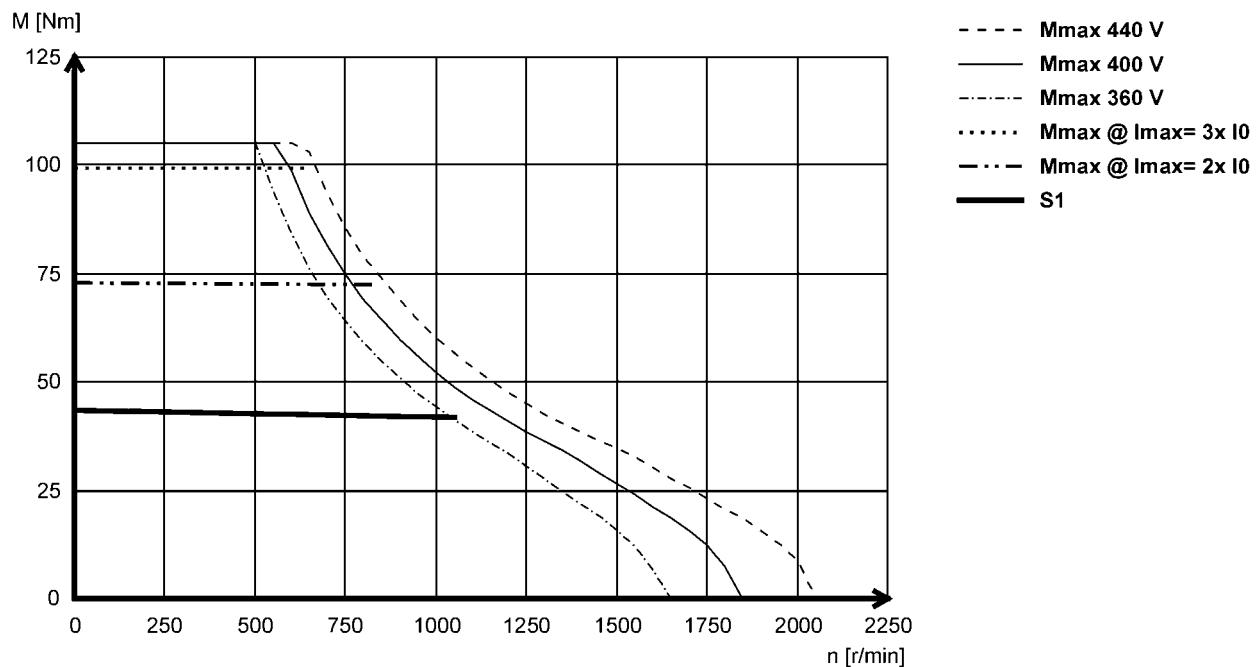

MCS14P14- (non-ventilated)

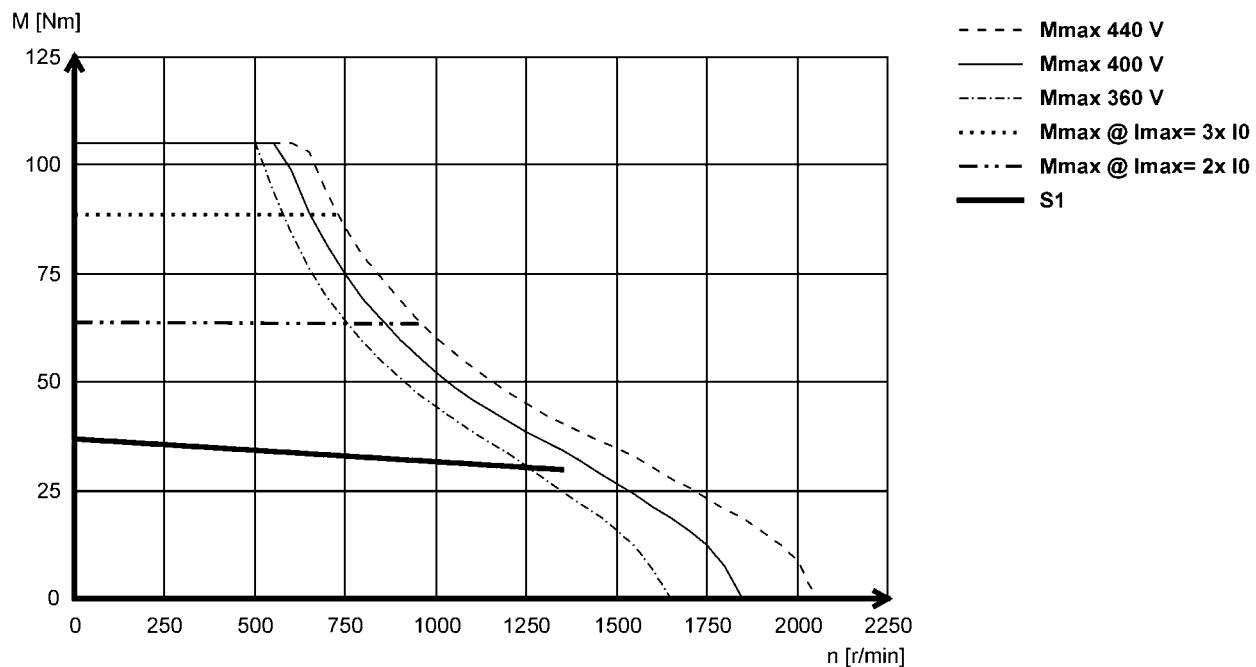

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS14P26- (forced ventilated)

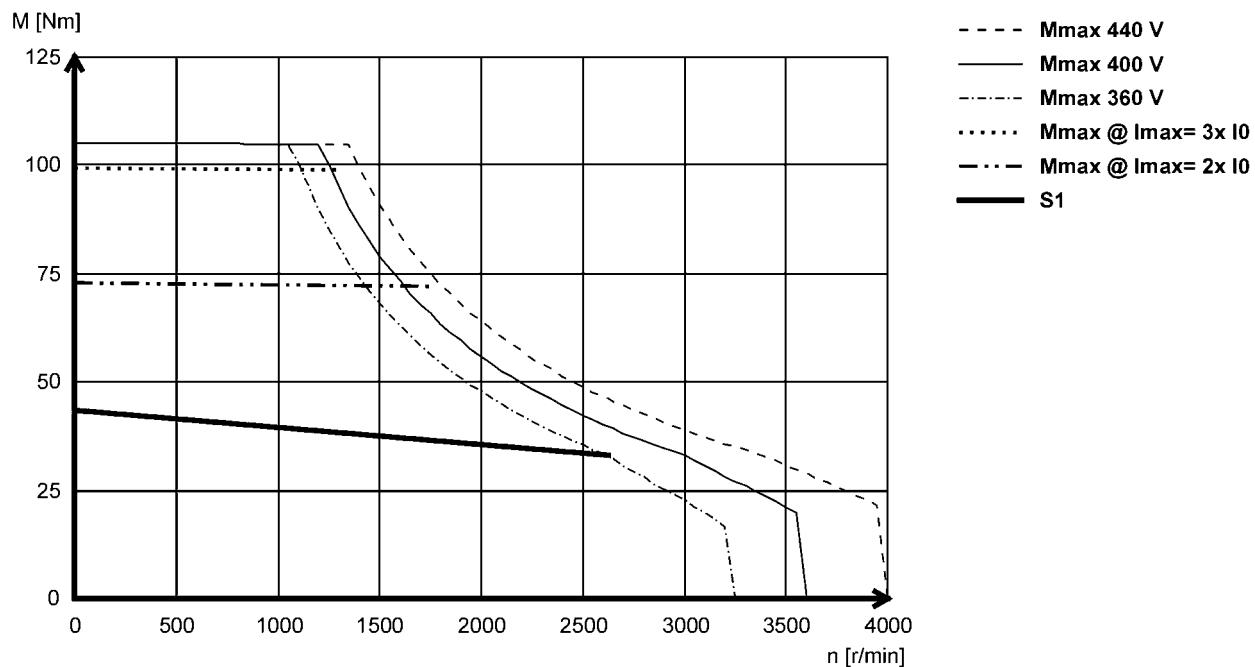

MCS14P32- (non-ventilated)

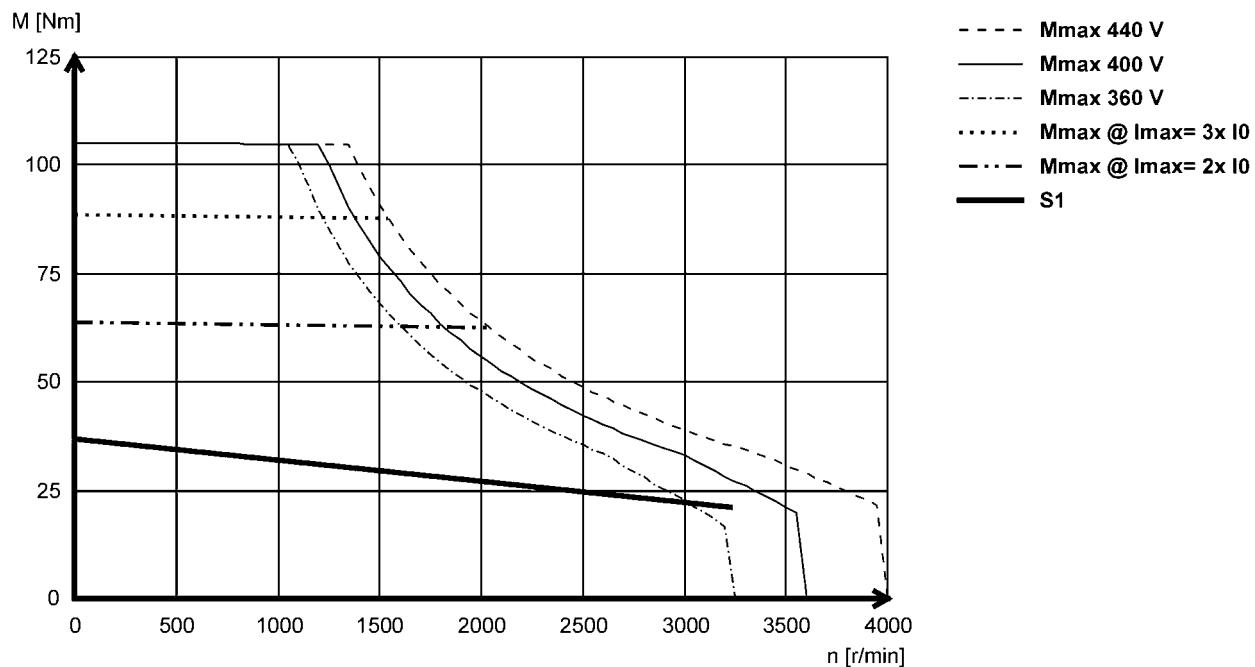

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19F12- (forced ventilated)

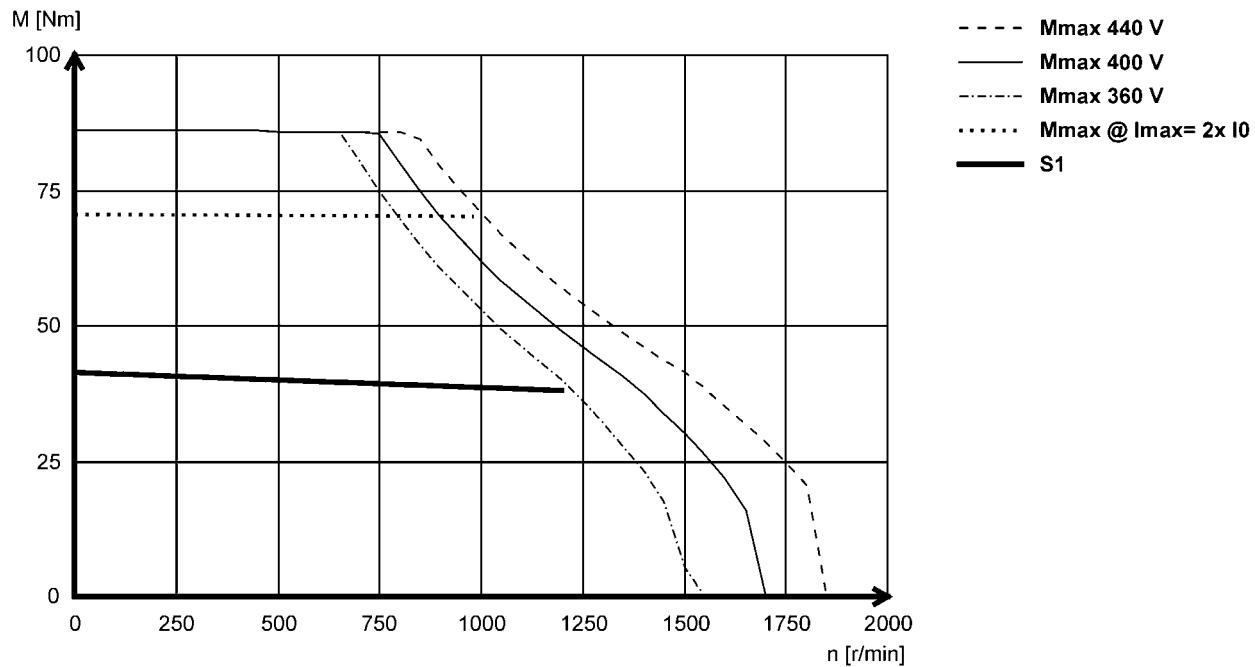

MCS19F14- (non-ventilated)

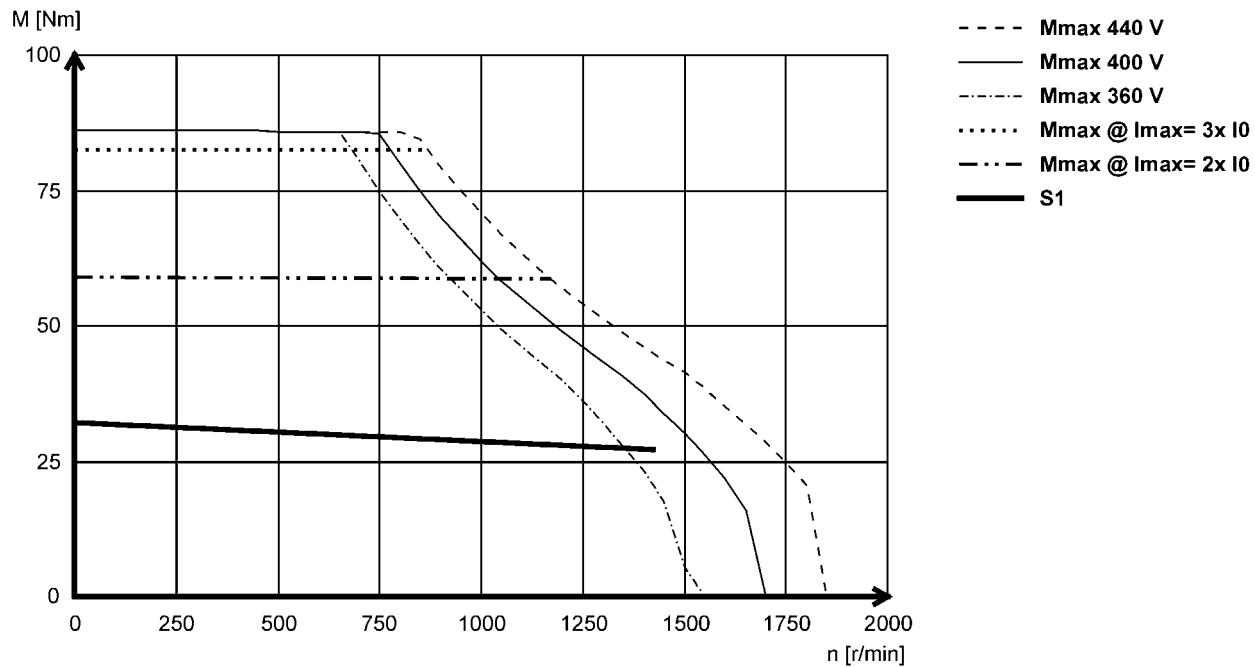

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19F29- (forced ventilated)

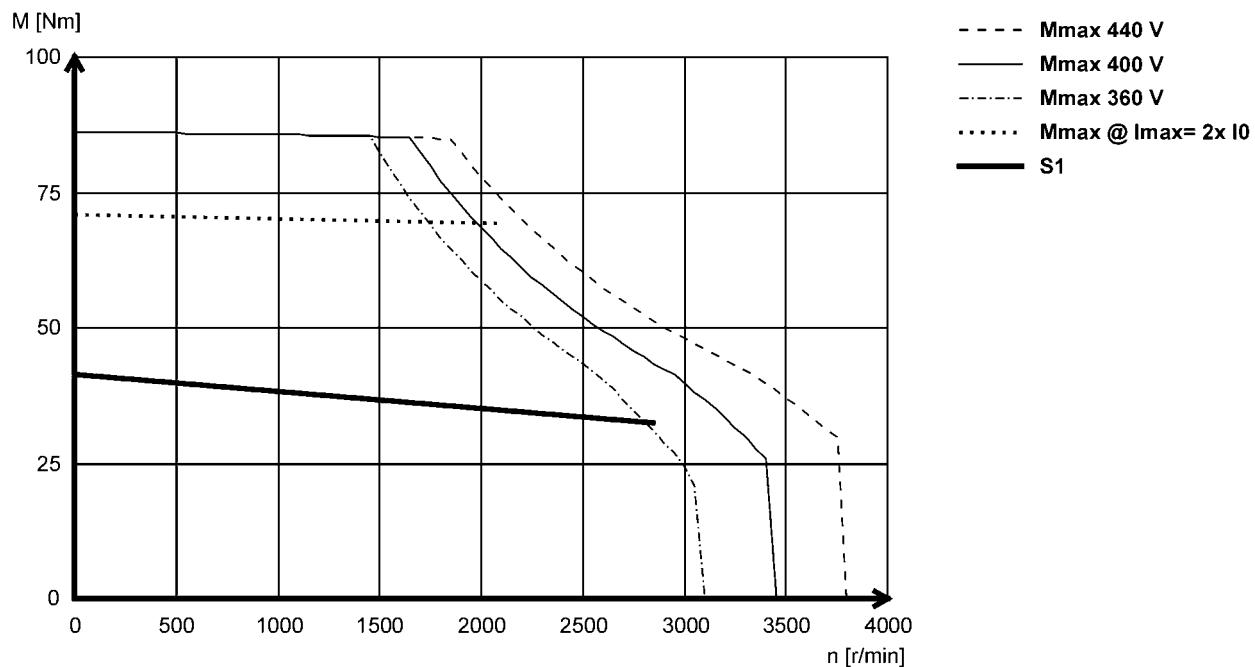

MCS19F30- (non-ventilated)

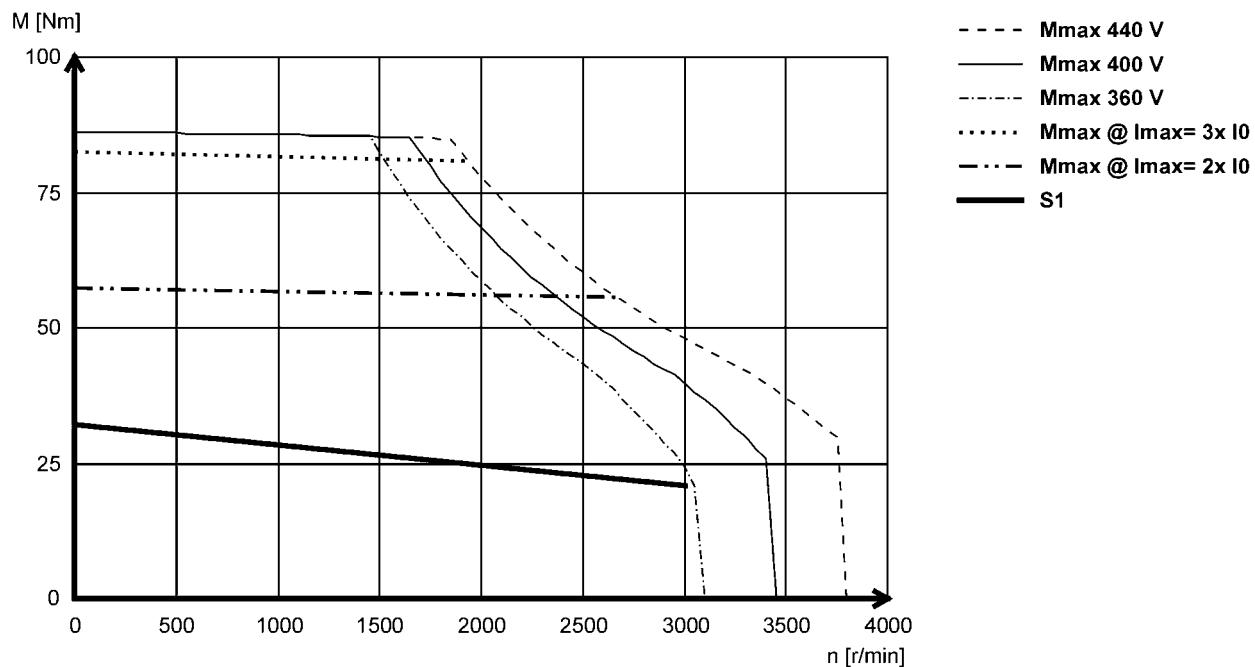

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19J12- (forced ventilated)

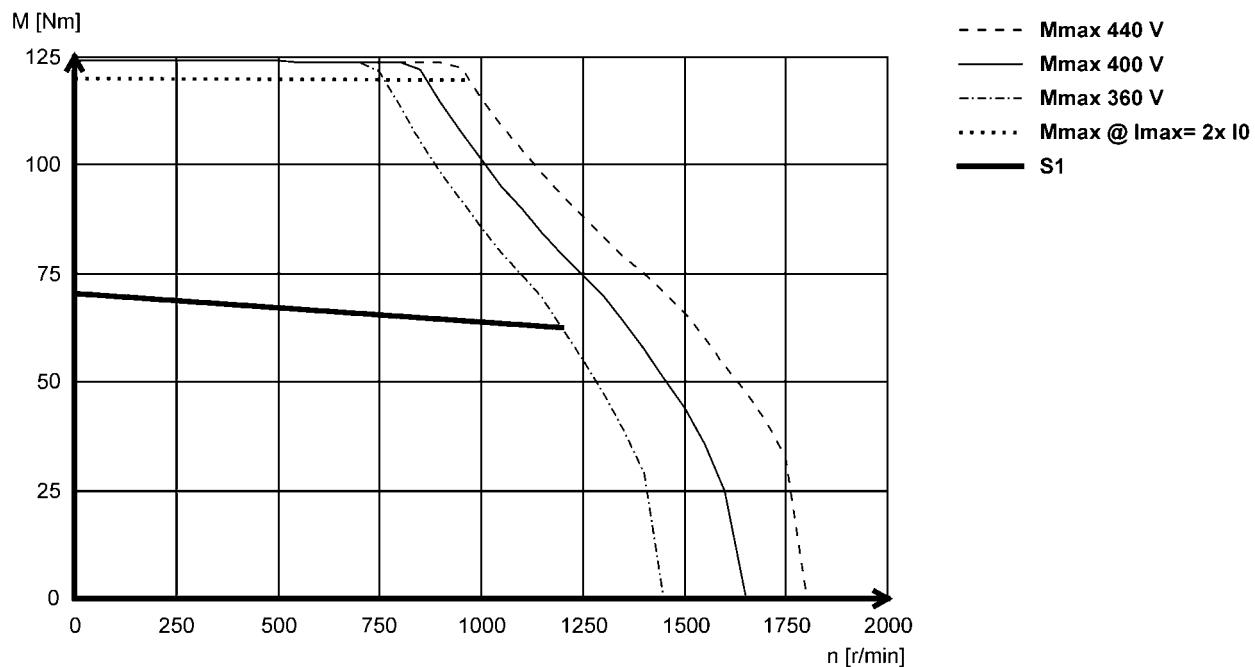

MCS19J14- (non-ventilated)

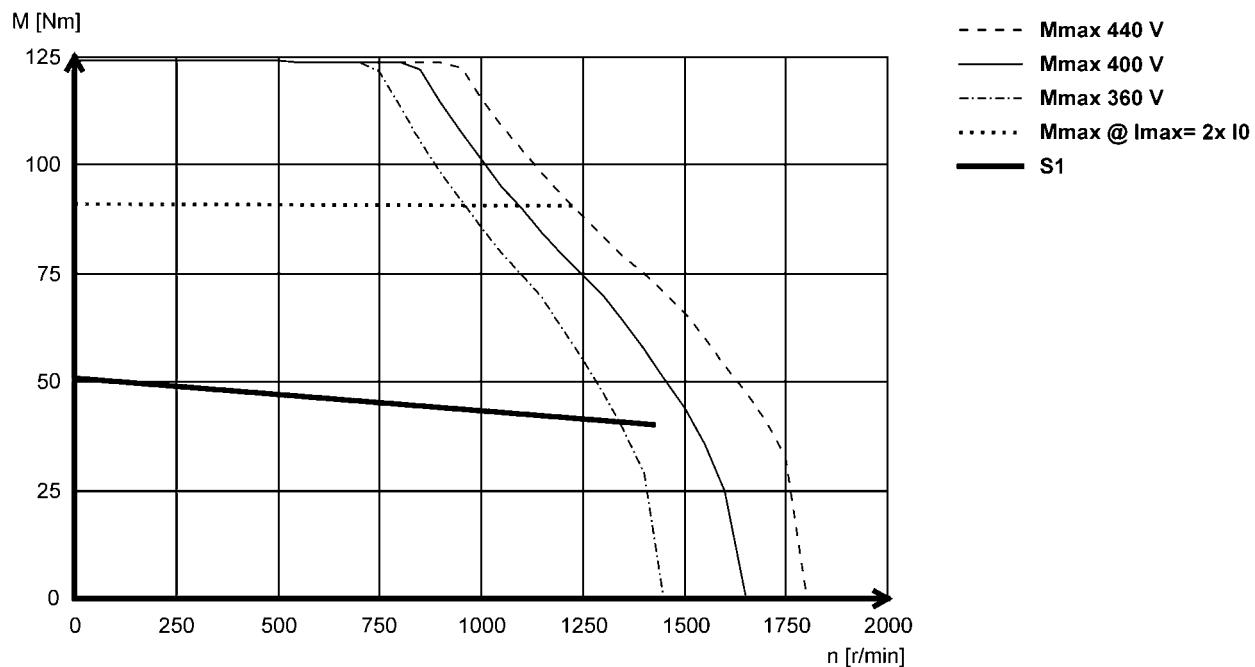

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19J29- (forced ventilated)

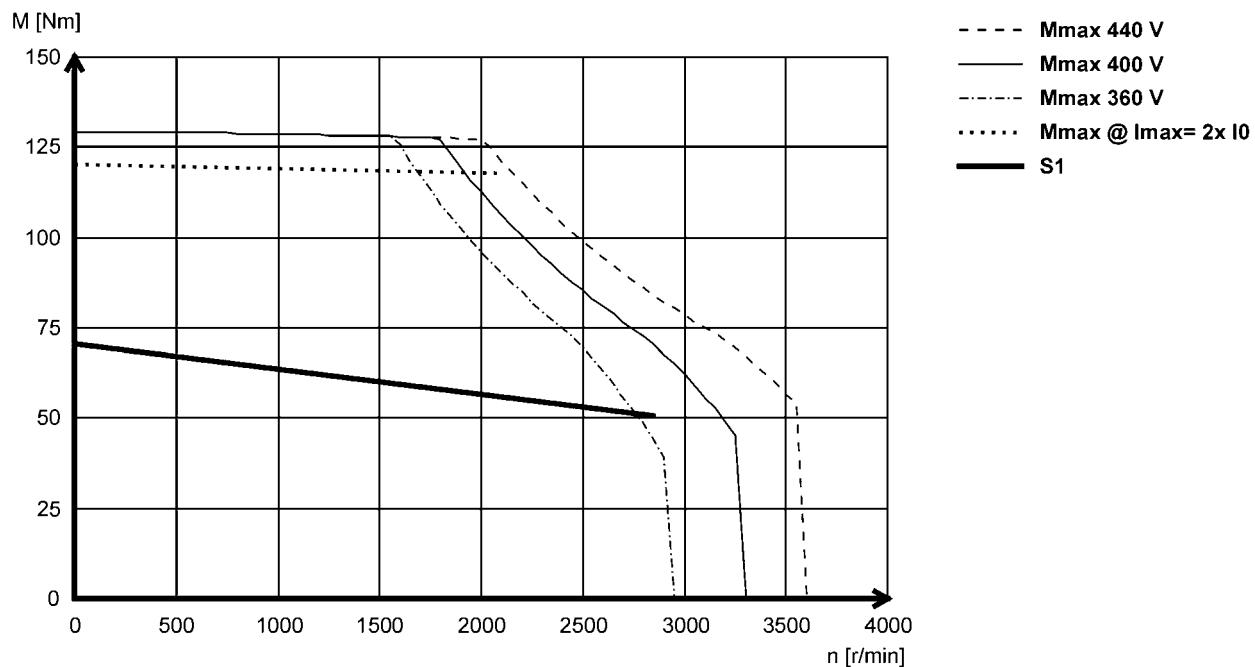

MCS19J30- (non-ventilated)

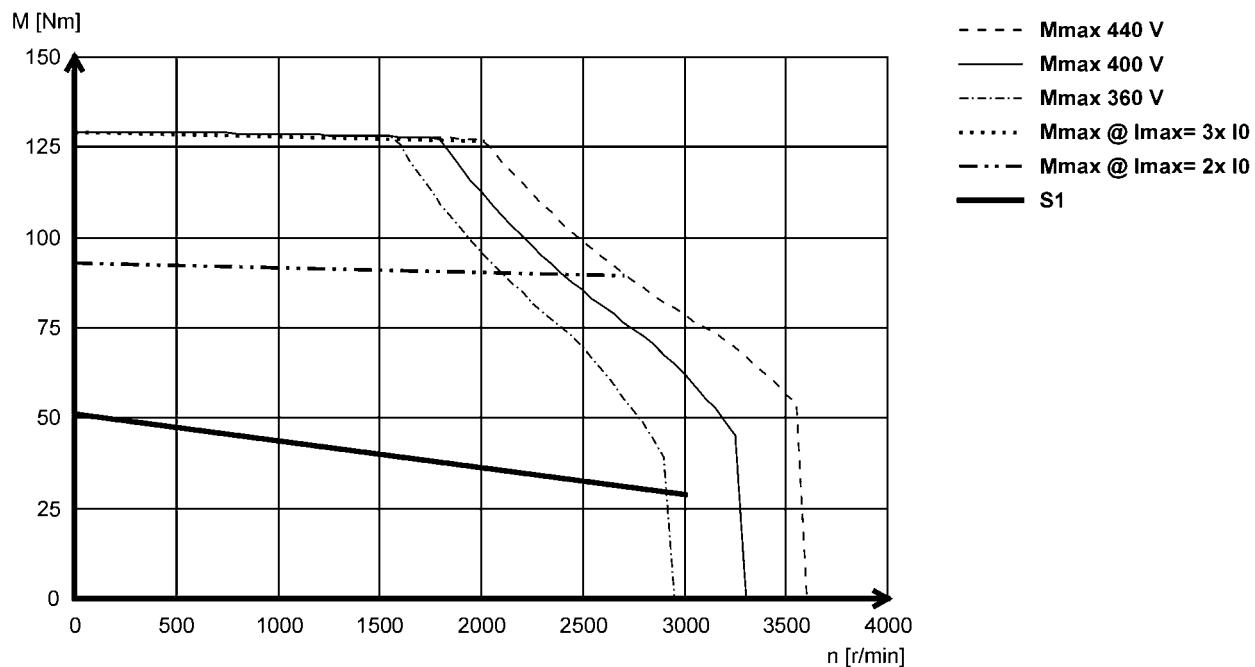

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19P12 (forced ventilated)

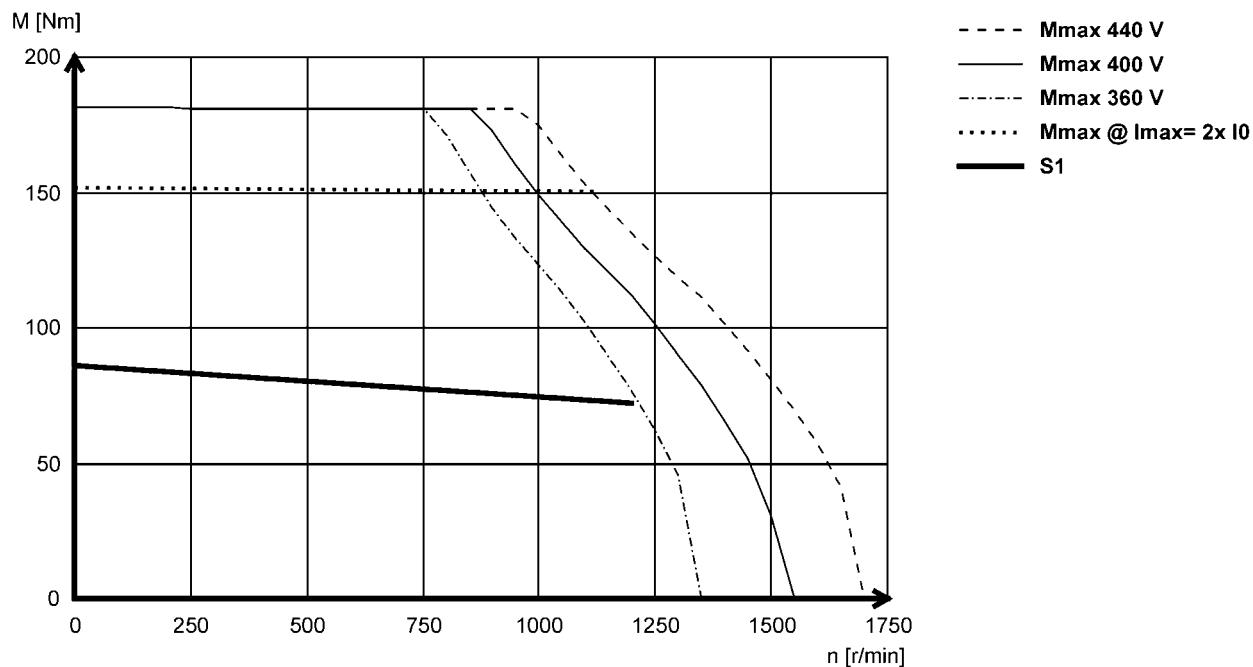

MCS19P14- (non-ventilated)

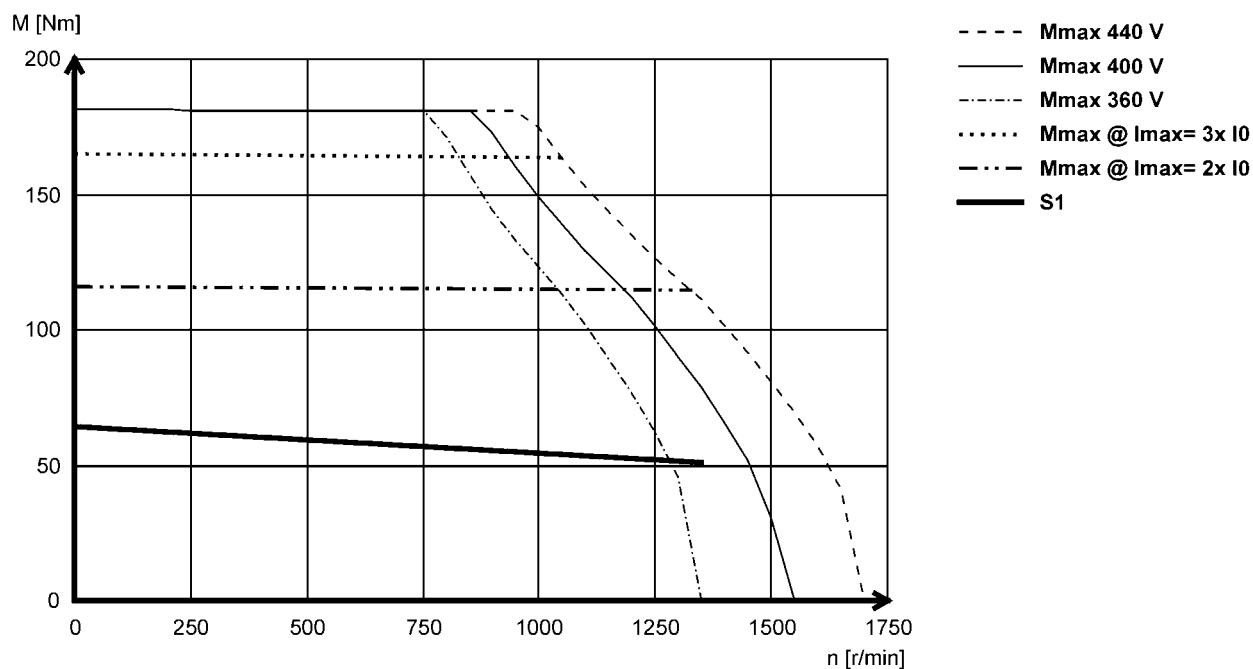

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 400 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS19P29- (forced ventilated)

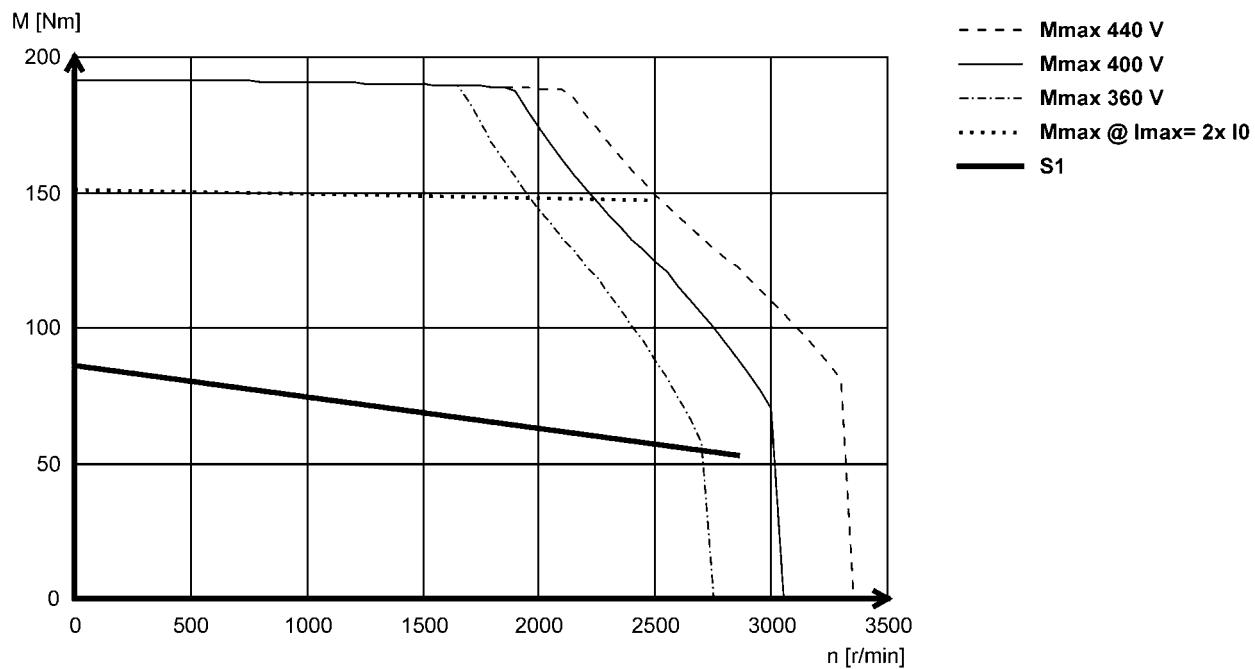

MCS19P30- (non-ventilated)

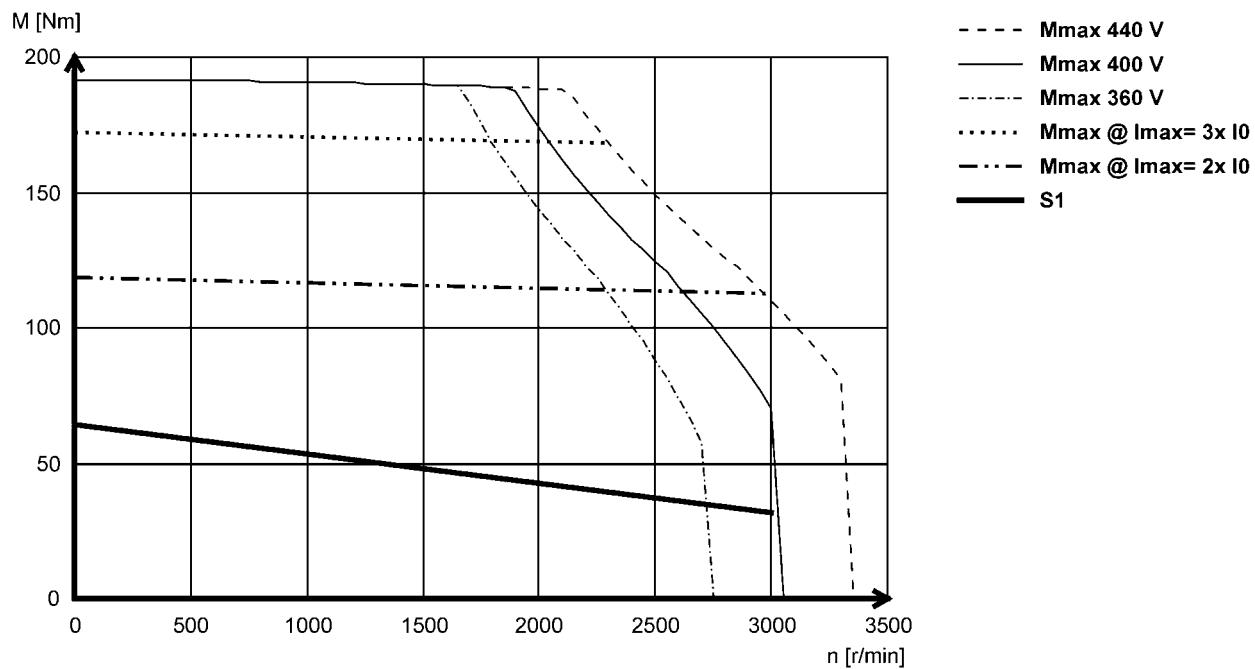

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06C41L (non-ventilated)

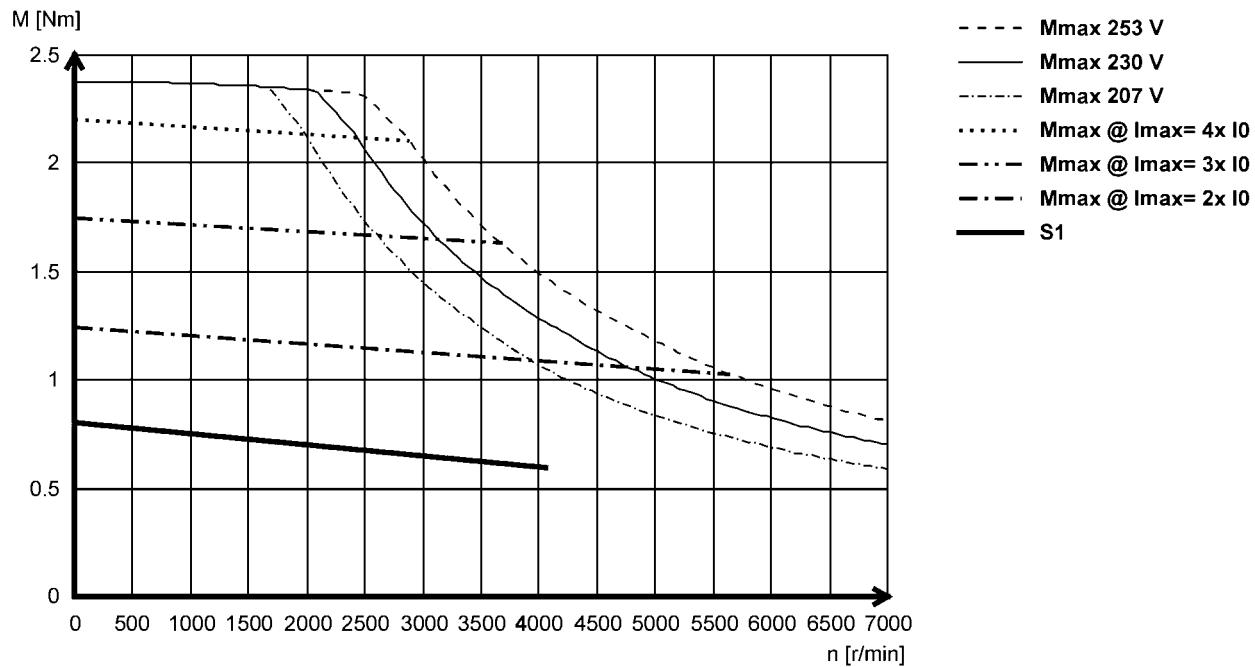

MCS06C60L (non-ventilated)

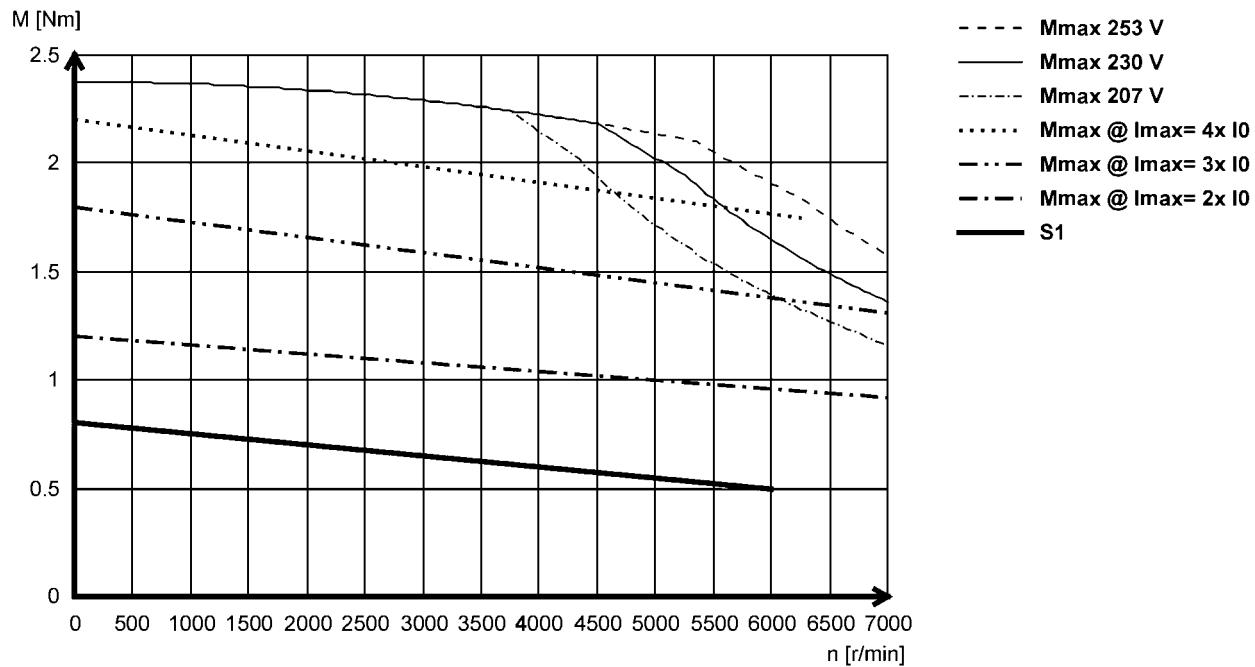

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06F41L (non-ventilated)

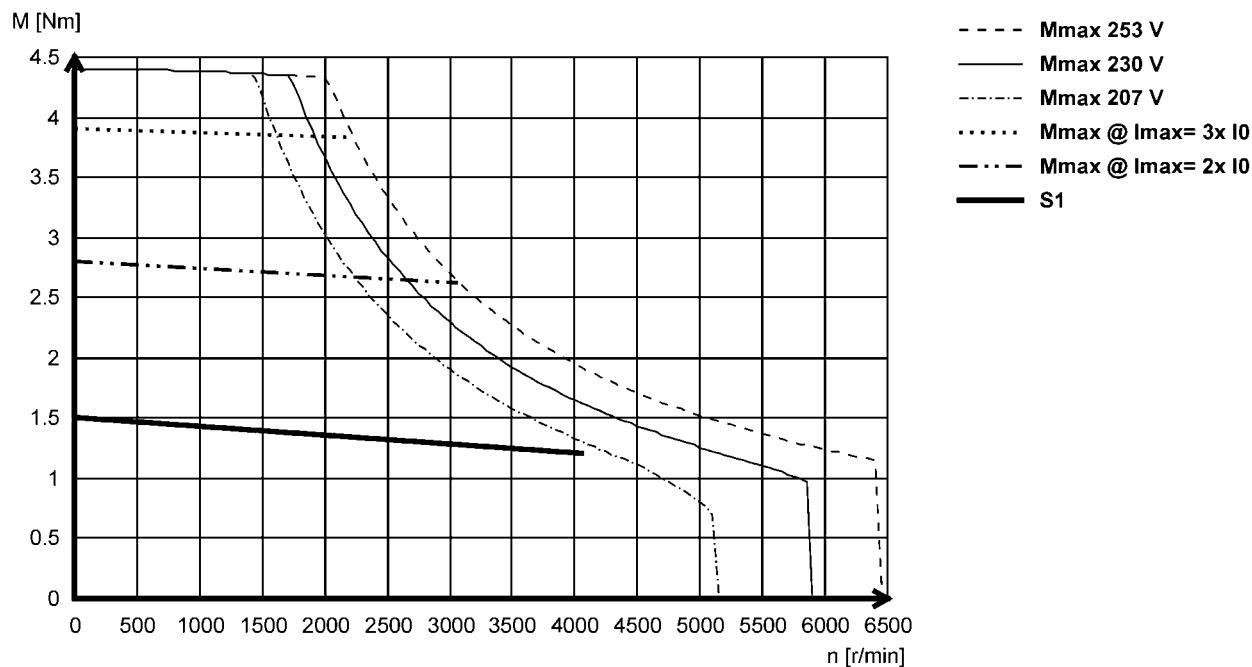

MCS06F60L (non-ventilated)

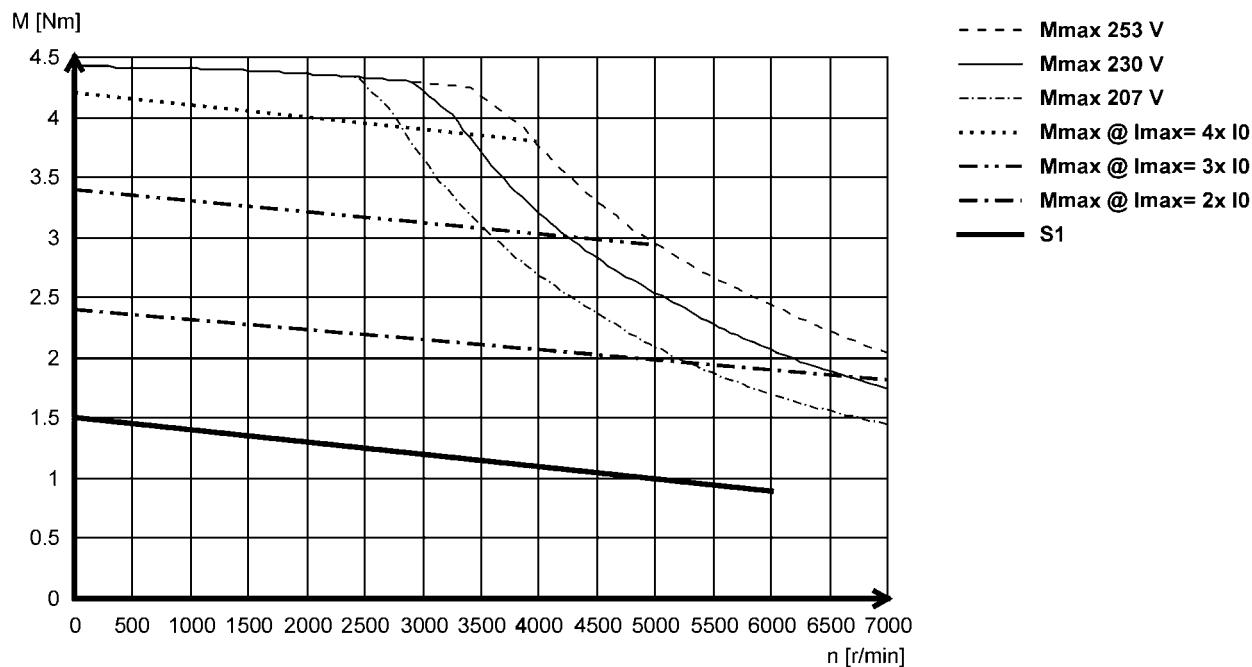

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS06I41L (non-ventilated)

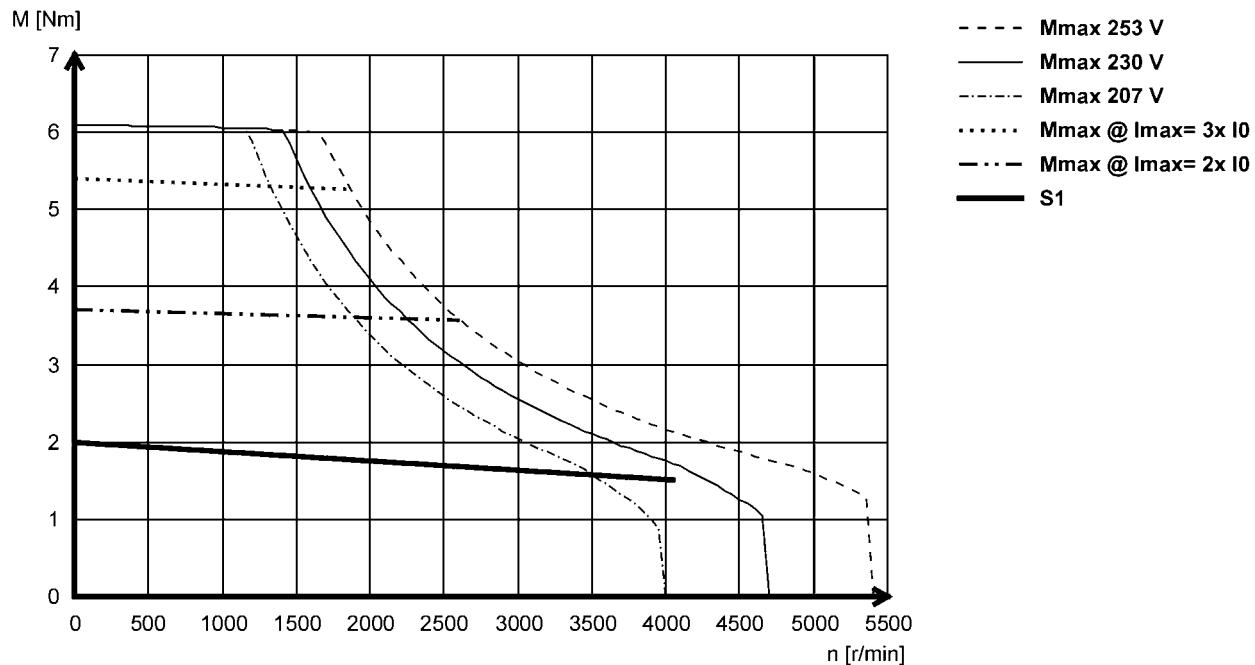

MCS06I60L (non-ventilated)

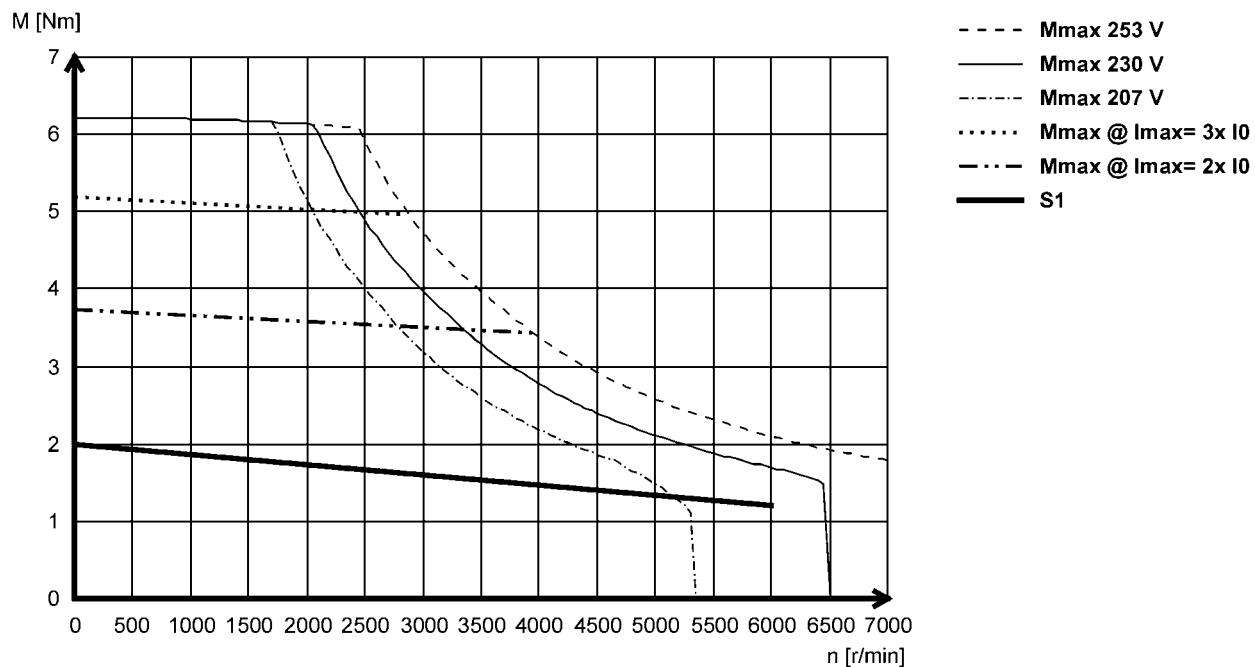

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09D41L (non-ventilated)

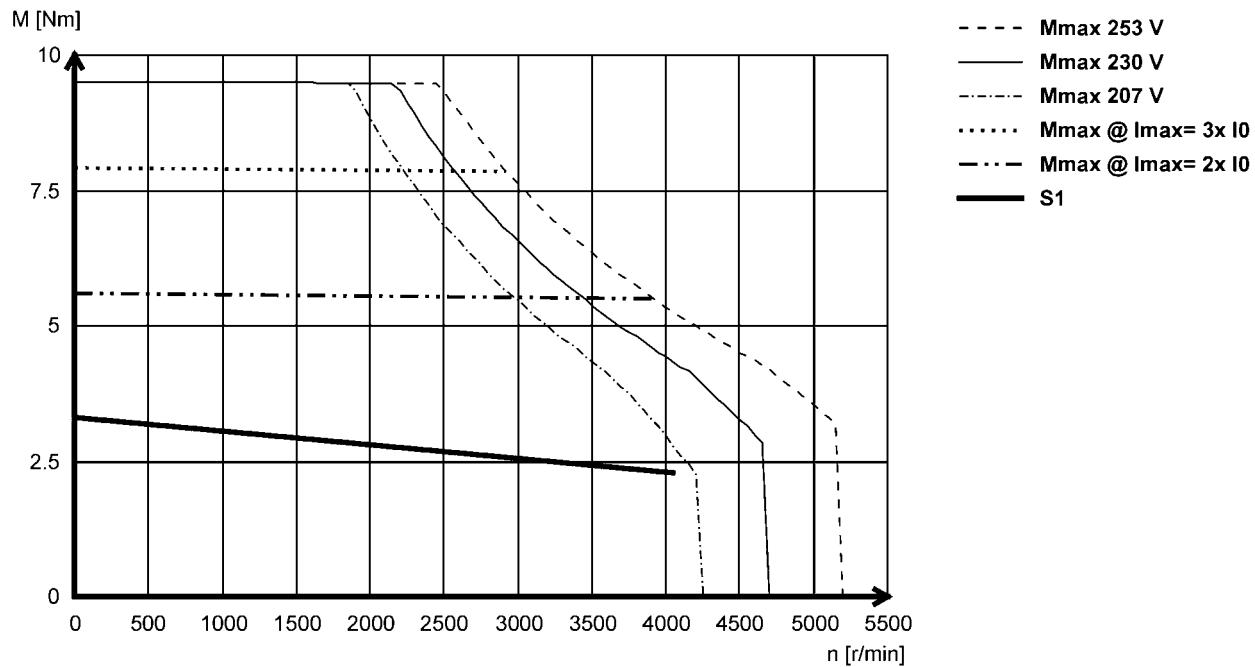

MCS09D60L (non-ventilated)

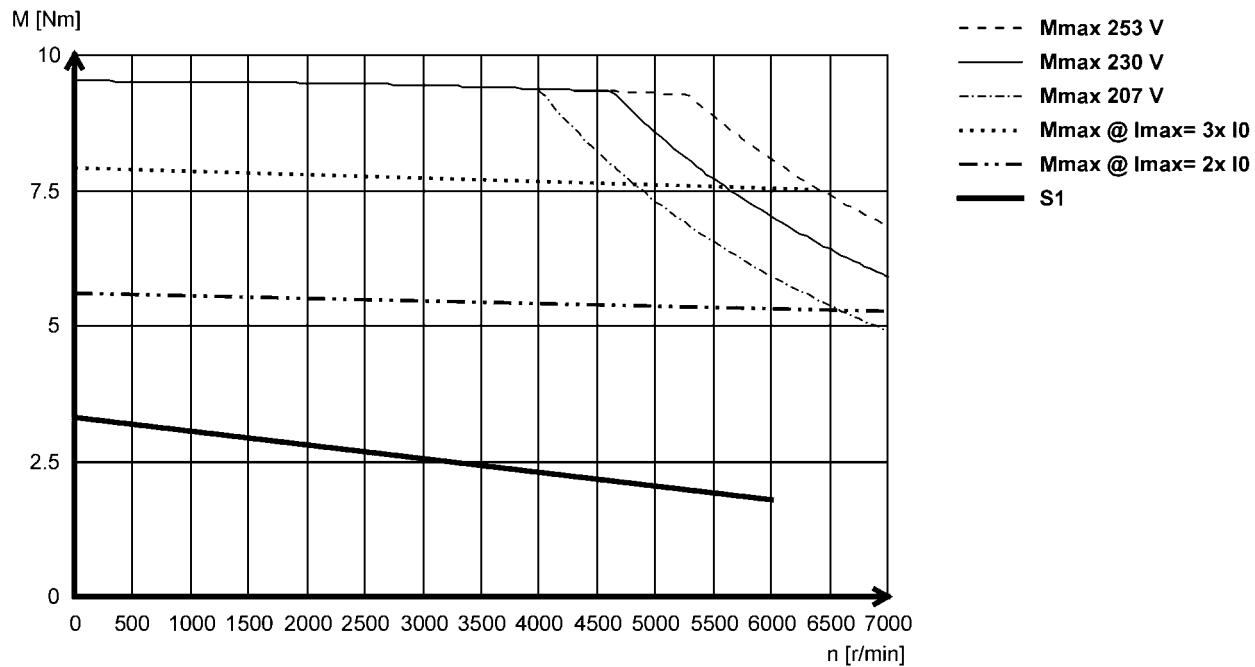

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09F38L (non-ventilated)

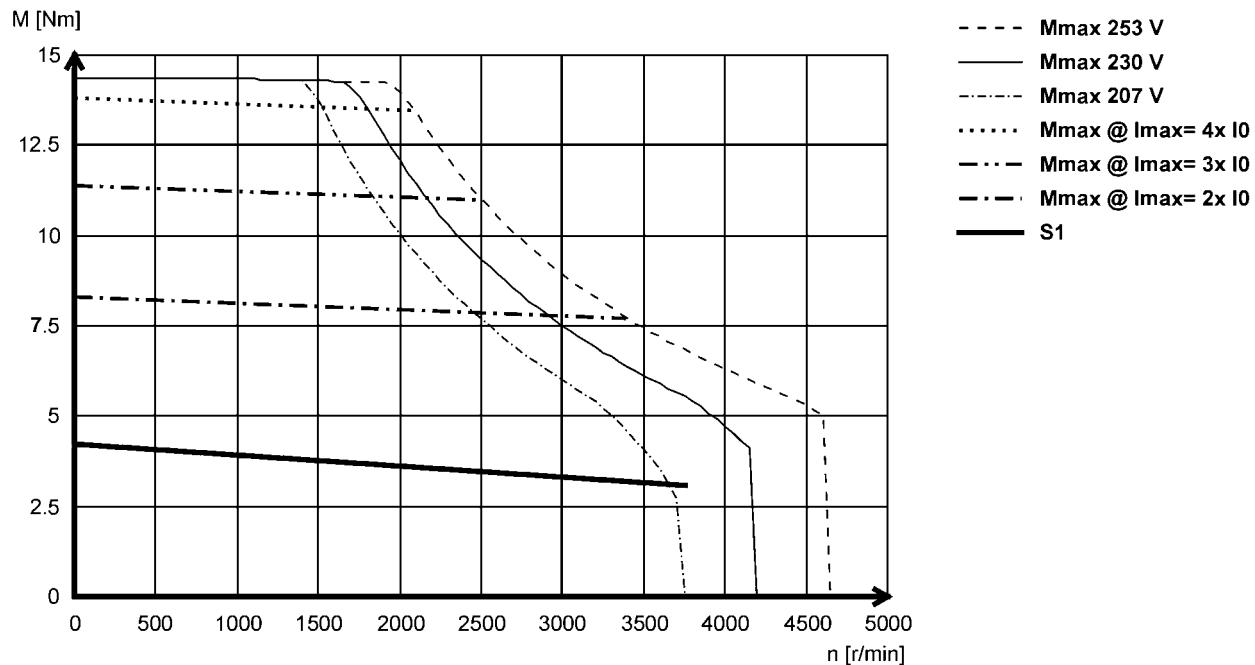

MCS09F60L (non-ventilated)

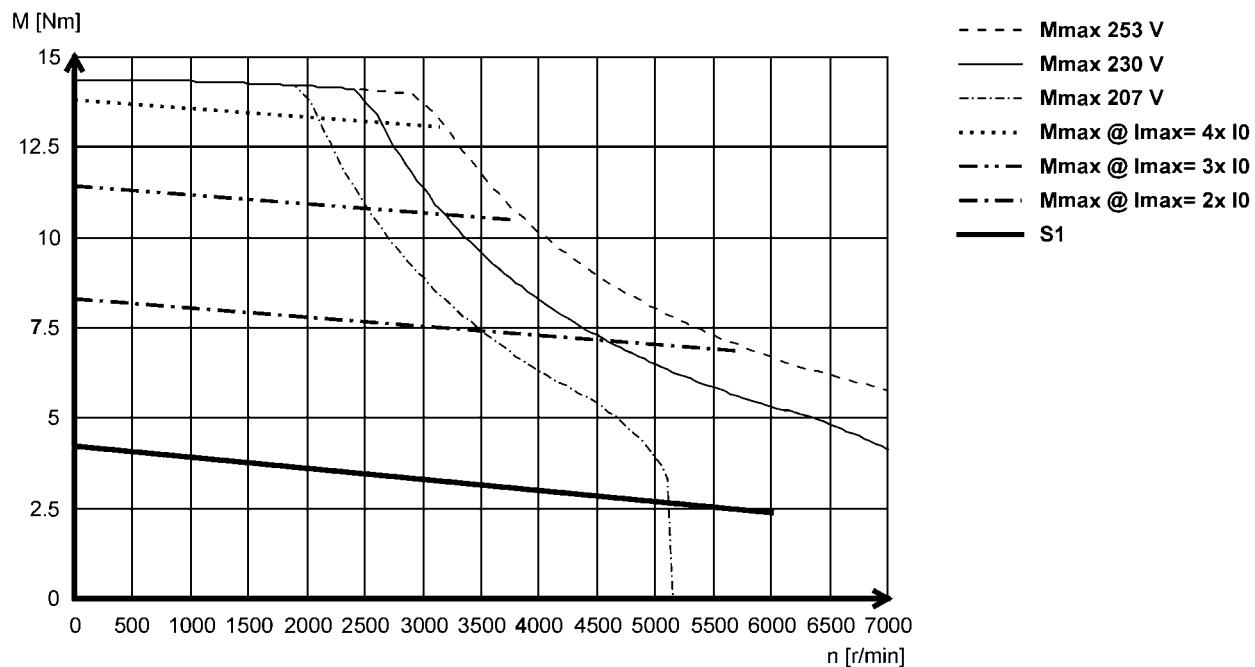

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09H41L (non-ventilated)

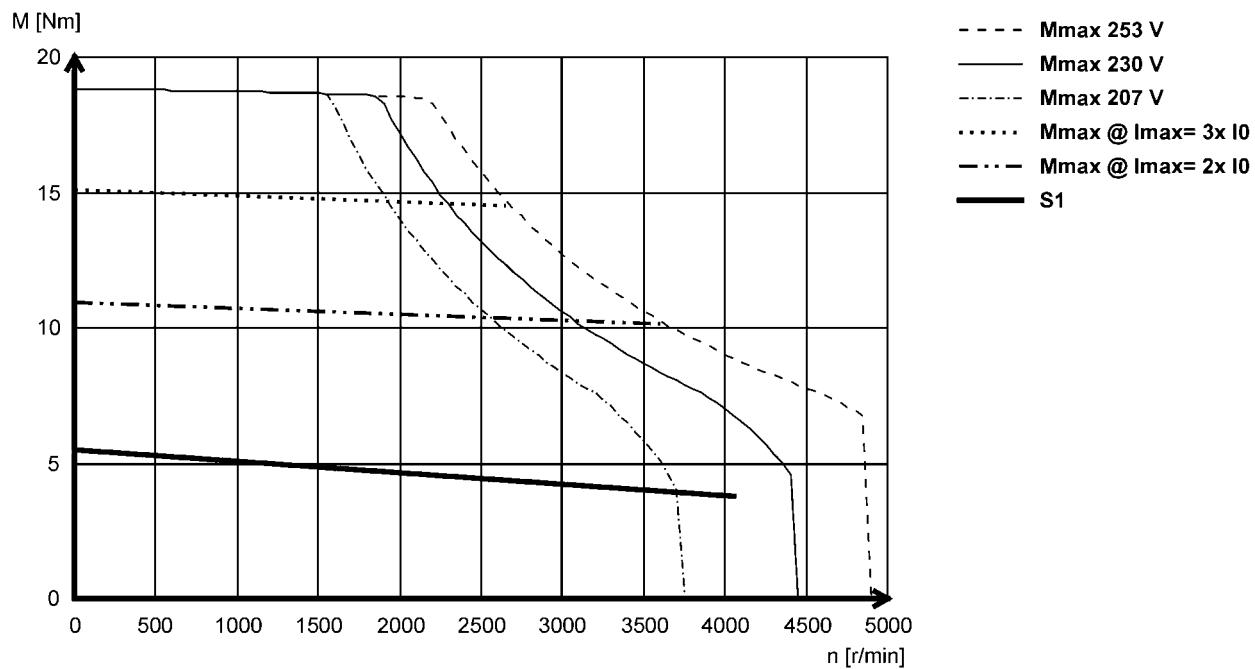

MCS09H60L (non-ventilated)

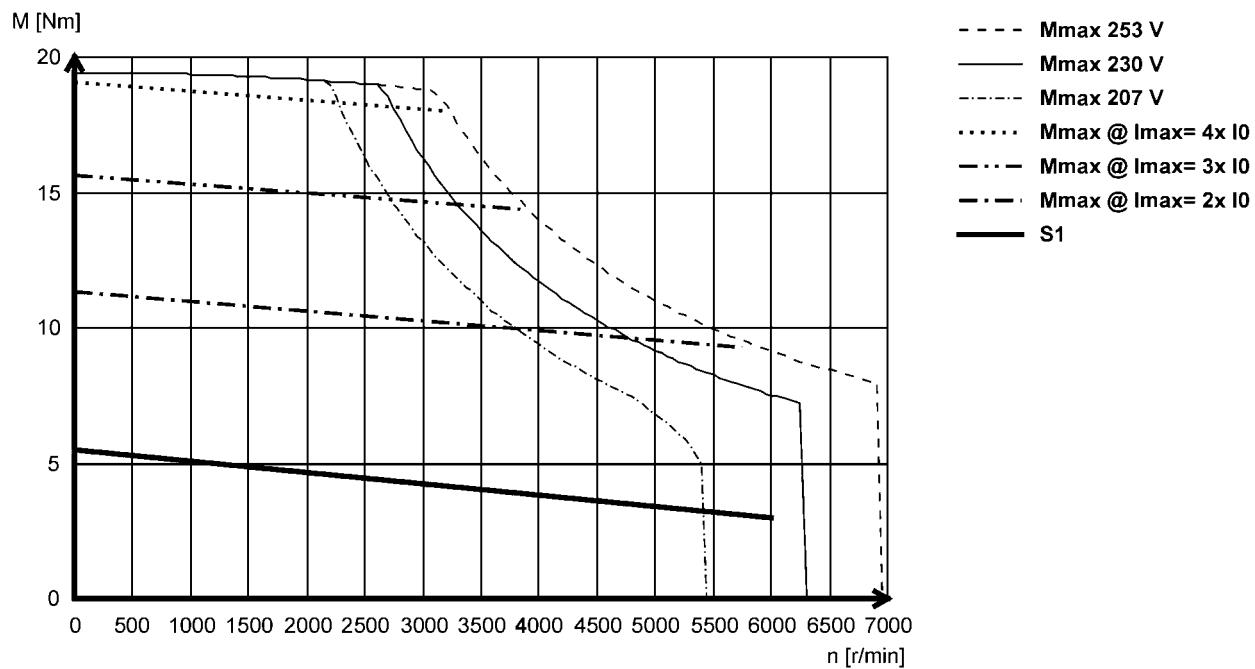

MCS synchronous servo motors




Technical data

Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS09L41L (non-ventilated)

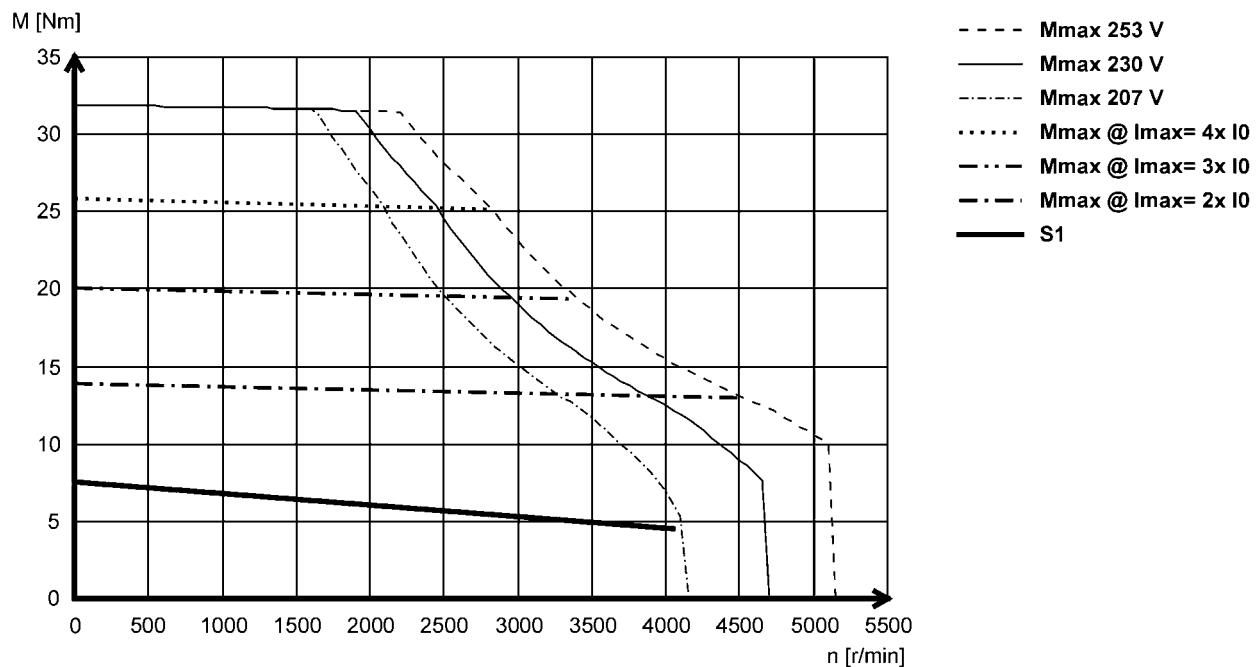

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12D20L (non-ventilated)

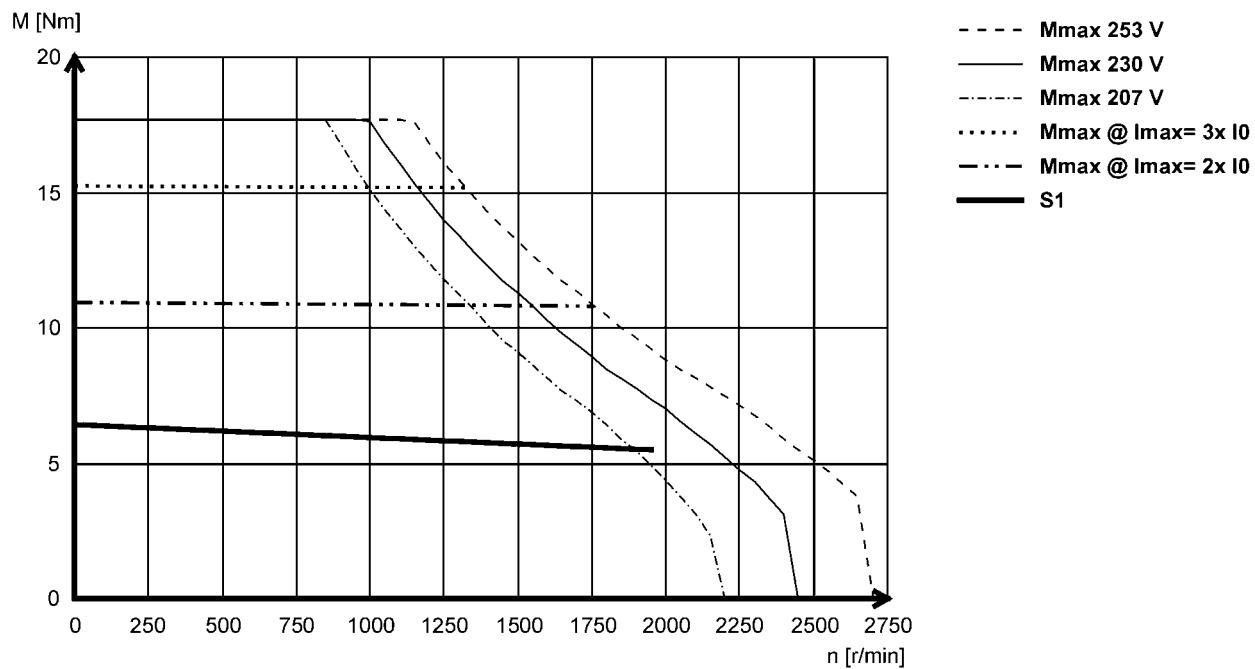

MCS12D41L (non-ventilated)

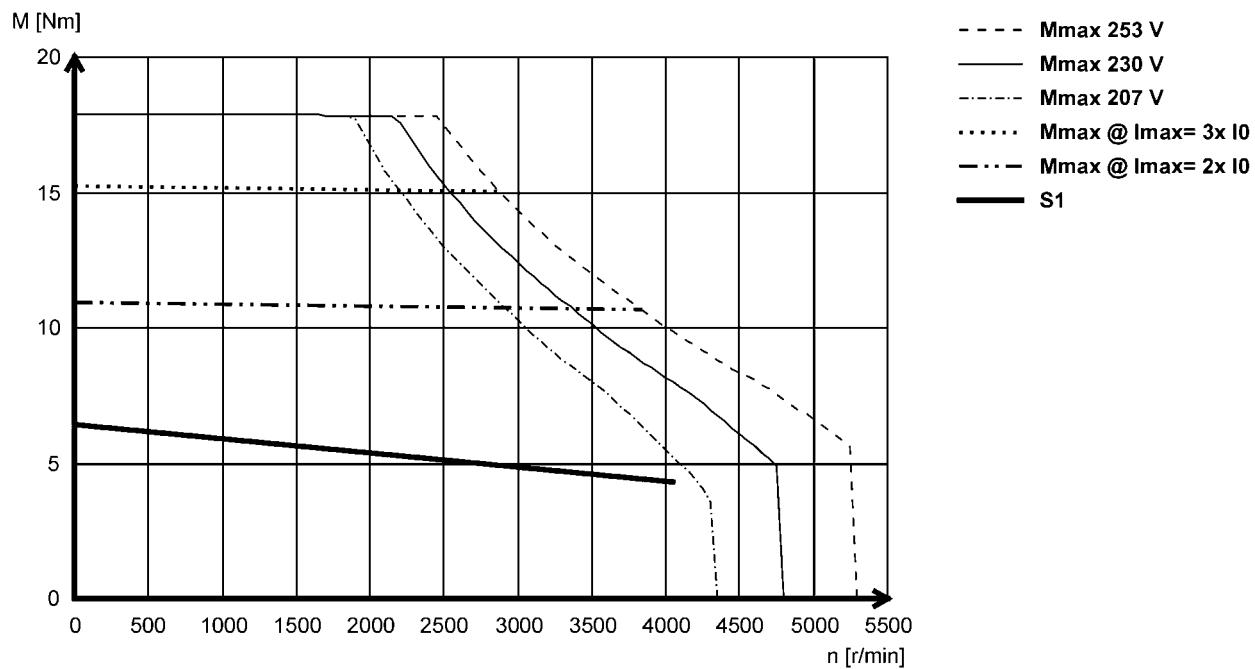

MCS synchronous servo motors




Technical data


Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12H15L (non-ventilated)

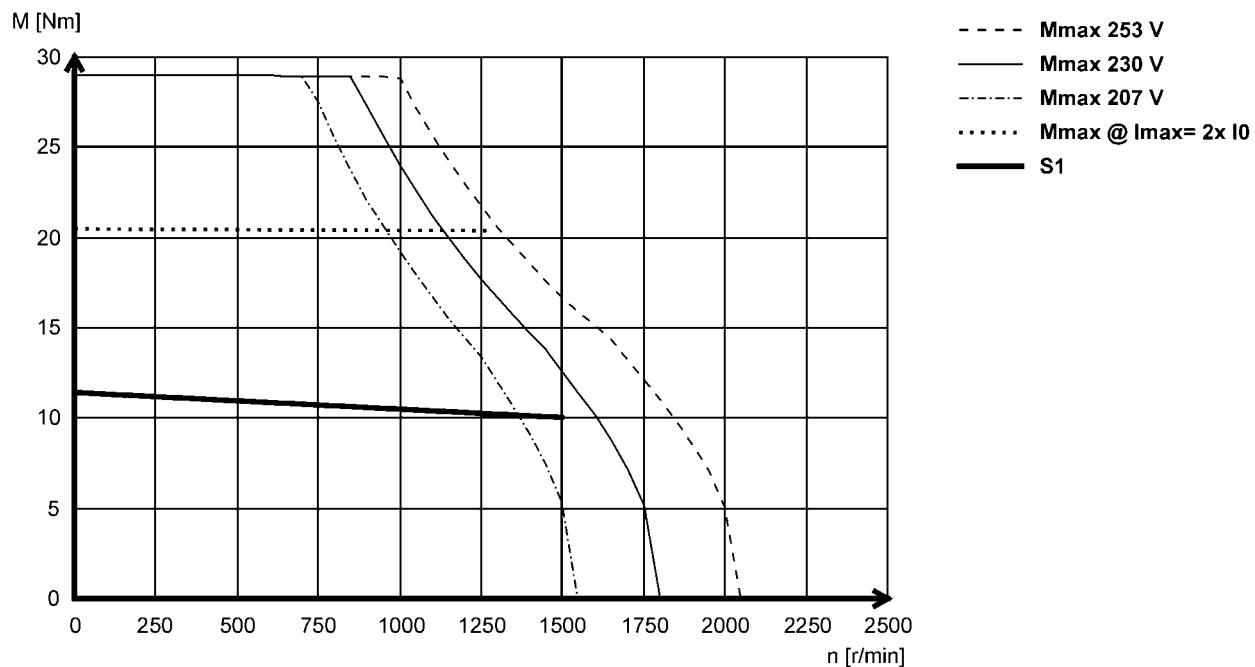

MCS12H30L- (non-ventilated)

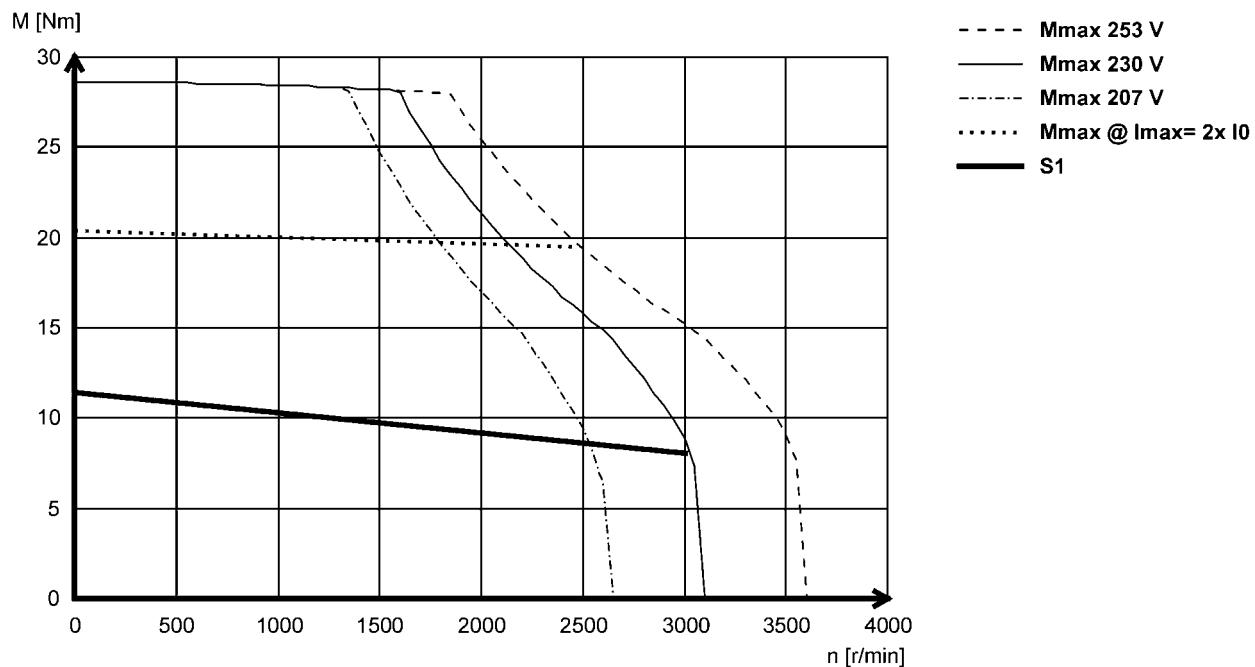

MCS synchronous servo motors




Technical data

Torque characteristics

- The data applies to a mains connection voltage of 3 x 230 V.
- You can find further torque characteristics at www.lenze.de/dsc.

MCS12L20L (non-ventilated)

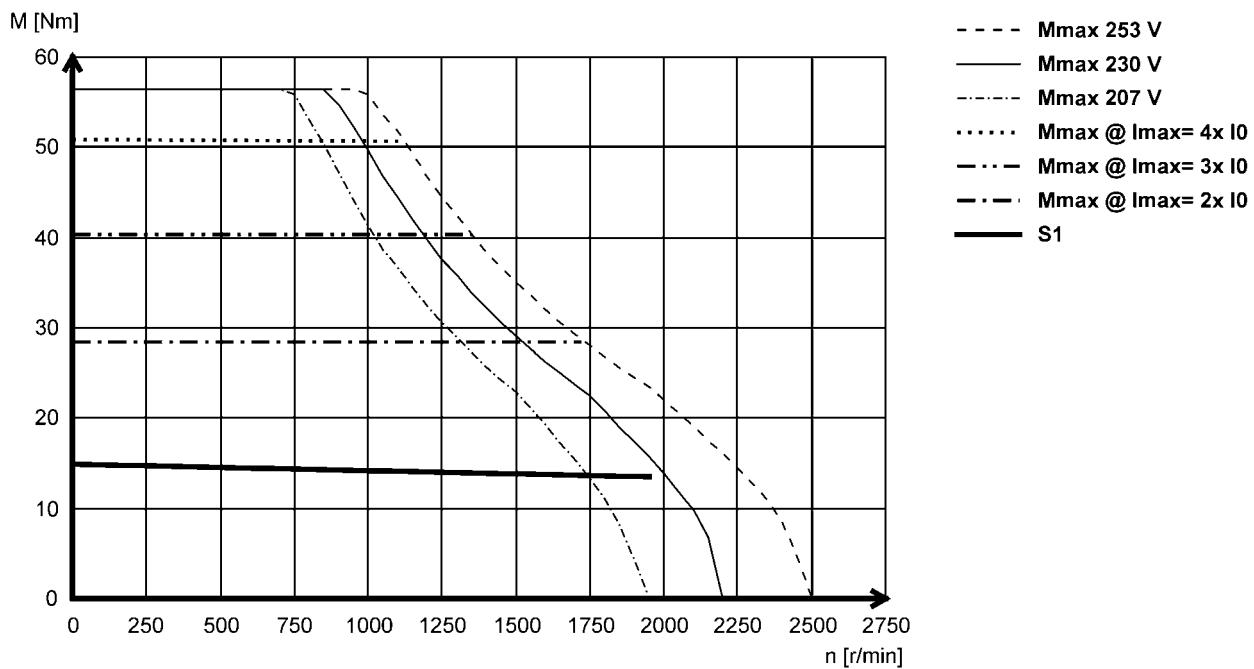


MCS synchronous servo motors

Technical data



Dimensions, self-ventilated

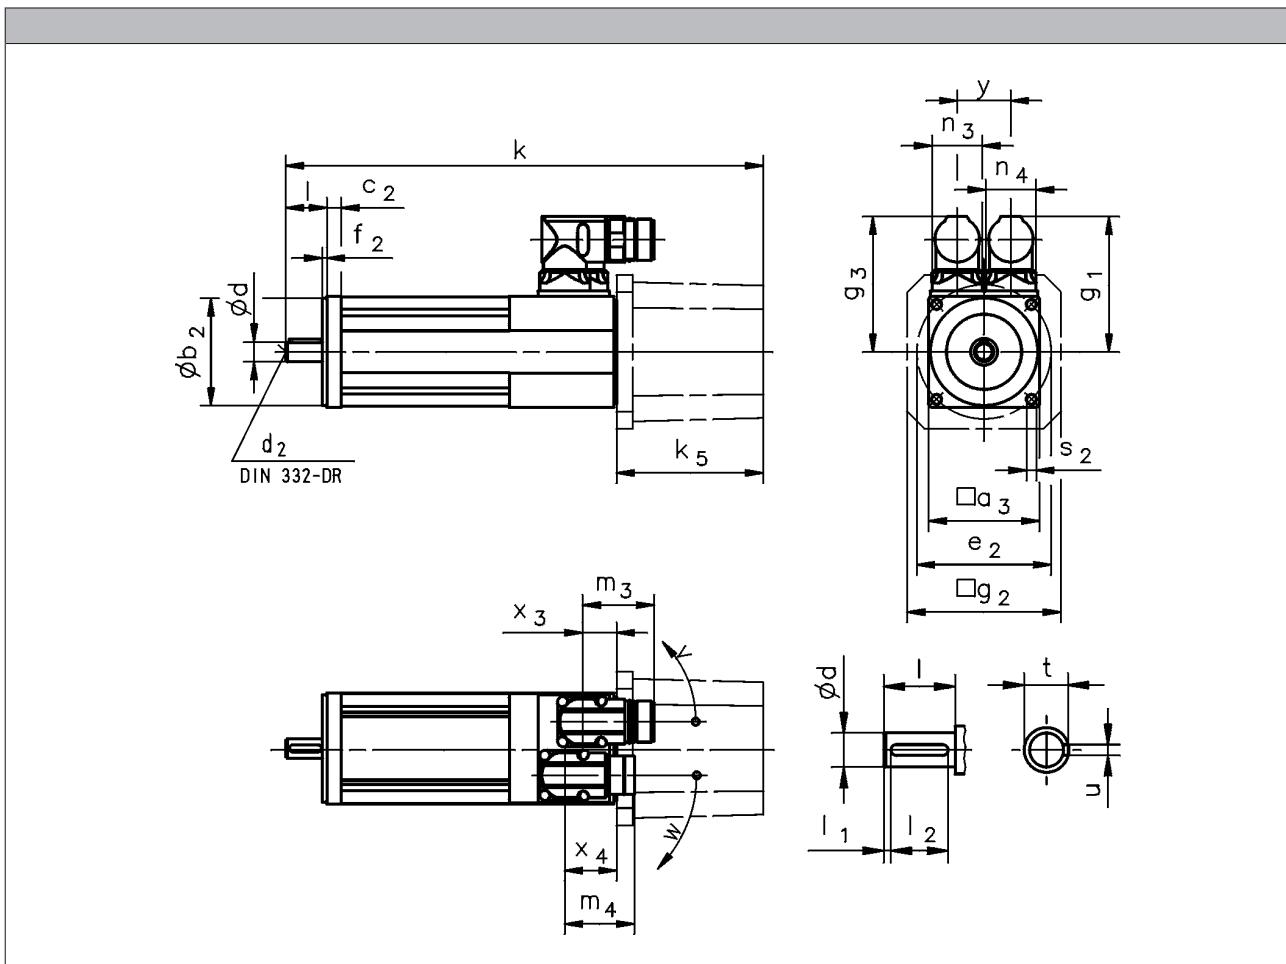

			MCS06C	MCS06F	MCS06I
R□0 / C40 BO	k	[mm]	155	185	215
R□0 / C40 P□	k	[mm]	174	204	233
SR□ / SV□ / E□□ BO	k	[mm]	237	266	297
SR□ / SV□ / E□□ P□	k	[mm]	255	285	315
SR□ / SV□ / E□□	k ₅	[mm]		82.0	
	g ₂	[mm]		86.0	
SKM BO	k	[mm]	190	220	250
SKM P□	k	[mm]	209	239	268
SKM	k ₅	[mm]		35.0	
	g ₂	[mm]		62.0	

- Speed / angle sensor: R□□ / C□□ / S□□ / E□□
- Brake: BO / P□

MCS synchronous servo motors

Technical data



Dimensions, self-ventilated

	g_1 [mm]	g_3 [mm]	x_3 [mm]	x_4 [mm]	m_3 [mm]	m_4 [mm]	n_3 [mm]	n_4 [mm]	y [mm]	v [°]	w [°]
MCS06	77	77	19	29	40	40	28	28	30	190	230

	d k6 [mm]	d_2 [mm]	l -0.7 ... 0.3	l_1 [mm]	l_2 [mm]	u [mm]	t [mm]
MCS06	11	M4	23	2.0	18	4.0	12.5


	a_3 j6 [mm]	b_2 [mm]	c_2 [mm]	e_2 [mm]	f_2 [mm]	s_2 [mm]
MCS06	62	60	8	75	2.5	5.5

MCS synchronous servo motors

Technical data



Dimensions, self-ventilated

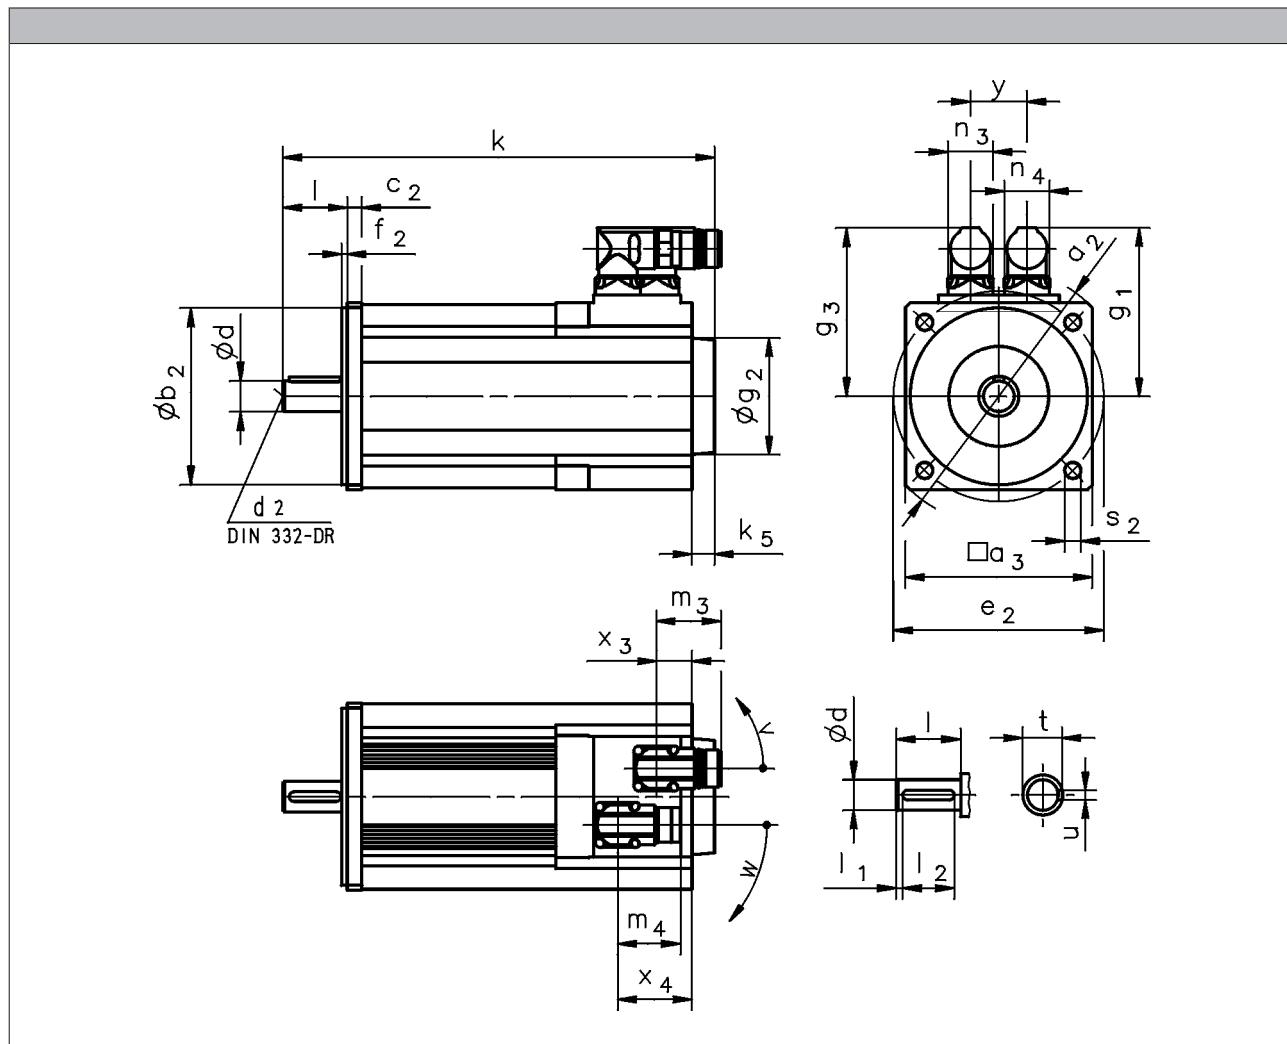

		MCS09D	MCS09F	MCS09H	MCS09L	MCS12D	MCS12H	MCS12L
R□0 / C40 B0	k [mm]	213	233	253	293	228	268	308
R□0 / C40 P□	k [mm]	233	253	273	313	248	288	328
R□0 / C40	k ₅ [mm]	13				14		
	g ₂ [mm]	67				72		
S□□ / E□□ B0	k [mm]	264	284	304	344	277	317	357
S□□ / E□□ P□	k [mm]	284	304	324	364	297	337	377
S□□ / E□□	k ₅ [mm]	64				63		
	g ₂ [mm]	81				89		

		MCS14D	MCS14H	MCS14L	MCS14P	MCS19F	MCS19J	MCS19P
R□0 / C40 B0	k [mm]	251	291	331	371	280	320	380
R□0 / C40 P□	k [mm]	279	319	359	399	314	364	424
R□0 / C40	k ₅ [mm]	24				15		
	g ₂ [mm]	78						
S□□ / E□□ B0	k [mm]	301	341	381	421	329	369	429
S□□ / E□□ P□	k [mm]	329	369	409	449	363	413	473
S□□ / E□□	k ₅ [mm]	74				64		
	g ₂ [mm]	101						

- ▶ Speed / angle sensor: R□□ / C□□ / S□□ / E□□
- ▶ Brake: B0 / P□

MCS synchronous servo motors



Technical data

Dimensions, self-ventilated

	g_1 [mm]	g_3 [mm]	x_3 [mm]	x_4 [mm]	m_3 [mm]	m_4 [mm]	n_3 [mm]	n_4 [mm]	y [mm]	v [°]	w [°]
MCS09	90	90	20	44		40		28	28	35	195
MCS12	105	105	22	46							260

	g_1 [mm]	g_3 [mm]	x_3 [mm]	x_4 [mm]	m_3 [mm]	m_4 [mm]	n_3 [mm]	n_4 [mm]	y [mm]	v [°]	w [°]
MCS14D15-											
MCS14D36-											
MCS14H15-	117	117	24	48		40		28		195	260
MCS14H32-											
MCS14L15-											
MCS14L32-	146	126	29	36		75		45		180	205
MCS14P14-	117	117	24	48		40		28		195	260
MCS14P32-	146	126	29	36		75		45		180	205
MCS19F14-	142	142	24 51 ¹⁾	48 75 ¹⁾		40		28		195	260
MCS19F30-	171	151	29 56 ¹⁾	36 63 ¹⁾		75		45		180	205
MCS19J14-	142	142	24 51 ¹⁾	48 75 ¹⁾		40		28		195	260
MCS19J30-	171	151	29 56 ¹⁾	36 63 ¹⁾		75		45		180	205
MCS19P14-	142	142	24 51 ¹⁾	48 75 ¹⁾		40		28		195	260
MCS19P30-	171	151	29 56 ¹⁾	36 63 ¹⁾		75		45		180	205

	d	d_2	l	l_1	l_2	u	t
	k_6		-0.7 ... 0.3				
	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]
MCS09	14	M5	30	2.5	25	5.0	16.0
MCS12	19	M6	40	4.0	32	6.0	21.5
MCS14	24	M8	50		40		27.0
MCS19	28	M10	60	5.0	50	8.0	31.0

	a_2 [mm]	a_3 [mm]	b_2 [mm]	c_2 [mm]	e_2 [mm]	f_2 [mm]	s_2 [mm]
			j6				
	[mm]						
MCS09	120	89	80	8	100	3.0	7.0
MCS12	160	116	110	9	130		10.0
MCS14	188	143	130	13	165		12.0
MCS19	250	192	180	11	215	4.0	14.0


¹⁾ On version with brake (P□)

MCS synchronous servo motors

Technical data



Dimensions, forced ventilated

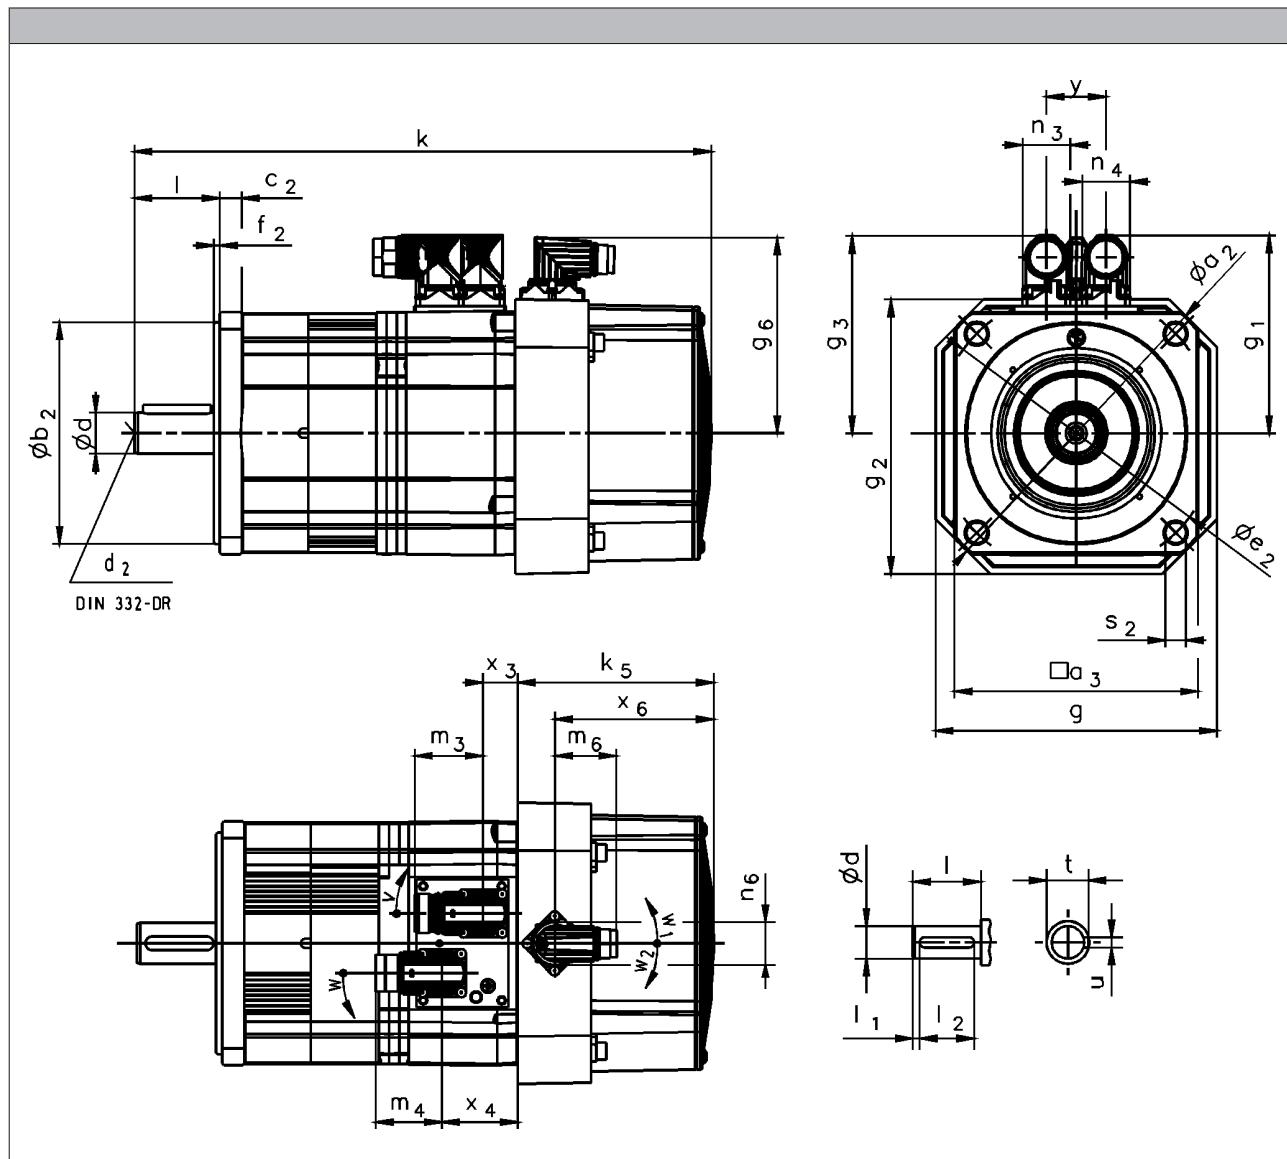

		MCS12D	MCS12H	MCS12L	MCS14D	MCS14H	MCS14L	MCS14P	MCS19F	MCS19J	MCS19P
R□0 / C40 B0	k [mm]	301	341	381	339	379	419	459	387	427	487
R□0 / C40 P□	k [mm]	321	361	401	368	408	448	488	421	471	531
R□0 / C40	k ₅ [mm]	92			115				126		
S□□ / E□□ B0	k [mm]	344	384	424	392	432	472	512	425	465	525
S□□ / E□□ P□	k [mm]	364	404	444	421	461	501	541	459	509	569
S□□ / E□□	k ₅ [mm]	135			169				165		
	g [mm]	140			167				212		
	g ₂ [mm]	140			163				210		

- Speed / angle sensor: R□□ / C□□ / S□□ / E□□
- Brake: B0 / P□

MCS synchronous servo motors



Technical data

Dimensions, forced ventilated

	g_1 [mm]	g_3 [mm]	g_6 [mm]	x_3 [mm]	x_4 [mm]	x_6 [mm]	m_3 [mm]	m_4 [mm]	m_6 [mm]	n_3 [mm]	n_4 [mm]	n_6 [mm]	y [mm]	v [°]	w [°]	w_1 [°]	w_2 [°]
MCS12D17																	
MCS12D35	105	105	107	16	40	67											
MCS12H14																	
MCS12H34																	
MCS12L17																	
MCS12L39																	
MCS14D14																	
MCS14D30	117	117		20	44												
MCS14H12																	
MCS14H28	146	126	115	24	31		40	75		28	45						
MCS14L14	117	117		20	44		37	40		28	28						
MCS14L30	146	126		24	31		93	75		45	45						
MCS14P11	117	117		20	44			40		28	28						
MCS14P26	146	126		24	31			75		45	45						
MCS19F12	142	142		19 46 ¹⁾	43 70 ¹⁾		96	40		28	28						
MCS19F29			142	24 51 ¹⁾	31 58 ¹⁾			75		45							
MCS19J12																	
MCS19J29																	
MCS19P12																	
MCS19P29																	

	d k6 [mm]	d_2 [mm]	l -0.7 ... 0.3	l_1 [mm]	l_2 [mm]	u [mm]	t [mm]
MCS12	19	M6	40	4.0	32	6.0	21.5
MCS14	24	M8	50		40		27.0
MCS19	28	M10	60	5.0	50	8.0	31.0

	a_2 [mm]	a_3 [mm]	b_2 j6 [mm]	c_2 [mm]	e_2 [mm]	f_2 [mm]	s_2 [mm]
MCS12	160	116	110	9	130		10.0
MCS14	188	143	130	13	165	3.5	12.0
MCS19	250	192	180	11	215	4.0	14.0

¹⁾ On version with brake (P□)

MCS synchronous servo motors

Technical data



6.11

MCS synchronous servo motors



Accessories

Permanent magnet holding brake

The synchronous servo motor can be fitted with integral permanent magnet holding brakes.

In the case of permanent magnet brakes, the rated torque applies solely as holding torque at standstill. This is due to the nature of their design. During braking from full motor speed, e.g. in the event of emergency stops, the braking torque is significantly reduced.

As such, they may not be used as safety elements (particularly with lifting axes) without additional measures being implemented.

The brakes are activated when the supply voltage is disconnected (closed-circuit principle). When using the brakes purely as holding brakes, virtually no wear occurs on the friction surfaces.

For traversing axes, adherence to the permissible load/brake motor (J_L / J_{MB}) moment of inertia ensures that the permissible maximum switching rate of the brake will not be exceeded and at least 2,000 emergency stop functions can be performed from a speed of 3,000 rpm.

For lifting axes, the load torque resulting from the weight acts additionally. In this case the specifications for J_L / J_{MB} do not apply.

Caution:

The brakes used are not safety brakes in the sense that a reduction in torque may arise as a result of disruptive factors that cannot be influenced, e.g. oil ingress.

The ohmic voltage drop along the cable must be taken into consideration in long motor supply cables and must be compensated for by a higher voltage at the line input.

The following applies for Lenze system cables:

$$U[V] = U_B[V] + 0.08 \frac{[V]}{[A] \cdot [m]} \cdot l_g[m] \cdot I_B[A]$$

If no suitable voltage (incorrect value, incorrect polarity) is applied to the brake, the brake will be applied and can be overheated and destroyed by the motor continuing to rotate.

The shortest switching times of the brakes are achieved by DC switching of the voltage. A spark suppressor is required to suppress interference and to increase the service life of the relay contacts here.



Permanent magnet holding brake

MCS synchronous servo motors



Accessories

Permanent magnet holding brake

Rated data with standard braking torque

	$U_{N, DC}^{3, 5)}$	M_N	M_N	M_{av}	$I_N^{2)}$	J	$t_1^{1)}$	$t_2^{1)}$	$Q_E^{4)}$	m	J_{MB}	J_L/J_{MB}
	[V]	20 °C	120 °C	120 °C								
	[V]	[Nm]	[Nm]	[Nm]	[A]	[kgcm²]	[ms]	[ms]	[J]	[kg]	[kgcm²]	
MCS06C	24	2.20	2.00	0.60	0.34	0.12	15.0	30.0	30.0	0.30	0.26	22.1
MCS06F		8.00	6.00	4.50	0.65	1.07	20.0	40.0	400	0.80	0.34	16.6
MCS06I		12.0	10.0	7.00			13.0	43.0			0.42	13.3
MCS09D		22.0	18.0	8.00	0.88	3.20	15.0	150	640	1.90	2.17	36.4
MCS09F		37.0	32.0	15.0	0.93	12.4	96.0	113	2350	3.10	2.57	30.5
MCS09H		37.0	32.0	15.0	0.93	12.4	96.0	113	2350	3.10	2.97	26.3
MCS09L		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	3.87	19.9
MCS12D		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	5.07	15.0
MCS12H		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	8.40	8.70
MCS12L		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	11.7	5.90
MCS14D		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	11.3	10.5
MCS14H		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	17.4	6.50
MCS14L		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	26.6	3.90
MCS14P		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	37.9	2.40
MCS19F		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	77.4	5.20

Rated data with increased braking torque

	$U_{N, DC}^{3, 5)}$	M_N	M_N	M_{av}	$I_N^{2)}$	J	$t_1^{1)}$	$t_2^{1)}$	$Q_E^{4)}$	m	J_{MB}	J_L/J_{MB}
	[V]	20 °C	120 °C	120 °C								
	[V]	[Nm]	[Nm]	[Nm]	[A]	[kgcm²]	[ms]	[ms]	[J]	[kg]	[kgcm²]	
MCS09D	24	12.0	10.0	7.00	0.65	1.07	20.0	40.0	400	0.80	2.17	36.4
MCS09F		24.0	19.0	12.0	0.71	3.13	16.0	90.0	890	1.20	2.57	30.5
MCS09H		37.0	32.0	15.0	0.93	12.4	96.0	113	2350	3.10	2.97	26.3
MCS09L		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	3.87	19.9
MCS12D		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	7.10	24.3
MCS12H		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	10.4	16.3
MCS12L		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	13.7	12.1
MCS14D		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	20.5	22.2
MCS14H		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	26.6	16.9
MCS14L		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	35.8	12.3
MCS14P		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	47.1	9.10
MCS19J		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	135	2.20
MCS19P		100	80.0	43.0	1.29	30.0	30.0	90.0	2100	4.30	190	1.20

¹⁾ Engagement and disengagement times are valid for rated voltage ($\pm 0\%$) and protective circuit for brakes with varistor for DC switching. The times may increase without a protective circuit.

²⁾ The currents are the maximum values when the brake is cold (value used for dimensioning the current supply). The values for a motor at operating temperature are considerably lower.

³⁾ With 24V DC brake: smoothed DC voltage, ripple $\leq 1\%$.

⁴⁾ Maximum switching energy per emergency stop at $n = 3000$ r/min for at least 2000 emergency stops.

⁵⁾ Voltage tolerance: -10% to +5%

MCS synchronous servo motors



Accessories

Resolver

Stator-fed resolver with two stator windings offset by 90° and one rotor winding with transformer winding.

Speed/angle sensor				
	1)			
Product key			RS0	RV0
			RS0	RV03
Resolution				
Angle		[°]		0.80
Accuracy		[°]		-10 ... 10
Absolute positioning				1 revolution
Max. speed				
	n_{\max}	[r/min]		8000
Max. input voltage				
DC	$U_{in,\max}$	[V]		10.0
Max. input frequency				
	$f_{in,\max}$	[Hz]		4.00
Ratio				
Stator / rotor		± 5 %		0.30
Rotor impedance				
	Z_{ro}	[Ω]		51 + j90
Stator impedance				
	Z_{so}	[Ω]		102 + j150
Impedance				
	Z_{rs}	[Ω]		44 + j76
Min. insulation resistance				
At DC 500 V	R	[Ω]		10.0
Number of pole pairs				1
Max. angle error		[°]		-10 ... 10
Inverter assignment				E84AVTC E94A ECS EVS93

1) 6 - Product key > speed/angle sensor

Speed-dependent safety functions

Suitable for safety function			No	Yes
Max. permissible angular acceleration				
MCS06	α	[rad/s ²]		56 000
MCS09 ... MCS19 ²⁾	α	[rad/s ²]		19 000
Functional safety				
IEC 61508				SIL3
EN 13849-1				Up to Performance Level e

2) 10 - Single encoder concepts with resolvers

MCS synchronous servo motors



Accessories

Incremental encoder and SinCos absolute value encoder

Encoder type		TTL incremental	SinCos absolute value		
Speed/angle sensor		C40	EQI	SRS	SVS
Product key	1)	IK4096-5V-T	AM32-5V-E	AS1024-8V-H	AS1024-8V-K2
Encoder type		Single-turn	Multi-turn	Single-turn	
Pulses		4096	32	1024	
Output signals		TTL	1 Vss		
Interfaces			EnDat	Hiperface	
Absolute revolutions		0	4096	1	
Resolution		1.30	0.40		
Angle ²⁾	[°]	-1 ... 1	-5 ... 5	-0.8 ... 0.8	
Min. input voltage					
DC	U _{in,min} [V]	4.50	4.75	7.00	
Max. input voltage					
DC	U _{in,max} [V]	5.50	5.25	12.0	
Max. speed	n _{max} [r/min]	7324	12000	6000	
Max. current consumption	I _{max} [A]	0.075	0.17	0.080	
Limit frequency	f _{max} [kHz]	500	6.00	200	
Inverter assignment		E94P	E94A	E84AVTC E94A ECS EVS93	

1) 6 - Product key > speed/angle sensor

2) Inverter-dependent.

Speed-dependent safety functions

Suitable for safety function		No	No	No	Yes
Max. permissible angular acceleration					
MCS06	α [rad/s ²]				970000
MCS09 ... MCS19	α [rad/s ²]				240000
Functional safety					
IEC 61508					SIL2
EN 13849-1					Up to Performance Level d

MCS synchronous servo motors



Accessories

Incremental encoder and SinCos absolute value encoder

Encoder type			SinCos absolute value							
Speed/angle sensor			SKM	SRM	SVM	ECN	EQN			
Product key			AM128-8V-H	AM1024-8V-H	AM1024-8V-K2	AS2048-5V-E	AM2048-5V-E			
Encoder type			Multi-turn		Single-turn		Multi-turn			
Pulses			128	1024	2048					
Output signals			1 Vss							
Interfaces			Hiperface			EnDat				
Absolute revolutions			4096		1	4096				
Resolution			0.40							
Angle		[°]	-1.3 ... 1.3							
Accuracy		[°]	-0.8 ... 0.8		-0.6 ... 0.6					
Min. input voltage			7.00		4.75					
DC	$U_{in,min}$	[V]	12.0							
Max. input voltage			5.25							
DC	$U_{in,max}$	[V]	9000		6000	12000				
Max. speed		n_{max} [r/min]	0.060		0.080	0.15	0.25			
Max. current consumption		I_{max} [A]	200							
Limit frequency		f_{max} [kHz]	E84AVTC E94A ECS EVS93							
Inverter assignment			E94A							

¹⁾ Inverter-dependent.

Speed-dependent safety functions

Suitable for safety function			No	No	Yes	No	No	
Max. permissible angular acceleration								
MCS06	α	[rad/s ²]			970000			
MCS09 ... MCS19	α	[rad/s ²]			240000			
Functional safety			SIL2					
IEC 61508								
EN 13849-1			Up to Performance Level d					

MCS synchronous servo motors



Accessories

Blowers

Rated data for 50 Hz

		Degree of protection	Number of phases					
				U _{min} [V]	U _{max} [V]	U _{N, AC} [V]	P _N [kW]	I _N [A]
MCS12	F10		1	210	240	230	0.019	0.12
	F50			104	122	115	0.018	0.22
MCS14	F10	IP54	1	210	240	230	0.040	0.25
	F50			104	122	115		0.53
MCS19	F10		1	210	240	230	0.060	0.26
	F50			104	122	115	0.047	0.45

Rated data for 60 Hz

		Degree of protection	Number of phases					
				U _{min} [V]	U _{max} [V]	U _{N, AC} [V]	P _N [kW]	I _N [A]
MCS12	F10		1	210	240	230	0.019	0.12
	F50			104	122	115	0.018	0.22
MCS14	F10	IP54	1	210	240	230	0.040	0.25
	F50			104	122	115		0.53
MCS19	F10		1	210	240	230	0.060	0.26
	F50			104	122	115	0.047	0.45

MCS synchronous servo motors



Accessories

Temperature monitoring


The thermal sensors used in the MCS motors continuously monitor the motor temperature. The temperature signal is transmitted over the system cable of the feedback system to the servo controller. Because of the different physical conditions, there are two temperature monitoring mechanisms on the MCS motors (there is no complete motor protection in either case)

MCS06

on this motor, the winding temperature of one winding phase is monitored with a KTY 83-110 type thermal sensor.

MCS09 to 19

These motors are monitored by three thermal sensors (1x KTY 83-110 + 2x PTC 150 °C) connected in series. This means that the temperature of the motor is determined with great accuracy in the permitted operating range and at the same time the overtemperature response configured in the controller is executed in the event of overtemperature in one of the winding phases.

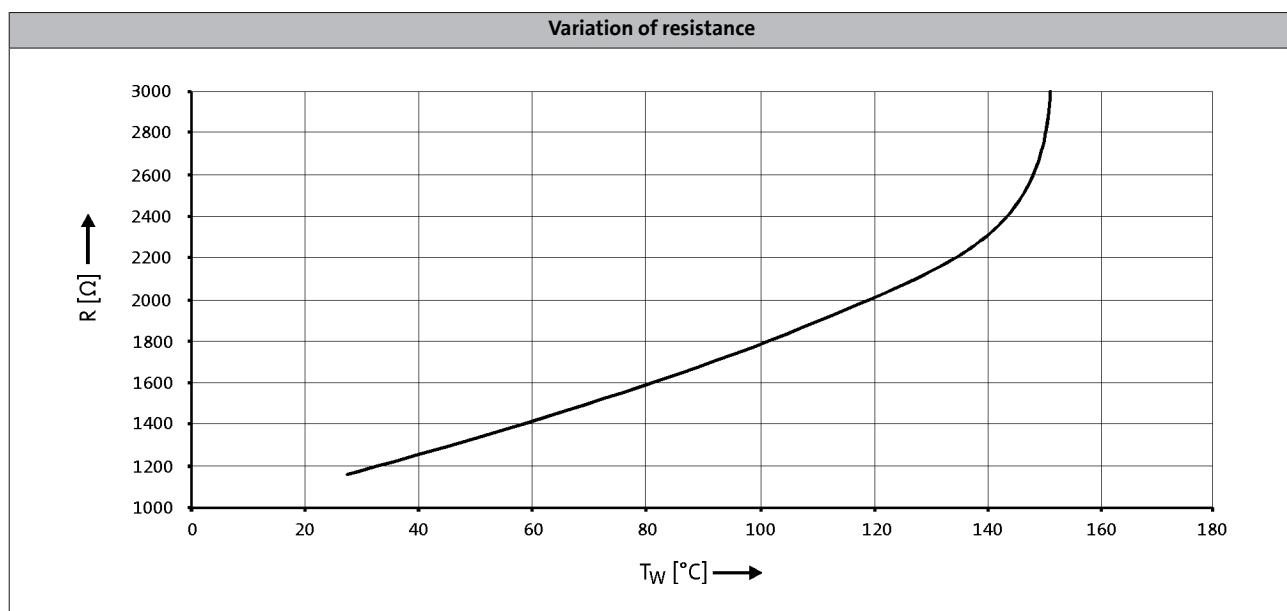

- If the detector is supplied with a measured current of 1 mA, the above relationship between the temperature and the resistance applies.

MCS synchronous servo motors



Accessories

Terminal box


If a servo motor is to be connected to an existing cable or plug connectors are not to be used for other reasons, the connection can also be made via a terminal box.

The terminals are designed as tension spring terminals to ensure here the long-term vibration resistance of the cable contacts with adequate contact pressure required.

The terminal boxes have generously dimensioned space for the customer's own wiring and large surface shield connection areas to ensure a secure EMC-compliant connection. The cable outlet may be to the left or to the right, depending on requirements.

It is not possible to attach a terminal box to the MCS06 or to models with the blower.

Connections

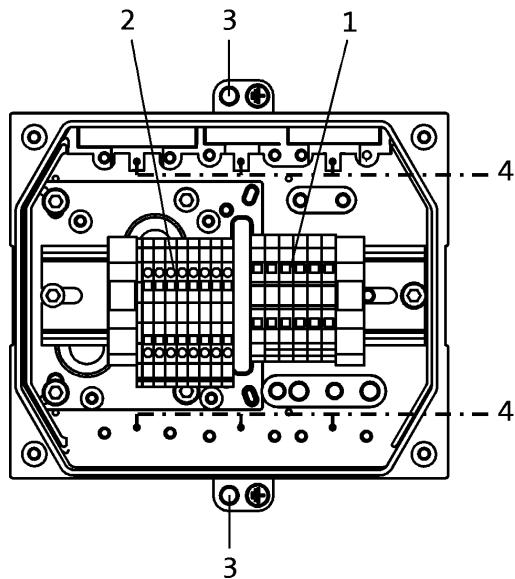


1: Power connection (terminals loadable up to 65 A) + brake connection.

2: Angle/speed sensor connection + thermal sensor connection.

3: PE connection.

4: Large area shield contact.

5: Openings for 2x M32, 2x M25, 2x M20 fittings. The openings are plugged and can be opened up as required by the customer.

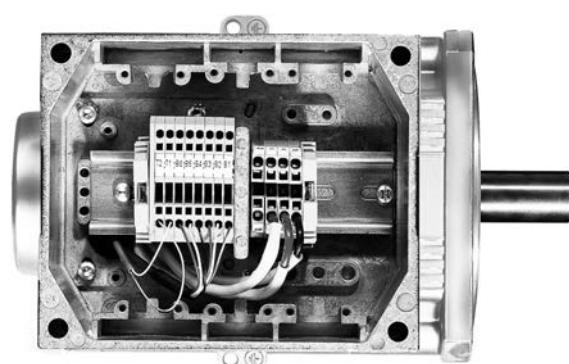


MCS synchronous servo motors

Accessories



Terminal box

Dimensions

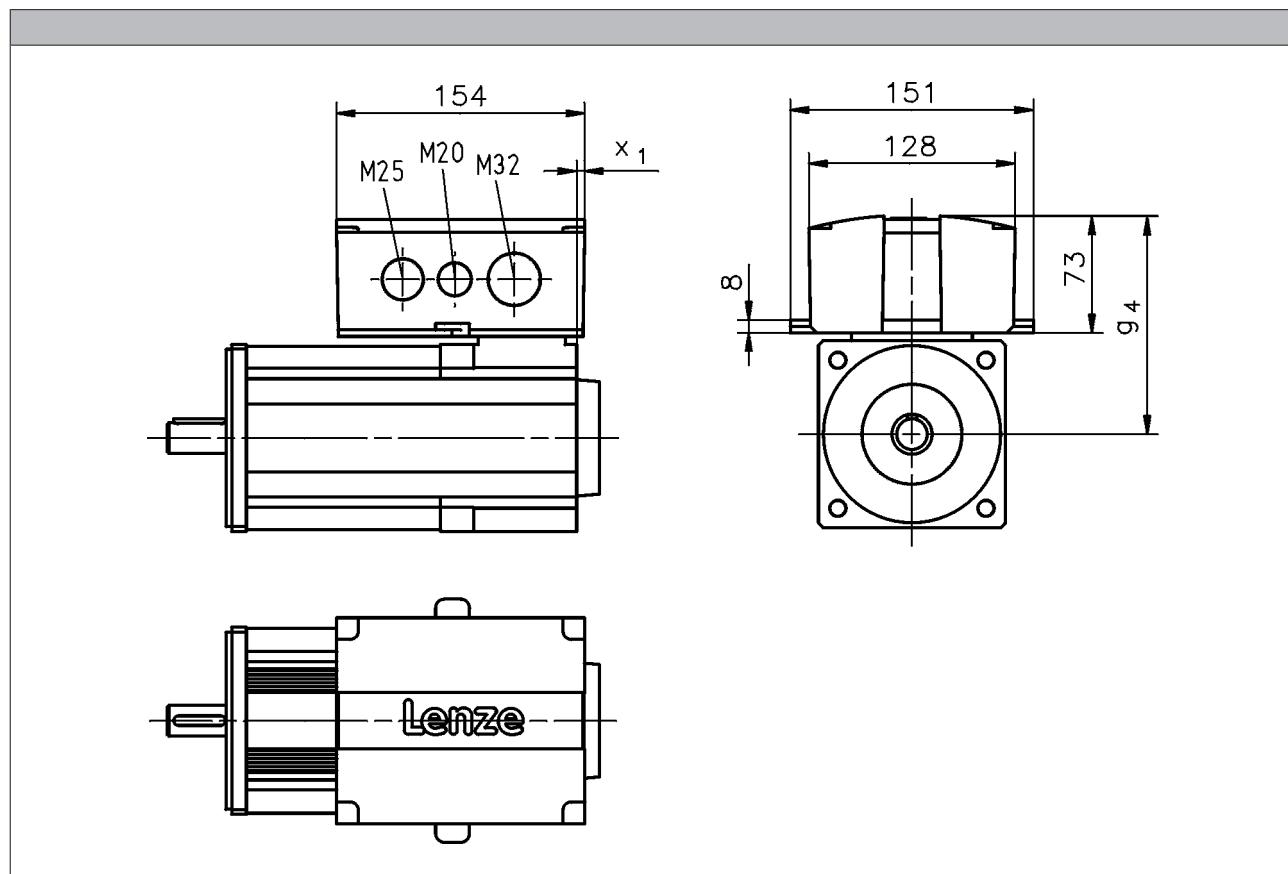

	g_4 [mm]	x_1 [mm]
MCS09	121	8
MCS12	136	5
MCS14	147	3
MCS19	172	

MCS synchronous servo motors



Accessories

ICN connector

An ICN connector is used as standard for the electrical connection to the servo motors.


A connector is used for the connection of motor and brake. The connections to the feedback system/temperature monitoring and the blower each employ a separate connector.

The connectors can be rotated through 270° and are fitted with a bayonet catch for SpeedTec connectors. As the connector fixing is also compatible with conventional union nuts. Existing mating connectors can therefore still be used without difficulty.

Connection for power and brake


- MCS06 to 12

Pin assignment		
Contact	Designation	Meaning
1	BD1	Holding brake +
2	BD2	Holding brake -
PE	PE	PE conductor
4	U	Phase U power
5	V	Phase V power
6	W	Phase W power



- MCS14 to 19

Pin assignment		
Contact	Designation	Meaning
1		Not assigned
2		Not assigned
+	BD1	Holding brake +
-	BD2	Holding brake -
PE	PE	PE conductor
U	U	Phase U power
V	V	Phase V power
W	W	Phase W power



MCS synchronous servo motors




Accessories

ICN connector

Feedback connection


- Resolver

Pin assignment		
Contact	Designation	Meaning
1	+Ref	Transformer windings
2	-Ref	
3	+VCC ETS	Supply: Electronic nameplate
4	+COS	Cosine stator windings
5	-COS	
6	+SIN	Sine stator windings
7	-SIN	
8		
9		Not assigned
10		
11	+KTY	KTY temperature sensor
12	-KTY	



- Hiperface incremental encoder and SinCos absolute value encoder

Pin assignment		
Contact	Designation	Meaning
1	B	Track B/+SIN
2	A ⁻	Track A inverse/-COS
3	A	Track A/+COS
4	+U _B	Supply +
5	GND	Mass
6	Z ⁻	Zero track inverse/-RS485
7	Z	Zero track/+RS485
8		Not assigned
9	B ⁻	Track B inverse/-SIN
10		Not assigned
11	+KTY	KTY temperature sensor
12	-KTY	



MCS synchronous servo motors




Accessories

ICN connector

Feedback connection


- ▶ SinCos absolute value encoder with EnDat interface

Pin assignment		
Contact	Designation	Meaning
1	U _P sensor	Supply: UP sensor
2		Not assigned
3		
4	0 V sensor	Supply: 0 V sensor
5	+KTY	KTY temperature sensor
6	-KTY	
7	+U _B	Supply +
8	Cycle	EnDat interface cycle
9	Cycle ⁻	EnDat interface inverse cycle
10	GND	Mass
11	Shield	Encoder housing screen
12	B	Track B
13	B ⁻	Track B inverse/-SIN
14	Data	EnDat interface data
15	A	Track A
16	A ⁻	Track A inverse
17	Data ⁻	EnDat interface inverse data



Blower connection

Pin assignment		
Contact	Designation	Meaning
PE	PE	PE conductor
1	U1	
2	U2	Fan
3		
4		
5		
6		



MCS synchronous servo motors

Accessories



6.11

MCS synchronous servo motors

Accessories



6.11

Lenze SE
Hans-Lenze-Straße 1
D-31855 Aerzen
Phone: +49 (0)5154 82-0
Telefax: +49 (0)5154 82 28 00

www.Lenze.com